

COUNCIL DIRECTIVE

of 27 July 1976

on the approximation of the laws of the Member States relating to front fog lamps for motor vehicles and filament lamps for such lamps

(76/762/EEC)

THE COUNCIL OF THE EUROPEAN COMMUNITIES,

Having regard to the Treaty establishing the European Economic Community, and in particular Article 100 thereof,

Having regard to the proposal from the Commission,

Having regard to the opinion of the European Parliament ⁽¹⁾,

Having regard to the opinion of the Economic and Social Committee ⁽²⁾,

Whereas the technical requirements which motor vehicles must satisfy pursuant to national laws relate *inter alia* to their front fog lamps;

Whereas those requirements differ from one Member State to another; whereas it is therefore necessary that all Member States adopt the same requirements either in addition to or in place of their existing rules, in order, in particular, to allow the EEC type-approval procedure which was the subject of Council Directive 70/156/EEC of 6 February 1970 on the approximation of the laws of the Member States relating to the type-approval of motor vehicles and their trailers ⁽³⁾, to be introduced in respect of each type of vehicle;

Whereas in Directive 76/756/EEC ⁽⁴⁾, the Council laid down the common requirements for the installation of lighting and light-signalling devices on motor vehicles and their trailers;

Whereas a harmonized type-approval procedure for front fog lamps makes it possible for each Member State to check compliance with the common construction and testing requirements and to inform the other

Member States of its findings by sending a copy of the component type-approval certificate completed for each type of front fog lamp; whereas the placing of an EEC component type-approval mark on all front fog lamps manufactured in conformity with the approved type obviates any need for technical checks on these front fog lamps in the other Member States:

Whereas it is desirable to take into account the technical requirements adopted by the UN Economic Commission for Europe in its Regulation No 19 ('Uniform provisions concerning the approval of motor vehicle fog lights') ⁽⁵⁾, which is annexed to the Agreement of 20 March 1958 concerning the adoption of uniform conditions for approval and reciprocal recognition of approval for motor vehicle equipment and parts;

Whereas the approximation of national laws relating to motor vehicles entails reciprocal recognition by Member States of the checks carried out by each of them on the basis of the common requirements,

HAS ADOPTED THIS DIRECTIVE:

Article 1

1. Each Member State shall grant EEC component type-approval for any type of front fog lamp which satisfies the construction and testing requirements laid down in Annexes 0, II, III, IV and V.
2. The Member State which granted EEC component type-approval shall take the measures required in order to verify that production models conform to the approved type, in so far as this is necessary and if need be in cooperation with the competent authorities in the other Member States. Such verification shall be limited to spot checks.

⁽¹⁾ OJ No C 55, 13. 5. 1974, p. 14.

⁽²⁾ OJ No C 109, 19. 9. 1974, p. 24.

⁽³⁾ OJ No L 42, 23. 2. 1970, p. 1.

⁽⁴⁾ See page 1 of this Official Journal.

⁽⁵⁾ Economic Commission for Europe, Document E/ECE/324 } rev. 1, Addendum 18, rev. 1 of 22
E/ECE/TRANS/505 } August 1974.

Article 2

Member States shall, for each type of front fog lamp which they approve pursuant to Article 1, issue to the manufacturer, or to his authorized representative, an EEC component type-approval mark conforming to the model shown in Annex II.

Member States shall take all appropriate measures to prevent the use of marks liable to create confusion between front fog lamps which have been type-approved pursuant to Article 1, and other devices.

Article 3

1. No Member State may prohibit the placing on the market of front fog lamps on grounds relating to their construction or method of functioning if they bear the EEC component type-approval mark.

2. Nevertheless, a Member State may prohibit the placing on the market of front fog lamps bearing the EEC component type-approval mark which consistently fail to conform to the approved type.

That State shall inform the other Member States and the Commission forthwith of the measures taken, specifying the reasons for its decision.

Article 4

The competent authorities of each Member State shall within one month send to the competent authorities of the other Member States a copy of the component type-approval certificates, an example of which is given in Annex I, completed for each type of front fog lamp which they approve or refuse to approve.

Article 5

1. If the Member State which has granted EEC component type-approval finds that a number of front fog lamps bearing the same EEC component type-approval mark do not conform to the type which it has approved, it shall take the necessary measures to ensure that production models conform to the approved type. The competent authorities of that State shall advise those of the other Member States of the measures taken which may, where there is consistent failure to conform, extend to withdrawal of EEC component type-approval. The said

authorities shall take the same measures if they are informed by the competent authorities of another Member State of such failure to conform.

2. The competent authorities of Member States shall inform each other within one month of any withdrawal of EEC component type-approval, and of the reasons for such a measure.

Article 6

Any decision taken pursuant to the provisions adopted in implementation of this Directive, to refuse or withdraw EEC component type-approval for front fog lamps or prohibit their placing on the market or use shall set out in detail the reasons on which it is based. Such decisions shall be notified to the party concerned, who shall at the same time be informed of the remedies available to him under the laws in force in the Member States and of the time limits allowed for the exercise of such remedies.

Article 7

No Member State may refuse to grant EEC type-approval or national type-approval of any vehicle on grounds relating to its front fog lamps if these bear the EEC component type-approval mark and are fitted in accordance with the requirements laid down in Directive 76/756/EEC.

Article 8

No Member State may refuse or prohibit the sale, registration, entry into service or use of any vehicle on grounds relating to its front fog lamps if these bear the EEC component type-approval mark and are fitted in accordance with the requirements laid down in Directive 76/756/EEC.

Article 9

For the purposes of this Directive, 'vehicle' means any motor vehicle intended for use on the road, with or without bodywork, having at least four wheels and a maximum design speed exceeding 25 km/h, with the exception of vehicles which run on rails, agricultural tractors and machinery and public works vehicles.

Article 10

Any amendments necessary to adjust the requirements of the Annexes to take account of technical progress

shall be adopted in accordance with the procedure laid down in Article 13 of Directive 70/156/EEEC.

Article 11

1. Member States shall adopt and publish the provisions necessary in order to comply with this Directive before 1 July 1977 and shall forthwith inform the Commission thereof. They shall apply these provisions from 1 October 1977 at the latest.

2. Once this Directive has been notified, the Member States shall also ensure that the Commission is informed, in sufficient time for it to submit its comments,

of any draft laws, regulations or administrative provisions which they propose to adopt in the field covered by this Directive.

Article 12

This Directive is addressed to the Member States.

Done at Brussels, 27 July 1976.

For the Council

The President

M. van der STOEL

List of Annexes

Annex 0 (*)	— Definitions, general specifications, illumination, conformity of production
Annex I	— model EEC component type-approval certificate
Annex II	— EEC component type-approval and marking requirements — Appendix: Example of an EEC component type-approval mark
Annex III (*)	— Filament lamps for front fog lamps
Annex IV (*)	— Standard (reference) filament lamps for front fog lamps
Annex V (*)	— Measuring screen

(*) The technical requirements of the Annexes are similar to those of Regulation No 19, rev. 1, of the Economic Commission for Europe. In particular, the breakdown into sections is the same. For this reason, where a section in Regulation No 19, rev. 1, has no counterpart in this Directive, its number is shown in brackets, for the record.

ANNEX 0

DEFINITIONS, GENERAL SPECIFICATIONS, ILLUMINATION, CONFORMITY OF PRODUCTION

1. DEFINITIONS

1.1. Front fog lamp

'Front fog lamp' means the lamp used to improve the illumination of the road in case of fog, snowfall, rainstorms or dust clouds.

1.2. Type of front fog lamp

'Type of front fog lamp' means front fog lamps which do not differ in such essential respects as:

- 1.2.1. the trade name or mark;
- 1.2.2. the characteristics of the optical system;
- 1.2.3. the inclusion of components capable of altering the optical effects by reflection, refraction or absorption; and
- 1.2.4. the type of filament lamp.

(2.)

(3.)

(4.)

5. GENERAL SPECIFICATIONS

5.1. Each sample submitted in accordance with 1.2.3 of Annex II shall conform to the specifications set forth in sections 6 and 7.

5.2. The front fog lamps shall be so designed and constructed that under normal conditions of use, notwithstanding any vibration to which they may be subjected during such use, their satisfactory operation remains assured and they retain the characteristics prescribed by this Directive. The correct position of the lens shall be clearly marked and the lens and reflector shall be so secured as to prevent any rotation during use.

5.3. Conformity with the requirements of this section shall be verified by visual inspection and, where necessary, by a trial fitting.

6. ILLUMINATION

6.1. Front fog lamps shall be so designed as to provide illumination with limited dazzle.

6.2. The illumination produced by the front fog lamp shall be determined by means of a vertical screen set up 25 m forward of the lens and at right angles to the axis of the front fog lamp. The point HV is the base of the perpendicular from the centre of the lamp to the screen. The line hh is the horizontal through HV (see Annex V).

6.3. In the case of a type of construction other than a sealed-beam type, a colourless standard filament lamp shall be used of the type specified by the manufacturer in accordance with the requirements of Annex IV, designed for a nominal voltage of 12 V and supplied by the manufacturer; it shall be supplied with electric current at a voltage such that it produces the flux prescribed for the tests corresponding to its type. In the case of a sealed-beam type of construction, current shall be supplied at the test voltage (6.0 V, 12.0 V or 24.0 V as appropriate).

6.4. The beam shall produce on the screen, over a width of not less than 225 cm on both sides of the line vv, a horizontal cut-off which is sufficiently sharp to enable adjustment to be performed with its aid.

6.5. The front fog lamp shall be so directed that the cut-off on the screen is 50 cm below the line hh.

6.6. When so adjusted, the front fog lamp shall meet the requirements set out in 6.7.

6.7. The illumination produced on the screen (see Annex V) shall meet the following requirements:

Zone on measuring screen	Zone limits	Illumination required (in lux)
A	225 cm on both sides of the line vv and 75 cm above hh	≥ 0.15 and ≤ 1
B	1 250 cm on both sides of the line vv and 150 cm above hh, including hh (except Zone A)	≤ 1
C	1 250 cm both sides of the line vv and starting from 150 cm above hh. The light intensity of the fog lamp making an upward angle in any direction of more than 15° with the horizontal plane shall be limited to 200 cd	≤ 0.5
D	450 cm on both sides of the line vv between the parallels to hh situated 75 and 150 cm respectively below hh	On each vertical line in this zone there shall be at least one point (a, b, c) where the illumination is ≥ 1.5
E	From 450 to 1 000 cm on both sides of zone D between the parallels to hh situated 75 and 150 cm respectively below hh	On each vertical line in this zone there shall be at least one point where the illumination is ≥ 0.5

Note: The illumination specifications shall apply also to the straight lines bounding the zones. The most stringent specification shall be applied in the case of the straight lines adjacent to two zones.

The illumination shall be measured either in white light or in coloured light as prescribed by the manufacturer for use of the front fog lamp in normal service. No variations in illumination detrimental to satisfactory visibility shall exist in either of the Zones B and C.

- 6.8. The screen illumination referred to in 6.7 shall be measured by means of a photo-electric cell, the photo-sensitive area of which shall be contained within a square of side 65 mm.

7. COLOUR OF LIGHT EMITTED

EEC component type-approval may be obtained for a type of front fog lamp emitting either white or yellow (*) light. The colouring, if any, of the beam may be obtained either through the filament lamp glass envelope or through the lens of the front fog lamp or by any other suitable means.

(8.)

(9.)

10. CONFORMITY OF PRODUCTION

Every front fog lamp bearing an EEC component type-approval mark shall conform to the type approved and satisfy the photometric requirements set out in section 6.

(11.)

(12.)

(*) Same definition as for 'selective yellow', but with a different purity factor: the limit towards white shall be $y \geq -x + 0.940$ and $y \geq 0.440$ instead of: $y \geq x + 0.966$, as for selective yellow.

ANNEX I

MODEL EEC COMPONENT TYPE-APPROVAL CERTIFICATE

(Maximum format: A4 (210 x 297 mm))

Name of administration

Notification concerning the granting, refusal or withdrawal of EEC component type-approval or the granting, refusal or withdrawal of an extension of EEC component type-approval for a type of front fog lamp

- Component type-approval No
1. Front fog lamp designed to emit white/yellow light (*)
2. Front fog lamp using a filament lamp of type F1, F2, F3, H1, H2, H3 (*)
3. Nominal voltage (in the case of a sealed-beam lamp) volts
4. Trade name or mark
5. Name and address of manufacturer
6. If applicable, name and address of manufacturer's authorized representative
7. Submitted for EEC component type-approval on
8. Technical service conducting EEC component type-approval tests
9. Date of report issued by that service
10. Number of report issued by that service
11. Extension of type-approval: yellow/white (*)
12. Date of granting/refusal/withdrawal of EEC component type-approval (*)
13. Date of granting/refusal/withdrawal of extension of EEC component type-approval (*)
14. Single EEC component type-approval granted on the basis of 3.3 of Annex II, for a lighting and light-signalling device comprising several lamps, and in particular:
15. Date of refusal/withdrawal (*) of single EEC component type-approval
16. Place
17. Date
18. Signature
19. The attached drawing No shows a front view of the front fog lamp, with details of the pattern of the lens moulding, and in cross-section
20. Remarks

(*) Delete where inapplicable.

ANNEX II

EEC COMPONENT TYPE-APPROVAL AND MARKING REQUIREMENTS

1. APPLICATION FOR EEC COMPONENT TYPE-APPROVAL
 - 1.1. The application for EEC component type-approval shall be submitted by the holder of the trade name or mark or by his authorized representative.
 - 1.2. For each type of front fog lamp, the application shall be accompanied by:
 - 1.2.1. a brief technical specification. If the lamp is not of the sealed-beam type, the type of filament lamp shall be specified. This type must be one of those whose characteristics are specified in Annex III;
 - 1.2.2. drawings (three copies) in sufficient detail to permit identification of the type of lamp, showing a front view of the lamp, with if necessary details of the pattern of the lens moulding and in cross section. The drawings shall show the intended position of the EEC component type-approval number and the additional symbol in relation to the rectangle containing the EEC component type-approval mark;
 - 1.2.3. two samples of the type of front fog lamp.
2. MARKINGS
 - 2.1. The samples of the type of front fog lamp submitted for EEC component type-approval must bear the applicant's trade name or mark, which must be clearly legible and indelible.
 - 2.2. Each lamp shall include on both the lens and the lamp housing a space of sufficient size for the EEC component type-approval mark. This shall be indicated on the drawings referred to in 1.2.2.
3. EEC COMPONENT TYPE-APPROVAL
 - 3.1. If all the samples submitted in accordance with section 1 meet the requirements of sections 5, 6 and 7 of Annex 0, EEC component type-approval shall be granted and a component type-approval number issued.
 - 3.2. This number shall not be assigned to any other type of front fog lamp except where EEC component type-approval is extended to another type of lamp differing only as to the colour.
 - 3.3. Where EEC component type-approval is requested for a type of lighting and light-signalling device comprising a front fog lamp and other lamps, a single EEC component type-approval mark may be issued provided that the front fog lamp complies with the requirements of this Directive and each of the other lamps forming part of the type of lighting and light-signalling device for which EEC type-approval is requested, complies with the specific Directive applying to it.
4. MARKS
 - 4.1. Every front fog lamp conforming to a type approved under this Directive shall bear an EEC component type-approval mark.
 - 4.2. This mark shall consist of a rectangle surrounding the lower case letter 'e', followed by the distinguishing letter(s) or number of the Member State which has granted the type-approval:
 - 1 for Germany,
 - 2 for France,
 - 3 for Italy,
 - 4 for the Netherlands,
 - 6 for Belgium,


11 for the United Kingdom,
13 for Luxembourg,
DK for Denmark,
IRL for Ireland.

It must also include the EEC component type-approval number which corresponds to the number of the EEC component type-approval certificate issued for the type of front fog lamp in question.

- 4.3. The EEC component type-approval mark shall be supplemented by an additional symbol 'B'.
- 4.4. The EEC component type-approval number must be placed in any convenient position near the rectangle surrounding the letter 'e'.
- 4.5. The EEC component type-approval mark and the additional symbol must be affixed to the lens of the lamp, or one of the lenses, in such a way as to be indelible and clearly legible even when the front fog lamps are fitted on the vehicle.
- 4.6. An example of the EEC component type-approval mark and the additional symbol is shown in the Appendix.
- 4.7. Where a single EEC type-approval number is issued, as under 3.3, for a type of lighting and light-signalling device comprising a front fog lamp and other lamps, one EEC component type-approval mark only may be affixed, consisting of:
 - a rectangle surrounding the letter 'e', followed by the distinguishing letter(s) or number of the Member State which has granted the type-approval,
 - an EEC component type-approval number,
 - the additional symbols required by the various Directives under which EEC component type-approval was granted.
- 4.8. The dimensions of the various components of this mark must not be less than the largest of the minimum dimensions specified for individual markings by the various Directives under which the EEC component type-approval was granted.

Appendix


EXAMPLE OF AN EEC COMPONENT TYPE-APPROVAL MARK

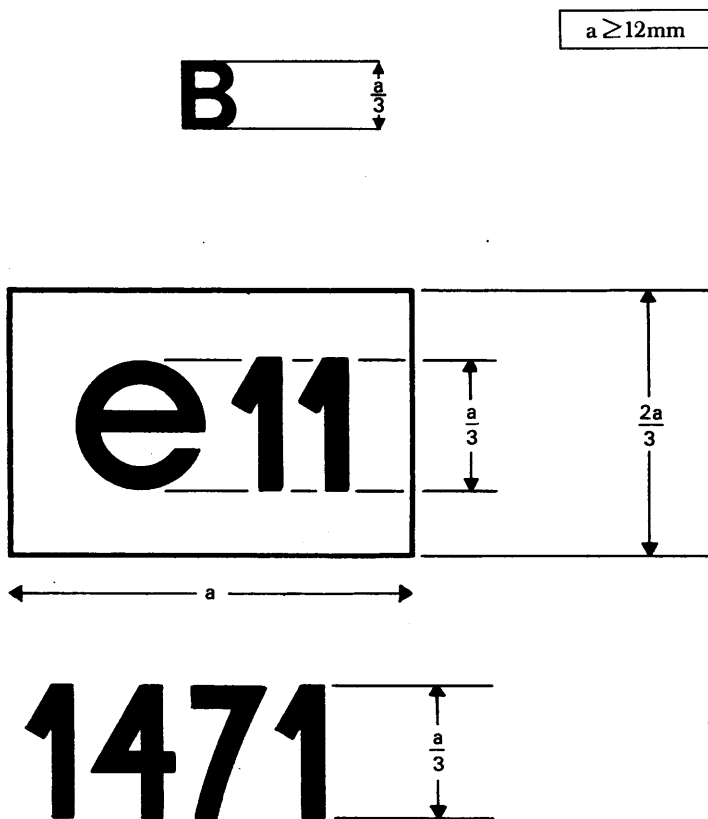

The device bearing the EEC component type-approval mark shown above is a front fog lamp EEC type-approved in the United Kingdom (e 11) under the number 1471.

ANNEX III

FLAMENT LAMPS FOR FRONT FOG LAMPS

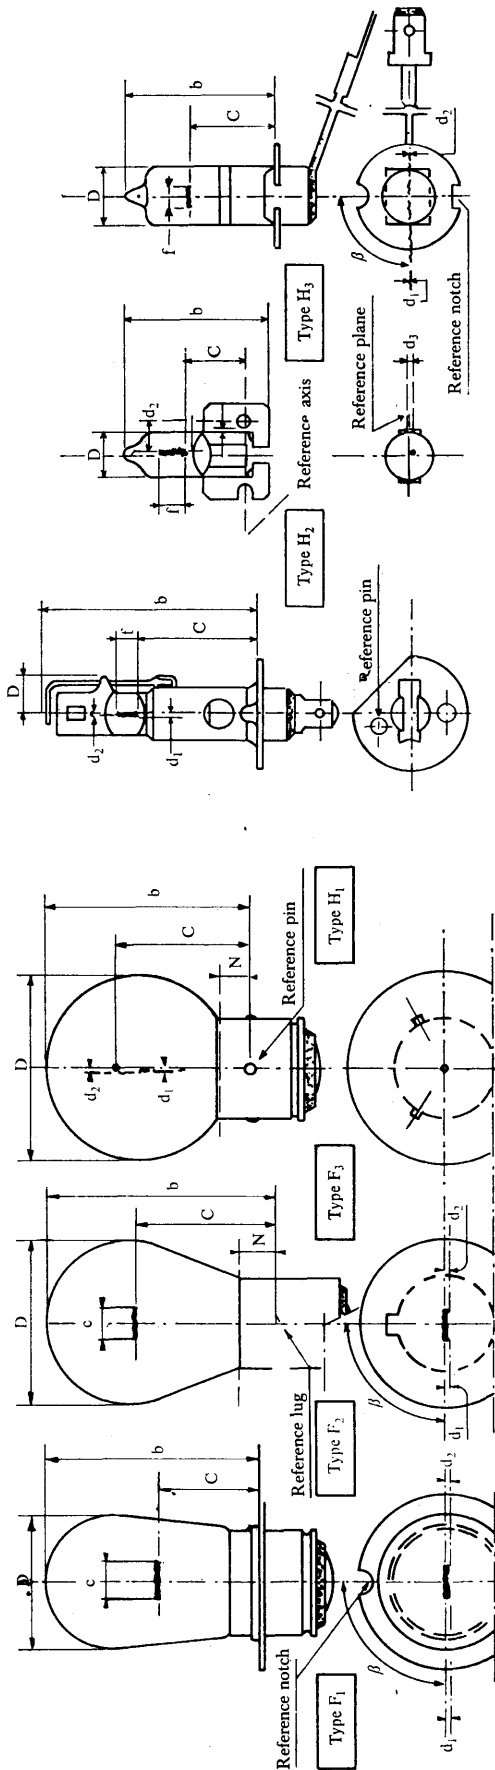

Dimensions (mm)

Type	F ₁		F ₂		F ₃		H ₁		H ₂		H ₃						
	min.	nom.	max.	min.	nom.	max.	min.	nom.	max.	min.	nom.	max.					
D			29.0			41.0						11.5					
b			46.0			50.0						31.0					
c	21.0 (1)	(2)	22.0 (1)	(3)	29.65 (1)	30.35 (1)	28.0 (1)	24.75 (1)	25.0	25.25 (1)	14.75 (1)	15.25 (1)	17.5 (1)	18.5 (1)			
d ₁	-0.5	0	+0.5	-0.5	0	+0.5	-0.5 (1)	-0.25 (1)	0	+0.25 (1)	-0.25	+0.25	(4)				
d ₂							-0.5 (1)	-0.5 (1)		+0.5 (1)	-0.50	+0.50	(4)				
d ₃										-0.25	+0.25	+0.25	(4)				
Ø	Coil diameter not specified																
f			6.0 (6 V) 7.5 (12 V) 6.75 (24 V)			7.0		4.5	5.5	6.5	4.0		3.0				
N (°)			90°			90°							90° (4)				
Cap (°)			P 36s (1)			BA 20s							X 511	PK 22s			
Electrical and photometric characteristics																	
Designation by	Volts	6	12	24	6	12	24	6	12	24	6	12	24	6	12	24	
	Watts	36	48	44	35	45	50	50	55	70	70	55	70	70	55	70	
Test voltage		6.3	13.2	28.0	6.3	13.2	28.0	6.3	13.2	28.0	6.3	13.2	28.0	6.3	13.2	28.0	
	Nominal watts	38.8	55.5	55.5	35	45	45	63	62	80	63	62	80	63	62	80	
Voltage at test	Toler. % (1)	± 10		± 10		± 10		± 7.5		± 7.5		± 7.5		± 7.5		(4)	
	Nominal luminous flux	650	1150	1030	650	685	650	900	1350	1550	1900	1300	1800	2150	1050	1450	1750
Luminous flux for head lamp tests (1)	Toler. % (1)	± 15		± 20		± 15		± 15		± 15		± 15		± 15		± 15	
		800			540		650		1150		1300		1300		1100		1100

(1) Maximum value.

(2) Applicable to 90% of the production only.

(3) Cylindrical tolerance.

(4) This dimension must be checked by a ring gauge with a bore equal to the maximum permissible diameter of the cap (see IEC publication 61).

(5) Cap in accordance with IEC publication 61.

(6) To be checked by a 'box system'.

(7) For the light test only the 12-volt lamp is used.

(8) For 24-volt lamps the P 36d cap is also sometimes used.

ANNEX IV


STANDARD (REFERENCE) FILAMENT LAMPS FOR FRONT FOG LAMPS

Type	F ₁	F ₂	F ₃	H ₁
Dimensions (mm)				
D	29 max.	36 max.	41 max.	10 max.
b	46 max.	50 max.	45 max.	49 max.
c	21.5 ± 0.15	30 ± 0.15	28.5 ± 0.15	25 ± 0.15
d ₁	± 0.2	± 0.2	± 0.2	± 0.2
d ₂				± 0.25
f	6 to 7.5	⁽¹⁾ 4 to 7	5 ± 1	5.5 ± 0.5
β	90 ± 3°	90 ± 3°		
Test voltage	13.2 V	13.5 V	13.2 V	13.2 V
Wattage at test voltage	55.5 W ± 10 %	35 W ± 10 %	45 W ± 10 %	62 W ± 7.5 %
Luminous flux for testing front fog lamps	800 lm	540 lm	650 lm	1.150 lm

⁽¹⁾ The dimension from the end of the filament to the reference axis should be 2.5 ± 0.2.

ANNEX V

MEASURING SCREEN
at a distance of 25 m

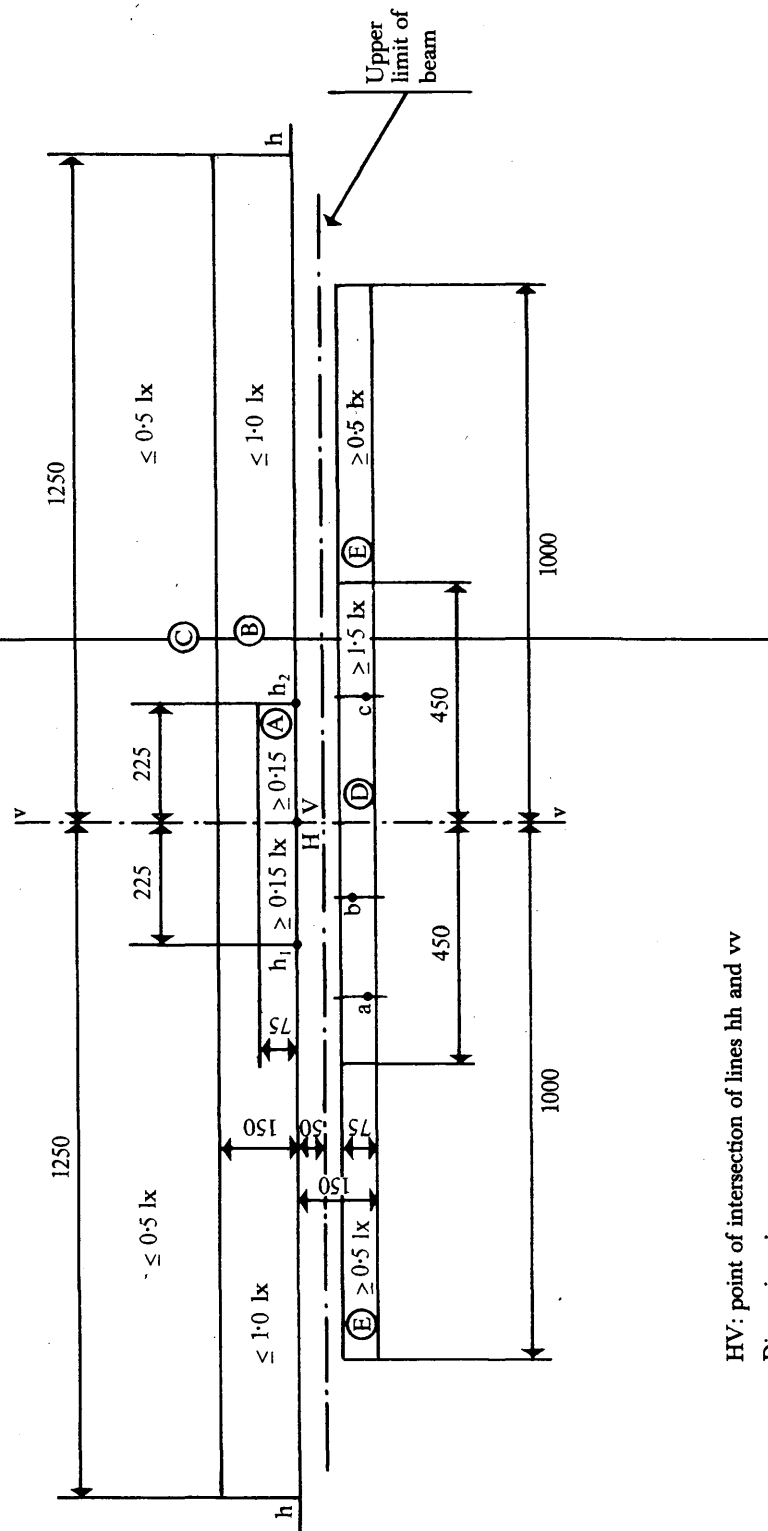

HV: point of intersection of lines hh and vv
Dimensions in cm