

I

(Akti, sprejeti v skladu s Pogodbo ES/Pogodbo Euratom, katerih objava je obvezna)

UREDBE

UREDBA (ES) št. 1272/2008 EVROPSKEGA PARLAMENTA IN SVETA

z dne 16. decembra 2008

o razvrščanju, označevanju in pakiranju snovi ter zmesi, o spremembi in razveljavitvi direktiv 67/548/EGS in 1999/45/ES ter spremembi Uredbe (ES) št. 1907/2006

(Besedilo velja za EGP)

EVROPSKI PARLAMENT IN SVET EVROPSKE UNIJE STA –

ob upoštevanju Pogodbe o ustanovitvi Evropske skupnosti in zlasti člena 95 Pogodbe,

ob upoštevanju predloga Komisije,

ob upoštevanju mnenja Evropskega ekonomsko-socialnega odbora ⁽¹⁾,

v skladu s postopkom, določenim v členu 251 Pogodbe ⁽²⁾,

ob upoštevanju naslednjega:

(1) Ta uredba bi morala zagotoviti visoko raven varovanja zdravja ljudi in okolja ter prosti pretok kemičnih snovi, zmesi in nekaterih posebnih izdelkov ter hkrati izboljšati konkurenčnost in inovativnost.

(2) Učinkovito delovanje notranjega trga za snovi, zmesi in navedene izdelke se lahko doseže le, če se zahteve, ki veljajo zanje, ne razlikujejo bistveno med državami članicami.

(3) V okviru približevanja zakonodaje o kriterijih za razvrščanje in označevanje snovi in zmesi bi se moralo zagotoviti visoko raven varovanja zdravja ljudi in okolja, da se doseže trajnostni razvoj.

(4) Trgovina s snovmi in zmesmi ne zadeva le notranjega, temveč tudi svetovni trg. Globalno usklajeni predpisi o razvrščanju in označevanju ter enotni predpisi o razvrščanju in označevanju za dobavo in uporabo na eni strani ter za prevoz na drugi strani bi morali zato koristiti podjetjem.

(5) Z namenom olajšanja svetovne trgovine in hkratnega varovanja zdravja ljudi in okolja so se v okviru Združenih narodov v obdobju 12 let z vso pozornostjo razvijali usklajeni kriteriji za razvrščanje in označevanje, rezultat tega pa je globalno usklajeni sistem za razvrščanje in označevanje kemikalij (Globally Harmonised System of Classification and Labelling of Chemicals, v nadaljnjem besedilu „GHS“).

(6) Ta uredba sledi mnogim izjavam, s katerimi je Skupnost potrdila svoj namen prispevati h globalni uskladitvi kriterijev za razvrščanje in označevanje ne le na ravni ZN, temveč tudi z vključitvijo mednarodno dogovorjenih meril GHS v zakonodajo Skupnosti.

(7) Koristi za podjetja bodo vedno večje, čim več bo držav v svetu, ki bodo v svojo zakonodajo vključile merila GHS. Skupnost bi morala igrati vodilno vlogo v tem procesu in druge države spodbujati k temu, da ji sledijo, in tako industriji v Skupnosti zagotoviti konkurenčno prednost.

(8) Zato je nujno, da se v Skupnosti uskladijo določbe in kriteriji za razvrščanje ter označevanje snovi, zmesi in nekaterih posebnih izdelkov, pri čemer se upoštevajo kriteriji za razvrščanje in pravila za označevanje GHS, ter se s tem gradi na 40-letnih izkušnjah, pridobljenih pri izvajanju obstoječe zakonodaje Skupnosti o kemikalijah, in

⁽¹⁾ UL C 204, 9.8.2008, str. 47.

⁽²⁾ Mnenje Evropskega parlamenta z dne 3. septembra 2008 (še ni objavljeno v Uradnem listu).

ohrani raven varovanja, ki je že bila dosežena s sistemom usklajevanja razvrščanja in označevanja, z razredi nevarnosti Skupnosti, ki še niso del GHS, in z obstoječimi pravili za označevanje in pakiranje.

(9) Ta uredba ne bi smela posegati v celovito in neomejeno uporabo pravil Skupnosti o konkurenci.

(10) Cilj te uredbe bi moral biti določiti lastnosti, zaradi katerih bi bilo treba snovi in zmesi razvrstiti kot nevarne, da se lahko nevarnosti teh snovi in zmesi ustrezno ugotavljajo in sporočajo. Te lastnosti bi morale vključevati fizikalne nevarnosti ter nevarnosti za zdravje ljudi in okolje, vključno z nevarnostmi za ozonski plašč.

(11) To uredbo bi bilo treba splošno uporabljati za vse snovi in zmesi, ki se dobavljajo v Skupnost, razen kadar so v preostali zakonodaji Skupnosti določena posebna pravila o razvrščanju in označevanju, takšni primeri so Direktiva Sveta 76/768/EGS z dne 27. julija 1976 o približevanju zakonodaje držav članic v zvezi s kozmetičnimi izdelki ⁽¹⁾, Direktiva Sveta 82/471/EGS z dne 30. junija 1982 o nekaterih proizvodih, ki se uporabljajo v prehrani živali ⁽²⁾, Direktiva Sveta 88/388/EGS z dne 22. junija 1988 o približevanju zakonodaje držav članic o aromah za uporabo v živilih in izhodnih surovinah za njihovo proizvodnjo ⁽³⁾, Direktiva Sveta 89/107/EGS z dne 21. decembra 1988 o približevanju zakonodaj držav članic o aditivih za živila, ki se smejo uporabljati v živilih, namenjenih za prehrano ljudi ⁽⁴⁾, Direktiva Sveta 90/385/EGS z dne 20. junija 1990 o približevanju zakonodaje držav članic o aktivnih medicinskih pripomočkih za vsaditev ⁽⁵⁾, Direktiva Sveta 93/42/EGS z dne 14. junija 1993 o medicinskih pripomočkih ⁽⁶⁾, Direktiva 98/79/ES Evropskega parlamenta in Sveta z dne 27. oktobra 1998 o *in vitro* diagnostičnih medicinskih pripomočkih ⁽⁷⁾, Odločba Komisije 1999/217/ES z dne 23. februarja 1999 o registru aromatičnih snovi, ki se uporabljajo v živilih ali na njih, pripravljenem skladno z Uredbo (ES) št. 2232/96 Evropskega parlamenta in Sveta z dne 28. oktobra 1996 ⁽⁸⁾, Direktiva 2001/82/ES Evropskega parlamenta in Sveta z dne 6. novembra 2001 o zakoniku Skupnosti o zdravilih za uporabo v veterinarski medicini ⁽⁹⁾, Direktiva 2001/83/ES Evropskega parlamenta in Sveta z dne 6. novembra 2001 o zakoniku Skupnosti o zdravilih za uporabo v humani medicini ⁽¹⁰⁾, Uredba (ES) št. 178/2002 Evropskega parlamenta in Sveta z dne 28. januarja 2002

o določitvi splošnih načel in zahtevah živilske zakonodaje, ustanovitvi Evropske agencije za varnost hrane in postopkih, ki zadevajo varnost hrane ⁽¹¹⁾, in Uredba (ES) št. 1831/2003 Evropskega parlamenta in Sveta z dne 22. septembra 2003 o dodatkih za uporabo v prehrani živali ⁽¹²⁾ ali pravila o prevozu snovi in zmesi po zraku, morju, cesti, železnici ali celinskih plovnihih poteh.

(12) Izrazi in opredelitve pojmov v tej uredbi bi morali biti v skladu s tistimi iz Uredbe (ES) št. 1907/2006 Evropskega parlamenta in Sveta z dne 18. decembra 2006 o registraciji, evalvaciji, avtorizaciji in omejevanju kemikalij (REACH) ⁽¹³⁾ ter z izrazi in opredelitvami pojmov, določenimi v pravilih, ki urejajo prevoz, pa tudi z opredelitvami pojmov, opredeljenimi v GHS na ravni ZN, da bi zagotovili kar največjo skladnost pri uporabi zakonodaje o kemikalijah v Skupnosti v okviru svetovne trgovine. Zaradi istega razloga bi morali biti razredi nevarnosti, opredeljeni v GHS, določeni tudi v tej uredbi.

(13) Zlasti je primerno vključiti tiste razrede nevarnosti, opredeljene v GHS, ki posebej upoštevajo dejstvo, da na fizikalne nevarnosti snovi ali zmesi vpliva tudi način njihovega sproščanja.

(14) Izraz „zmes“, kakor je opredeljen v tej uredbi, bi moral imeti enak pomen kot izraz „pripravek“, ki se je pred tem uporabljal v zakonodaji Skupnosti.

(15) Ta uredba bi morala nadomestiti Direktivo Sveta 67/548/EGS z dne 27. junija 1967 o približevanju zakonov in drugih predpisov v zvezi z razvrščanjem, pakiranjem in označevanjem nevarnih snovi ⁽¹⁴⁾ ter Direktivo 1999/45/ES Evropskega parlamenta in Sveta z dne 31. maja 1999 o približevanju zakonov in drugih predpisov držav članic v zvezi z razvrščanjem, pakiranjem in označevanjem nevarnih pripravkov ⁽¹⁵⁾. V celoti bi morala ohraniti sedanjo raven varovanja zdravja ljudi in okolja, ki jo zagotavljajo navedene direktive. Zato bi bilo treba nekatere razrede nevarnosti, ki jih obravnavajo navedene direktive, vendar še niso vključeni v GHS, ohraniti v tej uredbi.

(16) Odgovornost za identifikacijo nevarnosti snovi in zmesi in za odločitev o njihovi razvrstitvi bi morala biti večinoma v rokah proizvajalcev, uvoznikov in nadaljnjih uporabnikov teh snovi in zmesi, in sicer tudi tedaj, ko zanje veljajo

⁽¹⁾ UL L 262, 27.9.1976, str. 169.

⁽²⁾ UL L 213, 21.7.1982, str. 8.

⁽³⁾ UL L 184, 15.7.1988, str. 61.

⁽⁴⁾ UL L 40, 11.2.1989, str. 27.

⁽⁵⁾ UL L 189, 20.7.1990, str. 17.

⁽⁶⁾ UL L 169, 12.7.1993, str. 1.

⁽⁷⁾ UL L 331, 7.12.1998, str. 1.

⁽⁸⁾ UL L 84, 27.3.1999, str. 1.

⁽⁹⁾ UL L 311, 28.11.2001, str. 1.

⁽¹⁰⁾ UL L 311, 28.11.2001, str. 67.

⁽¹¹⁾ UL L 31, 1.2.2002, str. 1.

⁽¹²⁾ UL L 268, 18.10.2003, str. 29.

⁽¹³⁾ UL L 396, 30.12.2006, str. 1. Popravljen različica v UL L 136, 29.5.2007, str. 3.

⁽¹⁴⁾ UL 196, 16.8.1967, str. 1.

⁽¹⁵⁾ UL L 200, 30.7.1999, str. 1.

zahteve iz Uredbe (ES) št. 1907/2006. Nadalnjim uporabnikom bi bilo treba omogočiti, da pri izpolnjevanju nalog razvrščanja uporabijo razvrstitev snovi ali zmesi, ki jo v skladu s to uredbo opravi udeleženec dobavne verige, če ne spremenijo sestave snovi ali zmesi. Za razvrščanje snovi, ki niso dane v promet in morajo biti registrirane ali prijavljene v skladu z Uredbo (ES) št. 1907/2006, bi morali biti večinoma odgovorni proizvajalci, izdelovalci izdelkov in uvozniki. Vendar bi morala obstajati možnost, da se zagotovi usklajeno razvrščanje tistih snovi v razrede nevarnosti, ki vzbujajo največjo skrb, v posameznih primerih pa tudi za druge snovi, kar bi zavezovalo vse proizvajalce, uvoznike in nadaljnje uporabnike snovi in zmesi, ki vsebujejo takšne snovi.

- (17) Če je bila sprejeta odločitev o usklajeni razvrstitvi snovi v določen razred nevarnosti ali razločevanje znotraj razreda nevarnosti z vključitvijo ali spremembo vpisa v del 3 Priloge VI k tej uredbi, bi morali proizvajalec, uvoznik in nadaljnji uporabnik uporabiti usklajeno razvrstitev ter samostojno razvrščati le v preostale, neusklajene razrede nevarnosti ali razločevanja znotraj razreda nevarnosti.
- (18) Da bi bili potrošniki seznanjeni z nevarnostmi, bi morali dobavitelji snovi in zmesi v skladu s to uredbo zagotoviti, da so snovi ali zmesi, preden so dane v promet, označene in pakirane skladno z izpeljano razvrstitvijo. Nadalnjim uporabnikom bi bilo treba omogočiti, da pri izpolnjevanju zadevnih nalog uporabijo razvrstitev snovi ali zmesi, ki jo v skladu s to uredbo opravi udeleženec dobavne verige, pod pogojem, da ne spremenijo sestave snovi ali zmesi, distributerjem pa bi bilo treba omogočiti, da uporabijo razvrstitev snovi ali zmesi, ki jo v skladu s to uredbo opravi udeleženec dobavne verige.
- (19) Da bi zagotovili informacije o nevarnih snoveh tudi v primerih, ko te sestavljajo zmesi, ki vsebujejo vsaj eno snov, ki je razvrščena kot nevarna, bi bilo treba po potrebi zagotoviti dodatne informacije o njihovem označevanju.
- (20) Medtem ko od proizvajalca, uvoznika ali nadaljnega uporabnika snovi ali zmesi ne bi smeli zahtevati, da za namene razvrščanja pridobiva nove toksikološke ali ekotoksikološke podatke, pa bi kljub temu moral identificirati bistvene informacije o nevarnostih snovi ali zmesi, ki so mu že na razpolago, in oceniti njihovo kakovost. Proizvajalec, uvoznik ali nadaljnji uporabnik bi pri tem moral upoštevati tudi podatke o ljudeh iz preteklosti, kot so epidemiološke študije na izpostavljenih populacijah, podatke o nezgodni ali poklicni izpostavljenosti, podatke o učinkih in klinične študije. Te informacije bi bilo treba primerjati s kriteriji za različne razrede nevarnosti in razločevanja, da bi lahko proizvajalec, uvoznik ali nadaljnji uporabnik ugotovil, ali je treba snov ali zmes razvrstiti kot nevarno.
- (21) Ker se razvrstitev snovi ali zmesi lahko opravi že na podlagi razpoložljivih informacij, bi se morale razpoložljive informacije, ki se uporabljajo za namene te uredbe, najprej pridobiti v skladu s testnimi metodami iz Uredbe (ES) št. 1907/2006, določbami o prevozu ali mednarodnimi načeli ali postopki za potrjevanje informacij, da se zagotovi kakovost in primerljivost rezultatov ter skladnost z drugimi zahtevami na mednarodni ravni ali na ravni Skupnosti. Te testne metode, določbe, načela in postopke bi bilo treba upoštevati tudi, če se proizvajalec, uvoznik ali nadaljnji uporabnik odločijo za pridobivanje novih informacij.
- (22) Za lažje ugotavljanje nevarnosti zmesi bi morali proizvajalci, uvozniki in nadaljnji uporabniki izhajati iz podatkov za samo zmes, kadar so ti na voljo, izjema pa so na primer zmesi, ki bodisi vsebujejo rakotvorne snovi, mutagene snovi za zarodne celice ali snovi, ki so strupene za razmnoževanje, ali kadar se ocenjuje biorazgradnja ali kopičenje v organizmih v razredu nevarnosti „nevarnost za vodno okolje“. Kjer nevarnosti zmesi v navedenih primerih ni mogoče ustrezno oceniti na podlagi podatkov o sami zmesi, bi bilo treba kot podlago za opredelitev nevarnosti zmesi običajno uporabiti podatke o posameznih sestavinah zmesi.
- (23) Če je na voljo dovolj informacij o podobnih preskušanih zmesih, vključno s podatki o pomembnih sestavinah zmesi, se lahko nevarne lastnosti netestiranih zmesi določijo z uporabo posebnih pravil, imenovanih „premostitvena načela“. S temi pravili je mogoče opredeliti nevarnosti zmesi na podlagi dostopnih informacij o podobnih testiranih zmesih namesto s testiranjem zmesi. Kadar za samo zmes testni podatki niso na voljo ali so ti neustrezni, bi se morali proizvajalci, uvozniki in nadaljnji uporabniki ravnati po premostitvenih načelih, da bo zagotovljena ustrezna primerljivost rezultatov razvrščanja takšnih zmesi.
- (24) V posebnih sektorjih industrije se lahko vzpostavi mreža za lažjo izmenjavo podatkov ter združitev strokovnega znanja in izkušenj pri evalviranju informacij, testnih podatkov, določanju zanesljivosti informacij in premostitvenih načel. S takšnimi mrežami je mogoče v navedenih industrijskih sektorjih podpirati proizvajalce, uvoznike in nadaljnje uporabnike, predvsem pa mala in srednje velika podjetja (MSP), pri izpolnjevanju obveznosti iz te uredbe. Navedena mreža se lahko uporabi tudi za izmenjavo informacij in najboljših praks, da se poenostavi izpolnjevanje obveznosti glede prijave. Dobavitelji, ki uporabijo takšno podporo, bi morali v skladu s to uredbo biti v celoti odgovorni za izpolnjevanje obveznosti glede razvrščanja, pakiranja in označevanja.

- (25) Izredno pomembno je tudi varstvo živali, ki spada v področje uporabe Direktive Sveta 86/609/EGS z dne 24. novembra 1986 o približevanju zakonov in drugih predpisov držav članic o varstvu živali, ki se uporabljajo za poskusne in druge znanstvene namene ⁽¹⁾. V skladu s tem bi morali proizvajalec, uvoznik ali nadaljnji uporabnik, kadar se odločijo za pridobivanje informacij za namene te uredbe, namesto izvajanja testov na živalih v smislu Direktive 86/609/EGS najprej preveriti možnost uporabe drugih sredstev. Teste na človeku podobnih primatih bi bilo treba za namen te uredbe prepovedati.
- (26) Testne metode iz Uredbe Komisije (ES) št. 440/2008 z dne 30. maja 2008 o določitvi testnih metod v skladu z Uredbo (ES) št. 1907/2006 Evropskega parlamenta in Sveta o registraciji, evalvaciji, avtorizaciji in omejevanju kemikalij (REACH) ⁽²⁾ se redno pregledujejo in izboljšujejo, da bi zmanjšali testiranja na vretenčarjih in število udeleženih živali. Evropski center za validacijo alternativnih metod (ECVAM), ki deluje v okviru Skupnega raziskovalnega središča Komisije, ima pomembno vlogo pri znanstvenem evalviranju in validaciji alternativnih testnih metod.
- (27) Pri kriterijih razvrščanja in označevanja iz te uredbe bi bilo treba, kar zadeva evalvacijo nevarnosti snovi in zmesi ter obveznosti pridobivanja informacij o njihovih bistvenih lastnostih na drug način, kot so testi na živalih v smislu Direktive 86/609/EGS, čim bolj upoštevati spodbujanje alternativnih metod, kakor je določeno v Uredbi (ES) št. 1907/2006. Temu cilju in določenim obveznostim, ki izhajajo iz te uredbe, prihodnji kriteriji ne bi smeli predstavljati ovire, prav tako ne bi smeli v nobenem primeru imeti za posledico testov na živalih, če so za namene razvrščanja in označevanja primerni alternativni testi.
- (28) Za namene razvrščanja se podatki ne bi smeli pridobivati s testi na ljudeh. Upoštevati bi bilo treba razpoložljive in zanesljive epidemiološke podatke ter pretekle izkušnje o vplivih snovi in zmesi na ljudi (npr. podatki o poklicni izpostavljenosti in podatki iz zbirk podatkov o nesrečah), prav tako bi se jim lahko dala prednost pred podatki, ki izhajajo iz študij na živalih, kadar se pokažejo nevarnosti, ki niso ugotovljene na podlagi teh študij. Pretehtati bi bilo treba rezultate študij na živalih v primerjavi z rezultati na podlagi podatkov o ljudeh, pri presoji podatkov o živalih in ljudeh pa bi bila potrebna strokovna presoja, da se zagotovi najboljše varovanje zdravja ljudi.
- (29) Nove informacije glede fizikalnih nevarnosti bi vedno morale biti potrebne, razen kadar so podatki že na voljo ali kadar je v tej uredbi predvideno odstopanje.
- (30) Testi, ki se izvajajo samo zaradi te uredbe, se opravijo na snoveh ali zmesih v obliki(-ah) ali agregatnem(-ih) stanju(-ih), v katerem(-ih) se snov ali zmes da v promet in se lahko upravičeno pričakuje, da se bo v tej obliki ali agregatnem stanju uporabljala. Obstajati pa bi morala tudi možnost, da se za namen te uredbe uporabijo rezultati testov, izvedenih zaradi izpolnjevanja drugih predpisanih zahtev, vključno s tistimi, ki so jih predpisale tretje države, čeprav testi morda niso bili izvedeni na snoveh ali zmesih v obliki(-ah) ali agregatnem(-ih) stanju(-ih), v kateri so bila dana v promet ali za katero se lahko upravičeno pričakuje, da se bo uporabljala.
- (31) Če se testi izvedejo, bi morali biti po potrebi skladni z ustreznimi zahtevami za varstvo laboratorijskih živali iz Direktive 86/609/EGS, v primeru toksikoloških in ekotoksikoloških testov pa z načeli dobre laboratorijske prakse, ki jih določa Direktiva 2004/10/ES Evropskega parlamenta in Sveta z dne 11. februarja 2004 o usklajevanju zakonov in drugih predpisov o uporabi načel dobre laboratorijske prakse ter preverjanju njihove uporabe pri preskusih kemičnih snovi ⁽³⁾.
- (32) Kriteriji za razvrščanja v različne razrede nevarnosti in razločevanja bi morali biti določeni v prilogi, ki bi morala vsebovati tudi dodatne določbe glede pogojev za izpolnjevanje kriterijev.
- (33) Ker uporaba kriterijev za različne razrede nevarnosti za informacije ni vedno nedvoumna in preprosta, bi si morali proizvajalci, uvozniki in nadaljnji uporabniki pri določanju zanesljivosti dokazov pomagati s strokovno presojo, da dobijo ustrezne rezultate.
- (34) Proizvajalec, uvoznik ali nadaljnji uporabnik bi moral v skladu s kriteriji iz te uredbe določiti posebne mejne koncentracije za snovi, če lahko te mejne koncentracije upraviči, in o tem obvestiti Evropsko agencijo za kemikalije (v nadaljnjem besedilu „Agencija“). Vendar za usklajene razrede nevarnosti ali razločevanja snovi, vključenih v usklajeno razvrščanje in označevanje nekaterih nevarnih snovi, ki je priloženo k tej uredbi, ne bi smeli določiti posebnih mejnih koncentracij. Agencija bi morala zagotoviti smernice za določanje posebnih mejnih koncentracij. Zaradi zagotavljanja enotnosti bi morale biti pri usklajenih razvrstitvah po potrebi vključene tudi posebne mejne koncentracije. Posebne mejne koncentracije bi morale imeti pri razvrščanju prednost pred drugimi mejnimi koncentracijami.
- (35) Množilne faktorje („M-faktorje“) za snovi, razvrščene kot akutno nevarne za vodno okolje iz kategorije 1 ali kronično nevarne za vodno okolje iz kategorije 1, bi moral določiti proizvajalec, uvoznik ali nadaljnji uporabnik v skladu s kriteriji iz te uredbe. Agencija bi morala zagotoviti smernice za določanje M-faktorjev.

⁽¹⁾ UL L 358, 18.12.1986, str. 1.

⁽²⁾ UL L 142, 31.5.2008, str. 1.

⁽³⁾ UL L 50, 20.2.2004, str. 44.

- (36) Zaradi sorazmernosti in izvedljivosti bi bilo treba določiti splošne mejne vrednosti za ugotovljene nečistoče, dodatke in posamezne sestavine snovi ter za snovi v zmesih, hkrati pa tudi opredeliti, kdaj bi bilo treba informacije o njih upoštevati pri določanju razvrstitve glede na nevarnosti snovi in zmesi.
- (37) Za zagotovitev ustrezne razvrstitve zmesi bi bilo treba pri razvrščanju zmesi upoštevati razpoložljive informacije o sinergijskih in nasprotnih učinkih.
- (38) Proizvajalci, uvozniki in nadaljnji uporabniki bi morali ponovno evalvirati razvrstitve snovi ali zmesi, ki jih dajo v promet, če se seznanijo z novimi ustreznimi in zanesljivimi znanstvenimi ali tehničnimi informacijami, ki bi lahko vplivale na navedene razvrstitve, ali če spremenijo sestavo zmesi, tako da se zagotovi, da razvrstitev temelji na dopoljenih informacijah, razen če obstajajo zadostni dokazi, da se razvrstitev ne bi spremenila. Dobavitelji bi morali ustrezno dopolniti etikete.
- (39) Snovi ali zmesi, ki so razvrščene kot nevarne, bi bilo treba označevati in pakirati v skladu z njihovo razvrstitvijo, da se zagotovi ustrezno varstvo in da prejemniki prejmejo bistvene informacije, ki jih opozarjajo na nevarnosti snovi ali zmesi.
- (40) Za sporočanje nevarnosti snovi in zmesi se uporabljata dva instrumenta, ki ju določa ta uredba, in sicer etikete in varnostni listi iz Uredbe (ES) št. 1907/2006. Od teh dveh instrumentov so etikete edino sredstvo za obveščanje potrošnikov, uporabijo pa se lahko tudi za opozarjanje delavcev na izčrpnije informacije o snoveh ali zmesih, ki so navedene v varnostnih listih. Ker določbe o varnostnih listih vsebuje že Uredba (ES) št. 1907/2006, ki varnostni list uporablja kot glavno komunikacijsko sredstvo v dobavni verigi snovi, istih določb ni primerno podvajati v tej uredbi.
- (41) Da bi potrošnikom zagotavljali ustrezne in izčrpne informacije o nevarnostih in varni uporabi kemikalij in zmesi, bi bilo treba spodbujati uporabo in razširjanje spletnih strani ter brezplačnih telefonskih števil, predvsem v povezavi z zagotavljanjem informacij o posebnih vrstah embalaže.
- (42) Globalno usklajeno sredstvo za komuniciranje o nevarnostih v obliki etiket bi koristilo delavcem in potrošnikom po vsem svetu. Zato bi bilo treba elemente, ki se vključijo na etikete, določiti skladno s piktogrami za nevarnost, opozorilnima besedama, stavki o nevarnosti in previdnostnimi stavki, ki tvorijo osrednje informacije GHS. Vključevanje drugih informacij na etiketo bi bilo treba čim bolj omejiti, te informacije pa tudi ne bi smele spodbijati glavnih elementov.
- (43) Zelo pomembno je, da so snovi in zmesi, ki se dajo v promet, pravilno identificirane. Vendar bi morala Agencija podjetjem dovoliti, da kemijsko identiteto po potrebi in na njihovo zahtevo opišejo na način, ki ne ogroža zaupne narave njihovih dejavnosti. Če Agencija takšno zahtevo zavrne, bi morala biti v skladu s to uredbo dovoljena pritožba. Pritožba bi morala imeti odločilni učinek, tako da na etiketah ne bi smele biti navedene zaupne informacije, v zvezi s katerimi je bila vložena pritožba, dokler o njej ni bilo odločeno.
- (44) Mednarodna zveza za čisto in uporabno kemijo (IUPAC) je splošno uveljavljeni organ za določanje kemijske nomenklature in terminologije. Opredeljevanje snovi z njihovimi imeni po IUPAC je splošno razširjena praksa po vsem svetu in zagotavlja standardno podlago za opredeljevanje snovi v mednarodnem in večjezičnem okolju. Zato je za namene te uredbe primerno uporabljati ta imena.
- (45) Služba za izmenjavo kemijskih izvlečkov (CAS) upravlja sistem za vpisovanje snovi v register CAS, kjer se jim dodelijo enkratne registrske številke CAS. Te številke CAS se po vsem svetu uporabljajo v referenčnih delih, zbirkah podatkov in regulativnih dokumentih o skladnosti za opredeljevanje snovi brez dvomnosti kemijske nomenklature. Zato je za namene te uredbe primerno uporabljati številke CAS.
- (46) Da bi bile informacije na etiketi omejene na najnujnejše, bi bilo treba z načeli prednostnih informacij določiti najprimernejše elemente etiket za snovi ali zmesi, ki imajo več nevarnih lastnosti.
- (47) Direktiva Sveta 91/414/EGS z dne 15. julija 1991 o dajanju fitofarmacevtskih sredstev v promet ⁽¹⁾ in Direktiva 98/8/ES Evropskega parlamenta in Sveta z dne 16. februarja 1998 o dajanju biocidnih pripravkov v promet ⁽²⁾ bi se morali še naprej v celoti uporabljati za vse izdelke v okviru njihovega področja uporabe.
- (48) Stavkov, kot na primer „nestrupeno“, „nenevarno“, „ne onesnažuje okolja“, „ekološko sprejemljivo“ ali drugih stavkov o tem, da snov ali zmes ni nevarna, oziroma kakršnih koli drugih stavkov, ki niso v skladu z njeno razvrstitvijo, se na etiketah ali embalažah snovi ali zmesi ne bi smelo navesti.
- (49) Praviloma bi morale biti snovi in zmesi, zlasti tiste, ki se dobavijo za splošno uporabo, pakirane in opremljene s potrebnimi informacijami o njihovem označevanju. Izmenjavo ustreznih informacij med strokovnjaki, tudi za nepakirane snovi in zmesi, zagotavlja Uredba (ES) št. 1907/

⁽¹⁾ UL L 230, 19.8.1991, str. 1.⁽²⁾ UL L 123, 24.4.1998, str. 1.

2006. V izjemnih primerih pa se lahko zgodi, da se snovi ali zmesi za splošno uporabo dobavijo nepakirane. Ustrezne informacije o označevanju snovi ali zmesi bi bilo treba javnosti po potrebi zagotoviti na drugačen način, na primer z računi.
- (50) Pravila za uporabo etiket in razvrstitev informacij na etiketah so potrebna zaradi zagotavljanja razumljivosti informacij na etiketah.
- (51) Ta uredba bi morala določiti splošne standarde za pakiranje, da se zagotovi varna dobava nevarnih snovi in zmesi.
- (52) Prizadevanje organov bi moralo biti usmerjeno na snovi, ki vzbujajo največjo skrb glede zdravja in okolja. Zato bi bile potrebne določbe, ki bi pristojnim organom in proizvajalcem, uvoznikom ter nadaljnjim uporabnikom omogočile pošiljanje predlogov Agenciji za usklajeno razvrščanje in označevanje snovi, razvrščenih glede na rakotvornost, mutagenost za zarodne celice ali strupenost za razmnoževanje kategorij 1A, 1B ali 2, glede na preobčutljivost dihal ali od primera do primera glede na druge učinke. Pristojni organi držav članic bi morali imeti možnost, da za aktivne snovi, ki se uporabljajo v fitofarmacevtskih sredstvih in biocidnih pripravkih, predlagajo usklajeno razvrščanje in označevanje teh snovi. Agencija bi morala dati svoje mnenje o predlogu, zainteresiranim stranem pa bi bilo treba omogočiti, da predložijo svoje pripombe. Komisija bi morala predložiti osnutek sklepa o dokončni razvrstitvi in elementih označitve.
- (53) Da bi se v celoti upoštevalo opravljeno delo in izkušnje, pridobljene z Direktivo 67/548/EGS, vključno z razvrstitvijo in označitvijo posebnih snovi, naštetih v Prilogi I k Direktivi 67/548/EGS, bi bilo treba vse obstoječe usklajene razvrstitve pretvoriti v nove usklajene razvrstitve z uporabo novih kriterijev. Poleg tega bi bilo tudi treba vse obstoječe razvrstitve brez sprememb uvrstiti v Prilogo k tej uredbi, ker je začetek uporabe te uredbe odložen in so usklajene razvrstitve v skladu s kriteriji Direktive 67/548/EGS pomembne za razvrstitev snovi in zmesi v prehodnem obdobju. S tem ko bo za vse prihodnje usklajene razvrstitve veljala ta uredba, se bo mogoče izogniti neskladnostim pri usklajenih razvrstitvah iste snovi na podlagi obstoječih in novih kriterijev.
- (54) Treba bi bilo določiti pravila za popis razvrščanja in označevanja, da bi se omogočilo učinkovito delovanje notranjega trga za snovi in zmesi in bi bila hkrati zagotovljena visoka raven varovanja zdravja ljudi in okolja. Razvrstitev in etiketo vsake registrirane ali nevarne snovi, ki je dana v promet, bi bilo zato treba prijaviti Agenciji, da jo vključi v popis.
- (55) Agencija bi morala preučiti možnosti, kako bi se lahko še bolj poenostavilo priglasitveni postopek, pri čemer bi se zlasti upoštevalo potrebe MSP.
- (56) Različni proizvajalci in uvozniki iste snovi bi si morali prizadevati doseči soglasje o enotni razvrstitvi za to snov, razen za razrede nevarnosti in razločevanja, za katere veljajo usklajene razvrstitve za to snov.
- (57) Zaradi usklajenega varovanja javnosti in zlasti oseb, ki prihajajo v stik z nekaterimi snovmi, ter zaradi ustreznega izvajanja druge zakonodaje Skupnosti, ki temelji na razvrstitvah in etiketah, bi morale biti v popis vključene tako razvrstitve, dogovorjene v skladu s to uredbo med proizvajalci in uvozniki iste snovi, če je to mogoče, kakor tudi odločitve, sprejete na ravni Skupnosti za usklajeno razvrstitev in označevanje nekaterih snovi.
- (58) Informacije, vključene v popis razvrščanja in označevanja, bi morale biti dostopne in varovane na ravni, ki jo določa Uredba (ES) št. 1907/2006, zlasti informacije, ki lahko ob razkritju ogrozijo tržne interese zainteresiranih strani.
- (59) Države članice bi morale imenovati pristojni organ ali organe, ki so odgovorni za predloge za usklajeno razvrstitev in označitev, ter organe, ki so odgovorni za izvrševanje obveznosti iz te uredbe. Države članice bi morale določiti učinkovite ukrepe za spremljanje in nadzor, da zagotovijo izpolnjevanje te uredbe.
- (60) Pomembno je, da se dobaviteljem in vsem drugim zainteresiranim stranem, predvsem MSP, svetuje glede njihovih odgovornosti in obveznosti iz te uredbe. Nacionalne službe za pomoč uporabnikom, ki so že bile ustanovljene v skladu z Uredbo (ES) št. 1907/2006, lahko delujejo kot nacionalne službe za pomoč uporabnikom na podlagi te uredbe.
- (61) Za učinkovito delovanje sistema, vzpostavljenega s to uredbo, je pomembno zagotoviti dobro sodelovanje in usklajevanje med državami članicami, Agencijo in Komisijo.
- (62) Zaradi vzpostavitve informacijskih točk za informacije o nevarnih snoveh in zmesih bi morale države članice poleg organov, pristojnih za uporabo, in organov, odgovornih za izvrševanje te uredbe, imenovati organe, odgovorne za sprejemanje informacij o zdravju in kemijski identiteti, sestavinah in vrstah snovi, tudi tistih, za katere je bila v skladu s to uredbo dovoljena uporaba alternativnega kemijskega imena.
- (63) Pristojni organi lahko, če jih za to zaprosi država članica, opravijo statistično analizo, da bi ugotovili, ali so potrebni boljši ukrepi za obvladovanje tveganja.

- (64) Redna poročila držav članic in Agencije o izvajanju te uredbe bi morala biti nepogrešljivo sredstvo za spremljanje izvajanja zakonodaje o kemikalijah ter smeri razvoja na tem področju. Sklepi na podlagi ugotovitev iz poročil bi morali biti koristno in praktično sredstvo za preverjanje uredbe in za oblikovanje morebitnih predlogov za njene spremembe.
- (65) V Forumu za izmenjavo informacij o izvajanju zakonodaje, ki deluje znotraj Agencije, ustanovljene z Uredbo (ES) št. 1907/2006, bi bilo treba izmenjevati tudi informacije o izvrševanju te uredbe.
- (66) Da bi se v državah članicah zagotovile preglednost, nepristranskost in doslednost pri izvrševanju, bi morale države članice vzpostaviti ustrezen okvir za uvedbo učinkovitih, sorazmernih in odvračalnih kazni za kršitve te uredbe, ker lahko kršitve povzročijo škodo za zdravje ljudi in okolje.
- (67) Določiti bi bilo treba pravila, ki bi zahtevala, da so v oglasih za snovi, ki izpolnjujejo kriterije za razvrščanje v skladu s to uredbo, navedene z njimi povezane nevarnosti, da bi se zaščitili prejemniki snovi, vključno s potrošniki. Pri oglaševanju zmesi, ki so razvrščene kot nevarne, ki splošnemu uporabniku omogočajo sklenitev kupne pogodbe, ne da bi pred tem etiketo videl, bi bilo treba prav iz tega razloga navesti vrsto ali vrste nevarnosti, ki so navedene na etiketi.
- (68) Za primere, ko snov ali zmes pomeni resno tveganje za ljudi in okolje, čeprav v skladu s to uredbo ni razvrščena kot nevarna, bi bilo treba predvideti zaščitno klavzulo. Ker se s snovmi in zmesmi trguje po vsem svetu, bi bili morda v takšnih primerih potrebni ukrepi na ravni ZN.
- (69) Mnoge obveznosti podjetij, ki jih vzpostavlja Uredba (ES) št. 1907/2006, šele z razvrstitvijo postanejo aktualne, vendar ta uredba ne bi smela spreminjati področja uporabe in vpliva navedene uredbe, razen določb o varnostnih listih. Da se to zagotovi, bi se morala navedena uredba ustrezno spremeniti.
- (70) Začetek uporabe te uredbe bi moral biti postopen, da se vsem vpletenim stranem, organom, podjetjem in interesnim skupinam omogoči, da se pravočasno usmerijo k pripravam na nove naloge. Zato in ker je razvrstitev zmesi odvisna od razvrstitve snovi, bi bilo treba določbe za razvrščanje zmesi uporabljati šele po ponovni razvrstitvi vseh snovi. Če se izvajalci prostovoljno odločijo začeti uporabljati kriterije za razvrstitev iz te uredbe že prej, bi bilo treba to dovoliti, da bi se izognili zmedi, pa bi moralo biti v tem primeru označevanje in pakiranje skladno s to uredbo in ne direktivama 67/548/EGS ali 1999/45/ES.
- (71) Da podjetij ne bi po nepotrebnem obremenjevali, bi bilo treba določiti, da se snovi in zmesi, ki so že vstopile v dobavno verigo, ko se zanje začnejo uporabljati določbe glede označevanja iz te uredbe, smejo določen čas še naprej dati v promet, in sicer brez ponovne označitve.
- (72) Ker ciljev te uredbe, in sicer uskladitve pravil za razvrščanje, označevanje in pakiranje, določitve obveznosti za razvrščanje in vzpostavitev usklajenega seznama snovi, razvrščenih na ravni Skupnosti, ter popisa razvrstitev in označitev, države članice same ne morejo zadovoljivo doseči in se torej lahko bolje dosežejo na ravni Skupnosti, lahko Skupnost sprejme ukrepe v skladu z načelom subsidiarnosti iz člena 5 Pogodbe. V skladu z načelom sorazmernosti iz navedenega člena ta uredba ne presega tistega, kar je potrebno za dosego teh ciljev.
- (73) Ta uredba upošteva temeljne pravice in načela, ki jih zlasti priznava Listina Evropske unije o temeljnih pravicah ⁽¹⁾.
- (74) Ta uredba bi morala prispevati k izpolnitvi Strateškega pristopa k mednarodnemu ravnanju s kemikalijami (SAICM), sprejetega 6. februarja 2006 v Dubaju.
- (75) Ob upoštevanju razvoja na ravni ZN bi bilo treba razvrščanje in označevanje bioakumulativnih in strupenih snovi (PBT) in zelo obstojnih in zelo bioakumulativnih snovi (vPvB) pozneje vključiti v to uredbo.
- (76) Ukrepe, potrebne za izvajanje te uredbe, bi bilo treba sprejeti v skladu s Sklepom Sveta 1999/468/ES z dne 28. junija 1999 o določitvi postopkov za uresničevanje Komisiji podeljenih izvedbenih pooblastil ⁽²⁾.
- (77) Zlasti bi bilo treba Komisiji podeliti pooblastila za prilagoditev te uredbe tehničnemu in znanstvenemu napredku, vključno z vključitvijo sprememb GHS, izvedenih na ravni ZN, predvsem pa spremembe na ravni ZN v zvezi uporabo informacij o podobnih zmesih. Pri takšnih prilagoditvah tehničnemu in znanstvenemu napredku bi bilo treba upoštevati polletni delovni ritem na ravni ZN. Poleg tega bi bilo treba Komisiji podeliti pooblastila za odločanje o usklajenem razvrščanju in označevanju določenih snovi. Ker so ti ukrepi splošnega obsega in so namenjeni spreminjanju nebitvenih določb te uredbe, jih je treba sprejeti v skladu z regulativnim postopkom s pregledom iz člena 5a Sklepa 1999/468/ES.

⁽¹⁾ UL C 364, 18.12.2000, str. 1.⁽²⁾ UL L 184, 17.7.1999, str. 23.

- (78) Kadar v nujnih primerih ni mogoče upoštevati običajnih rokov za regulativni postopek s pregledom, bi bilo treba Komisiji omogočiti uporabo nujnega postopka iz člena 5a(6) Sklepa 1999/468/ES za sprejetje prilagoditev tehničnemu napredku.
- (79) Komisiji bi moral za namene te uredbe pomagati odbor, ustanovljen z Uredbo (ES) št. 1907/2006, da se zagotovi usklajeno dopolnjevanje zakonodaje o kemikalijah –

SPREJELA NASLEDNJO UREDBO:

NASLOV I

SPLOŠNO

Člen 1

Namen in področje uporabe

1. Namen te uredbe je zagotoviti visoko raven varovanja zdravja ljudi in okolja ter prosti pretok snovi, zmesi in izdelkov iz člena 4(8) z:

- (a) uskladitvijo kriterijev za razvrščanje snovi in zmesi ter pravil o označevanju in pakiranju nevarnih snovi in zmesi;
- (b) določitvijo obveznosti:
- (i) proizvajalcev, uvoznikov in nadaljnjih uporabnikov za razvrščanje snovi in zmesi, danih v promet;
- (ii) dobaviteljev za označevanje ter pakiranje snovi in zmesi, danih v promet;
- (iii) proizvajalcev, izdelovalcev izdelkov in uvoznikov za razvrščanje snovi, ki niso dane v promet in morajo biti registrirane ali prijavljene v skladu z Uredbo (ES) št. 1907/2006;
- (c) določitvijo obveznosti proizvajalcev in uvoznikov snovi, da Agenciji sporočijo razvrstitev in elemente etikete, ki Agenciji niso bili predloženi v okviru registracije na podlagi Uredbe (ES) št. 1907/2006;
- (d) pripravo seznama snovi z njihovo usklajeno razvrstitvijo in elementi etikete na ravni Skupnosti v delu 3 Priloge VI;
- (e) uvedbo popisa razvrščanja in označevanja snovi, sestavljenega iz vseh prijav, predložitev ter usklajene razvrstitve in elementov etikete iz točk (c) in (d).

2. Ta uredba se ne uporablja za:

- (a) radioaktivne snovi in zmesi s področja uporabe Direktive Sveta 96/29/Euratom z dne 13. maja 1996 o določitvi temeljnih varnostnih standardov za varstvo zdravja delavcev in prebivalstva pred nevarnostmi zaradi ionizirajočega sevanja ⁽¹⁾;
- (b) snovi in zmesi, ki so pod carinskim nadzorom, razen če se obdelujejo ali predelujejo, in ki so v začasni hrambi, prosti coni ali prostem skladišču in so namenjene za ponovni izvoz ali so v tranzitu;
- (c) neizolirane intermediate;
- (d) snovi in zmesi za znanstveno raziskovanje in razvoj, ki niso dane v promet, če se uporabljajo v nadzorovanih pogojih v skladu z delovno in okoljsko zakonodajo Skupnosti.

3. Odpadki, opredeljeni v Direktivi 2006/12/ES Evropskega parlamenta in Sveta z dne 5. aprila 2006 o odpadkih ⁽²⁾, ne pomenijo snovi, zmesi ali izdelka v smislu člena 2 te uredbe.

4. Države članice smejo za določene snovi ali zmesi v posebnih primerih dovoliti odstopanja od te uredbe, če je to potrebno za obrambne namene.

5. Ta uredba se ne uporablja za naslednje snovi in zmesi v obliki končnih izdelkov, ki so namenjene končnemu uporabniku:

- (a) zdravila, opredeljena v Direktivi 2001/83/ES;
- (b) zdravila za uporabo v veterinarski medicini, opredeljena v Direktivi 2001/82/ES;
- (c) kozmetične izdelke, opredeljene v Direktivi 76/768/EGS;
- (d) medicinske pripomočke, opredeljene v direktivah 90/385/EGS in 93/42/EGS, ki so invazivni ali se uporabljajo v neposrednem fizičnem stiku s človeškim telesom, in Direktivi 98/79/ES;
- (e) hrano ali krmo, opredeljeno v Uredbi (ES) št. 178/2002, vključno z uporabo:
- (i) kot dodatek živilom, ki spada v področje uporabe Direktive 89/107/EGS;
- (ii) kot aromatična snov v živilih, ki spada v področje uporabe Direktive 88/388/EGS in Odločbe 1999/217/ES;

⁽¹⁾ UL L 159, 29.6.1996, str. 1.

⁽²⁾ UL L 114, 27.4.2006, str. 9.

(iii) kot dodatek krmi, ki spada v področje uporabe Uredbe (ES) št. 1831/2003;

(iv) v prehrani živali, ki spada v področje uporabe Direktive 82/471/EGS.

6. Razen kjer se uporablja člen 33, se ta uredba ne uporablja za prevoz nevarnega blaga po zraku, morju, cesti, železnici ali celinskih plovnih poteh.

Člen 2

Opredelitev pojmov

Za namene te uredbe se uporabljajo naslednje opredelitve pojmov:

1. „razred nevarnosti“ pomeni vrsto fizikalne nevarnosti ali nevarnosti za zdravje ali okolje;
2. „kategorija nevarnosti“ pomeni nadaljnjo razčlenitev po kriterijih znotraj vsakega razreda nevarnosti, ki določa resnost nevarnosti;
3. „piktogram za nevarnost“ pomeni grafičen prikaz, sestavljen iz simbola in drugih grafičnih elementov, kot so robovi, motivi ali barva ozadja, namenjenih sporočanju določenih informacij o zadevni nevarnosti;
4. „opozorilna beseda“ pomeni besedo, ki označuje relativno stopnjo nevarnosti, ki bralca opozori na morebitno nevarnost; ločimo med dvema stopnjama:
 - (a) „Nevarno“ pomeni opozorilno besedo, ki označuje kategorije resnejših nevarnosti;
 - (b) „Pozor“ pomeni opozorilno besedo, ki označuje kategorije manj resnih nevarnosti;
5. „stavek o nevarnosti“ pomeni besedilo glede razreda ali kategorije nevarnosti, ki opisuje vrsto nevarnosti, ki jo povzroča nevarna snov ali zmes, po potrebi pa tudi stopnjo nevarnosti;
6. „previdnostni stavek“ pomeni besedilo, ki opisuje priporočni(-e) ukrep(-e) za zmanjšanje ali preprečevanje negativnih učinkov, ki so posledica izpostavljenosti nevarni snovi ali zmesi zaradi njene uporabe ali odstranjevanja;
7. „snov“ pomeni kemijski element in njegove spojine v naravnem stanju ali pridobljene s kakršnim koli proizvodnim postopkom, vključno z vsemi dodatki, potrebnimi za ohranitev njene obstojnosti, in vsemi nečistočami, ki nastanejo pri uporabljenem postopku, ne vključuje pa topil, ki se lahko izločijo, ne da bi to vplivalo na obstojnost snovi ali spremenilo njeno sestavo;

8. „zmes“ pomeni zmes ali raztopino, sestavljeno iz dveh ali več snovi;

9. „izdelek“ pomeni predmet, ki dobi med proizvodnjo posebno obliko ali površino, ki bolj določa njegovo funkcijo kot njegovo kemijsko sestavo;

10. „izdelovalec izdelka“ pomeni fizično ali pravno osebo, ki izdeluje ali sestavlja izdelek v Skupnosti;

11. „polimer“ pomeni snov, sestavljeno iz molekul, za katere je značilno zaporedje ene ali več vrst monomernih enot. Takšne molekule morajo biti porazdeljene v okviru določenega razpona molekulske mase, pri čemer se razlike v molekulski masi lahko pripišejo predvsem razlikam v številu monomernih enot. Polimer vsebuje:

- (a) navadno masno večino molekul z vsaj tremi monomernimi enotami, ki so s kovalentno vezjo povezane vsaj še z eno drugo monomerno enoto ali drugim reaktantom;
- (b) manj kot navadno masno večino molekul z enako molekulsko maso.

V okviru te opredelitve pomeni „monomerna enota“ vezano obliko monomerne snovi v polimeru;

12. „monomer“ pomeni snov, ki je zmožna tvoriti kovalentne vezi z zaporedjem dodatnih podobnih ali drugačnih molekul, pod pogoji ustrezne reakcije, pri kateri se tvorijo polimeri in se uporablja za ta posebni postopek;

13. „registracijski zavezanec“ pomeni proizvajalca ali uvoznika snovi oz. izdelovalca ali uvoznika izdelka, ki vloži prošnjo za registracijo snovi v skladu z Uredbo (ES) št. 1907/2006;

14. „proizvodnja“ pomeni izdelavo ali ekstrakcijo snovi v naravnem stanju;

15. „proizvajalec“ pomeni fizično ali pravno osebo s stalnim prebivališčem oziroma sedežem v Skupnosti, ki proizvaja snov v Skupnosti;

16. „uvoz“ pomeni fizični vnos na carinsko območje Skupnosti;

17. „uvoznik“ pomeni fizično ali pravno osebo s stalnim prebivališčem oziroma sedežem v Skupnosti, ki je odgovorna za uvoz;

18. „dajanje v promet“ pomeni dobavo ali dajanje izdelkov na voljo tretjim osebam za plačilo ali neodplačno. Uvoz se šteje za dajanje v promet;

19. „nadaljnji uporabnik“ pomeni fizično ali pravno osebo s stalnim prebivališčem oziroma sedežem v Skupnosti, ki ni proizvajalec ali uvoznik in uporablja snov kot tako ali v zmesi pri svoji industrijski ali poklicni dejavnosti. Distributer ali potrošnik ni nadaljnji uporabnik. Ponovni uvoznik, izvzet na podlagi člena 2(7)(c) Uredbe (ES) št. 1907/2006, se šteje za nadaljnjega uporabnika;
20. „distributer“ pomeni fizično ali pravno osebo s stalnim prebivališčem oziroma sedežem v Skupnosti, vključno s trgovcem na drobno, ki snov kot tako ali v zmesi samo skladišči in daje v promet za tretje osebe;
21. „intermediat“ pomeni snov, ki se proizvede in porabi ali uporabi v kemičnem procesu za pretvorbo v drugo snov (v nadaljnjem besedilu: „sinteza“);
22. „neizolirani intermediat“ pomeni intermediat, ki se med sintezo ne odstrani namerno (razen za vzorčenje) iz opreme, v kateri poteka sinteza. Takšna oprema vključuje reakcijsko posodo, njeno pomožno opremo in vso opremo, skozi katero gre(-do) snov(-i) med neprekinjenim ali serijskim postopkom, ter cevi za prenos iz ene posode v drugo za naslednjo reakcijsko fazo, ne vključuje pa cistern in drugih posod, v katerih se snov(-i) hrani(-jo) po proizvodnji;
23. „Agencija“ pomeni Evropsko agencijo za kemikalije, ustanovljeno z Uredbo (ES) št. 1907/2006;
24. „pristojni organ“ pomeni organ ali organe, ki jih ustanovijo države članice za izpolnjevanje obveznosti iz te uredbe;
25. „uporaba“ pomeni predelavo, formulacijo, porabo, hrambo, posedovanje, obdelavo, polnjenje v posode, prenos iz ene posode v drugo, mešanje, izdelavo izdelka ali katero koli drugo uporabo;
26. „dobavitelj“ pomeni proizvajalca, uvoznika, nadaljnjega uporabnika ali distributerja, ki da v promet snov kot tako ali v zmesi ali zmes;
27. „zlitina“ pomeni kovinsko snov, ki je homogena v makroskopskem merilu in je sestavljena iz dveh ali več elementov, združenih tako, da ju ni mogoče enostavno ločiti z mehaničnimi sredstvi; zlitine se za namene te uredbe štejejo za zmesi;
28. „UN RTDG“ pomeni priporočila Združenih narodov za prevoz nevarnega blaga;
29. „prijavitelj“ pomeni proizvajalca ali uvoznika oziroma skupino proizvajalcev ali uvoznikov, ki pri Agenciji oddajo prijavo;
30. „znanstveno raziskovanje in razvoj“ pomeni kakršno koli izvajanje znanstvenih poskusov, analiziranje ali kemijsko raziskovanje, ki se opravlja v nadzorovanih pogojih;
31. „mejna vrednost“ pomeni vrednost razvrščene nečistoče, dodatka ali posamezne sestavine v snovi ali zmesi, ki se upošteva pri odločanju o tem, ali je treba snov oziroma zmes razvrstiti;
32. „mejna koncentracija“ pomeni vrednost razvrščene nečistoče, dodatka ali posamezne sestavine v snovi ali zmesi, ki lahko povzroči razvrstitev snovi ali zmesi;
33. „razločevanje“ pomeni razlikovanje znotraj razredov nevarnosti glede na način izpostavljenosti ali vrsto učinka;
34. „M-faktor“ pomeni množilni faktor, ki se uporablja za koncentracijo snovi, razvrščene kot akutno nevarne za vodno okolje iz kategorije 1 ali kronično nevarne za vodno okolje iz kategorije 1, da lahko z metodo seštevanja razvrstimo zmes, v kateri je prisotna snov;
35. „pakiranec“ pomeni končni izdelek pakiranja, ki ga sestavljata embalaža in njena vsebina;
36. „embalaža“ pomeni eno ali več posod in vse druge sestavine ali materiale, ki so potrebni, da lahko posoda izpolni svojo funkcijo zadrževanja in druge varnostne funkcije;
37. „vmesna embalaža“ pomeni embalažo med notranjo embalažo ali izdelki in zunanjo embalažo.

Člen 3

Nevarne snovi in zmesi ter specifikacija razredov nevarnosti

Snov ali zmes, ki ustreza kriterijem za fizikalne nevarnosti, nevarnosti za zdravje ali nevarnosti za okolje, opredeljene v delih 2 do 5 Priloge I, je nevarna in se razvrsti v skladu z ustreznim razredom nevarnosti iz navedene priloge.

Če v Prilogi I pri razredih nevarnosti obstaja razločevanje po načinu izpostavljenosti ali vrsti učinka, se snov ali zmes razvrsti v skladu s takšnim razločevanjem.

Člen 4

Splošne obveznosti za razvrščanje, označevanje in pakiranje

1. Proizvajalci, uvozniki in nadaljnji uporabniki razvrščajo snovi ali zmesi v skladu z naslovom II, preden jih dajo v promet.

2. Brez poseganja v zahteve iz odstavka 1 proizvajalci, izdelovalci izdelkov in uvozniki razvrstijo tiste snovi, ki niso dane v promet, v skladu z naslovom II, če:

(a) členi 6, 7(1) ali (5), 17 ali 18 Uredbe (ES) št. 1907/2006 določajo registracijo snovi;

(b) člena 7(2) ali 9 Uredbe (ES) št. 1907/2006 določata prijavo.

3. Če zaradi vnosa v delu 3 Priloge VI za snov velja usklajeno razvrščanje in označevanje v skladu z naslovom V, se ta snov razvrsti v skladu s tem vnosom, razvrstitev te snovi v skladu z naslovom II za razrede nevarnosti ali razločevanja, ki jih zajema ta vnos, pa se ne izvede.

Kadar pa snov spada tudi v enega ali več razredov nevarnosti ali razločevanj, ki jih vnos v delu 3 Priloge VI ne zajema, se razvrstitev v skladu z naslovom II izvede za navedene razrede nevarnosti ali razločevanja.

4. Če se snov ali zmes razvrsti kot nevarna, dobavitelji zagotovijo, da se snov ali zmes označi in zapakira v skladu z naslovoma III in IV, preden se da v promet.

5. Distributerji lahko pri izpolnjevanju obveznosti v skladu z odstavkom 4 za snov ali zmes uporabijo razvrstitev, ki jo v skladu z naslovom II opravi udeleženec dobavne verige.

6. Nadaljnji uporabniki lahko pri izpolnjevanju obveznosti v skladu z odstavkoma 1 in 4 za snov ali zmes uporabijo razvrstitev, ki jo v skladu z naslovom II opravi udeleženec dobavne verige, pod pogojem, da ne spremenijo sestave snovi ali zmesi.

7. Zmes iz dela 2 Priloge II, ki vsebuje snov, razvrščeno kot nevarno, se ne da v promet, razen če je označena v skladu z naslovom III.

8. Za namene te uredbe se izdelki iz oddelka 2.1 Priloge I razvrščajo, označujejo in pakirajo v skladu s pravili za snovi in zmesi, preden se dajo v promet.

9. Dobavitelji v dobavni verigi med seboj sodelujejo, da izpolnijo zahteve glede razvrščanja, označevanja in embalaže iz te uredbe.

10. Snovi in zmesi se ne dajo v promet, če ne ustrezajo določbam iz te uredbe.

NASLOV II

RAZVRŠČANJE GLEDE NA NEVARNOSTI

POGLAVJE 1

Identifikacija informacij in njihovo preverjanje

Člen 5

Identifikacija dostopnih informacij o snoveh in njihovo preverjanje

1. Proizvajalci, uvozniki in nadaljnji uporabniki snovi identificirajo pomembne informacije, ki so na voljo za presojo o tem, ali neka snov pomeni fizikalno nevarnost ali nevarnost za zdravje ali okolje, kot je določeno v Prilogi I, in sicer zlasti naslednje:

- (a) podatke, pridobljene z uporabo katere koli od metod iz člena 8(3);
- (b) epidemiološke podatke in izkušnje o učinkih na ljudi, kot so podatki o poklicni izpostavljenosti in podatki iz zbirk podatkov o nesrečah;
- (c) katere koli druge informacije, pridobljene v skladu z oddelkom 1 Priloge XI k Uredbi (ES) št. 1907/2006;
- (d) katere koli nove znanstvene informacije;
- (e) katere koli druge informacije, pridobljene v okviru mednarodno priznanih kemičnih programov.

Informacije se nanašajo na oblike ali agregatna stanja, v katerih se snov da v promet, in se lahko upravičeno pričakuje, da se bo v tej obliki ali agregatnem stanju uporabljala.

2. Proizvajalci, uvozniki in nadaljnji uporabniki preverijo informacije iz odstavka 1 in se prepričajo, ali so ustrezne, zanesljive in znanstveno preverjene, da se lahko uporabijo za evalvacijo v skladu s poglavjem 2 tega naslova.

Člen 6

Poizvedovanje o dostopnih informacijah o zmesih in njihovo preverjanje

1. Proizvajalci, uvozniki ali nadaljnji uporabniki zmesi identificirajo pomembne informacije o sami zmesi ali o snoveh, ki jih vsebuje, ki so na voljo za presojo o tem, ali neka zmes pomeni fizikalno nevarnost ali nevarnost za zdravje ali okolje, kot je določeno v Prilogi I, in sicer zlasti naslednje:

- (a) podatke, pridobljene z uporabo katere koli od metod iz člena 8(3) o sami zmesi ali o snoveh, ki jih vsebuje;

(b) epidemiološke podatke in izkušnje o učinkih na ljudi, kot so podatki o poklicni izpostavljenosti ali podatki iz zbirk podatkov o poškodbah;

(c) katere koli druge informacije, pridobljene v skladu z oddelkom 1 Priloge XI k Uredbi (ES) št. 1907/2006, o sami zmesi ali snoveh, ki jih vsebuje;

(d) katere koli druge informacije, pridobljene v okviru mednarodno priznanih kemičnih programov, o sami zmesi ali snoveh, ki jih vsebuje.

Informacije se nanašajo na oblike ali agregatna stanja, v katerih se zmes da v promet, in, kjer ustrezno, se lahko upravičeno pričakuje, da se bo v tej obliki ali agregatnem stanju uporabljala.

2. Če so informacije iz odstavka 1 na voljo za samo zmes ter se je proizvajalec, uvoznik ali nadaljnji uporabnik prepričal, da so te informacije ustrezne in zanesljive ter po potrebi tudi znanstveno preverjene, jih proizvajalec, uvoznik ali nadaljnji uporabnik ob upoštevanju odstavkov 3 in 4 uporabi za evalvacijo v skladu s poglavjem 2 tega naslova.

3. Za evalvacijo zmesi v skladu s poglavjem 2 tega naslova glede razredov nevarnosti „mutagenost za zarodne celice“, „rakotvornost“ in „strupenost za razmnoževanje“, navedenih v oddelkih 3.5.3.1, 3.6.3.1 in 3.7.3.1 Priloge I, proizvajalec, uvoznik ali nadaljnji uporabnik za snovi v zmesi uporabi samo ustrezne dostopne informacije iz odstavka 1.

Poleg tega se v primerih, ko dostopni testni podatki o samih zmesih kažejo na učinke mutagenosti za zarodne celice, rakotvornosti in strupenosti za razmnoževanje, ki se ne ugotovijo na podlagi informacij o posameznih snoveh, upoštevajo tudi ti podatki.

4. Za evalvacijo zmesi v skladu s poglavjem 2 tega naslova glede lastnosti „biorazgradljivost“ in „kopičenje v organizmih“ v razredu nevarnosti „nevarnost za vodno okolje“ iz oddelkov 4.1.2.8 in 4.1.2.9 Priloge I proizvajalec, uvoznik ali nadaljnji uporabnik za snovi v zmesi uporabi samo ustrezne dostopne informacije iz odstavka 1.

5. Če ni na voljo nobenih testnih podatkov iz odstavka 1 o sami zmesi ali so ti neustrezni, proizvajalec, uvoznik ali nadaljnji uporabnik uporabi druge dostopne informacije o posameznih snoveh in podobnih preskušanih zmesih, ki se lahko prav tako štejejo za pomembne pri ugotavljanju, ali je zmes nevarna, vendar le, če se je proizvajalec, uvoznik ali nadaljnji uporabnik prepričal, da so te informacije ustrezne in zanesljive, da se lahko uporabijo za evalvacijo v skladu s členom 9(4).

Člen 7

Testi na ljudeh in živalih

1. Kadar se izvajajo novi testi za namene te uredbe, se testi na živalih v smislu Direktive 86/609/EGS izvedejo samo takrat, ko ni na voljo nobene druge možnosti, ki bi zagotavljala ustrezno zanesljivost in kakovost podatkov.

2. Testi na človeku podobnih primatih so za namene te uredbe prepovedani.

3. Testi na ljudeh se za namene te uredbe ne izvajajo. Vendar se za namene te uredbe lahko uporabljajo podatki, ki izvirajo iz drugih virov, na primer kliničnih študij.

Člen 8

Pridobivanje novih informacij o snoveh in zmesih

1. Pri ugotavljanju, ali snov oziroma zmes pomeni nevarnost za zdravje ali okolje, kakor je določeno v Prilogi I te uredbe, lahko proizvajalec, uvoznik ali nadaljnji uporabnik izvede nove teste, če je izčrpal vsa druga sredstva za pridobivanje informacij, vključno z uporabo pravil iz oddelka 1 Priloge XI k Uredbi (ES) št. 1907/2006.

2. Pri ugotavljanju, ali snov oziroma zmes pomeni katero od fizikalnih nevarnosti iz dela 2 Priloge I, proizvajalec, uvoznik ali nadaljnji uporabnik izvede teste, predpisane v navedenem delu, razen če so ustrezni in zanesljivi podatki že na voljo.

3. Testi iz odstavka 1 se izvedejo po eni od naslednjih metod:

(a) testne metode iz člena 13(3) Uredbe (ES) št. 1907/2006;

ali

(b) zanesljiva mednarodno priznana znanstvena načela ali metode, potrjene v skladu z mednarodnimi postopki.

4. Če proizvajalec, uvoznik ali nadaljnji uporabnik izvede nove ekotoksikološke ali toksikološke teste in analize, se ti izvedejo v skladu s členom 13(4) Uredbe (ES) št. 1907/2006.

5. Če se za namene te uredbe izvajajo novi testi za ugotavljanje fizikalnih nevarnosti, se izvajajo najpozneje od 1. januarja 2014 bodisi v skladu z ustreznim in priznanim sistemom kakovosti ali pa jih izvajajo laboratoriji, ki izpolnjujejo ustrezne priznane standarde.

6. Testi, ki se izvajajo za namene te uredbe, se na snovi ali zmesi izvedejo v obliki ali agregatnem(-ih) stanju(-ih), v katerem(-ih) se snov ali zmes da v promet in se lahko upravičeno pričakuje, da se bo v tej obliki ali agregatnem stanju uporabljala.

POGLAVJE 2

Evalvacija informacij o nevarnosti in odločitev o razvrstitvi

Člen 9

Evalvacija informacij o nevarnosti snovi in zmesi

1. Proizvajalci, uvozniki in nadaljnji uporabniki snovi ali zmesi evalvirajo informacije, pridobljene v skladu s poglavjem 1 tega naslova, z uporabo kriterijev za razvrščanje v posamezen razred nevarnosti ali razločevanje iz delov 2, 3, 4 in 5 Priloge I, da se prepričajo o nevarnostih, povezanih s snovjo ali zmesjo.

2. Pri evalviranju dostopnih testnih podatkov za snov ali zmes, ki niso bili pridobljeni po testnih metodah iz člena 8(3), proizvajalci, uvozniki in nadaljnji uporabniki primerjajo uporabljene testne metode z metodami iz navedenega člena, da ugotovijo, ali uporaba teh testnih metod vpliva na evalvacijo iz odstavka 1 tega člena.

3. Če kriterijev ni mogoče uporabiti neposredno za dostopne pridobljene informacije, proizvajalci, uvozniki in nadaljnji uporabniki opravijo evalvacijo na podlagi določanja zanesljivosti informacij s pomočjo presoje strokovnjakov v skladu z oddelkom 1.1.1 Priloge I te uredbe in oddelkom 1.2 Priloge XI k Uredbi (ES) št. 1907/2006, tako da določijo zanesljivost vseh informacij, ki vplivajo na določitev nevarnosti snovi ali zmesi.

4. Če so na voljo samo informacije iz člena 6(5), proizvajalci, uvozniki in nadaljnji uporabniki pri evalviranju uporabijo premostitvena načela iz oddelka 1.1.3 in posameznih oddelkov v delih 3 in 4 Priloge I.

Če pa te informacije ne dovoljujejo uporabe premostitvenih načel niti načel presoje strokovnjakov ali določanja zanesljivosti informacij, opisanih v delu 1 Priloge I, proizvajalci, uvozniki in nadaljnji uporabniki evalvirajo informacije z uporabo druge metode ali metod, opisanih v posameznih oddelkih delov 3 in 4 Priloge I.

5. Proizvajalci, uvozniki in nadaljnji uporabniki pri evalviranju razpoložljivih informacij za namene razvrščanja upoštevajo obliko ali agregatna stanja, v katerih se snov ali zmes da v promet in se lahko upravičeno pričakuje, da se bo v tej obliki ali agregatnih stanjih uporabljala.

Člen 10

Mejne koncentracije in M-faktorji za razvrščanje snovi in zmesi

1. Posebne mejne koncentracije in splošne mejne koncentracije so najvišje vrednosti, dodeljene snovi, ki označujejo prag, pri katerem ali nad katerim prisotnost zadevne snovi v drugi snovi ali zmesi kot ugotovljene nečistoče, dodatka ali posamezne sestavine povzroči razvrstitev snovi ali zmesi kot nevarne.

Posebne mejne koncentracije določi proizvajalec, uvoznik ali nadaljnji uporabnik, če ustrezne in zanesljive znanstvene informacije kažejo, da je snov očitno nevarna že, ko je snov prisotna v koncentraciji, nižji od koncentracij, določenih za posamezen razred nevarnosti v delu 2 Priloge I, ali nižji od splošnih mejnih koncentracij, določenih za posamezen razred nevarnosti v delih 3, 4 in 5 Priloge I.

V posebnih primerih lahko proizvajalec, uvoznik ali nadaljnji uporabnik, če ima ustrezne, zanesljive in prepričljive znanstvene informacije o tem, da nevarnost snovi, razvrščene kot nevarne, ni očitna, določi posebne mejne koncentracije, ki so višje od koncentracij, določenih za ustrezen razred nevarnosti v delu 2 Priloge I, oziroma višje od splošnih mejnih koncentracij, določenih za ustrezen razred nevarnosti v delih 3, 4 in 5 navedene priloge.

2. M-faktorje za snovi, razvrščene kot akutno nevarne za vodno okolje iz kategorije 1 ali kronično nevarne za vodno okolje iz kategorije 1, ob upoštevanju odstavka 3 določijo proizvajalci, uvozniki in nadaljnji uporabniki.

3. Ne glede na odstavek 1 se za usklajene razrede nevarnosti ali razločevanja snovi, vključene v del 3 Priloge VI, posebne mejne koncentracije ne določijo.

4. Ne glede na odstavek 2 se M-faktorji ne določijo za usklajene razrede nevarnosti ali razločevanja snovi, vključene v del 3 Priloge VI, za katere je M-faktor določen v tem delu.

Če pa v delu 3 Priloge VI ni M-faktorja za snovi, razvrščene kot akutno nevarne za vodno okolje iz kategorije 1 ali kronično nevarne za vodno okolje iz kategorije 1, M-faktor na podlagi podatkov, ki so na voljo v zvezi s snovjo, določi proizvajalec, uvoznik ali nadaljnji uporabnik. Ta M-faktor je treba uporabiti, če proizvajalec, uvoznik ali nadaljnji uporabnik zmes, ki vsebuje snov, razvrsti z metodo seštevanja.

5. Pri določanju posebnih mejnih koncentracij ali M-faktorjev proizvajalci, uvozniki in nadaljnji uporabniki upoštevajo posebne mejne koncentracije ali M-faktorje za zadevno snov, ki so bili vključeni v popis razvrščanja in označevanja.

6. Posebne mejne koncentracije, določene v skladu z odstavkom 1, imajo prednost pred koncentracijami iz ustreznih oddelkov dela 2 Priloge I ali splošnimi mejnimi koncentracijami za razvrstitev iz ustreznih oddelkov delov 3, 4 in 5 Priloge I.

7. Agencija zagotovi dodatne smernice za uporabo odstavkov 1 in 2.

Člen 11

Mejne vrednosti

1. Če snov vsebuje drugo snov, ki je sama razvrščena kot nevarna, bodisi v obliki ugotovljene nečistoče, dodatka ali posamezne sestavine, se to upošteva pri razvrščanju, če je koncentracija ugotovljene nečistoče, dodatka ali posamezne sestavine enaka ali višja od veljavne mejne vrednosti v skladu z odstavkom 3.

2. Če zmes vsebuje snov, ki je sama razvrščena kot nevarna, in sicer bodisi kot sestavino bodisi v obliki ugotovljene nečistoče ali dodatka, se ta informacija upošteva pri razvrščanju, če je koncentracija te snovi enaka ali višja od mejne vrednosti v skladu z odstavkom 3.

3. Mejna vrednost iz odstavkov 1 in 2 se določi, kot je navedeno v oddelku 1.1.2.2 Priloge I.

Člen 12

Posebni primeri, ko je potrebna nadaljnja evalvacija

Če se z evalvacijo, opravljeno v skladu s členom 9, ugotovijo naslednje lastnosti ali učinki, jih proizvajalci, uvozniki in nadaljnji uporabniki upoštevajo pri razvrščanju:

- (a) kadar ustrezne in zanesljive informacije kažejo, da fizikalne nevarnosti snovi ali zmesi odstopajo od nevarnosti, ugotovljenih pri testih;
- (b) kadar prepričljivi znanstveni testni podatki kažejo, da snov ali zmes ni biološko razpoložljiva, in kadar so navedeni podatki preverjeni ustrezni in zanesljivi;
- (c) kadar ustrezne in zanesljive znanstvene informacije kažejo na možnost pojava sinergijskih ali nasprotnih učinkov med snovmi v zmesi, za katero je ocena temeljila na informacijah o snoveh v zmesi.

Člen 13

Odločitev o razvrstitvi snovi in zmesi

Če evalvacija, opravljena v skladu s členoma 9 in 12, kaže, da nevarnosti, povezane s snovjo ali zmesjo, ustrezajo kriterijem za razvrstitev v enega ali več razredov nevarnosti ali razločevanj iz delov 2 do 5 Priloge I, proizvajalci, uvozniki in nadaljnji uporabniki razvrstijo snov ali zmes v ustrezen razred ali razrede nevarnosti ali razločevanja in določijo:

- (a) eno ali več kategorij nevarnosti za vsak ustrezen razred nevarnosti ali razločevanja;
- (b) ob upoštevanju člena 21 en ali več stavkov o nevarnosti, ki ustrezajo posamezni kategoriji nevarnosti, določeni v skladu s točko (a).

Člen 14

Posebna pravila za razvrstitev zmesi

1. Razvrstitev zmesi ostane nespremenjena, če evalvacija informacij kaže na enega od naslednjih primerov:

- (a) da poteka počasna reakcija snovi v zmesi z atmosferskimi plini, zlasti kisikom, ogljikovim dioksidom in vodno paro, pri čemer nastajajo različne snovi v majhnih koncentracijah;
- (b) da poteka zelo počasna reakcija snovi v zmesi z drugimi snovmi v zmesi, pri čemer nastajajo nadaljnje snovi v majhnih koncentracijah;
- (c) da se lahko snovi v zmesi polimerizirajo in oblikujejo oligomere ali polimere v majhnih koncentracijah.

2. Zmesi ni treba razvrstiti glede na eksplozivne, oksidativne ali vnetljive lastnosti v skladu z delom 2 Priloge I, če je izpolnjen vsaj eden od naslednjih pogojev:

- (a) nobena od snovi v zmesi nima nobene od teh lastnosti in je na podlagi informacij, ki so na voljo dobavitelju, malo verjetno, da bi zmes predstavljala takšne nevarnosti;
- (b) v primeru spremembe sestave zmesi je na podlagi znanstvenih podatkov razvidno, da evalvacija informacij o zmesi ne bo spremenila razvrstitve;
- (c) če se zmes daje v promet v obliki aerosolnega razpršilnika, izpolnjuje določbe iz člena 8(1a) Direktive Sveta 75/324/EGS z dne 20. maja 1975 o približevanju zakonodaje držav članic o aerosolnih razpršilnikih ⁽¹⁾.

⁽¹⁾ UL L 147, 9.6.1975, str. 40.

Člen 15

Pregled razvrstitve snovi in zmesi

1. Proizvajalci, uvozniki in nadaljnji uporabniki sprejmejo vse ustrezne ukrepe, ki jih imajo na voljo, da se seznanijo z novimi znanstvenimi in tehničnimi informacijami, ki bi lahko vplivale na razvrščanje snovi ali zmesi, ki jih bodo dali v promet. Če se proizvajalec, uvoznik ali nadaljnji uporabnik seznani s temi informacijami in meni, da so ustrezne in zanesljive, proizvajalec, uvoznik ali nadaljnji uporabnik nemudoma izvede novo evalvacijo v skladu s tem poglavjem.

2. Kadar proizvajalec, uvoznik ali nadaljnji uporabnik spremeni zmes, ki je bila razvrščena kot nevarna, proizvajalec, uvoznik ali nadaljnji uporabnik opravi novo evalvacijo v skladu s tem poglavjem, če gre za eno od naslednjih sprememb:

- (a) spremembo v sestavi začetne koncentracije ene ali več nevarnih sestavin v koncentracijah, ki ustrezajo najvišjim vrednostim v tabeli 1.2 dela 1 Priloge I ali jih presegajo;
- (b) spremembo v sestavi z nadomestitvijo ali dodajanjem ene ali več sestavin v koncentracijah, ki ustrezajo mejnim vrednostim iz člena 11(3) ali jih presegajo.

3. Nova evalvacija v skladu z odstavkoma 1 in 2 ni potrebna, če je na podlagi zanesljive znanstvene ocene mogoče sklepati, da to ne bo spremenilo razvrstitve.

4. Proizvajalci, uvozniki in nadaljnji uporabniki prilagodijo razvrstitev snovi ali zmesi v skladu z rezultati nove evalvacije, razen če ne obstajajo usklajeni razredi nevarnosti ali razločevanja snovi, vključenih v del 3 Priloge VI.

5. Kadar zadevna snov ali zmes spada v področje uporabe Direktive 91/414/EGS ali Direktive 98/8/ES, se zahteve iz teh direktiv uporabljajo tudi za odstavke 1 do 4 tega člena.

Člen 16

Razvrstitev snovi, vključenih v popis razvrščanja in označevanja

1. Proizvajalci in uvozniki lahko razvrstijo snov drugače, kot je opredeljeno v razvrstitvi, vključeni v popis razvrščanja in označevanja, če Agenciji predložijo razloge za to razvrstitev skupaj s prijavo v skladu s členom 40.

2. Odstavek 1 se ne uporablja, če gre pri razvrstitvi, ki je vključena v popis razvrščanja in označevanja, za usklajeno razvrstitev, vključeno v del 3 Priloge VI.

NASLOV III

OBVEŠČANJE O NEVARNOSTI Z OZNAČEVANJEM

POGLAVJE 1

Vsebina etikete

Člen 17

Splošna pravila

1. Snov ali zmes, razvrščena kot nevarna in vsebovana v embalaži, je opremljena z etiketo, ki vključuje:

- (a) ime, naslov in telefonsko številko dobavitelja(-ev);
- (b) nominalno količino snovi ali zmesi v pakirancu, ki je na voljo za splošno uporabo, razen če je ta količina navedena drugje na pakirancu;
- (c) identifikatorje izdelka, določene v členu 18;
- (d) po potrebi piktograme za nevarnost v skladu s členom 19;
- (e) po potrebi opozorilni besedi v skladu s členom 20;
- (f) po potrebi stavke o nevarnosti v skladu s členom 21;
- (g) po potrebi ustrezne previdnostne stavke v skladu s členom 22;
- (h) po potrebi razdelek za dodatne informacije v skladu s členom 25.

2. Etiketa je sestavljena v uradnem jeziku ali uradnih jezikih države(-) članice(-), v kateri (katerih) se snov ali zmes daje v promet, razen če zadevna(-e) država(-e) članica(-e) ne določi(-jo) drugače.

Dobavitelji lahko na etiketah uporabijo več jezikov, kot jih zahtevajo države članice, pod pogojem, da so v vseh jezikih enake navedbe.

Člen 18

Identifikatorji izdelka

1. Etiketa vsebuje podrobnosti, ki omogočajo opredelitev snovi ali zmesi (v nadaljnjem besedilu „identifikatorji izdelka“).

Za opredeljevanje snovi ali zmesi se uporablja isti izraz kot na varnostnem listu, izdelanem v skladu s členom 31 Uredbe (ES) št. 1907/2006 (v nadaljnjem besedilu „varnostni list“), kar ne pomeni v člen 17(2) te uredbe.

2. Identifikator izdelka za snov vključuje vsaj eno od naslednjih navedb:

- (a) če je snov vključena v del 3 Priloge VI, njeno ime in identifikacijsko številko, kakor sta tam navedeni;
- (b) če snov ni vključena v del 3 Priloge VI, vendar je vključena v popis razvrščanja in označevanja, njeno ime in identifikacijsko številko, kakor sta tam navedeni;
- (c) če snov ni vključena niti v del 3 Priloge VI niti v popis razvrščanja in označevanja, številko, ki jo je določila Služba za izmenjavo kemijskih izvlečkov (Chemical Abstracts Service) (v nadaljnjem besedilu „številka CAS“), in ime, določeno v nomenklaturi IUPAC (v nadaljnjem besedilu „nomenklatura IUPAC“), ali številko CAS skupaj z drugim(-i) mednarodnim(-i) kemijskim(-i) imenom(-i), ali
- (d) če številka CAS ni na voljo, ime, določeno v nomenklaturi IUPAC ali drugo(-a) mednarodno(-a) kemijsko(-a) ime(-na).

Če ime v nomenklaturi IUPAC presega 100 znakov, se lahko uporabi drugo ime (običajno ime, trgovsko ime, kratica) iz oddelka 2.1.2 Priloge VI k Uredbi (ES) št. 1907/2006, če prijava v skladu s členom 40 vsebuje tako ime v nomenklaturi IUPAC kot tudi drugo uporabljeno ime.

3. Identifikator izdelka za zmes vključuje obe od naslednjih navedb:

- (a) trgovsko ime ali etiketo zmesi;
- (b) opredelitev vseh snovi v zmesi, zaradi katerih se zmes razvrsti na podlagi akutne strupenosti, jedkosti za kožo ali hude poškodbe oči, mutagenosti za zarodne celice, rakotvornosti, strupenosti za razmnoževanje, preobčutljivosti kože ali dihal, specifične strupenosti za ciljne organe (STOT) ali nevarnosti za vdihavanje.

Če je treba zaradi navedene zahteve v primeru iz točke (b) navesti več kemijskih imen, zadostuje že navedba štirih, razen če je za prikaz vrste in resnosti nevarnosti treba navesti več kot štiri imena.

Izbrana kemijska imena opredeljujejo snovi, ki so najbolj odgovorne za glavne zdravju nevarne lastnosti; te so bile odločilne za razvrstitev zmesi in izbiro ustreznih stavkov o nevarnosti.

Člen 19

Piktogrami za nevarnost

1. Etiketa vključuje ustrezen(-e) piktogram(-e) za nevarnost, namenjen(-e) sporočanju določenih informacij o zadevni nevarnosti.

2. Ob upoštevanju člena 33 piktogrami za nevarnost ustrezajo zahtevam iz oddelka 1.2.1 Priloge I in iz Priloge V.

3. Piktogram za nevarnost, ki ustreza posamezni razvrstitvi, je določen v tabelah Priloge I, v katerih so navedeni elementi etikete, ki se zahtevajo za posamezen razred nevarnosti.

Člen 20

Opozorilni besedi

1. Etiketa vključuje ustrezno opozorilno besedo v skladu z razvrstitvijo nevarne snovi ali zmesi.

2. Opozorilna beseda, ki ustreza posamezni razvrstitvi, je določena v tabelah iz delov 2 do 5 Priloge I, v katerih so navedeni elementi etikete, ki se zahtevajo za posamezen razred nevarnosti.

3. Če se na etiketi uporabi opozorilna beseda „Nevarno“, na njej ni opozorilne besede „Pozor“.

Člen 21

Stavki o nevarnosti

1. Etiketa vključuje ustrezne stavke o nevarnosti v skladu z razvrstitvijo nevarne snovi ali zmesi.

2. Stavki o nevarnosti, ki ustrezajo posamezni razvrstitvi, so določeni v tabelah iz delov 2 do 5 Priloge I, v katerih so navedeni elementi etikete, ki se zahtevajo za posamezen razred nevarnosti.

3. Če je snov vključena v del 3 Priloge VI, se na etiketi uporabi stavek o nevarnosti za vsako posamezno razvrstitev, ki jo zajema vnos v navedenem delu, poleg tega pa tudi stavek o nevarnosti iz odstavka 2 za vsako drugo razvrstitev, ki ni zajeta v navedenem vnosu.

4. Besedilo stavkov o nevarnosti je skladno s Prilogo III.

Člen 22

Previdnostni stavki

1. Etiketa vključuje ustrezne previdnostne stavke.

2. Previdnostni stavki se izberejo med tistimi, določenimi v tabelah iz delov 2 do 5 Priloge I, v katerih so navedeni elementi etiket za posamezen razred nevarnosti.

3. Previdnostni stavki se izberejo v skladu s kriteriji iz dela 1 Priloge IV, pri čemer se upoštevajo stavki o nevarnosti in predvideni ali ugotovljeni načini uporabe snovi ali zmesi.

4. Besedilo previdnostnih stavkov je skladno z delom 2 Priloge IV.

Člen 23

Odstopanja od zahtev za označevanje v posebnih primerih

Posebne določbe o označevanju iz oddelka 1.3 Priloge I se uporabljajo za:

- (a) prenosne plinske posode;
- (b) plinske posode za propan, butan ali utekočinjeni zemeljski plin;
- (c) aerosole in posode, zaprte z zapečatenim zapiralom za razprševanje, ki vsebujejo snovi ali zmesi, razvrščene kot nevarne za vdihavanje;
- (d) kovine v masivni obliki, zlitine, zmesi, ki vsebujejo polimere, zmesi, ki vsebujejo elastomere;
- (e) eksplozive iz oddelka 2.1 Priloge I, ki se dajejo v promet z namenom doseganja eksplozivnih ali pirotehničnih učinkov.

Člen 24

Prošnja za uporabo alternativnega kemijskega imena

1. Proizvajalec, uvoznik ali nadaljnji uporabnik snovi v zmesi lahko Agenciji predloži prošnjo za uporabo alternativnega kemijskega imena, ki snov v zmesi opredeljuje bodisi z imenom, ki navaja najpomembnejše funkcionalne kemijske skupine, bodisi z alternativnim označevanjem, kadar snov izpolnjuje kriterije iz dela 1 Priloge I in če lahko dokaže, da bi lahko razkritje kemijske identitete te snovi na etiketi ali varnostnem listu ogrozilo zaupno naravo njegove dejavnosti, zlasti njegove intelektualne lastnine.

2. Vsaka prošnja iz odstavka 1 tega člena se predloži v obliki, določeni v členu 111 Uredbe (ES) št. 1907/2006, skupaj z ustrezno pristojbino.

Višino pristojbine določi Komisija po postopku iz člena 54(2) te uredbe.

Za MSP se določi nižja pristojbina.

3. Agencija lahko od proizvajalca, uvoznika ali nadaljnega uporabnika zahteva dodatne informacije, če so takšne informacije potrebne za sprejetje odločitve. Če Agencija v šestih tednih po vložitvi prošnje ali prejemu dodatno zahtevanih informacij prošnji ne nasprotuje, se šteje, da je uporaba zahtevanega imena dovoljena.

4. Če agencija prošnje ne sprejme, se uporablja praktična ureditev iz člena 118(3) Uredbe (ES) št. 1907/2006.

5. Agencija obvesti pristojne organe o odločitvi v zvezi s prošnjo v skladu z odstavkoma 3 ali 4 in jim predloži

informacije, ki jih je posredoval proizvajalec, uvoznik ali nadaljnji uporabnik.

6. Če je iz novih informacij razvidno, da alternativno kemijsko ime ne zagotavlja dovolj informacij, da bi na delovnem mestu uvedli potrebne previdnostne ukrepe v zvezi z zdravju neškodljivo in varno uporabo in zagotovili, da je mogoče nadzorovati tveganje, ki spremlja ravnanje z zmesjo, Agencija preuči odločitev o uporabi alternativnega kemijskega imena. Agencija lahko prekliče svojo odločitev ali jo spremeni z odločitvijo, v kateri opredeli, katero alternativno kemijsko ime se sme uporabiti. Če Agencija svojo odločitev prekliče ali spremeni, se uporablja praktična ureditev iz člena 118(3) Uredbe (ES) št. 1907/2006.

7. Če je bila dovoljena uporaba alternativnega kemijskega imena, vendar razvrstitev snovi v zmesi, za katero se to alternativno ime uporablja, ne ustreza več kriterijem iz oddelka 1.4.1 Priloge I, dobavitelj te snovi v zmesi na etiketi in varnostnem listu namesto alternativnega kemijskega imena v skladu s členom 18 za snov uporabi identifikator izdelka.

8. Če Agencija utemeljitev v skladu s členom 10(a)(xi) Uredbe (ES) št. 1907/2006 glede informacij iz člena 119(2)(f) ali (g) navedene uredbe v zvezi s snovmi kot takimi ali v zmesi, sprejme kot utemeljeno, proizvajalec, uvoznik ali nadaljnji uporabnik na etiketi in varnostnem listu lahko uporabi ime, ki bo javnosti dostopno na internetu. Proizvajalec, uvoznik ali nadaljnji uporabnik v zvezi s snovmi v zmesi, za katere se člen 119(2)(f) ali (g) navedene uredbe ne uporablja več, lahko Agenciji predloži prošnjo za uporabo alternativnega kemijskega imena, kakor je navedeno v odstavku 1 tega člena.

9. Če je dobavitelj zmesi pred 1. junijem 2015 v skladu s členom 15 Direktive 1999/45/ES dokazal, da razkritje kemijske identitete snovi v zmesi ogroža zaupno naravo njegove dejavnosti, lahko za namene te uredbe še naprej uporablja dogovorjeno alternativno ime.

Člen 25

Dodatne informacije na etiketi

1. Če ima snov ali zmes, ki je razvrščena kot nevarna, fizikalne lastnosti ali lastnosti, ki vplivajo na zdravje, navedene v oddelkih 1.1 in 1.2 Priloge II, se v razdelek za dodatne informacije na etiketi vključijo ustrezni stavki.

Stavki so skladni z oddelkoma 1.1 in 1.2 Priloge II in delom 2 Priloge III.

Če je snov vključena v del 3 Priloge VI, se v dodatne informacije na etiketi vključijo vsi dodatni stavki o nevarnosti.

2. Če snov ali zmes, ki je razvrščena kot nevarna, spada v področje uporabe Direktive 91/414/EGS, se v razdelek za dodatne informacije na etiketi vključi ustrezen stavek.

Stavek je skladen z delom 4 Priloge II in delom 3 Priloge III k tej uredbi.

3. Dobavitelj lahko v razdelku za dodatne informacije na etiketi poleg informacij iz odstavkov 1 in 2 navede tudi druge informacije, če te ne otežujejo razpoznavnosti elementov etikete, določenih v členu 17(1)(a) do (g), in če vsebujejo dodatne podrobnosti in niso v nasprotju z informacijami, ki jih opredeljujejo navedeni elementi, ter ne povzročajo dvoma o njih.

4. Stavkov, kot na primer „nestrupeno“, „nenevarno“, „ne onesnažuje okolja“, „ekološko sprejemljivo“ ali kakršnih koli drugih stavkov o tem, da snov ali zmes ni nevarna, oziroma kakršnih koli drugih stavkov, ki niso v skladu z razvrstitvijo navedene snovi ali zmesi, se na etiketi ali embalaži snovi ali zmesi ne navede.

5. Če je snov ali zmes razvrščena v skladu z delom 5 Priloge I, velja, da:

- (a) piktogram za nevarnost ni naveden na etiketi;
- (b) se opozorilna beseda, stavki o nevarnosti in previdnostni stavki na etiketi navedejo v razdelku za dodatne informacije.

6. Če zmes vsebuje snov, razvrščeno kot nevarno, se označi v skladu z delom 2 Priloge II.

Besedilo stavkov je skladno z delom 3 Priloge III in se na etiketi navede v razdelku za dodatne informacije.

Etiketa vključuje tudi identifikator izdelka iz člena 18 ter ime, naslov in telefonsko številko dobavitelja zmesi.

Člen 26

Načela prednostne razvrstitve piktogramov za nevarnost

1. Če bi bilo zaradi razvrstitve snovi ali zmesi na etiketi potrebnih več piktogramov, se uporabljajo naslednja pravila prednostne razvrstitve, s katerimi se zmanjša število zahtevanih piktogramov za nevarnost:

- (a) če se uporabi piktogram za nevarnost „GHS01“, piktograma za nevarnost „GHS02“ in „GHS03“ nista obvezna, razen v primerih, ko je obvezen več kot en piktogram za nevarnost;
- (b) če se uporabi piktogram za nevarnost „GHS06“, se piktogram za nevarnost „GHS07“ ne navede;

(c) če se uporabi piktogram za nevarnost „GHS05“, se piktogram za nevarnost „GHS07“ ne navede pri draženju kože ali oči;

(d) če se uporabi piktogram za nevarnost „GHS08“ pri preobčutljivosti dihal, se piktogram za nevarnost „GHS07“ ne navede pri povzročanju preobčutljivosti kože ali draženju kože in oči.

2. Če bi bilo zaradi razvrstitve snovi ali zmesi potrebnih več piktogramov za nevarnost za isti razred nevarnosti se na etiketi navede piktogram za nevarnost, ki za vsak zadevni razred nevarnosti ustreza najresnejši kategoriji nevarnosti.

Za snovi, vključene v del 3 Priloge VI, za katere se prav tako uporablja razvrstitev v skladu z naslovom II, se na etiketi navede piktogram za nevarnost, ki za vsak zadevni razred nevarnosti ustreza najresnejši kategoriji nevarnosti.

Člen 27

Načela prednostne razvrstitve stavkov o nevarnosti

Če je snov ali zmes razvrščena v več razredov nevarnosti ali razločevanj znotraj nekega razreda nevarnosti, se na etiketi navedejo vsi stavki o nevarnosti, ki so potrebne zaradi takšne razvrstitve, razen če gre za očitno podvajanje ali so očitno odveč.

Člen 28

Načela prednostne razvrstitve previdnostnih stavkov

1. Če zaradi izbire previdnostnih stavkov nekateri previdnostni stavki postanejo očitno odveč ali so glede na snov, zmes ali embalažo nepotrebni, se takšni stavki na etiketi ne navedejo.

2. Če se snov ali zmes dobavi za splošno uporabo, se na etiketi po potrebi navede previdnostni stavek, ki se nanaša na odstranjevanje snovi ali zmesi in na odstranjevanje embalaže, razen če se ne zahteva v skladu s členom 22.

V vseh drugih primerih previdnostni stavek, ki se nanaša na odstranjevanje, ni potreben, če je očitno, da odstranjevanje snovi, zmesi ali embalaže ni nevarno za zdravje ljudi ali okolje.

3. Na etiketi se ne navede več kot šest previdnostnih stavkov, razen če je to potrebno za prikaz vrste in resnosti nevarnosti.

Člen 29

Odstopanje od zahtev za označevanje in pakiranje

1. Če je embalaža snovi ali zmesi tako majhna ali ima takšno obliko, da zahtev iz člena 31 v zvezi z etiketo v jeziku ali jezikih države članice, v kateri se snov ali zmes da v promet, ni mogoče

izpolniti, se elementi etikete, določeni v prvem pododstavku člena 17(2), zagotovijo v skladu z oddelkom 1.5.1 Priloge I.

2. Če vseh informacij na etiketi ni mogoče zagotoviti na način, predviden v odstavku 1, se lahko v skladu z oddelkom 1.5.2 Priloge I navede manj informacij.

3. Če se nevarna snov ali zmes iz dela 5 Priloge II za splošno uporabo dobavi brez embalaže, je treba priložiti izvod elementov etikete, naveden v skladu s členom 17.

4. Za nekatere zmesi, ki so razvrščene kot nevarne za okolje, se lahko v skladu s postopkom iz člena 53 določijo odstopanja od nekaterih določb o okoljskem označevanju ali posebne določbe za tovrstno označevanje, če se lahko dokaže, da bi to zmanjšalo vpliv na okolje. Takšna odstopanja ali posebne določbe so opredeljene v delu 2 Priloge II.

5. Komisija lahko od Agencije zahteva, da pripravi in ji predloži druge predloge za odstopanje od zahtev za označevanje in pakiranje.

Člen 30

Posodabljanje informacij na etiketah

1. Dobavitelj zagotovi, da se etiketa dopolni takoj po spremembi razvrstitve in označitve te snovi ali zmesi, če je nova nevarnost resnejša ali če so v skladu s členom 25 potrebni novi dodatni elementi etikete ob upoštevanju vrste spremembe glede varovanja zdravja ljudi in okolja. Dobavitelji v skladu s členom 4(9) med seboj sodelujejo, da lahko označevanje spremenijo brez odlašanja.

2. Če so potrebne spremembe, ki niso zajete v odstavku 1, dobavitelj zagotovi, da se etiketa dopolni v 18 mesecih.

3. Dobavitelj snovi ali zmesi iz direktiv 91/414/EGS ali 98/8/ES dopolni etiketo v skladu z navedenima direktivama.

POGLAVJE 2

Uporaba etiket

Člen 31

Splošna pravila za uporabo etiket

1. Etiket so trdno pritrjene na eno ali več površin embalaže, ki neposredno vsebuje snov ali zmes, in jih je možno brati vodoravno, ko je pakiranje postavljeno na običajni način.

2. Barva in videz vseh etiket sta takšna, da je piktogram za nevarnost jasno razviden.

3. Elementi etikete iz člena 17(1) so jasno in trajno označeni. Jasno se razlikujejo od ozadja, njihova velikost in razmiki med njimi pa so takšni, da jih je mogoče brez težav prebrati.

4. Oblika, barva in velikost piktograma za nevarnost in mere etikete so določene v oddelku 1.2.1 Priloge I.

5. Etiketa ni potrebna, če so elementi etikete iz člena 17(1) jasno vidni na sami embalaži. V takšnih primerih se za informacije, navedene na embalaži, uporabljajo zahteve iz tega poglavja, ki veljajo za etiketo.

Člen 32

Razvrstitev informacij na etiketi

1. Piktogrami za nevarnost, opozorilna beseda, stavki o nevarnosti in previdnostni stavki so na etiketi razvrščeni skupaj.

2. Dobavitelj lahko določi vrstni red stavkov o nevarnosti na etiketi. V skladu z odstavkom 4 pa so vsi stavki o nevarnosti na etiketi razvrščeni skupaj glede na jezik.

Dobavitelj lahko določi vrstni red previdnostnih stavkov na etiketi. V skladu z odstavkom 4 pa so vsi previdnostni stavki na etiketi razvrščeni skupaj glede na jezik.

3. Sklopi stavkov o nevarnosti in sklopi previdnostnih stavkov iz odstavka 2 so na etiketi razvrščeni skupaj glede na jezik.

4. Dodatne informacije se vpišejo v razdelek za dodatne informacije iz člena 25, in sicer skupaj z drugimi elementi etikete, ki so določeni v členu 17(1)(a) do (g).

5. Zaradi izpolnjevanja posebnih zahtev glede označevanja se lahko barve uporabljajo tudi na drugih delih etikete, ne samo na piktogramih za nevarnost.

6. Elementi etikete, ki se zahtevajo v skladu z drugimi akti Skupnosti, se vpišejo v razdelek za dodatne informacije na etiketi iz člena 25.

Člen 33

Posebna pravila za označevanje zunanje, notranje in enojne embalaže

1. Če je pakiranec sestavljen iz zunanje in notranje embalaže ter kakršne koli vmesne embalaže, zunanja embalaža pa izpolnjuje določbe glede označevanja v skladu s pravili o prevozu nevarnega blaga, se notranja in vse vmesne embalaže označijo v skladu to uredbo. Tudi zunanja embalaža se lahko označi v skladu s to uredbo. Če se piktogram(-i) za nevarnost, ki se

zahteva(-jo) po tej uredbi, nanašajo na isto nevarnost kot v predpisih o prevozu nevarnega blaga, piktogram(-i) za nevarnost, ki se zahteva(-jo) po tej uredbi, na zunanji embalaži ni(-so) potreben(-ni).

2. Če se ne zahteva, da mora zunanja embalaža pakiranja izpolnjevati določbe glede označevanja v skladu s pravili o prevozu nevarnega blaga, se zunanja in vse notranje embalaže, vključno z vmesno embalažo, označijo v skladu s to uredbo. Če pa sta kljub zunanji embalaži notranja ali vmesna embalaža jasno vidni, zunanje embalaže ni treba označiti.

3. Posamezni pakiranci, ki izpolnjujejo določbe glede označevanja v skladu s predpisi o prevozu nevarnega blaga, se označijo v skladu s to uredbo in predpisi o prevozu nevarnega blaga. Če se piktogram(-i) za nevarnost, ki se zahteva(-jo) po tej uredbi, nanaša(-jo) na isto nevarnost kot v predpisih o prevozu nevarnega blaga, piktogram(-i) za nevarnost, ki se zahteva(-jo) po tej uredbi, ni(-so) potreben(-ni).

Člen 34

Poročilo o obveščanju glede varne uporabe kemikalij

1. Agencija do 20. januarja 2012 opravi raziskavo o obveščanju javnosti glede varne uporabe snovi in zmesi ter o morebitni potrebi po vključitvi dodatnih informacij na etikete. Ta raziskava se izvede v posvetovanju s pristojnimi organi in interesnimi kategorij in temelji, po potrebi, na najboljših praksah.

2. Komisija brez poseganja v določbe o označevanju iz tega naslova ter na podlagi raziskave iz odstavka 1 Evropskemu parlamentu in Svetu predloži poročilo, po potrebi pa tudi pripravi zakonodajni predlog za spremembo te uredbe.

NASLOV IV

EMBALAŽA

Člen 35

Embalaža

1. Embalaža, ki vsebuje nevarne snovi ali zmesi, izpolnjuje naslednje zahteve:

- (a) embalaža je oblikovana in izdelana tako, da vsebina iz nje ne more uhajati, razen če niso predpisani drugi posebni varnostni mehanizmi;
- (b) materiali, iz katerih so izdelani embalaža in zapirala, so oblikovani tako, da ne morejo poškodovati vsebine ali z njo tvoriti nevarnih spojin;
- (c) vsi deli embalaže in zapiral so vzdržljivi in trdni, tako da varno prenesejo običajne obremenitve in deformacije, ki

nastopijo pri ravnanju z njimi, in pri tem ne popustijo ali se razrahljajo;

- (d) embalaža, opremljena z zamenljivimi zapirali, je oblikovana tako, da jo je mogoče večkrat ponovno zapreti, ne da bi po tem vsebina iz nje uhajala.

2. Embalaža, ki vsebuje nevarno snov ali zmes, dobavljeno za splošno uporabo, nima niti oblike niti izgleda, s katerim bi bila privlačna za otroke ali bi lahko spodbudila njihovo dejavno radovednost ali bila zavajajoča za potrošnike, niti nima podobnega izgleda ali oblike, ki se uporablja za živila, živalsko krmo, zdravila ali kozmetične izdelke in ki bi lahko bila zavajajoča za potrošnike.

Če embalaža vsebuje snov ali zmes, ki izpolnjuje zahteve iz oddelka 3.1.1 Priloge II, se opremi z zapirali, varnimi za otroke, v skladu z oddelki 3.1.2, 3.1.3 in 3.1.4.2 Priloge II.

Če embalaža vsebuje snov ali zmes, ki izpolnjuje zahteve iz oddelka 3.2.1 Priloge II, se opremi z otipnim opozorilom za nevarnost v skladu z oddelkom 3.2.2 Priloge II.

3. Za embalažo za snovi in zmesi velja, da izpolnjuje zahteve iz odstavka 1(a), (b) in (c), če izpolnjuje predpise o prevozu nevarnega blaga po zraku, morju, cesti, železnici ali celinskih plovnih poteh.

NASLOV V

USKLAJENO RAZVRŠČANJE IN OZNAČEVANJE SNOVI TER POPIS RAZVRŠČANJA IN OZNAČEVANJA

POGLAVJE 1

Vzpostavitev usklajenega razvrščanja in označevanja snovi

Člen 36

Usklajeno razvrščanje in označevanje snovi

1. Za snov, ki v naslednjih točkah ustreza kriterijem iz Priloge I, se navadno uporablja usklajeno razvrščanje in označevanje v skladu s členom 37:

- (a) preobčutljivost dihal, kategorija 1 (Priloga I, oddelek 3.4);
- (b) mutagenost za zarodne celice, kategorije 1A, 1B ali 2 (Priloga I, oddelek 3.5);
- (c) rakotvornost, kategorije 1A, 1B ali 2 (Priloga I, oddelek 3.6);
- (d) strupenost za razmnoževanje, kategorije 1A, 1B ali 2 (Priloga I, oddelek 3.7).

2. Za snov, ki velja za aktivno snov v smislu Direktive 91/414/EGS ali Direktive 98/8/ES, se običajno uporablja usklajeno razvrščanje in označevanje. Za takšne snovi se uporabljajo postopki iz člena 37(1), (4), (5) in (6).

3. Če snov izpolnjuje kriterije za druge razrede nevarnosti ali razločevanja od tistih iz odstavka 1 in se zanjo ne uporablja odstavek 2, se lahko v posameznih primerih v Prilogo VI doda tudi usklajena razvrstitev in označitev v skladu s členom 37, če obstaja utemeljitev za takšno ukrepanje na ravni Skupnosti.

Člen 37

Postopek za usklajeno razvrščanje in označevanje snovi

1. Pristojni organ lahko Agenciji predloži predlog za usklajeno razvrstitev in označitev snovi, po potrebi pa tudi posebne mejne koncentracije ali M-faktorje ali predlog za njihov pregled.

Predlog upošteva obliko, določeno v delu 2 Priloge VI, in vsebuje ustrezne informacije, ki so določene v delu 1 Priloge VI.

2. Proizvajalec, uvoznik ali nadaljnji uporabnik snovi lahko Agenciji predloži predlog za usklajeno razvrstitev in označitev te snovi, po potrebi pa tudi posebne mejne koncentracije ali M-faktorje, če za takšno snov še ni vnosa v delu 3 Priloge VI glede razreda nevarnosti ali razločevanj, na katera se predlog nanaša.

Predlog se pripravi v skladu z ustreznimi deli oddelkov 1, 2 in 3 Priloge I k Uredbi (ES) št. 1907/2006 in upošteva obliko, določeno v delu B Poročila o kemijski varnosti iz oddelka 7 navedene Priloge. Predlog vsebuje ustrezne informacije, ki jih določa del 1 Priloge VI k tej uredbi. Uporablja se člen 111 Uredbe (ES) št. 1907/2006.

3. Če se predlog proizvajalca, uvoznika ali nadaljnjega uporabnika nanaša na usklajeno razvrstitev in označitev snovi v skladu s členom 36(3), mu je priložena pristojbina, ki jo določi Komisija v skladu z regulativnim postopkom iz člena 54(2).

4. Odbor za oceno tveganja Agencije, vzpostavljen v skladu s členom 76(1)(c) Uredbe (ES) št. 1907/2006, sprejme mnenje o vsakem predlogu, predloženem v skladu z odstavkom 1 ali 2, in sicer v 18 mesecih po prejemu predloga, pri čemer zadevnim stranem omogoči, da predložijo pripombe. Agencija to mnenje in vse morebitne pripombe sporoči Komisiji.

5. Če Komisija meni, da je usklajena razvrstitev in označitev zadevne snovi ustrezna, nemudoma predloži osnutek sklepa o vključitvi te snovi, skupaj z ustreznimi elementi razvrstitve in označitve, v tabelo 3.1 dela 3 Priloge VI, po potrebi pa tudi posebne mejne koncentracije ali M-faktorje.

Ustrezen vnos pod istimi pogoji vključi v tabelo 3.2 dela 3 Priloge VI do 31. maja 2015.

Navedeni ukrep, namenjen spreminjanju nebitvenih določb te uredbe, se sprejme v skladu z regulativnim postopkom s pregledom iz člena 54(3). V nujnih primerih lahko Komisija uporabi nujni postopek iz člena 54(4).

6. Proizvajalci, uvozniki in nadaljnji uporabniki, ki imajo nove informacije, na podlagi katerih bi lahko spremenili elemente usklajene razvrstitve in označitve snovi iz dela 3 Priloge VI, pristojnemu organu v državi članici, v kateri je snov dana v promet, predložijo predlog v skladu z drugim pododstavkom odstavka 2.

Člen 38

Vsebina mnenj in sklepov o usklajeni razvrstitvi in označitvi v delu 3 Priloge VI; dostopnost informacij

1. V mnenjih iz člena 37(4) in sklepih v skladu s členom 37(5) je za vsako snov določeno vsaj:

- (a) identiteta snovi v skladu z oddelki 2.1 do 2.3.4 Priloge VI k Uredbi (ES) št. 1907/2006;
- (b) razvrstitev snovi v skladu s členom 36, vključno z utemeljitvijo;
- (c) po potrebi, posebna mejna koncentracija ali M-faktorji;
- (d) elementi etikete za snov, določeni v točkah (d), (e) in (f) člena 17(1), skupaj z dodatnimi stavki o nevarnosti za snov, določenimi v skladu s členom 25(1);
- (e) po potrebi vsi drugi parametri, na podlagi katerih je mogoče oceniti nevarnost zmesi za zdravje ali okolje, če te vsebujejo zadevne nevarne snovi, ali snovi, ki vsebujejo takšne nevarne snovi v obliki ugotovljenih nečistoč, dodatkov in sestavin.

2. Pri objavi mnenja ali sklepa iz člena 37(4) in (5) te uredbe se uporabljata člena 118(2) in 119 Uredbe (ES) št. 1907/2006.

POGLAVJE 2

Popis razvrščanja in označevanja

Člen 39

Področje uporabe

To poglavje se uporablja za:

- (a) snovi, ki se morajo registrirati v skladu z Uredbo (ES) št. 1907/2006;
- (b) snovi, za katere se uporablja člen 1 in izpolnjujejo kriterije za razvrstitev kot nevarne ter se dajejo v promet bodisi same ali pa so prisotne v zmesi nad mejnimi koncentracijami, določenimi v tej uredbi oziroma Direktivi 1999/45/ES, zaradi česar je zmes razvrščena kot nevarna.

Člen 40

Obveznost prijave Agenciji

1. Vsi proizvajalci ali uvozniki ali skupine proizvajalcev ali uvoznikov (v nadaljnjem besedilu „prijavitelji“), ki dajejo v promet snov iz člena 39, Agenciji v prijavi sporočijo naslednje informacije, da se lahko vključijo v popis iz člena 42:

- (a) podatke o prijavitelju ali prijaviteljih, ki so odgovorni za dajanje ene ali več snovi v promet, v skladu z oddelkom 1 Priloge VI k Uredbi (ES) št. 1907/2006;
- (b) identiteto ene ali več snovi v skladu z oddelki 2.1 do 2.3.4 Priloge VI k Uredbi (ES) št. 1907/2006;
- (c) razvrstitev ene ali več snovi v skladu s členom 13;
- (d) če je snov razvrščena v nekatere razrede nevarnosti ali razločevanja, ne pa v vse, prijavitelji navedejo razloge, ali je to zaradi manjkajočih podatkov, nepopolnih podatkov ali pa popolni podatki niso zadostni za razvrstitev;
- (e) posebne mejne koncentracije ali M-faktorje, odvisno od primera, v skladu s členom 10 te uredbe skupaj z utemeljitvijo, pri čemer navedejo ustrezne dele oddelkov 1, 2 in 3 Priloge I k Uredbi (ES) št. 1907/2006;
- (f) elemente etikete za snov ali snovi, ki so določeni v točkah (d), (e) in (f) člena 17(1), skupaj z dodatnimi stavki o nevarnosti za snov, določenimi v skladu s členom 25(1).

Informacije iz točk (a) do (f) se ne sporočijo, če so bile Agenciji poslane v okviru registracije v skladu z Uredbo (ES) št. 1907/2006 ali če jih je ta prijavitelj že sporočil.

Prijavitelj te informacije predloži v obliki, določeni v členu 111 Uredbe (ES) št. 1907/2006.

2. Zadevni prijavitelj(-i) dopolnjuje(-jo) informacije, navedene v odstavku 1, in jih prijavi(-jo) Agenciji, če se po preučitvi na podlagi člena 15(1) sprejme sklep o spremembi razvrstitve in označitve snovi.

3. Snovi, ki so dane v promet 1. decembra 2010 ali po tem datumu, se prijavijo v skladu z odstavkom 1 v enem mesecu po tem, ko so bile dane v promet.

Snovi, ki so dane v promet pred 1. decembrom 2010, pa se pred tem datumom lahko prijavijo v skladu z odstavkom 1.

Člen 41

Sporazumni vnosi

Če se zaradi prijave iz člena 40(1) v popisu iz člena 42 za isto snov pojavijo različni vnosi, si prijavitelji in registracijski zavezanci prizadevajo, da dosežejo sporazumni vnos, ki se vključi v popis. Prijavitelji o tem ustrezno obvestijo Agencijo.

Člen 42

Popis razvrščanja in označevanja

1. Agencija vzpostavi in hrani popis razvrščanja in označevanja v obliki zbirke podatkov.

V popis se vključijo informacije, sporočene v skladu s členom 40(1), in informacije, sporočene v okviru registracije v skladu z Uredbo (ES) št. 1907/2006.

Informacije iz popisa, ki ustrezajo informacijam iz člena 119(1) Uredbe (ES) št. 1907/2006, so dostopne javnosti. Agencija prijaviteljem in registracijskim zavezancem, ki ji v skladu s členom 29(1) Uredbe št. 1907/2006 predložijo informacije o snovi, odobri dostop do drugih informacij o tej snovi v popisu. Drugim odobri dostop do takšnih informacij ob upoštevanju člena 118 navedene uredbe.

2. Agencija popis dopolni, ko prejme dopolnjene informacije v skladu s členom 40(2) ali členom 41.

3. Poleg informacij iz odstavka 1 Agencija v vsak vnos po potrebi vključi naslednje informacije:

- (a) ali za ta vnos obstaja usklajena razvrstitev in označitev na ravni Skupnosti z vključitvijo v del 3 Priloge VI;

- (b) ali gre pri tem vnosu za skupni vnos, ki ga je za isto snov opravilo več registracijskih zavezancev v skladu s členom 11(1) Uredbe (ES) št. 1907/2006;
- (c) ali gre v tem primeru za sporazumni vnos dveh ali več prijaviteljev ali registracijskih zavezancev v skladu s členom 41;
- (d) ali se vnos razlikuje od drugega vnosa v popisu za isto snov.

Informacije iz točke (a) se dopolnijo, če se sprejme sklep v skladu s členom 37(5).

NASLOV VI

PRISTOJNI ORGANI IN IZVRŠEVANJE

Člen 43

Imenovanje pristojnih organov in organov, odgovornih za izvrševanje, ter sodelovanje med organi

Države članice imenujejo pristojni organ ali organe, ki so odgovorni za predloge za usklajeno razvrstitev in označitev, ter organe, ki so odgovorni za izvrševanje obveznosti iz te uredbe.

Pristojni organi in organi, odgovorni za izvrševanje, sodelujejo pri izvajanju nalog iz te uredbe in zadevnim organom drugih držav članic nudijo vso potrebno pomoč, ki bi jo v ta namen lahko potrebovali.

Člen 44

Služba za pomoč uporabnikom

Države članice vzpostavijo nacionalne službe za pomoč uporabnikom, ki proizvajalcem, uvoznikom, distributerjem, nadaljnjim uporabnikom in drugim zainteresiranim svetujejo glede njihovih odgovornosti in obveznosti, ki izhajajo iz te uredbe.

Člen 45

Imenovanje organov, odgovornih za prejemanje informacij v zvezi z zagotavljanjem nujne zdravstvene pomoči

1. Države članice imenujejo organ ali organe, ki so odgovorni za prejemanje informacij od uvoznikov in nadaljnjih uporabnikov zlasti za pripravo preventivnih in kurativnih ukrepov, predvsem v primeru zagotavljanja nujne zdravstvene pomoči, zaradi dajanja zmesi v promet. Te informacije vključujejo informacije o kemijski sestavi zmesi, ki se dajo v promet in razvrstijo kot nevarne zaradi učinka na zdravje ali njihovih fizikalnih učinkov, ter kemijski identiteti snovi v zmesih, za katere je Agencija v skladu s členom 24 ugodila prošnji za uporabo alternativnega kemijskega imena.

2. Imenovani organi poskrbijo za vsa potrebna jamstva za varovanje tajnosti prejetih informacij. Takšne informacije se smejo uporabiti samo:

- (a) v zdravstvene namene pri oblikovanju preventivnih in kurativnih ukrepov, zlasti v nujnih primerih,

ter

- (b) če zanje zaprosi država članica, da bi opravila statistično analizo in ugotovila, ali so potrebni boljši ukrepi za obvladovanje tveganja.

Informacije se ne uporabijo za druge namene.

3. Imenovani organi prejmejo od dobavitelja in nadaljnjih uporabnikov, odgovornih za trženje, vse informacije, ki jih potrebujejo za izvajanje nalog, za katere so pristojni.

4. Komisija do 20. januarja 2012 na podlagi pregleda oceni možnosti za usklajevanje informacij iz odstavka 1, pri čemer tudi določi obliko, v kateri morajo uvozniki in nadaljnji uporabniki imenovanim organom predložiti informacije. Komisija lahko na podlagi pregleda in po posvetovanju z zadevnimi interesnimi skupinami, npr. Evropskim združenjem centrov za zastrupitve in kliničnih toksikologov (EAPCCT), sprejme uredbo, s katero se tej uredbi doda priloga.

Navedeni ukrepi, namenjeni spreminjanju nebitvenih določb te uredbe z njenim dopolnjevanjem, se sprejmejo v skladu z regulativnim postopkom s pregledom iz člena 54(3).

Člen 46

Izvrševanje in poročanje

1. Države članice sprejmejo vse potrebne ukrepe, vključno z vzdrževanjem sistema uradnega nadzora, da zagotovijo, da se snovi in zmesi ne dajo v promet, dokler niso razvrščene, označene, prijavljene in zapakirane v skladu s to uredbo.

2. Države članice Agenciji vsakih pet let do 1. julija predložijo poročilo o rezultatih uradnega nadzora in drugih sprejetih izvršilnih ukrepih. Prvo poročilo se predloži do 20. januarja 2012. Agencija da ta poročila na razpolago Komisiji, ki jih upošteva v svojih poročilih iz člena 117 Uredbe (ES) št. 1907/2006.

3. Forum iz člena 76(1)(f) Uredbe (ES) št. 1907/2006 opravlja naloge, določene v členu 77(4)(a) do (g) Uredbe (ES) št. 1907/2006 v zvezi z izvrševanjem te uredbe.

Člen 47

Kazni za neizpolnjevanje obveznosti

Države članice uvedejo kazni za neizpolnjevanje te uredbe in sprejmejo vse potrebne ukrepe, da bi zagotovile uporabo te uredbe. Kazni morajo biti učinkovite, sorazmerne in odvračilne. Države članice uradno obvestijo Komisijo o določbah glede kazni do 20. junija 2010, nemudoma pa jo obvestijo tudi o vseh naknadnih spremembah navedenih določb.

NASLOV VII

SKUPNE IN KONČNE DOLOČBE

Člen 48

Oglaševanje

1. Pri vsakem oglaševanju snovi, razvrščene kot nevarne, se navedejo zadevni razredi ali kategorije nevarnosti.

2. Pri vsakem oglaševanju zmesi, ki je razvrščena kot nevarna ali se zanjo uporablja člen 25(6), ki splošnemu uporabniku omogoča sklenitev kupne pogodbe, ne da bi pred tem etiketo videl, se navede vrsta ali vrste nevarnosti, ki so navedene na etiketi.

Prvi pododstavek ne posega v določbe Direktive 97/7/ES Evropskega parlamenta in Sveta z dne 20. maja 1997 o varstvu potrošnikov glede sklepanja pogodb pri prodaji na daljavo ⁽¹⁾.

Člen 49

Obvezno shranjevanje informacij in zahteve po informacijah

1. Dobavitelj zbira vse informacije, ki jih uporablja za razvrščanje in označevanje v skladu s to uredbo, ter jih hrani vsaj 10 let po tem, ko je to snov ali zmes zadnjič dobavil.

Dobavitelj te informacije hrani skupaj z informacijami, ki se zahtevajo v skladu s členom 36 Uredbe (ES) št. 1907/2006.

2. Če dobavitelj preneha opravljati dejavnost ali svojo dejavnost delno ali v celoti prenese na tretjo osebo, mora oseba, ki je odgovorna za likvidacijo dobaviteljevega podjetja ali ki prevzame odgovornost za dajanje zadevne snovi ali zmesi v promet, namesto dobavitelja izpolniti obveznost iz odstavka 1.

3. Pristojni organ ali organ, odgovoren za izvajanje, v državi članici, v kateri ima dobavitelj sedež, ali Agencija lahko od dobavitelja zahtevajo, da jim zagotovi katero koli informacijo iz prvega pododstavka odstavka 1.

Če je ta informacija Agenciji na voljo na podlagi registracije v skladu z Uredbo (ES) št. 1907/2006 ali prijavo v skladu s členom 40 te uredbe, potem Agencija uporabi te informacije, organ pa svojo zahtevo naslovi na Agencijo.

Člen 50

Naloge Agencije

1. Agencija zagotavlja državam članicam in institucijam Skupnosti najboljše možno znanstveno in tehnično svetovanje pri vprašanjih o kemikalijah, ki spadajo v njeno pristojnost in se ji predložijo v skladu z določbami te uredbe.

2. Sekretariat Agencije:

(a) industriji zagotavlja tehnične in znanstvene smernice ter po potrebi pomoč pri izpolnjevanju obveznosti iz te uredbe;

(b) pristojnim organom zagotavlja tehnične in znanstvene smernice glede uporabe te uredbe, službam za pomoč uporabnikom, ki so jih države članice vzpostavile v skladu s členom 44, pa zagotavlja pomoč.

Člen 51

Klavzula o prostem pretoku

Države članice ne prepovejo, omejijo ali ovirajo dajanja v promet snovi ali zmesi, ki izpolnjujejo določbe te uredbe in, po potrebi, aktov Skupnosti, sprejetih zaradi izvajanja te uredbe, na podlagi razlogov, ki so povezani z razvrščanjem, označevanjem ali pakiranjem snovi in zmesi v smislu te uredbe.

Člen 52

Zaščitna klavzula

1. Če država članica upravičeno meni, da snov ali zmes zaradi razvrstitve, označitve ali pakiranja resno ogroža zdravje ljudi ali okolje, čeprav izpolnjuje zahteve iz te uredbe, lahko sprejme ustrezne začasne ukrepe. Država članica o tem takoj obvesti Komisijo, Agencijo in druge države članice, pri tem pa navede razloge za svojo odločitev.

2. Komisija v 60 dneh po prejemu obvestila države članice sprejme odločitev v skladu z regulativnim postopkom iz člena 54(2), s katerim bodisi odobri začasni ukrep za obdobje, določeno v odločitvi, ali od države članice zahteva, da prekliče ukrep.

⁽¹⁾ UL L 144, 4.6.1997, str. 19.

3. Če Komisija odobri začasni ukrep v zvezi z razvrstitvijo ali označitvijo snovi v skladu z odstavkom 2, pristojni organ zadevne države članice v skladu s postopkom iz člena 37 Agenciji predloži predlog za usklajeno razvrščanje in označevanje, in sicer v treh mesecih po odločitvi Komisije.

Člen 53

Prilagoditve tehničnemu in znanstvenemu napredku

1. Komisija lahko prilagodi člene 6(5), 11(3), 12, 14, 18(3)(b), 23, 25 do 29 ter drugi in tretji pododstavek člena 35(2) in priloge I do VII tehničnemu in znanstvenemu napredku, pri čemer ustrezno upošteva nadaljnji razvoj GHS, zlasti pa vse spremembe na ravni ZN glede uporabe informacij o podobnih zmesih, obenem pa tudi upošteva razvijanje mednarodno priznanih kemičnih programov in spremembe v zvezi z informacijami iz podatkovnih baz o nesrečah. Navedeni ukrepi, namenjeni spreminjanju nebitvenih določb te uredbe, se sprejmejo v skladu z regulativnim postopkom s pregledom iz člena 54(3). V nujnih primerih lahko Komisija uporabi nujni postopek iz člena 54(4).

2. Države članice in Komisija v skladu s svojo vlogo v ustreznih forumih ZN spodbujajo – na ravni ZN – usklajevanje kriterijev za razvrščanje in označevanje bioakumulativnih in strupenih snovi (PBT) in zelo obstojnih in zelo bioakumulativnih snovi (vPvB).

Člen 54

Postopek v odboru

1. Komisiji pomaga odbor, ustanovljen s členom 133 Uredbe (ES) št. 1907/2006.

2. Ob sklicevanju na ta odstavek se uporabljata člena 5 in 7 Sklepa 1999/468/ES, ob upoštevanju določb člena 8 Sklepa.

Rok iz člena 5(6) Sklepa 1999/468/ES je tri mesece.

3. Ob sklicevanju na ta odstavek se uporabljata člen 5a(1) do (4) in člen 7 Sklepa 1999/468/ES, ob upoštevanju določb člena 8 Sklepa.

4. Ob sklicevanju na ta odstavek se uporabljata člen 5a(1), (2), (4) in (6) ter člen 7 Sklepa 1999/468/ES, ob upoštevanju določb člena 8 Sklepa.

Člen 55

Spremembe Direktive 67/548/EGS

Direktiva 67/548/EGS se spremeni:

1. v členu 1(2) se črta drugi pododstavek;

2. člen 4 se spremeni:

(a) odstavek 3 se nadomesti z naslednjim:

„3. Če je bil v del 3 Priloge VI k Uredbi (ES) št. 1272/2008 Evropskega parlamenta in Sveta z dne 16. december 2008 o razvrščanju, označevanju in pakiranju snovi in zmesi (*) vključen vnos z usklajeno razvrstitvijo in označitvijo neke snovi, se ta snov razvrsti v skladu s tem vnosom, odstavka 1 in 2 pa se ne uporabljata za kategorije nevarnosti, zajete s tem vnosom.

(*) UL L353, 31.12.2008, str. 1.“;

(b) odstavek 4 se črta;

3. člen 5 se spremeni:

(a) v odstavku 1 se črta drugi pododstavek;

(b) odstavek 2 se nadomesti z naslednjim:

„2. Ukrepi iz prvega pododstavka odstavka 1 se uporabljajo, dokler je snov na seznamu v delu 3 Priloge VI k Uredbi (ES) št. 1272/2008 za kategorije nevarnosti, ki jih zajema ta vnos, ali dokler se v skladu s postopkom iz člena 37 Uredbe (ES) št. 1272/2008 ne sprejme sklep, da se snov ne uvrsti na seznam.“;

4. besedilo člena 6 se nadomesti z naslednjim:

„Člen 6

Obveznost opravljanja preiskave

Proizvajalci, distributerji in uvozniki snovi, ki so uvrščene na seznam EINECS, a zanje ni vnosa v delu 3 Priloge VI k Uredbi (ES) št. 1272/2008, opravijo preiskavo, da se seznanijo z obstoječimi ustreznimi in dostopnimi podatki o lastnostih takšnih snovi. Na podlagi teh informacij pakirajo in začasno označijo nevarne snovi v skladu s pravili iz členov 22 do 25 te direktive in s kriteriji iz Priloge VI k tej direktivi.“;

5. v členu 22 se črtata odstavka 3 in 4;

6. v členu 23 se odstavek 2 spremeni:

(a) v točki (a) se besedilo „Prilogi I“ nadomesti z besedilom „delu 3 Priloge VI k Uredbi (ES) št. 1272/2008“;

(b) v točki (c) se besedilo „Prilogi I“ nadomesti z besedilom „delu 3 Priloge VI k Uredbi (ES) št. 1272/2008“;

- (c) v točki (d) se besedilo „Prilogi I“ nadomesti z besedilom „delu 3 Priloge VI k Uredbi (ES) št. 1272/2008“;
- (d) v točki (e) se besedilo „Prilogi I“ nadomesti z besedilom „delu 3 Priloge VI k Uredbi (ES) št. 1272/2008“;
- (e) v točki (f) se besedilo „Prilogi I“ nadomesti z besedilom „delu 3 Priloge VI k Uredbi (ES) št. 1272/2008“;
7. v členu 24(4) se drugi pododstavek črta;
8. člen 28 se črta;
9. v členu 31 se črtata odstavka 2 in 3;
10. po členu 32 se vstavi naslednji člen:
- „Člen 32a
- Začasna določba glede označevanja in pakiranja snovi**
- Členi 22 do 25 se od 1. decembra 2010 ne uporabljajo za snovi.“;
11. Priloga I se črta.
- Člen 56
- Sprememba Direktive 1999/45/ES**
- Direktiva 1999/45/ES se spremeni:
1. v prvi alinei člena 3(2) se besedilo „v Prilogi I k Direktivi 67/584/EGS“ nadomesti z besedilom „v delu 3 Priloge VI k Uredbi (ES) št. 1272/2008 Evropskega Parlamenta in Sveta z dne 16. december 2008 o razvrščanju, označevanju in pakiranju snovi in zmesi (*);
- (*) UL L353, 31.12.2008, str. 1.“;
2. besedilo „v Prilogi I k Direktivi 67/548/EGS“ se nadomesti z „v delu 3 Priloge VI k Uredbi (ES) št. 1272/2008“ v naslednjih določbah:
- (a) člen 3(3);
- (b) člen 10(2), točke 2.3.1, 2.3.2, 2.3.3 in 2.4 prva alinea;
- (c) Priloga II, točki (a) in (b) zadnjega odstavka Uvoda;
- (d) Priloga II, del A,
- točka 1.1.1(a) in (b),
- točka 1.2(a) in (b),
- točka 2.1.1(a) in (b),
- točka 2.2(a) in (b),
- točka 2.3(a) in (b),
- točka 3.1.1(a) in (b),
- točka 3.3(a) in (b),
- točka 3.4(a) in (b),
- točka 4.1.1(a) in (b),
- točka 4.2.1(a) in (b),
- točka 5.1.1(a) in (b),
- točka 5.2.1(a) in (b),
- točka 5.3.1(a) in (b),
- točka 5.4.1(a) in (b),
- točka 6.1(a) in (b),
- točka 6.2(a) in (b),
- točka 7.1(a) in (b),
- točka 7.2(a) in (b),
- točka 8.1(a) in (b),
- točka 8.2(a) in (b),
- točka 9.1(a) in (b),
- točka 9.2(a) in (b),
- točka 9.3(a) in (b),
- točka 9.4(a) in (b);
- (e) Priloga II, uvodni del dela B;
- (f) Priloga III, točki (a) in (b) Uvoda;
- (g) Priloga III, del A, oddelek (a) Vodno okolje,
- točka 1.1(a) in (b),
- točka 2.1(a) in (b),
- točka 3.1(a) in (b),
- točka 4.1(a) in (b),
- točka 5.1(a) in (b),
- točka 6.1(a) in (b);

- (h) Priloga III, del A, oddelek (b) Nevodno okolje, točka 1.1(a) in (b);
 - (i) Priloga V, oddelek A, točki 3 in 4;
 - (j) Priloga V, oddelek B, točka 9;
 - (k) Priloga VI, del A, tretji stolpec tabele pod točko 2;
 - (l) Priloga VI, del B, točka 1, prvi odstavek, prvi stolpec tabele pod točko 3;
 - (m) Priloga VIII, Dodatek 1, drugi stolpec tabele;
 - (n) Priloga VIII, Dodatek 2, drugi stolpec tabele;
3. v Prilogi VI, delu B, točki 1, prvi alineji odstavka 3 in v odstavku 5 se besede „v Prilogi I“ nadomestijo z besedami „v delu 3 Priloge VI k Uredbi (ES) št. 1272/2008“;
4. v zadnjem odstavku točke 4.2 dela B Priloge VI se besedilo „v Prilogi I k Direktivi 67/548/EGS (19. sprememba)“ nadomesti z besedilom „v delu 3 Priloge VI k Uredbi (ES) št. 1272/2008“.

Člen 57

Sprememba Uredbe (ES) št. 1907/2006 po pričetku veljavnosti te uredbe

Uredba (ES) št. 1907/2006 se spremeni po pričetku veljavnosti te uredbe:

1. člen 14(2) se spremeni:
- (a) točka (b) se nadomesti z naslednjim:

„(b) posebnih mejnih koncentracij, ki so določene v delu 3 Priloge VI k Uredbi (ES) št. 1272/2008 Evropskega parlamenta in Sveta z dne 16. december 2008 o razvrščanju, označevanju in pakiranju snovi in zmesi (*);
 - (ba) v primeru snovi, ki so razvrščene kot nevarne za vodno okolje, če je bil množilni faktor, v nadaljnjem besedilu „M-faktor“, določen v delu 3 Priloge VI k Uredbi (ES) št. 1272/2008, mejnih vrednosti iz tabele 1.1 v Prilogi I k navedeni uredbi, ki so prilagojene na podlagi izračuna, določenega v oddelku 4.1 Priloge I k navedeni uredbi;

(*) UL L353, 31.12.2008, str. 1.“;

- (b) točka (e) se nadomesti z naslednjim:

„(e) posebnih mejnih koncentracij iz sporazumnega vnosa v popisu razvrščanja in označevanja iz člena 42 Uredbe (ES) št. 1272/2008;

- (ea) v primeru snovi, ki so razvrščene kot nevarne za vodno okolje, če je bil M- faktor določen na podlagi sporazumnega vpisa v popisu razvrščanja in označevanja iz člena 42 Uredbe (ES) št. 1272/2008, mejnih vrednosti iz tabele 1.1 v Prilogi I k navedeni uredbi, ki so prilagojene na podlagi izračuna, določenega v oddelku 4.1 Priloge I k navedeni uredbi;“;

2. člen 31 se spremeni:

- (a) odstavek 8 se nadomesti z naslednjim:

„8. Varnostni list se zagotovi brezplačno na papirju ali v elektronski obliki najpozneje na dan, ko je snov ali zmes prvič dobavljena.“;

- (b) doda se naslednji odstavek:

„10. Če se snovi razvrščajo v skladu z Uredbo (ES) št. 1272/2008 v obdobju od začetka njene veljavnosti do 1. decembra 2010, se ta razvrstitev lahko vključi v varnostni list skupaj z razvrstitvijo v skladu z Direktivo 67/548/EGS.

Od 1. decembra 2010 do 1. junija 2015 varnostni listi za snovi vsebujejo razvrstitev v skladu z Direktivo 67/548/EGS in Uredbo (ES) št. 1272/2008.

Če se zmesi razvrščajo v skladu z Uredbo (ES) št. 1272/2008 v obdobju od začetka njene veljavnosti do 1. junija 2015, se ta razvrstitev lahko vključi v varnostni list skupaj z razvrstitvijo v skladu z Direktivo 1999/45/ES. Do 1. junija 2015, ko se snovi in zmesi razvrščajo in označujejo v skladu z Uredbo (ES) št. 1272/2008, se ta razvrstitev navede v varnostnem listu, skupaj z razvrstitvijo snovi, zmesi in njenih sestavin v skladu z Direktivo 67/548/EGS oziroma Direktivo 1999/45/ES.“;

3. člen 56(6)(b) se nadomesti z naslednjim:

- „(b) vse druge snovi, katerih koncentracija ne presega najnižje mejne vrednosti iz Direktive 1999/45/ES ali dela 3 Priloge VI k Uredbi (ES) št. 1272/2008, in se zato zmesi iz njih razvrstijo kot nevarne.“;

4. v členu 59 se spremenita odstavka 2 in 3:

- (a) v odstavku 2 se drugi stavek nadomesti z naslednjim:

„Dokumentacija je lahko omejena na sklicevanje na vnos v delu 3 Priloge VI k Uredbi (ES) št. 1272/2008.“;

- (b) v odstavku 3 se drugi stavek nadomesti z naslednjim:
- „Dokumentacija je lahko omejena na sklicevanje na vnos v delu 3 Priloge VI k Uredbi (ES) št. 1272/2008.“;
5. v členu 76(1)(c) se besedilo „z naslovom XI“ nadomesti z besedilom „z naslovom V Uredbe (ES) št. 1272/2008“;
6. člen 77 se spremeni:
- (a) v odstavku 2(e) se prvi stavek nadomesti z naslednjim:
- „(e) vzpostavitev in vzdrževanje zbirke (zbirk) podatkov z informacijami o vseh registriranih snoveh, popisom razvrščanja in označevanja ter usklajenim seznamom razvrstitev in označitev, pripravljenim v skladu z Uredbo (ES) št. 1272/2008;“
- (b) v odstavku 3(a) se besedilo „z naslovi VI do XI“ nadomesti z besedilom „z naslovi VI do X“;
7. naslov XI se črta;
8. oddelka I in II Priloge XV se spremenita:
- (a) oddelek I se spremeni:
- (i) prva alineja se črta;
- (ii) druga alineja se nadomesti z naslednjim:
- „— identifikacije CMR, PBT, vPvB ali snovi, ki vzbujajo enakovredno zaskrbljenost v skladu s členom 59;“;
- (b) točka 1 oddelka II se črta;
9. tabela Priloge XVII se spremeni:
- (a) stolpec „Oznaka snovi, skupin snovi ali pripravka“ se spremeni:
- (i) vnosi 28, 29 in 30 se nadomestijo z naslednjim:
- „28. Snovi, navedene v delu 3 Priloge VI k Uredbi (ES) št. 1272/2008, razvrščene med rakotvorne iz kategorije 1A ali 1B (tabela 3.1) ali rakotvorne iz kategorij 1 ali 2 (tabela 3.2) in na seznam uvrščene kot:
- rakotvorne iz kategorije 1A (tabela 3.1)/rakotvorne iz kategorije 1 (tabela 3.2), našteje v Dodatku 1
 - rakotvorne iz kategorije 1B (tabela 3.1)/rakotvorne iz kategorije 2 (tabela 3.2), našteje v Dodatku 2
29. Snovi, navedene v delu 3 Priloge VI k Uredbi (ES) št. 1272/2008, razvrščene med mutagene za zarodne celice iz kategorij 1A ali 1B (tabela 3.1) ali mutagene iz kategorij 1 ali 2 (tabela 3.2), in so na seznam uvrščene kot:
- mutagene iz kategorije 1A (tabela 3.1)/mutagene iz kategorije 1 (tabela 3.2) v Dodatku 3
 - mutagene iz kategorije 1B (tabela 3.1)/mutagene iz kategorije 2 (tabela 3.2) v Dodatku 4
30. Snovi, navedene v delu 3 Priloge VI k Uredbi (ES) št. 1272/2008, razvrščene med strupene za razmnoževanje iz kategorij 1A ali 1B (tabela 3.1) ali strupene za razmnoževanje iz kategorij 1 ali 2 (tabela 3.2), in na seznam uvrščene kot:
- strupene za razmnoževanje iz kategorije 1A, škodljivi učinki na spolno delovanje in plodnost ali razvoj (tabela 3.1) ali strupene za razmnoževanje iz kategorije 1 z R60 (lahko škoduje plodnosti) ali R61 (lahko škoduje nerojenemu otroku) (tabela 3.2) v Dodatku 5
 - strupene za razmnoževanje iz kategorije 1B škodljivi učinki na spolno delovanje in plodnost ali razvoj (tabela 3.1) ali strupene za razmnoževanje iz kategorije 1 z R60 (lahko škoduje plodnosti) ali R61 (lahko škoduje nerojenemu otroku) (tabela 3.2), v Dodatku 6“;
- (b) v stolpcu „Pogoji omejitve“ se pri vnosu 28 prva alineja točke 1 nadomesti z naslednjim:
- „— ustrezne posebne mejne koncentracije, navedene v delu 3 Priloge VI k Uredbi (ES) št. 1272/2008, ali“;
10. dodatki 1 do 6 k Prilogi XVII se spremenijo:
- (a) predgovor se spremeni:
- (i) v oddelku z naslovom „Snovi“ se besedilo „Prilogi I k Direktivi 67/548/EGS“ nadomesti z besedilom „delu 3 Priloge VI k Uredbi (ES) št. 1272/2008“;
- (ii) v oddelku z naslovom „Število indeks“ se besedilo „Prilogi I k Direktivi 67/548/EGS“ nadomesti z besedilom „delu 3 Priloge VI k Uredbi (ES) št. 1272/2008“;
- (iii) v oddelku z naslovom „Opombe“ se besedilo „uvodni besedi Priloge I k Direktivi 67/548/EGS“ nadomesti z besedilom „delu 1 Priloge VI k Uredbi (ES) št. 1272/2008“;

(iv) opomba A se nadomesti z naslednjim:

„Opomba A

Brez poseganja v člen 17(2) Uredbe (ES) št. 1272/2008 mora biti na etiketi ime snovi v obliki enega od poimenovanj iz dela 3 Priloge VI k navedeni uredbi.

V navedenem delu je v nekaterih primerih uporabljen splošen opis, denimo „... spojine“ ali „... soli“. V tem primeru mora dobavitelj, ki takšno snov daje v promet, na etiketi navesti njeno pravilno ime, pri čemer je treba ustrezno upoštevati oddelek 1.1.1.4 Priloge VI k Uredbi (ES) št. 1272/2008.

V skladu z Uredbo (ES) št. 1272/2008 se v primeru, da je snov vključena v del 3 Priloge VI k navedeni uredbi, elementi etikete za vsako posamezno razvrstitev, ki jo zajema vnos v navedenem delu, vključijo v etiketo, poleg njih pa tudi veljavni elementi etikete za vse druge razvrstitve, ki niso zajete v navedenem vnosu, ter drugi elementi etikete v skladu s členom 17 navedene uredbe.

Za snovi, ki spadajo v eno od posebnih kategorij snovi iz dela 3 Priloge VI k Uredbi (ES) št. 1272/2008, se elementi etikete za vsako posamezno razvrstitev, ki jo zajema vnos v navedenem delu, vključijo v etiketo, poleg njih pa tudi veljavni elementi etikete za vse druge razvrstitve, ki niso zajete v navedenem vnosu, ter drugi elementi etikete v skladu s členom 17 navedene uredbe.

Za snovi, ki spadajo v več kot eno od posebnih kategorij snovi iz dela 3 Priloge VI k Uredbi (ES) št. 1272/2008, se elementi etikete za vsako posamezno razvrstitev, ki jo zajemajo vnosi v navedenem delu, vključijo v etiketo, poleg njih pa tudi veljavni elementi etikete za vse druge razvrstitve, ki niso zajete v navedenem vnosu, ter drugi veljavni elementi etikete v skladu s členom 17 navedene uredbe. Kadar sta v dveh vnosih za isti razred nevarnosti ali razločevanje navedeni dve različni razvrstitvi, se uporabi razvrstitev, ki odraža strožjo razvrstitev glede na nevarnost.“;

(v) opomba D se nadomesti z naslednjim:

„Opomba D:

Nekatere snovi, ki lahko spontano polimerizirajo ali se hitro razgradijo, se navadno dajejo v promet v stabilizirani obliki. V takšni obliki so navedene

tudi v delu 3 Priloge VI k Uredbi (ES) št. 1272/2008.

Vendar so takšne snovi včasih dane v promet v nestabilizirani obliki. V tem primeru mora dobavitelj, ki takšno snov daje v promet, za imenom snovi na etiketi navesti še besedo „nestabilizirano.“;

(vi) opomba E se črta;

(vii) opomba H se nadomesti z naslednjim:

„Opomba H

Razvrstitev in označitev te snovi se uporablja za nevarno(-e) lastnost(-i), ki je (so) označen(-e) s stavkom(-i) o nevarnosti v kombinaciji z navedeno razvrstitvijo glede na nevarnost. Zahteve iz člena 4 Uredbe (ES) št. 1272/2008 glede dobaviteljev te snovi se uporabljajo za vse druge razrede nevarnosti, razločevanja in kategorije.

Za končno označitev se uporabljajo zahteve iz oddelka 1.2 Priloge I k Uredbi (ES) št. 1272/2008.“;

(viii) opomba K se nadomesti z naslednjim:

„Opomba K:

Razvrstitev kot rakotvorna ali mutagena snov ni potrebna, če je razvidno, da je masni delež 1,3-butadiena (št. Eines 203-450-8) manjši kot 0,1 % m/m. Če snov ni razvrščena kot rakotvorna ali mutagena, je treba uporabiti vsaj previdnostne stavke (P102-P210-P403). Ta opomba se uporablja samo za nekatere kompleksne snovi, pridobljene iz nafte, iz dela 3 Priloge VI k Uredbi (ES) št. 1272/2008.“;

(ix) opomba S se nadomesti z naslednjim:

„Opomba S:

Te snovi ni treba označiti v skladu s členom 17 Uredbe (ES) št. 1272/2008 (glej oddelek 1.3 Priloge I navedene uredbe).“;

(b) v Dodatku 1 se naslov nadomesti z naslednjim:

„Točka 28 – Rakotvorne snovi: kategorija 1A (tabela 3.1)/kategorija 1 (tabela 3.2).“;

(c) Dodatek 2 se spremeni:

(i) naslov se nadomesti s „Točka 28 – Rakotvorne snovi: kategorija 1B (tabela 3.1)/kategorija 2 (tabela 3.2).“;

- (ii) v vnosih z indeks številni 024-017-00-8, 611-024-001, 611-029-00-9, 611-030-00-4 in 650-017-00-8 se besedilo „Priloga I k Direktivi 67/548/EGS“ nadomesti z besedilom „Priloga VI k Uredbi (ES) št. 1272/2008.“;
- (d) v Dodatku 3 se naslov nadomesti z naslednjim:
- „Točka 29 – Mutagene snovi: kategorija 1A (tabela 3.1)/kategorija 1 (tabela 3.2)“;
- (e) v Dodatku 4 se naslov nadomesti z naslednjim:
- „Točka 29 – Mutagene snovi: kategorija 1B (tabela 3.1)/kategorija 2 (tabela 3.2)“;
- (f) v Dodatku 5 se naslov nadomesti z naslednjim:
- „Točka 30 – Snovi, strupene za razmnoževanje: kategorija 1A (tabela 3.1)/kategorija 1 (tabela 3.2)“;
- (g) v Dodatku 6 se naslov nadomesti z naslednjim:
- „Točka 30 – Snovi, strupene za razmnoževanje: kategorija 1B (tabela 3.1)/kategorija 1 (tabela 3.2)“;
11. beseda „pripravek“ v vseh sklonih in številih v smislu člena 3(2) Uredbe(ES) št. 1907/2006 se v celotnem besedilu nadomesti z besedo „zmes“ v ustreznem sklonu in številu in temu ustrezno se prilagodi tudi stavek, v katerem se nahaja.

Člen 58

Spremembe Uredbe (ES) št. 1907/2006 od 1. decembra 2010

Uredba (ES) št. 1907/2006 se spremeni s 1. decembrom 2010:

1. v členu 14(4), se uvodni stavek nadomesti z naslednjim:

„4. Če registracijski zavezanec na podlagi izvedenih faz (a) do (d) odstavka 3 ugotovi, da snov izpolnjuje kriterije za razvrstitev v katerega koli od naslednjih razredov ali kategorij nevarnosti iz Priloge I Uredbe (ES) št. 1272/2008:

- (a) razredi nevarnosti 2.1 do 2.4, 2.6 in 2.7, 2.8 vrste A in B, 2.9, 2.10, 2.12, 2.13 iz kategorij 1 in 2, 2.14 iz kategorij 1 in 2, 2.15 vrste A do F;
- (b) razredi nevarnosti 3.1 do 3.6, 3.7 (škodljivi učinki na spolno delovanje in plodnost ali razvoj), 3.8 (razen narkotičnih učinkov), 3.9 in 3.10;
- (c) razred nevarnosti 4.1;
- (d) razred nevarnosti 5.1;

ali da se snov šteje za PBT ali vPvB, ocena kemijske varnosti vključuje še naslednje dodatne faze:“;

2. člen 31 se spremeni:

- (a) odstavek 1(a) se nadomesti z naslednjim:

„(a) kadar snov izpolnjuje kriterije za razvrstitev kot nevarna v skladu z Uredbo (ES) št. 1272/2008 ali kadar zmes izpolnjuje kriterije za razvrstitev kot nevarna v skladu z Direktivo 1999/45/ES, ali“;

- (b) odstavek 4 se nadomesti z naslednjim:

„4. Varnostnega lista ni treba dostaviti, če so nevarne snovi v skladu z Uredbo (ES) št. 1272/2008 ali nevarne zmesi v skladu z Direktivo 1999/45/ES, ki so v ponudbi ali prodaji za javnost, opremljene z zadostnimi informacijami, da uporabnikom omogočajo sprejetje vseh potrebnih ukrepov glede varovanja zdravja ljudi, varnosti in okolja, razen če jih ne zahteva nadaljnji uporabnik ali distributer.“;

3. člen 40(1) se nadomesti z naslednjim:

„1. Agencija preuči vse predloge za testiranje iz registracije ali poročila nadaljnega uporabnika za pridobitev informacij o snovi iz prilog IX in X. Prednost imajo registracije snovi, ki imajo ali lahko imajo lastnosti PBT, vPvB, povzročajo preobčutljivost in/ali imajo lastnosti, ki so rakotvorne, mutagene ali strupene za razmnoževanje (CMR), ali snovi v količinah nad 100 ton na leto, katerih uporaba se odraža v splošni in razpršeni izpostavljenosti, če ustrezajo kriterijem katerega koli od razredov ali kategorij nevarnosti iz Priloge I k Uredbi (ES) št. 1272/2008:

- (a) razredi nevarnosti 2.1 do 2.4, 2.6 in 2.7, 2.8 vrste A in B, 2.9, 2.10, 2.12, 2.13 iz kategorij 1 in 2, 2.14 iz kategorij 1 in 2, 2.15 vrste A do F;
- (b) razredi nevarnosti 3.1 do 3.6, 3.7 (škodljivi učinki na spolno delovanje in plodnost ali razvoj), 3.8 (razen narkotičnih učinkov), 3.9 in 3.10;
- (c) razred nevarnosti 4.1;
- (d) razred nevarnosti 5.1“;

4. odstavki (a), (b) in (c) člena 57 se nadomestijo z naslednjim:

„(a) snovi, ki izpolnjujejo kriterije za razvrstitev kot rakotvorne iz kategorij 1A ali 1B v skladu z oddelkom 3.6 Priloge I k Uredbi (ES) št. 1272/2008;

- (b) snovi, ki izpolnjujejo kriterije za razvrstitev kot mutagene za zarodne celice iz kategorij 1A ali 1B v skladu z oddelkom 3.5 Priloge I k Uredbi (ES) št. 1272/2008;

- (c) snovi, ki izpolnjujejo kriterije za razvrstitev kot strupene za razmnoževanje iz kategorij 1A ali 1B, škodljivi učinki na spolno delovanje in plodnost ali razvoj v skladu z oddelkom 3.7 Priloge I k Uredbi (ES) št. 1272/2008;“
5. v členu 65 se besedilo „direktivah 67/548/EGS in“ nadomesti z besedilom „Direktivo 67/548/EGS in Uredbo (ES) št. 1272/2008 ter“;
6. člen 68(2) se nadomesti z naslednjim:
- „2. Za snovi kot take, v zmesi ali v izdelku, ki izpolnjujejo kriterije za razvrstitev kot rakotvorne, mutagene za zarodne celice ali strupene za razmnoževanje iz kategorij 1A ali 1B in ki bi jih lahko potrošniki uporabili ter za katere je Komisija predlagala omejitve potrošniške uporabe, se Priloga XVII spremeni v skladu s postopkom iz člena 133(4). Členi 69 do 73 se ne uporabljajo.“;
7. člen 119 se spremeni:
- (a) v odstavku 1 se točka (a) nadomesti z naslednjim:
- „(a) brez poseganja v odstavke 2(f) in (g) tega člena ime po nomenklaturi IUPAC za snovi, ki izpolnjujejo kriterije za razvrstitev v katerega koli od razredov ali kategorij nevarnosti iz Priloge I k Uredbi (ES) št. 1272/2008:
- razredi nevarnosti 2.1 do 2.4, 2.6 in 2.7, 2.8 vrste A in B, 2.9, 2.10, 2.12, 2.13 iz kategorij 1 in 2, 2.14 iz kategorij 1 in 2, 2.15 vrste A do F;
 - razredi nevarnosti 3.1 do 3.6, 3.7 (škodljivi učinki na spolno delovanje in plodnost ali razvoj), 3.8 (razen narkotičnih učinkov), 3.9 in 3.10;
 - razred nevarnosti 4.1;
 - razred nevarnosti 5.1“;
- (b) odstavek 2 se spremeni:
- (i) točka (f) se nadomesti z naslednjim:
- „(f) ob upoštevanju člena 24 Uredbe (ES) št. 1272/2008 ime po nomenklaturi IUPAC za snovi, ki niso v postopnem uvajanju in so navedene v odstavku 1(a) tega člena, in sicer za obdobje šestih let;“;
- (ii) v točki (g) se uvodni stavek nadomesti z naslednjim:
- „(g) ob upoštevanju člena 24 Uredbe (ES) št. 1272/2008 ime po nomenklaturi IUPAC za snovi iz odstavka 1(a) tega člena, ki se uporabljajo samo za enega ali več naslednjih namenov:“;
8. v členu 138(1) se drugi stavek uvodnega dela nadomesti z naslednjim:
- „Vendar se za snovi, ki izpolnjujejo kriterije za razvrstitev kot rakotvorne, mutagene za zarodne celice ali strupene za razmnoževanje iz kategorij 1A, 1B v skladu z Uredbo (ES) št. 1272/2008, pregled opravi do 1. junija 2014.“;
9. Priloga III se spremeni:
- (a) točka (a) se nadomesti z naslednjim:
- „(a) snovi, za katere je predvideno (tj. z uporabo (Q)SAR ali drugih dokazov), da bodo verjetno izpolnjevale kriterije za razvrščanje v kategorijo 1A ali 1B rakotvornosti, mutagenosti za zarodne celice ali strupenosti za razmnoževanje, ali pa kriteriji iz Priloge XIII;“;
- (b) točka b(ii) se nadomesti z naslednjim:
- „(ii) za katere je predvideno (tj. z uporabo (Q)SAR ali drugih dokazov), da bodo verjetno izpolnjevale kriterije za razvrščanje v enega od razredov nevarnosti ali razločevanja za zdravje ali okolje po Uredbi (ES) št. 1272/2008.“;
10. v točki 8 Priloge V se besedilo „Direktivo 67/548/EGS“ nadomesti z besedilom „Uredbo (ES) št. 1272/2008.“;
11. v Prilogi VI se oddelki 4.1, 4.2 in 4.3 nadomestijo z naslednjim:
- „4.1 Razvrščanje glede na nevarne lastnosti snovi, ki izhaja iz uporabe naslovov I in II Uredbe (ES) št. 1272/2008, za vse razrede in kategorij nevarnosti iz navedene uredbe;
- Poleg tega naj bodo za vsak vnos navedeni razlogi, zaradi katerih snov ni bila razvrščena v razred nevarnosti ali razločevanje znotraj razreda nevarnosti (tj. manjkajoči, nepopolni podatki ali pa popolni podatki niso zadostni za razvrstitev);
- 4.2 Simbol za nevarnost za snov(-i), ki izhaja iz uporabe naslova III Uredbe (ES) št. 1272/2008;

4.3 Posebne mejne koncentracije, kjer je ustrezno, ki izhajajo iz uporabe člena 10 Uredbe (ES) št. 1272/2008 in členov 4 in 7 Direktive 1999/45/ES.;

14. Priloga X se spremeni:

12. Priloga VIII se spremeni:

(a) v stolpcu 2 se druga alineja točke 8.4.2 nadomesti z naslednjim:

„— če je za snov znano, da je rakotvorna iz kategorij 1A ali 1B, ali mutagena za zarodne celice iz kategorij 1A, 1B ali 2.“;

(b) v stolpcu 2 se drugi in tretji odstavek točke 8.7.1 nadomestita z naslednjim:

„Če je za snov znano, da ima škodljive posledice za plodnost, izpolnjuje kriterije za razvrstitev kot strupena za razmnoževanje iz kategorij 1A ali 1B: škoduje lahko plodnosti (H360F), podatki, ki so na voljo, pa so zadostni, da se opravi groba ocena tveganja, takrat ni potrebno nadaljnje preskušanje za plodnost. Vendar pa je treba upoštevati preskušanje strupenosti za razvoj.“

Če je za snov znano, da povzroča strupenost za razvoj, izpolnjuje kriterije za razvrstitev kot strupena za razmnoževanje iz kategorij 1A ali 1B: škoduje lahko nerojenemu otroku (H360D), podatki, ki so na voljo, pa so zadostni, da se opravi groba ocena tveganja, takrat ni potrebno nadaljnje preskušanje za plodnost. Vendar pa je treba upoštevati preskušanje učinkov na plodnost.“;

13. v stolpcu 2 točke 8.7 Priloge IX se drugi in tretji odstavek nadomestita z naslednjim:

„Če je za snov znano, da ima škodljive posledice za plodnost, izpolnjuje kriterije za razvrstitev kot strupena za razmnoževanje iz kategorij 1A ali 1B: škoduje lahko plodnosti (H360F), podatki, ki so na voljo, pa so zadostni, da se opravi groba ocena tveganja, takrat ni potrebno nadaljnje preskušanje za plodnost. Vendar pa je treba upoštevati preskušanje strupenosti za razvoj.“

Če je za snov znano, da povzroča strupenost za razvoj, izpolnjuje kriterije za razvrstitev kot strupena za razmnoževanje iz kategorij 1A ali 1B: škoduje lahko nerojenemu otroku (H360D), podatki, ki so na voljo, pa so zadostni, da se opravi groba ocena tveganja, takrat ni potrebno nadaljnje preskušanje za plodnost. Vendar pa je treba upoštevati preskušanje učinkov na plodnost.“;

(a) v stolpcu 2 točke 8.7 se drugi in tretji odstavek nadomestita z naslednjim:

„Če je za snov znano, da ima škodljive posledice za plodnost, izpolnjuje kriterije za razvrstitev kot strupena za razmnoževanje iz kategorij 1A ali 1B: škoduje lahko plodnosti (H360F), podatki, ki so na voljo, pa so zadostni, da se opravi groba ocena tveganja, takrat ni potrebno nadaljnje preskušanje za plodnost. Vendar pa je treba upoštevati preskušanje strupenosti za razvoj.“

Če je za snov znano, da povzroča strupenost za razvoj, izpolnjuje kriterije za razvrstitev kot strupena za razmnoževanje iz kategorij 1A ali 1B: škoduje lahko nerojenemu otroku (H360D), podatki, ki so na voljo, pa so zadostni, da se opravi groba ocena tveganja, takrat ni potrebno nadaljnje preskušanje za plodnost. Vendar pa je treba upoštevati preskušanje učinkov na plodnost.“;

(b) v stolpcu 2 točke 8.9.1, se druga alineja prvega odstavka nadomesti z naslednjim:

„— je snov razvrščena kot mutagena za zarodne celice iz kategorije 2 ali obstaja dokaz iz študije(-) ponovljenih odmerkov, da snov lahko povzroči hiperplazijo in/ali preneoplastične spremembe.“;

(c) v stolpcu 2 se drugi odstavek točke 8.9.1 nadomesti z naslednjim:

„Če je snov razvrščena kot mutagena za zarodne celice iz kategorij 1A ali 1B, je privzeta domneva, da obstaja verjetnost genotoksičnega mehanizma za rakotvornost. Praviloma se v teh primerih preskušanje rakotvornosti ne zahteva.“;

15. v Prilogi XIII se druga in tretja alineja točke 1.3 nadomestita z naslednjim:

„— je snov razvrščena med rakotvorne (kategorije 1A ali 1B), snovi, mutagene za zarodne celice (kategorije 1A in 1B), ali snovi, strupene za razmnoževanje (kategorije 1A, 1B in 2), ali

— obstajajo drugi dokazi kronične strupenosti, kot se opredeli na podlagi razvrstitve STOT (ponavljajoča se izpostavljenost) iz kategorije 1 (oralno, dermalno, vdihavanje plinov/hlapov, vdihavanje prahu/meglice/dima) ali kategorije 2 (oralno, dermalno, vdihavanje plinov/hlapov, vdihavanje prahu/meglice/dima) v skladu z Uredbo (ES) št. 1272/2008.“;

16. v tabeli Priloge XVII se stolpec „Oznaka snovi, skupin snovi ali zmesi“ spremeni:

(a) vnos 3 se nadomesti z naslednjim:

„3. Tekoče snovi ali zmesi, ki se štejejo za nevarne v skladu z Direktivo 1999/45/ES ali izpolnjujejo kriterije za razvrstitev v katerega koli od naslednjih razredov ali kategorij nevarnosti iz Priloge I k Uredbi (ES) št. 1272/2008:

(a) razredi nevarnosti 2.1 do 2.4, 2.6 in 2.7, 2.8 vrste A in B, 2.9, 2.10, 2.12, 2.13 iz kategorij 1 in 2, 2.14 iz kategorij 1 in 2, 2.15 vrste A do F;

(b) razredi nevarnosti 3.1 do 3.6, 3.7 (škodljivi učinki na spolno delovanje in plodnost ali razvoj), 3.8 (razen narkotičnih učinkov), 3.9 in 3.10;

(c) razred nevarnosti 4.1;

(d) razred nevarnosti 5.1.“;

(b) vnos 40 se nadomesti z naslednjim:

„40. Snovi, ki so razvrščene med vnetljive pline iz kategorij 1 ali 2, vnetljive tekočine iz kategorij 1, 2 ali 3, vnetljive trdne snovi iz kategorij 1 ali 2, snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline iz kategorij 1, 2 ali 3, piroforne tekočine iz kategorij 1 ali piroforne trdne snovi iz kategorij 1, ne glede na to, ali so navedene v delu 3 Priloge VI k navedeni uredbi ali ne.“.

Člen 59

Sprememba Uredbe (ES) št. 1097/2006 od 1. junija 2015

Uredba (ES) št. 1907/2006 se spremeni od 1. junija 2015:

1. člen 14(2) se nadomesti z naslednjim:

„2. Ocene kemijske varnosti v skladu z odstavkom 1 ni treba opraviti za snov v pripravku, če je njena koncentracija v pripravku nižja od

(a) mejnih vrednosti iz člena 11(3) Uredbe (ES) št. 1272/2008;

(f) 0,1 % mase po masi (m/m), če snov izpolnjuje kriterije iz Priloge XIII k tej uredbi.“;

2. člen 31 se spremeni:

(a) točka (a) odstavka 1 se nadomesti z naslednjim:

„(a) kadar snov ali zmes izpolnjuje kriterije za razvrstitev kot nevarna v skladu z Uredbo (ES) št. 1272/2008 ali“;

(b) odstavek 3 se spremeni:

„3. Dobavitelj na zahtevo prejemnika temu priskrbi varnostni list, izpolnjen v skladu s Prilogo II, kadar zmes ne izpolnjuje kriterijev za razvrstitev kot nevarna v skladu z naslovoma I in II Uredbe (ES) št. 1272/2008, toda vsebuje:

(a) v posamezni koncentraciji ≥ 1 mas.% za neplinaste zmesi in $\geq 0,2$ vol.% za plinaste zmesi vsaj eno snov, ki je nevarna za zdravje ljudi ali okolje, ali

(b) v posamezni koncentraciji ≥ 1 mas.% za neplinaste zmesi vsaj eno snov, ki je rakotvorna iz kategorije 2, strupena za razmnoževanje iz kategorij 1A, 1B in 2, povzroča preobčutljivost za kožo iz kategorije 1, povzroča preobčutljivost dihal iz kategorije 1 ali ima učinke na dojenje ali prek dojenja ali je obstojna, se lahko kopiči v organizmih in je strupena (PBT) v skladu s kriteriji iz Priloge XIII ali je zelo obstojna in se zelo lahko kopiči v organizmih (vPvB) v skladu s kriteriji iz Priloge XIII ali je zaradi drugih razlogov kot tistih iz točke (a) vključena na seznam, sestavljen v skladu s členom 59(1), ali

(c) snov, za katero obstajajo omejitve izpostavljenosti na delovnem mestu na ravni Skupnosti.“;

(c) odstavek 4 se nadomesti z naslednjim:

„4. Varnostnega lista ni treba dostaviti, če so nevarne snovi ali zmesi, ki so v ponudbi ali prodaji za javnost, opremljene z zadostnimi informacijami, ki uporabnikom omogočajo sprejetje vseh potrebnih ukrepov glede varovanja zdravja ljudi, varnosti in okolja, razen če jih ne zahteva nadaljnji uporabnik ali distributer.“;

3. člen 56(6)(b) se nadomesti z naslednjim:

„(b) vse druge snovi, katerih koncentracija ne presega mejnih vrednosti, določenih v členu 11(3) Uredbe (ES) št. 1272/2008, in se zato zmesi iz njih razvrstijo kot nevarne.“;

4. v členu 65 se besedilo „in Direktivo 1999/45/ES“ črta;

(ii) točka 2(d) se nadomesti z naslednjim:

5. Priloga II se spremeni:

„(d) umetniške barve, zajete z Uredbo (ES) št. 1272/2008.“

(a) točka 1.1 se nadomesti z naslednjim:

Člen 60

„1.1 Identifikacija snovi ali zmesi

Izraz, ki se uporablja za identifikacijo snovi, je enak izrazu, ki je naveden na etiketi v skladu s členom 18(2) Uredbe (ES) št. 1272/2008.

Izraz, ki se uporablja za identifikacijo zmesi, je enak izrazu, ki je naveden na etiketi v skladu s členom 18(3) Uredbe (ES) št. 1272/2008.“;

Razveljavitev

Direktiva 67/548/EEC in Direktiva 1999/45/EC se razveljavita z učinkom od 1. junija 2015.

Člen 61

Prehodne določbe

(b) opomba 1 k prvi alineji točke 3.3(a) se črta;

(c) točka 3.6 se nadomesti z naslednjim:

„3.6. Če Agencija v skladu s členom 24 Uredbe (ES) št. 1272/2008 sklene, da lahko kemijska identiteta snovi na etiketi in na varnostnem listu ostane zaupna, se njena kemijska narava opiše v naslovu 3, da bi s tem zagotovili varno ravnanje.

Ime, ki se uporablja na varnostnem listu (vključno zaradi točk 1.1, 3.2, 3.3 in 3.5), je enako kot ime na etiketi, dogovorjeno po postopku iz člena 24 Uredbe (ES) št. 1272/2008.“;

1. Do 1. decembra 2010 se snovi razvrščajo, označujejo in pakirajo v skladu z Direktivo 67/548/EGS.

Do 1. junija 2015 se zmesi razvrščajo, označujejo in pakirajo v skladu z Direktivo 1999/45/ES.

2. Z odstopanjem od drugega pododstavka člena 62 te uredbe in ob upoštevanju zahtev iz odstavka 1 tega člena se lahko snovi in zmesi pred 1. decembrom 2010 oziroma 1. junijem 2015 razvrščajo, označujejo in pakirajo v skladu s to uredbo. V tem primeru se določbe o označevanju in pakiranju iz direktiv 67/548/EGS in 1999/45/ES ne uporabljajo.

3. Od 1. decembra 2010 do 1. junija 2015 se snovi razvrščajo v skladu z Direktivo 67/548/EGS in to uredbo. Označujejo in pakirajo se v skladu s to uredbo.

4. Z odstopanjem od drugega pododstavka člena 62 te uredbe snovi, ki so bile razvrščene, označene in pakirane v skladu z Direktivo 67/548/EGS in dane v promet že pred 1. decembrom 2010, do 1. decembra 2012 ni treba ponovno označiti in pakirati v skladu s to uredbo.

Z odstopanjem od drugega pododstavka člena 62 te uredbe zmesi, ki so bile razvrščene, označene in pakirane v skladu z Direktivo 1999/45/ES in dane v promet pred 1. junijem 2015, do 1. junija 2017 ni treba ponovno označiti in pakirati v skladu s to uredbo.

5. Če je bila snov ali zmes pred 1. decembrom 2010 oziroma 1. junijem 2015 razvrščena v skladu z Direktivo 67/548/EGS oziroma Direktivo 1999/45/ES, lahko proizvajalci, uvozniki in nadaljnji uporabniki spremenijo razvrstitev snovi ali zmesi na podlagi pretvorbene tabele iz Priloge VII te uredbe.

6. v Prilogi VI se oddelek 4.3 nadomesti z naslednjim:

„4.3 Posebne mejne koncentracije, kjer je ustrezno, ki izhajajo iz uporabe člena 10 Uredbe (ES) št. 1272/2008.“;

7. Priloga XVII se spremeni:

(a) v stolpcu „Oznaka snovi, skupin snovi ali zmesi“ tabele iz vnosa 3, se besedilo „ki se štejejo za nevarne v skladu z Direktivo 1999/45/ES“ črta;

(b) v stolpcu „Pogoji omejitve“ se vnos 28 spremeni:

(i) druga alineja točke 1 se nadomesti z naslednjim:

„— ustrezne splošne mejne koncentracije, navedene v delu 3 Priloge I k Uredbi (ES) št. 1272/2008.“;

6. Država članica lahko do 1. decembra 2011 obdrži obstoječ strožji način razvrščanja in označevanja snovi, ki so bile vključene v del 3 Priloge VI te uredbe, če so bili ti elementi razvrstitve in označitve sporočeni Komisiji v skladu z zaščitno klavzulo iz Direktive 67/548/EGS pred 20. januarjem 2009 in če država članica v skladu s členom 37(1) te uredbe do 1. junija 2009 Agenciji predloži predlog za usklajeno razvrščanje in označevanje, ki zajema te elemente razvrstitve in označitve.

To pa predpostavlja, da Komisija do 20. januarja 2009 še ni sprejela odločitve o predlagani razvrstitvi in označitvi v skladu z zaščitno klavzulo iz Direktive 67/548/EGS.

Če predlagana usklajena razvrstitev in označitev, predložena v skladu s prvim pododstavkom, ni vključena v del 3 Priloge VI

v skladu s členom 37(5) ali je v navedeni del vključena v spremenjeni obliki, izjema iz prvega pododstavka tega odstavka ne velja več.

Člen 62

Začetek veljavnosti

Ta uredba začne veljati dvajseti dan po objavi v *Uradnem listu Evropske unije*.

Naslovi II, III in IV se za snovi uporabljajo od 1. decembra 2010, za zmesi pa od 1. junija 2015.

Ta uredba je v celoti zavezujoča in se neposredno uporablja v vseh državah članicah.

V Strasbourgu, 16. decembra 2008

Za Evropski parlament

Predsednik

H.-G. PÖTTERING

Za Svet

Predsednik

B. LE MAIRE

PRILOGA I

ZAHTEVE ZA RAZVRŠČANJE IN OZNAČEVANJE NEVARNIH SNOVI IN ZMESI

Ta priloga določa kriterije razvrščanja v razrede nevarnosti in razločevanja znotraj njih ter določa dodatne določbe glede pogojev za izpolnjevanje kriterijev.

1. DEL 1: SPLOŠNA NAČELA ZA RAZVRŠČANJE IN OZNAČEVANJE**1.0. Opredelitev pojmov**

Plin pomeni snov:

- (i) katere parni tlak je pri 50 °C večji od 300 kPa (absolutno) ali
- (ii) ki je pri 20 °C in standardnem tlaku 101,3 kPa popolnoma plinasta.

Tekočina pomeni snov ali zmes:

- (i) katere parni tlak pri 50 °C ni večji od 300 kPa (3 barov),
- (ii) ki pri 20 °C in standardnem tlaku 101,3 kPa ni povsem plinasta in
- (iii) ki ima pri standardnem tlaku 101,3 kPa tališče ali začetno tališče kPa pri 20 °C ali manj.

Trdna snov pomeni snov ali zmes, ki ne ustreza opredelitvama tekočine ali plina.

1.1. Razvrščanje snovi in zmesi**1.1.0. Sodelovanje zaradi izpolnjevanja zahtev te uredbe**

Dobavitelji v dobavni verigi med seboj sodelujejo, da izpolnijo zahteve glede razvrščanja, označevanja in pakiranja iz te uredbe.

Dobavitelji v gospodarski panogi lahko med seboj sodelujejo, da izpolnijo prehodne določbe iz člena 61 glede snovi in zmesi, ki se dajo v promet.

Dobavitelji v gospodarski panogi lahko med seboj sodelujejo z vzpostavitvijo mreže ali si na kakšen drug način izmenjujejo podatke in strokovno znanje pri razvrščanju snovi in zmesi v skladu z naslovom II te uredbe. V takih primerih dobavitelji v gospodarski panogi v celoti dokumentirajo, na podlagi česa so bile sprejete odločitve o razvrstitvi, navedeno dokumentacijo pa skupaj s podatki in informacijami, na katerih temelji razvrstitev, dajo na razpolago pristojnim organom ter na zahtevo tudi ustreznim organom, odgovornim za izvrševanje. V primerih, ko dobavitelji v gospodarski panogi sodelujejo na ta način, vsak od njih sicer še naprej ostane v celoti odgovoren za razvrščanje, označevanje in pakiranje snovi ter zmesi, ki jih da v promet, obenem pa tudi za vse druge zahteve te uredbe.

Mreža se lahko uporabi tudi za izmenjavo informacij in najboljših praks, s čimer bi poenostavili izpolnjevanje obveznosti prijave.

1.1.1. Vloga in uporaba strokovne presoje ter določitve zanesljivosti dokazov

1.1.1.1. Kadar kriterijev ni mogoče uporabiti neposredno za dostopne pridobljene informacije, ali ko so na voljo le informacije iz člena 6(5), se zanesljivost dokazov določi na podlagi strokovne presoje v skladu s členom 9(3) oziroma 9(4).

1.1.1.2. Pri razvrščanju zmesi se lahko na več področjih uporabi strokovna presoja, s čimer se zagotovi, da je obstoječe informacije mogoče uporabiti za čim več zmesi zaradi varovanja zdravja ljudi in varovanja okolja. Strokovna presoja se lahko zahteva tudi pri razlaganju podatkov v zvezi z razvrstitvijo snovi glede na nevarnost, zlasti v primerih, ko je treba določiti zanesljivost dokazov.

- 1.1.1.3. Določitev zanesljivosti dokazov pomeni, da se vse dostopne informacije, povezane z določitvijo nevarnosti, obravnavajo skupaj, na primer rezultati ustreznih testov in vitro, pomembni podatki o živalih, informacije, pridobljene prek analogije po skupinah (razvrščanje v skupine, navzkrižno branje, podatki o (Q)SAR, izkušnje ljudi, kot so podatki o poklicni izpostavljenosti in podatki iz zbirk podatkov o nesrečah, epidemiološke in klinične študije ter dobro dokumentirana poročila in opažanja o posameznih primerih. Kakovosti in doslednosti podatkov se ustrezno pripiše ustrezna teža. Informacije o snoveh in zmesih, povezane s snovjo ali zmesjo, ki se razvršča, se štejejo kot ustrezne, prav tako pa tudi rezultati študije v zvezi z mestom delovanja ter mehanizmi ali načini delovanja. Pri enotni določitvi zanesljivosti dokazov se skupaj zberejo vsi pozitivni in negativni rezultati.
- 1.1.1.4. Za namen razvrstitve nevarnosti za zdravje (del 3) ugotovljeni nevarni učinki, dobljeni z ustreznimi študijami na živalih ali iz izkušenj ljudi in ki so v skladu z merili za razvrstitev običajno upravičujejo razvrstitev. Kadar so dostopni dokazi pri ljudeh in živalih in si ugotovitve nasprotujejo, se ocenita kakovost in zanesljivost dokazov iz obeh virov, da se reši vprašanje razvrstitve. Na splošno imajo ustrezni, zanesljivi in reprezentativni podatki o ljudeh prednost pred drugimi podatki (vključno z epidemiološkimi študijami, znanstveno preverjenimi študijami primerov iz te priloge ali statistično podprtimi izkušnjami). Vendar lahko tudi dobro oblikovane in izvedene epidemiološke študije vključujejo premalo subjektov za ugotavljanje sorazmerno redkega, vendar pomembnega učinka za evalvacijo možnih zavajajočih dejavnikov. Zato neobstoje pozitivnih rezultatov pri ljudeh ne ovrže nujno pozitivnih rezultatov dobro izvedenih študij na živalih, vendar je treba v tem primeru evalvirati trdnost, kakovost in statistično vrednost podatkov o ljudeh in živalih.
- 1.1.1.5. Za namen razvrstitve nevarnosti za zdravje (del 3) so pomembne informacije za ugotavljanje učinka na ljudi način izpostavljenosti, informacije o mehanizmih in študije metabolizma. Kadar je pomen takšnih informacij dvomljiv, je lahko upravičena nižja razvrstitev, če sta trdnost in kakovost podatkov ponovno zagotovljeni. Kadar obstajajo znanstveni dokazi, da mehanizem ali način delovanja ni pomemben za ljudi, se snovi ali zmesi ne bi smelo razvrstiti.
- 1.1.2. **Posebne mejne koncentracije, M-faktorji in splošne mejne vrednosti**
- 1.1.2.1. Posebne mejne koncentracije ali M-faktorji se uporabijo v skladu s členom 10.
- 1.1.2.2. *Mejne vrednosti*
- 1.1.2.2.1. Iz mejnih vrednosti je razvidno, kdaj je treba prisotnost snovi upoštevati pri razvrščanju snovi ali zmesi, ki vsebuje to nevarno snov, in sicer v obliki ugotovljene nečistoče, dodatka ali posamezne sestavine (glej člen 11).
- 1.1.2.2.2. Mejne vrednosti iz člena 11 so naslednje:
- (a) za nevarnosti za zdravje in okolje v delih 3, 4 in 5 te priloge:
- (i) za snovi z določeno posebno mejno koncentracijo za ustrezen razred nevarnosti ali razločevanje, in sicer bodisi v delu 3 Priloge VI bodisi v popisu razvrstitev in označitev iz člena 42, če sta razred nevarnosti ali razločevanje navedena v tabeli 1.1, je mejna vrednost nižja od posebne mejne koncentracije in ustrezne splošne mejne vrednosti v tabeli 1.1, ali
- (ii) za snovi z določeno posebno mejno koncentracijo za ustrezen razred nevarnosti ali razločevanje, in sicer bodisi v delu 3 Priloge VI bodisi v popisu razvrstitev in označitev iz člena 42, če razred nevarnosti ali razločevanje nista navedena v tabeli 1.1, mejna vrednost ustreza posebni mejni koncentraciji, določeni v delu 3 Priloge VI oziroma v popisu razvrstitev in označitev, ali
- (iii) za snovi, za katere ni določena posebna mejna koncentracija za ustrezen razred nevarnosti ali razločevanje niti v delu 3 Priloge VI niti v popisu razvrstitev in označitev iz člena 42, če sta razred nevarnosti ali razločevanje navedena v tabeli 1.1, je mejna vrednost ustrezna splošna mejna vrednost, določena v tej tabeli; ali
- (iv) za snovi, za katere ni določena posebna mejna koncentracija za ustrezen razred nevarnosti ali razločevanje niti v delu 3 Priloge VI niti v popisu razvrstitev in označitev iz člena 42, če razred nevarnosti ali razločevanje nista navedena v tabeli 1.1, mejna vrednost ustreza splošni mejni koncentraciji za razvrstitev v ustrezne oddelke delov 3, 4 in 5 te priloge;

- (b) za nevarnosti za vodno okolje v oddelku 4.1 te priloge:
- (i) za snovi, za katere je določen M-faktor za ustrezno skupino nevarnosti, in sicer bodisi v delu 3 Priloge VI bodisi v popisu razvrstitev in označitev iz člena 42, mejna vrednost ustreza splošni mejni vrednosti v tabeli 1.1, prilagojeni na podlagi izračuna iz oddelka 4.1 te priloge, ali
- (ii) za snovi, za katere ni določen M-faktor za ustrezno skupino nevarnosti niti v delu 3 Priloge VI niti v popisu razvrstitev in označitev iz člena 42, je mejna vrednost ustrezna splošna mejna vrednost, določena v tabeli 1.1.

Tabela 1.1

Splošne mejne vrednosti

Razred nevarnosti	Splošne mejne vrednosti, ki jih je treba upoštevati
Akutna strupenost:	
— Kategorije 1–3	0,1 %
— Kategorija 4	1 %
Jedkost za kožo/draženje kože	1 % ⁽¹⁾
Huda poškodba oči/draženje oči	1 % ⁽²⁾
Nevarnost za vodno okolje	
— kategorija akutnosti 1	0,1 % ⁽³⁾
— kategorija kroničnosti 1	0,1 % ⁽³⁾
— kategorije kroničnosti 2–4	1 %

⁽¹⁾ Ali < 1 %, kadar je primerno, glej oddelek 3.2.3.3.1.

⁽²⁾ Ali < 1 %, kadar je primerno, glej oddelek 3.3.3.3.1.

⁽³⁾ Ali < 0,1 %, kadar je primerno, glej oddelek 4.1.3.1.

Opomba:

Splošne mejne vrednosti so navedene v masnih deležih, razen za plinaste zmesi, za katere so navedene v volumskem deležu.

1.1.3. Premostitvena načela za razvrstitev zmesi, kadar niso dostopni podatki o testih za celotno zmes

Kadar testi za določitev nevarnih lastnosti zmesi niso bili izvedeni, vendar je na voljo dovolj podatkov o podobnih testnih zmesih in posameznih nevarnih sestavinah, da je mogoče ustrezno opredeliti nevarnosti zmesi, se ti podatki uporabijo v skladu z naslednjimi premostitvenimi pravili iz člena 9(4) za vsak posamezen razred nevarnosti iz dela 3 in dela 4 te priloge, pri čemer se upoštevajo vse posebne določbe za zmes vsakega razreda nevarnosti.

1.1.3.1. Redčenje

Če je zmes razredčena s snovjo (razredčilom), ki je razvrščena v enako kategorijo nevarnosti ali nižjo kategorijo nevarnosti kot najmanj nevarna prvotna sestavina in za katero se ne pričakuje, da bo vplivala na razvrstitev drugih sestavin glede na nevarne lastnosti, potem se uporabi ena od naslednjih možnosti:

- nova zmes se razvrsti enako kot prvotna zmes;
- kadar so na voljo podatki za vse ali le nekatere sestavine zmesi, se uporabi metoda, razložena v posameznem oddelku dela 3 in dela 4 za razvrstitev zmesi;
- pri akutni toksičnosti se uporabi metoda za razvrstitev zmesi na podlagi sestavin zmesi (metoda dodajanja);

1.1.3.2. *Serije*

Za kategorijo nevarnosti ene proizvodne serije zmesi se lahko domneva, da je bistveno enaka kategoriji nevarnosti druge proizvodne serije istega tržnega proizvoda in da jo proizvaja ali nadzoruje isti dobavitelj, razen če obstaja razlog za domnevo, da obstajajo takšne bistvene razlike, zaradi katerih se je spremenila razvrstitev serije. Če se spremeni razvrstitev serije, je treba serijo ponovno evalvirati.

1.1.3.3. *Koncentracija izredno nevarnih zmesi*

Če je v primeru razvrstitve zmesi iz oddelkov 3.1, 3.2, 3.3, 3.8, 3.9, 3.10 in 4.1 zmes razvrščena v kategorijo ali podkategorijo največje nevarnosti in se je koncentracija sestavin zmesi, ki so v tej kategoriji ali podkategoriji, povečala, se nova zmes razvrsti v to kategorijo ali podkategorijo brez dodatnega testiranja.

1.1.3.4. *Interpolacija znotraj ene kategorije strupenosti*

Pri razvrstitvi zmesi iz oddelkov 3.1, 3.2, 3.3, 3.8, 3.9, 3.10 in 4.1 za tri zmesi z enako nevarno sestavino, kadar sta zmesi A in B v isti kategoriji nevarnosti in ima zmes C enake aktivne nevarne sestavine s koncentracijo, ki je med koncentracijami nevarnih sestavin iz zmesi A in B, se za zmes C domneva, da je v isti kategoriji nevarnosti kot zmesi A in B.

1.1.3.5. *Zelo podobne zmesi*

Predpostavke so naslednje:

(a) dve zmesi, od katerih vsaka vsebuje po dve sestavini:

(i) A + B

(ii) C + B;

(b) koncentracija sestavine B je približno ista v obeh zmesih;

(c) koncentracija sestavine A v zmesi (i) je enaka koncentraciji sestavine C v zmesi (ii);

(d) podatki o nevarnosti za A in C so dostopni in zelo podobni, tj. so v isti kategoriji nevarnosti in se ne pričakuje, da bodo vplivali na razvrstitev sestavine B glede na nevarnost.

Če je zmes (i) že razvrščena v poseben razred nevarnosti na podlagi podatkov o testu, se zmes (ii) uvrsti v isto kategorijo nevarnosti.

1.1.3.6. *Pregled razvrstitve, če se je sestava zmesi spremenila*

Naslednje spremembe začetne koncentracije so določene za uporabo člena 15(2)(a):

Tabela 1.2

Premostitveno načelo za spremembe sestave zmesi

Začetno območje koncentracije sestavine	Dovoljene spremembe začetne koncentracije sestavine
$\leq 2,5 \%$	$\pm 30 \%$
$2,5 < C \leq 10 \%$	$\pm 20 \%$
$10 < C \leq 25 \%$	$\pm 10 \%$
$25 < C \leq 100 \%$	$\pm 5 \%$

1.1.3.7. *Aerosoli*

Pri razvrstitvi zmesi iz oddelkov 3.1, 3.2, 3.3, 3.4, 3.8 in 3.9 se zmes v obliki aerosola razvrsti v isto kategorijo nevarnosti kot zmes, ki ni v obliki aerosola, če dodani potisni plin ne vpliva na nevarne lastnosti zmesi pri razprševanju in so na voljo znanstveni dokazi, iz katerih izhaja, da oblika v aerosolu ni bolj nevarna kot v neareosolni obliki.

1.2. **Označevanje**1.2.1. ***Mere in oblika elementov etikete***

1.2.1.1. Piktogrami za nevarnosti, določeni v Prilogi V, imajo črn simbol na belem ozadju z dovolj širokim rdečim okvirjem, da se razločno vidi.

1.2.1.2. Piktogrami za nevarnosti imajo obliko kvadrata, postavljenega na oglišče. Vsak piktogram za nevarnosti obsega vsaj eno petnajstino površine usklajene etikete, vendar najmanjša površina ne sme biti manjša od 1 cm².

1.2.1.3. Mere etikete so naslednje:

Tabela 1.3

Mere oznak

Prostornina embalaže	Mere (v milimetrih)
do vključno 3 litrov:	če je mogoče, vsaj 52 × 74
Več od 3 litrov, vendar do vključno 50 litrov:	vsaj 74 × 105
Več od 50 litrov, vendar do vključno 500 litrov:	vsaj 105 × 148
več kot 500 litrov:	vsaj 148 × 210

1.3. **Odstopanja od zahtev za označevanje v posebnih primerih**

V skladu s členom 23 se uporabljajo naslednja odstopanja:

1.3.1. ***Prenosne plinske posode***

Za prenosne plinske posode s prostornino 150 litrov ali manj se uporablja ena od naslednjih možnosti:

- (a) Oblika in mere so v skladu s predpisi zadnje izdaje standarda ISO 7225 „Plinske jeklenke – Svarilne etikete“. V tem primeru ima lahko oznaka izvorno ime ali industrijsko ali trgovsko ime snovi ali zmesi, če so nevarne snovi v zmesi jasno in neizbrisljivo navedene na plinski posodi.
- (b) Informacije iz člena 17 so navedene na obstojni informativni ploščici ali etiketi, ki je trdno pritrjena na posodi.

1.3.2. ***Plinske posode za propan, butan ali utekočinjeni zemeljski plin (UZP)***

1.3.2.1. Če so propan, butan in utekočinjeni zemeljski plin ali zmes, ki vsebuje te snovi, razvrščeni v skladu z merili te priloge, dani v promet le kot gorivo v zaprtih jeklenkah za ponovno polnjenje ali v pločevinkah za enkratno uporabo v smislu standarda EN 417 kot gorivo, ki se sprostijo le za gorenje (zadnja izdaja standarda EN 417 „Kovinske plinske pločevinke za enkratno uporabo za utekočinjene zemeljske pline z ventilom ali brez za uporabo s prenosnimi napravami, konstrukcija, nadzor, testiranje in označevanje“), so te jeklenke ali pločevinke označene le z ustreznim piktogramom ter stavki o nevarnosti glede vnetljivosti.

1.3.2.2. Na etiketi ni treba navesti informacij v zvezi z učinki na zdravje ljudi ali okolje. Namesto tega dobavitelj na varnostnem listu sporoči informacije v zvezi z učinki na zdravje ljudi in okolje in nadaljnjim uporabnikom ali distributerjem.

- 1.3.2.3. Potrošnikom je treba sporočiti zadostne informacije, da lahko sprejme vse potrebne ukrepe za varovanje zdravja in varno ravnanje.

1.3.3. ***Aerosoli in posode, zaprte z zapečatenim zapiralom za razprševanje, ki vsebujejo snovi ali zmesi, razvrščene kot nevarne za vdihavanje***

Snovi ali zmesi, razvrščenih v skladu z merili iz oddelkov 3.10.2 in 3.10.3, glede na uporabo oddelka 3.10.4 ni treba označiti za to nevarnost, če so dane v promet v obliki aerosolnih razpršilcev ali v posodah, zaprtih z zapečatenim zapiralom za razprševanje.

1.3.4. ***Kovine v masivni obliki, zlitine, zmesi, ki vsebujejo polimere, zmesi, ki vsebujejo elastomere***

- 1.3.4.1. Za kovine v masivni obliki, zlitine, zmesi, ki vsebujejo polimere, in zmesi, ki vsebujejo elastomere, ni potrebna oznaka v skladu s to prilogo, če niso nevarne za zdravje ljudi pri vdihavanju, zaužitju ali v stiku s kožo ali za vodno okolje v obliki, v kateri so dane v promet, čeprav so razvrščene kot nevarne v skladu z merili iz te priloge.

- 1.3.4.2. Namesto tega dobavitelj na varnostnem listu sporoči informacije nadaljnjim uporabnikom ali distributerjem.

1.3.5. ***Eksplzivni, dani v promet za doseganje eksplozivnega ali pirotehničnega učinka***

Eksplzivni, kot določeno v oddelku 2.1, dani v promet za doseganje eksplozivnega ali pirotehničnega učinka, se označijo in zapakirajo v skladu z zahtevami le za eksplozive.

1.4. ***Prošnja za uporabo alternativnega kemijskega imena***

1.4.1. ***Prošnje za uporabo alternativnega kemijskega imena v skladu s členom 24 se lahko odobrijo le,***

- (I) če za snov ni bila določena v Skupnosti veljavna mejna vrednost izpostavljanja in
- (II) če lahko proizvajalec, uvoznik ali nadaljnji uporabnik dokaže, da je uporaba alternativnega kemijskega imena v skladu s potrebo po zagotovitvi zadostnih informacij za uvedbo potrebnih previdnostnih ukrepov za zdravju neškodljivo in varno uporabo na delovnem mestu ter potrebo po zagotovitvi, da je tveganje, ki spremlja ravnanje s snovjo, mogoče nadzorovati, ter
- (III) če se snov uvršča izključno v eno ali več skupin nevarnosti:
 - (a) katera koli skupina nevarnosti iz dela 2 te priloge;
 - (b) akutna strupenost iz skupine 4;
 - (c) jedkost za kožo/draženje kože iz skupine 2;
 - (d) hude poškodbe oči/draženje oči iz skupine 2;
 - (e) specifična strupenost za ciljne organe – enkratna izpostavljenost – iz skupine 2 ali 3;
 - (f) specifična strupenost za ciljne organe – ponavljajoča se izpostavljenost – iz skupine 2;
 - (g) nevarno za vodno okolje – kronična nevarnost – iz skupine 3 ali 4.

1.4.2. ***Izbira kemijskega imena/kemijskih imen za zmesi, ki so namenjene uporabi v proizvodnji dišav ali parfumov***

Za snovi, ki se nahajajo v naravi, se lahko namesto kemijskih imen sestavin ciljnega eteričnega olja ali izvlečka uporabi kemijsko ime ali kemijska imena vrste „eterično olje iz ...“ ali „izvleček iz ...“, kakor je navedeno v členu 18(3)(b).

1.5. **Odstopanja od zahtev glede označevanja in pakiranja**

1.5.1. ***Odstopanja od člena 31 [(člena 29(1))]***

1.5.1.1. Če se uporablja člen 29(1), se elementi etikete iz člena 17 lahko navedejo v eni izmed naslednjih oblik:

- (a) v izvlečnih etiketah; ali
- (b) na privezanih etiketah ali
- (c) na zunanji embalaži.

1.5.1.2. Na etiketi na notranji embalaži so vsaj piktogrami za nevarnost, identifikator izdelka iz člena 18 ter ime in telefonska številka dobavitelja snovi ali zmesi.

1.5.2. ***Odstopanja od člena 17 [(člena 29(2))]***

1.5.2.1. *Označevanje pakirancev, katerih vsebina ne presega 125 ml*

1.5.2.1.1. Stavki o nevarnosti in previdnostni stavki, povezani s spodaj navedenimi skupinami nevarnosti, se lahko izpustijo iz elementov etikete, ki se zahtevajo v skladu s členom 17, če:

- (a) vsebina pakiranja ne presega 125 ml in
- (b) se snov ali zmes uvršča v eno ali več naslednjih skupin nevarnosti:
 - (1) oksidativni plini iz skupine 1;
 - (2) plini pod tlakom;
 - (3) vnetljive tekočine iz skupine 2 ali 3;
 - (4) vnetljive trdne snovi iz skupine 1 ali 2;
 - (5) samoreaktivne snovi ali zmesi vrste C do F;
 - (6) samosegrevajoče se snovi ali zmesi iz skupine 2;
 - (7) snovi ali zmesi, ki v stiku z vodo sproščajo vnetljive pline, iz skupine 1, 2 ali 3;
 - (8) oksidativne tekočine iz skupine 2 ali 3;
 - (9) oksidativne trdne snovi iz skupine 2 ali 3;
 - (10) organski peroksidi vrste C do F;
 - (11) akutno strupene snovi iz skupine 4, če se snovi ali zmesi ne dobavljajo za splošno uporabo;
 - (12) snovi, ki dražijo kožo, iz skupine 2;
 - (13) snovi, ki dražijo oči, iz skupine 2;
 - (14) specifična strupenost za ciljne organe – enkratna izpostavljenost – iz skupine 2 ali 3, če se snov ali zmes ne dobavlja za splošno uporabo;
 - (15) specifična strupenost za ciljne organe – ponavljajoča se izpostavljenost – iz skupine 2, če se snov ali zmes ne dobavlja za splošno uporabo;

(16) nevarno za vodno okolje – akutna nevarnost – iz skupine 1;

(17) nevarno za vodno okolje – kronična nevarnost – iz skupine 1 ali 2.

Izjeme glede označevanja majhnih embalaž aerosolov kot vnetljivih, ki so določene v Direktivi 75/324/EGS, se uporabljajo za aerosolne razpršilnike.

1.5.2.1.2. Previdnostni stavki, povezani s spodaj navedenimi skupinami nevarnosti, se lahko izpustijo iz elementov etikete, ki se zahtevajo v skladu s členom 17, če:

(a) vsebina pakiranja ne presega 125 ml in

(b) se snov ali zmes uvršča v eno ali več naslednjih skupin nevarnosti:

(1) vnetljivi plini iz skupine 2;

(2) strupenost za razmnoževanje: učinki na dojenje ali prek dojenja;

(3) nevarno za vodno okolje – kronična nevarnost iz skupine 3 ali 4.

1.5.2.1.3. Piktogram, stavek o nevarnosti in previdnostni stavek, povezan s spodaj navedenimi skupinami nevarnosti, se lahko izpustijo iz elementov etikete, ki se zahtevajo v skladu s členom 17, če:

(a) vsebina pakiranja ne presega 125 ml in

(b) se snov ali zmes uvršča v eno ali več skupin nevarnosti:

(1) jedko za kovine

1.5.2.2. *Označevanje topljive embalaže za enkratno uporabo*

Elementi etikete, ki se zahtevajo v členu 17, se lahko pri topljivi embalaži za enkratno uporabo izpustijo, če:

(a) vsebina vsake topljive embalaže ne presega 25 ml,

(b) je vsebina topljive embalaže razvrščena izključno v eno ali več skupin nevarnosti, navedenih v 1.5.2.1.1 (b) in

(c) je topljiva embalaža vsebovana v zunanji embalaži, ki v celoti ustreza zahtevam iz člena 17.

1.5.2.3. Oddelek 1.5.2.2 ne velja za snovi ali zmesi, ki sodijo v področje uporabe direktiv 91/414/EGS oziroma 98/8/ES.

2. DEL 2: FIZIKALNE NEVARNOSTI

2.1. **Eksplzivni**2.1.1. **Opredelitev pojmov**

2.1.1.1. Razred eksplozivov zajema

- (a) eksplozivne snovi in zmesi;
- (b) eksplozivne izdelke, razen naprav, ki vsebujejo eksplozivne snovi ali zmesi v takšni količini ali takšnega značaja, da njihov nenameren ali slučajen vžig ne povzroči nobenega učinka zunaj naprave z izstrelkom, ognjem, dimom, vročino ali hrupom; in
- (c) snovi, zmesi in izdelke, ki niso navedeni v točkah (a) in (b) in so izdelani za doseganje dejanskega eksplozivnega ali pirotehničnega učinka.

2.1.1.2. Za izvajanje te uredbe se uporabljajo naslednje opredelitve pojmov:

Eksplzivna snov ali zmes je trdna ali tekoča snov ali zmes snovi, ki lahko sama pri kemijski reakciji sprošča plin pri takšni temperaturi in tlaku ter s takšno hitrostjo, ki povzroči škodo okolici. Pirotehnične snovi so tudi vključene, čeprav ne sproščajo plinov.

Pirotehnična snov ali zmes je snov ali zmes, pri katerih se tvorijo toplota, svetloba, zvok, plin ali dim ali njihove kombinacije, ki so posledica neeksplozivnih samodejnih in eksotermnih kemijskih reakcij.

Nestabilni eksploziv je eksplozivna snov ali zmes, ki je termično nestabilna in/ali preveč občutljiva za običajno ravnanje, prevoz in uporabo.

Eksplzivni izdelek je izdelek, ki vsebuje eno ali več eksplozivnih snovi ali zmesi.

Pirotehnični izdelek je izdelek, ki vsebuje eno ali več pirotehničnih snovi ali zmesi.

Namenski eksploziv je snov, zmes ali izdelek, ki je proizveden za doseganje dejanskega eksplozivnega ali pirotehničnega učinka.

2.1.2. **Kriteriji za razvrstitev**

2.1.2.1. Snovi, zmesi in izdelki tega razreda so razvrščeni kot nestabilni eksplozivi na podlagi diagrama 2.1.2. Testne metode so opisane v delu I Priporočila Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev.

2.1.2.2. Snovi, zmesi in izdelki iz tega razreda, ki niso razvrščeni kot nestabilni eksplozivi, se uvrstijo v enega od naslednjih šestih podrazredov glede na vrsto nevarnosti, ki jo pomenijo:

- (a) Podrazred 1.1 Snovi, zmesi in izdelki, ki lahko povzročijo eksplozijo v masi (eksplozija v masi je eksplozija, ki se praktično v trenutku razširi na celotno količino);
- (b) Podrazred 1.2 Snovi, zmesi in izdelki, ki lahko pri eksploziji tvorijo drobce, vendar ne morejo povzročiti eksplozije v masi;
- (c) Podrazred 1.3 Snovi, zmesi in izdelki, ki lahko povzročijo požar, nevarnost za nastanek drobcev ali udarnega vala je majhna, in ne morejo povzročiti eksplozije v masi:
 - (i) tiste, katerih gorenje povzroča znatno toplotno sevanje; ali
 - (ii) tiste, ki zgorevajo druga za drugo, pri čemer nastaja šibak udarni val ali manjši drobci ali oboje;

- (d) Podrazred 1.4 Snovi, zmesi in izdelki, ki niso zelo nevarni:
- snovi, zmesi in izdelki, ki ob vžigu niso zelo nevarni. Vplivi so omejeni na pakiranca, ob eksploziji pa naj ne bi nastali večji delci z daljšim dometom. Zunanji plamen ne sme povzročiti trenutne eksplozije skoraj celotne vsebine tovora;
- (e) Podrazred 1.5 Izredno neobčutljive snovi ali zmesi, ki lahko povzročijo eksplozijo v masi:
- izredno neobčutljive snovi in zmesi, ki lahko povzročijo eksplozijo v masi, vendar so tako neobčutljive, da je v običajnih razmerah zelo majhna verjetnost vžiga ali prehoda gorenja v detonacijo;
- (f) Podrazred 1.6 Izredno neobčutljivi izdelki, pri katerih ni nevarnosti eksplozije v masi:
- izdelki, ki vsebujejo le izredno neobčutljive detonirajoče snovi ali zmesi, verjetnost, da bi nastal nepredvideni vžig ali se razširil ogenj, pa je zanemarljiva.

2.1.2.3. Eksplozivi, ki niso razvrščeni kot nestabilni eksplozivi, se glede na rezultate testov iz tabele 2.1.1 razvrstijo v enega od šestih podrazredov iz odstavka 2.1.2.2. te priloge na podlagi testnih serij 2 do 8 iz dela I Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev.

Tabela 2.1.1

Kriteriji za eksplozive

Kategorija	Kriteriji
Nestabilni eksplozivi ali eksplozivi podrazredov 1.1 do 1.6	Za eksplozive podrazreda 1.1 do 1.6 je treba izvesti naslednji niz testov: Eksplozivnost: v skladu s testno serijo ZN 2 (oddelek 12 Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev). Testna serija ZN 2 se ne uporablja za namenske eksplozive ⁽¹⁾. Občutljivost: v skladu s testno serijo ZN 3 (oddelek 13 Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev). Termična obstojnost: v skladu s testom ZN 3(c) (pododdelek 13.6.1 Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev). Za uvrstitev v ustrezni podrazred so potrebni naslednji testi.

⁽¹⁾ To zajema snovi, zmesi in izdelke, ki so proizvedeni za doseganje dejanskega eksplozivnega ali pirotehničnega učinka.

2.1.2.4. Če so eksplozivi brez embalaže ali prepakirani v embalažo, ki ni prvotna ali podobna embalaža, jih je treba ponovno testirati.

2.1.3. **Obvestilo o nevarnosti**

Elementi etikete se uporabljajo za snovi, zmesi ali izdelke, ki izpolnjujejo kriteriji za razvrstitev v ta razred nevarnosti, v skladu s tabelo 2.1.2.

OPOMBA k Tabeli 2.1.2: Eksplozivi brez embalaže ali prepakirani eksplozivi, ki niso v prvotni ali podobni embalaži, vključujejo vse naslednje elemente etikete:

- (a) Piktogram: bomba med eksplozijo;
- (b) Opozorilna beseda: „Nevarno“; in
- (c) Stavek o nevarnosti: „Eksplozivno: nevarnost eksplozije v masi“

kadar pa nevarnost ustreza eni od kategorij nevarnosti v tabeli 2.1.2, se podeli ustrezni simbol, opozorilna beseda in/ali stavek o nevarnosti.

Tabela 2.1.2:

Elementi etikete za eksplozive

Razvrstitev	Nestabilni eksploziv	Podrazred 1.1	Podrazred 1.2	Podrazred 1.3	Podrazred 1.4	Podrazred 1.5	Podrazred 1.6
Piktogrami GHS							
Opozorilna beseda	Nevarno	Nevarno	Nevarno	Nevarno	Pozor	Nevarno	Brez opozorilne besede
Stavek o nevarnosti	H200: Nestabilni eksploziv	H201: Eksplozivno; nevarnost eksplozije v masi	H202: Eksplozivno; velika nevarnost za nastanek drobcev	H203: Eksplozivno; nevarnost za nastanek požara, udarnega vala ali drobcev	H204: Nevarnost za nastanek požara ali drobcev	H205: Pri požaru lahko eksplodira v masi	Brez stavka o nevarnosti
Previdnostni stavek – preprečevanje	P201 P202 P281	P210 P230 P240 P250 P280	P210 P230 P240 P250 P280	P210 P230 P240 P250 P280	P210 P240 P250 P280	P210 P230 P240 P250 P280	Brez previdnostnega stavka
Previdnostni stavek – odziv	P372 P373 P380	P370 + P380 P372 P373	P370 + P380 P372 P373	P370 + P380 P372 P373	P370 + P380 P372 P373	P370 + P380 P372 P373	Brez previdnostnega stavka
Previdnostni stavek – shranjevanje	P401	P401	P401	P401	P401	P401	Brez previdnostnega stavka
Previdnostni stavek – odstranjevanje	P501	P501	P501	P501	P501	P501	Brez previdnostnega stavka

2.1.4. *Dodatni preudarki pri razvrstitvi*

- 2.1.4.1. Razvrstitev snovi, zmesi in izdelkov v razred nevarnosti eksplozivov in nadaljnja uvrstitev v podrazred je zelo zapleten postopek v treh stopnjah. Nujno je sklicevanje na del I Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev.

V prvem koraku se ugotavlja, ali ima snov ali zmes eksplozivne učinke (testna serija 1). Drugi korak je postopek sprejetja (testne serije 2 do 4), tretji korak pa je določitev podrazreda nevarnosti (testne serije 5 do 7). Ocena o tem, ali je določena snov, ki jo je mogoče razvrstiti kot „emulzijo, suspenzijo ali gel amonijevega nitrata, vmesnega izdelka pri izdelavi detonirajočih eksplozivov (ANE)“, dovolj neobčutliva, da se jo lahko razvrsti kot oksidativno tekočino (oddelek 2.13) ali oksidativno trdno snov (oddelek 2.14), je podana v testih testne serije 8.


Eksplozivne snovi in zmesi, ki so prepojene z vodo ali alkoholi ali so razredčene z drugimi snovmi, da se prepreči eksplozivnost, so lahko obravnavane drugače v smislu razvrstitve in se lahko uporabijo drugačni razredi nevarnosti v skladu z njihovimi fizikalnimi lastnosti (glej tudi Prilogo II oddelek 1.1.).

Na nekatere fizikalne nevarnosti vplivajo različni dejavniki (ki izhajajo iz eksplozivnih lastnosti), tako na primer razredčenje, pri desenzibiliziranih eksplozivih, vključitev v zmes ali izdelek, embalaža in drugo.

Postopek razvrstitve je določen z naslednjim načinom odločanja (glej diagrame 2.1.1 do 2.1.4).

Diagram 2.1.1


Splošni diagram postopka za razvrstitev snovi, zmesi ali izdelka v razred eksplozivov (razred 1 za prevoz)

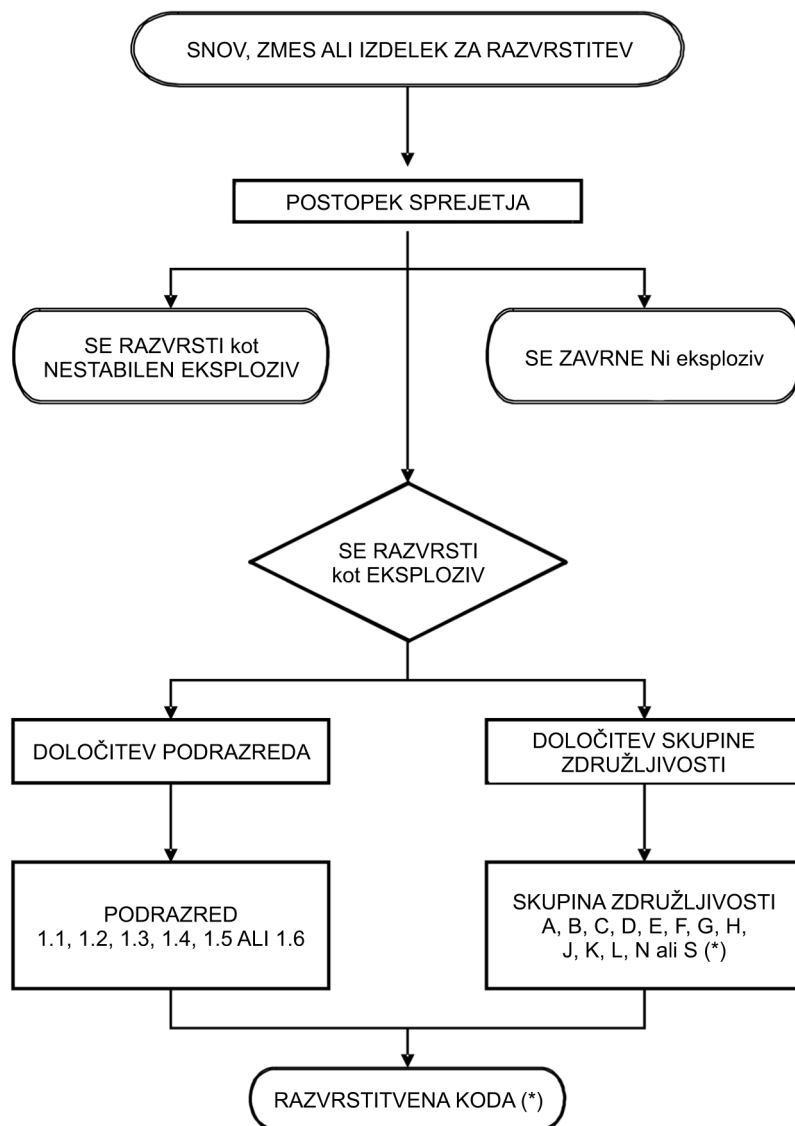

(*) Glej pododdelek 2.1.2 Priporočil Združenih narodov o prevozu nevarnega blaga, vzorčni predpisi, 15. spremenjena izdaja.

Diagram 2.1.2


Postopek za začasno sprejetje snovi, zmesi ali izdelka v razred eksplozivov (razred 1 za prevoz)

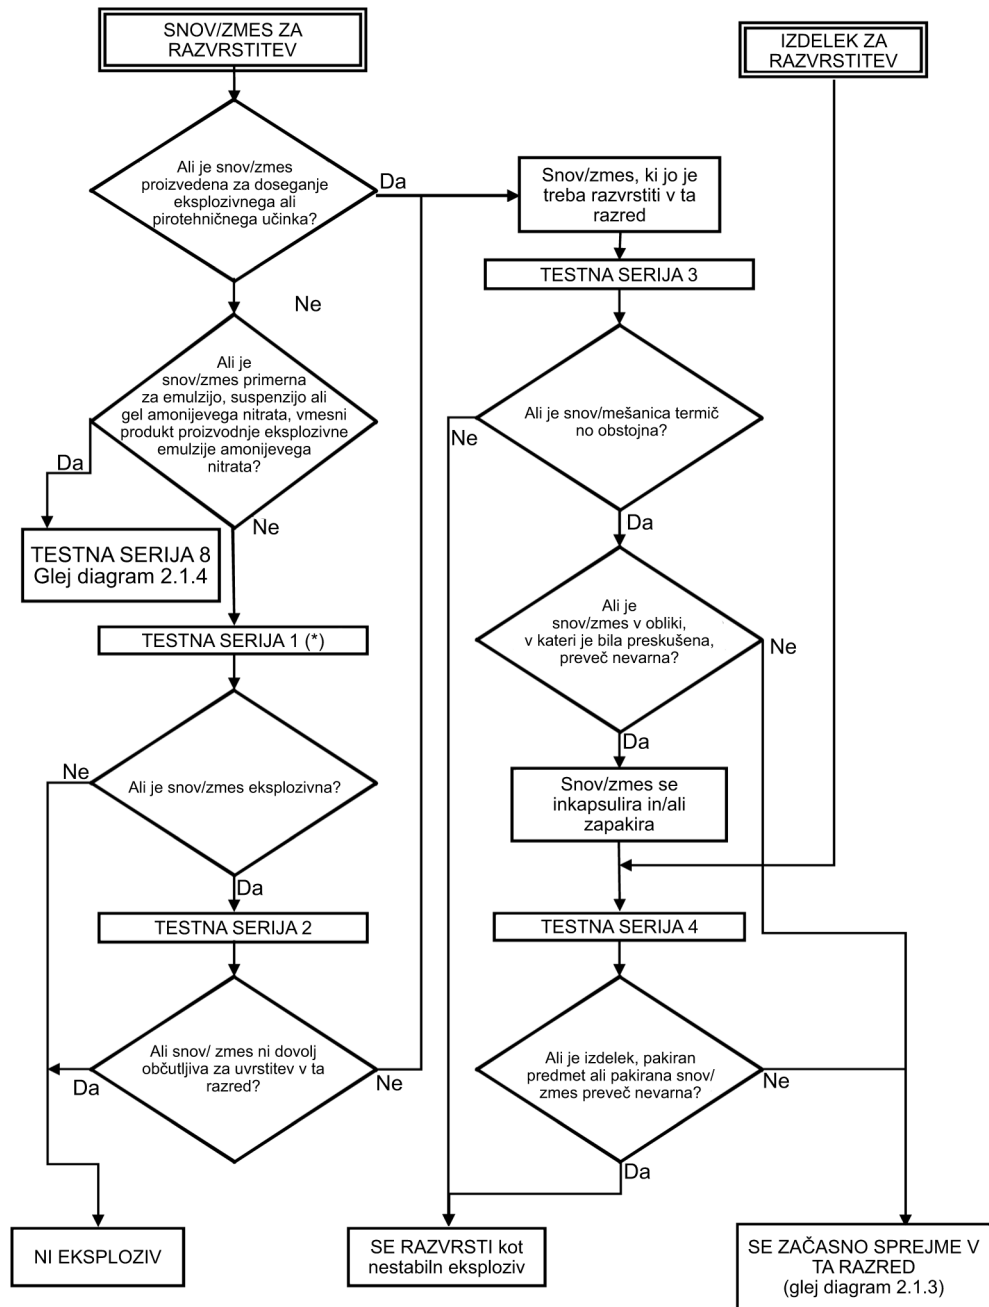

(*) Za razvrstitev začnite s testno serijo 2.

Diagram 2.1.4

Postopek za razvrstitev emulzij, suspenzij ali gelov amonijevega nitrata

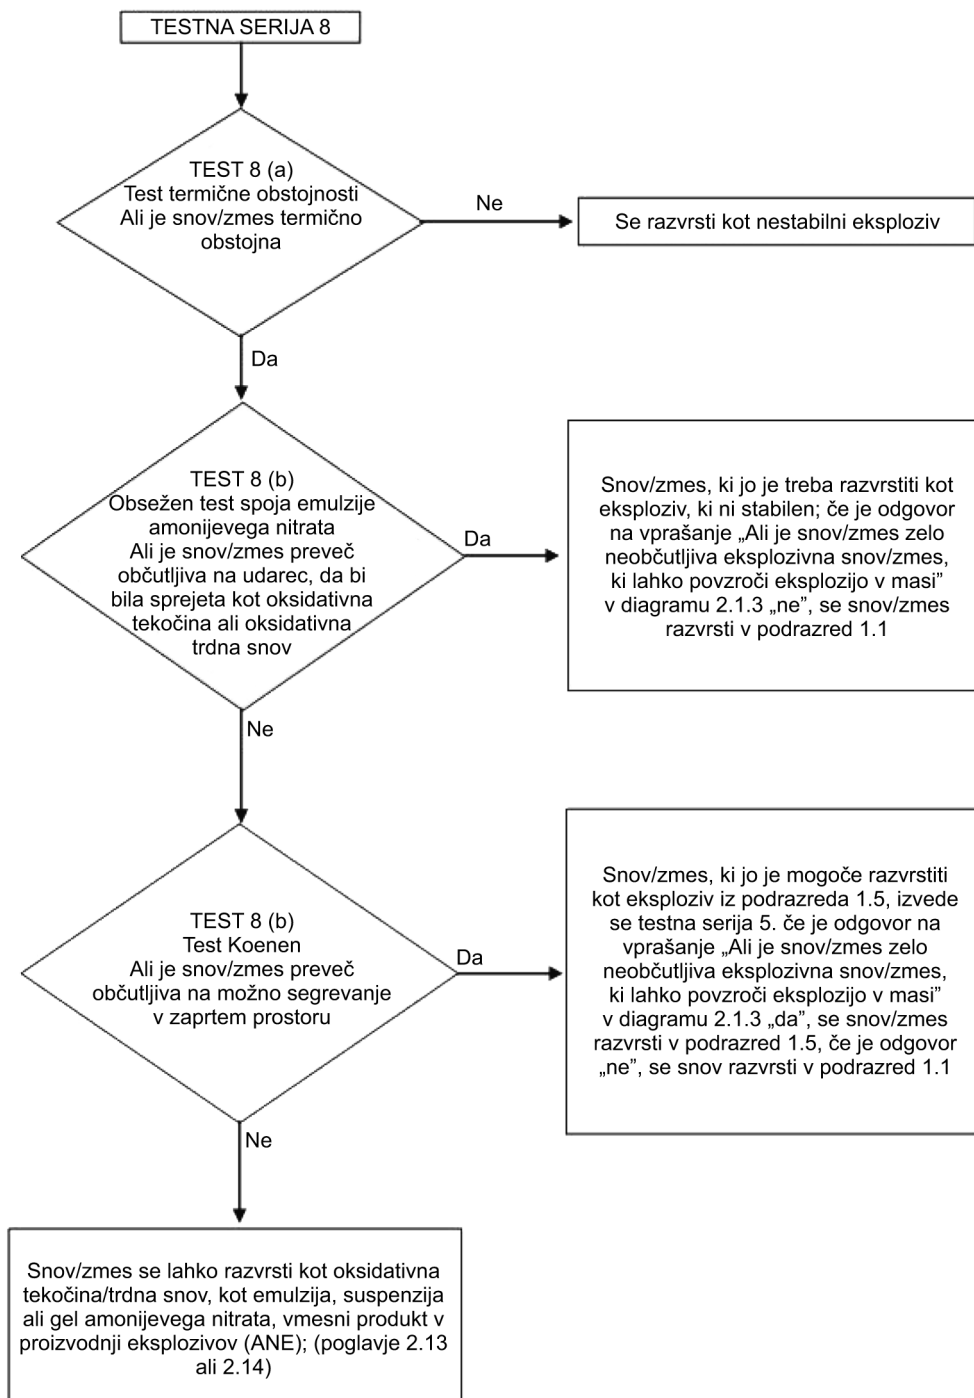

2.1.4.2. Postopek preverjanja

Eksplzivnost je povezana z obstojem nekaterih kemijskih skupin v molekuli, ki lahko reagirajo tako, da se zelo hitro poveča temperatura ali tlak. Postopek preverjanja je namenjen ugotavljanju prisotnosti takšnih reaktivnih skupin in možnosti hitre sprostitve energije. Če se pri postopku preverjanja snovi ali zmesi ugotovi možna eksplozivnost, je treba opraviti postopek sprejetja (glej oddelek 10.3 Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev).


Opomba:

Če je energija eksotermnega razpada organskih snovi manjša od 800 J/g, ni potreben test širjenja detonacije vrste (a) serije 1 niti test občutljivosti na detonacijski udar vrste (a) serije 2.

2.1.4.3. Snov ali zmes se ne razvrsti kot eksploziv, če:

- (a) v molekuli ni kemijskih skupin, ki so povezane z eksplozivnostjo. Primeri skupin, ki so lahko eksplozivne, so navedeni v tabelah A6.1 in A6.2 Dodatka 6 Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev; ali
- (b) snov vsebuje kemijske skupine, ki so lahko eksplozivne in vključujejo kisik, izračunano kisikovo razmerje pa je manjše od -200;

Kisikovo razmerje se izračuna za kemijsko reakcijo:



po formuli:

Kisikovo razmerje = $-1600 [2x + (y/2) - z] / \text{molekulska masa}$;

- (c) kadar organska snov ali homogena zmes organskih snovi vsebuje kemijske skupine, ki so lahko eksplozivne, vendar je energija eksotermnega razpada manjša od 500 J/g in se eksotermni razpad začne pod 500 °C. Energija eksotermnega razpada se lahko določi s primerno kalorimetrično metodo ali
- (d) je za zmesi ali anorganske oksidativne snovi z organskimi snovmi koncentracija anorganske oksidativne snovi:
 - manjša od 15 % masnega deleža, če je oksidativna snov uvrščena v kategorijo 1 ali 2;
 - manjša od 30 % masnega deleža, če je oksidativna snov uvrščena v kategorijo 3.

2.1.4.4. Pri zmesih, ki vsebujejo znan eksploziv, je treba opraviti postopek sprejetja.**2.2. Vnetljivi plini****2.2.1. Opredelitev pojmov**

Vnetljivi plin je plin ali plinska zmes, ki ima območje vnetljivosti z zrakom pri 20 °C in standardnem tlaku 101,3 kPa.

2.2.2. Kriteriji za razvrstitev**2.2.2.1. Vnetljivi plin se razvrsti v ta razred v skladu s tabelo 2.2.1:**

Tabela 2.2.1

Kriteriji za vnetljive pline

Kategorija	Kriteriji
1	Plini, ki so pri 20 °C in standardnem tlaku 101,3 kPa: (a) vnetljivi v zmesi z zrakom pri volumskem deležu 13 % ali manj; ali (b) je njihovo območje vnetljivosti z zrakom vsaj 12 odstotnih točk, in sicer ne glede na spodnjo mejo vnetljivosti.
2	Plini, razen plinov kategorije 1, ki imajo območje vnetljivosti v zmesi z zrakom pri 20 °C in standardnem tlaku 101,3 kPa.

Opomba:

Za razvrstitev aerosolov glej 2.3.

2.2.3. Obvestilo o nevarnosti

Za snovi in zmesi, ki izpolnjujejo kriteriji za razvrstitev v ta razred nevarnosti, se uporabljajo elementi etikete v skladu s tabelo 2.2.2.

Tabela 2.2.2

Elementi etikete za vnetljive pline

Razvrstitev	Kategorija 1	Kategorija 2
Piktogram GHS		Ni piktograma
Opozorilna beseda	Nevarno	Pozor
Stavek o nevarnosti	H220: Zelo lahko vnetljiv plin	H221: Vnetljiv plin
Previdnostni stavek – preprečevanje	P210	P210
Previdnostni stavek – odziv	P377 P381	P377 P381
Previdnostni stavek – shranjevanje	P403	P403
Previdnostni stavek – odstranjevanje		

2.2.4. Dodatni preudarki pri razvrstitvi

- 2.2.4.1. Vnetljivost se določi s testi ali izračunom v skladu z metodami ISO (glej ISO 10156, kakor je bil spremenjen, Plini in plinske mešanice – Določanje potenciala požara in oksidativnosti za izbiro izhodnih ventilov jeklenk) za mešanice, kadar je dovolj podatkov. Če ni dovolj podatkov za uporabo teh metod, se lahko uporabi testna metoda EN 1839, kakor je bila spremenjena (Določanje meje eksplozivnosti plinov in hlapov).

2.3. Vnetljivi aerosoli

2.3.1. Opredelitev pojmov

Aerosol (kar pomeni aerosolni razpršilniki) pomeni kovinsko, stekleno ali plastično posodo za enkratno uporabo, ki vsebuje pod tlakom stisnjen, utekočinjen ali raztopljen plin, s tekočino, pasto ali prahom ali brez njega in je opremljena s sprožilcem, ki omogoča izbrizganje vsebine v obliki trdnih ali tekočih delcev v suspenziji v plinu, kot pene, paste ali prahu ali v tekočem ali plinskem stanju.

2.3.2. Kriteriji za razvrstitev

2.3.2.1. Aerosoli se razvrstijo kot vnetljivi v skladu z oddelkom 2.3.2.2, če vsebujejo katero koli sestavino, ki je razvrščena kot vnetljiva v skladu s kriteriji iz tega dela, tj.:

- tekočine s plameniščem ≤ 93 °C, kar vključuje vnetljive tekočine v skladu z Oddelkom 2.6;
- vnetljive pline (glej 2.2);
- vnetljive trdne snovi (glej 2.7).


Opomba:

Vnetljive sestavine ne zajemajo piroforčnih, samosegrevajočih se snovi ali vodnoreaktivnih snovi in zmesi, ker se takšne sestavine nikoli ne uporabljajo kot sestavine aerosolov.

2.3.2.2. Vnetljivi aerosol se razvrsti v eno od dveh kategorij tega razreda na podlagi sestavin, kemijske toplote zgorevanja in, če je primerno, rezultatov testa vnetljivosti pene (za penaste aerosole), testa oddaljenosti vžiga ter testa v zaprtem prostoru (za aerosole v razpršilniku) v skladu z diagramom 2.3.1 in Priporočili Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev, del III, pododdeleki 31.4, 31.5 in 31.6.

Diagram 2.3.1 za vnetljive aerosole

Diagram 2.3.1 (a) za vnetljive aerosole

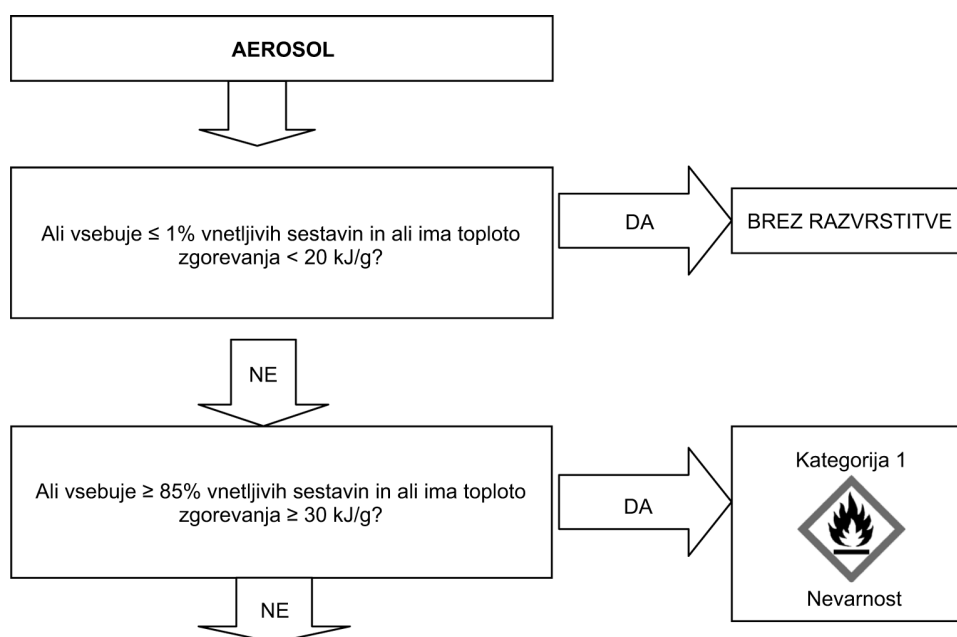

za aerosole v razpršilniku glej način odločanja 2.3.1 (b);

za penaste aerosole glej način odločanja 2.3.1 (c).

Diagram 2.3.1 (b) za aerosole v razpršilniku

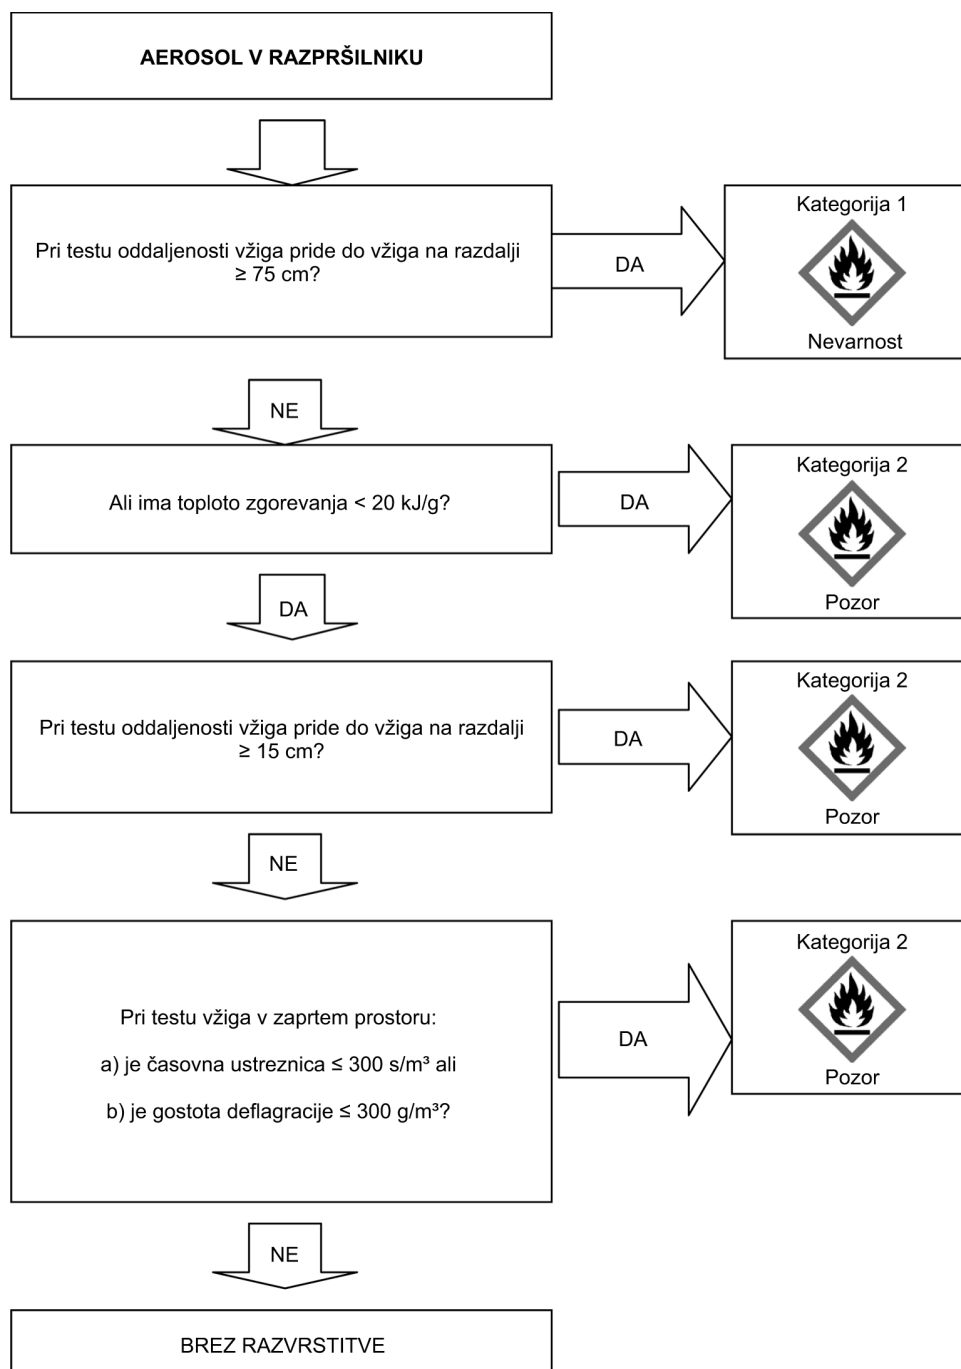
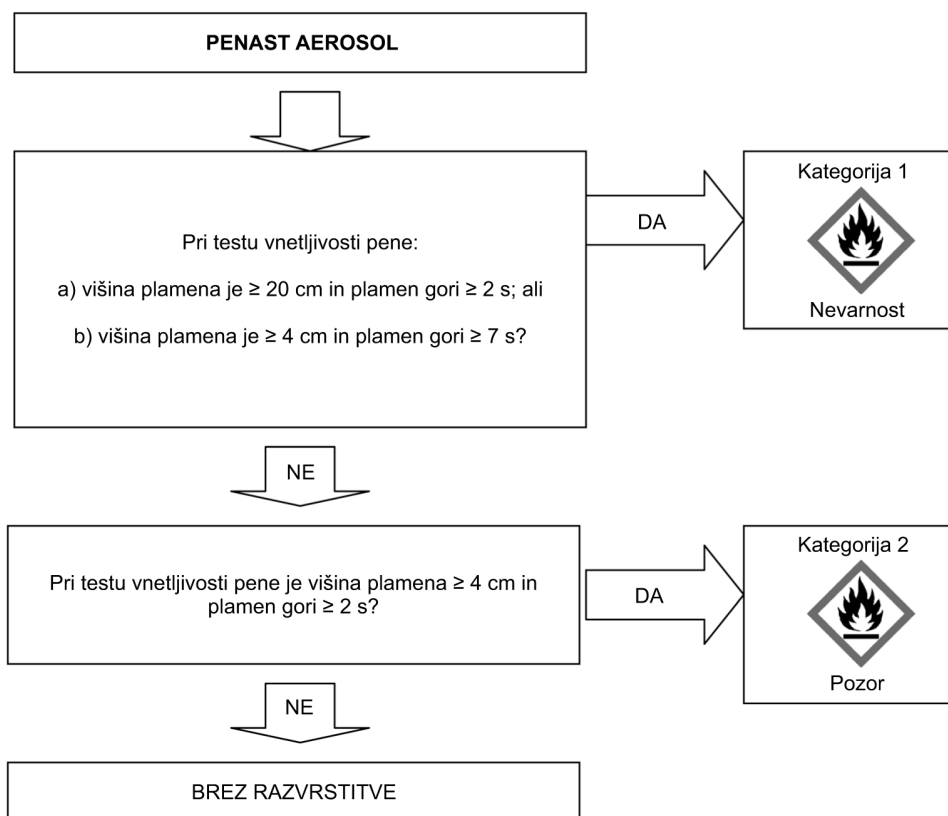


Diagram 2.3.1 (c) za penaste aerosole

2.3.3. **Obvestilo o nevarnosti**

Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 2.3.2.

Tabela 2.3.2

Elementi etikete za vnetljive aerosole

Razvrstitev	Kategorija 1	Kategorija 2
Piktogrami GHS		
Opozorilna beseda	Nevarno	Pozor
Stavek o nevarnosti	H222: Zelo lahko vnetljiv aerosol	H223: Vnetljiv aerosol
Previdnostni stavek – preprečevanje	P210 P211 P251	P210 P211 P251
Previdnostni stavek – odziv		
Previdnostni stavek – shranjevanje	P410 + P412	P410 + P412
Previdnostni stavek – odstranjevanje		

2.3.4. **Dodatni preudarki pri razvrstitvi**

- 2.3.4.1. Kemijska toplota zgorevanja (ΔH_c), v kilojoulih na gram (kJ/g), je rezultat teoretične toplote zgorevanja (ΔH_{comb}) in učinkovitosti zgorevanja ter je običajno manjša od 1,0 (značilna učinkovitost zgorevanja je 0,95 ali 95 %).

Za sestavljen aerosolni formulacija je kemijska toplota zgorevanja vsota ponderiranih toplot zgorevanja za posamezne sestavine:

$$\Delta H_{c \text{ (product)}} = \sum_i^n [w_i \% \times \Delta H_{c(i)}]$$

pri čemer je:

ΔH_c = kemijska toplota zgorevanja (kJ/g);

w_i % = masni delež sestavine i v produktu;

$\Delta H_{c(i)}$ = specifična toplota zgorevanja (kJ/g) sestavine i v produktu.

Kemijske toplote zgorevanja so na voljo v literaturi in se lahko izračunajo ali določijo s testi (glej ASTM D 240, kakor je bil spremenjen – Standardne testne metode za toploto zgorevanja tekočih ogljikovodikovih goriv z bombnim kalorimetrom, EN/ISO 13943, kakor je bil spremenjen, 86.1 do 86.3 – Požarna varnost – Slovar in NFPA 30B, kakor je bil spremenjen – Zakonik za proizvodnjo in skladiščenje aerosolnih izdelkov).

2.4. **Oksidativni plini**

2.4.1. **Opredelitev pojmov**

Oksidativni plin je vsak plin ali zmes plina, ki lahko, običajno z dovajanjem kisika, povzroči vžig druge snovi ali prispeva k njenemu vžigu bolj kot zrak.

2.4.2. **Kriteriji za razvrstitev**

- 2.4.2.1. Oksidativni plin se razvrsti v eno kategorijo tega razreda v skladu s tabelo 2.4.1:

Tabela 2.4.1

Kriteriji za oksidativne pline

Kategorija	Kriteriji
1	Vsak plin, ki lahko na splošno z dovajanjem kisika povzroči vžig druge snovi ali prispeva k njenemu vžigu bolj kot zrak.

Opomba:

„Plini, ki povzročijo vžig druge snovi ali prispevajo k njenemu vžigu bolj kot zrak“ pomeni čiste pline ali plinske mešanice z oksidativno močjo več kot 23,5 %, ki se določi z metodo, opredeljeno v standardu ISO 10156, kakor je bil spremenjen, ali 10156-2, kakor je bil spremenjen.

2.4.3. **Obvestilo o nevarnosti**

Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 2.4.2.

Tabela 2.4.2

Elementi etikete za oksidativne pline

Razvrstitev	Kategorija 1
Piktogram GHS	

Razvrstitev	Kategorija 1
Opozorilna beseda	Nevarno
Stavek o nevarnosti	H270: Lahko povzroči ali okrepi požar; oksidativna snov
Previdnostni stavek – preprečevanje	P220 P244
Previdnostni stavek – odziv	P370 + P376
Previdnostni stavek – shranjevanje	P403
Previdnostni stavek – odstranjevanje	

2.4.4. **Dodatni preudarki pri razvrstitvi**

Za razvrstitev oksidativnega plina se opravijo testi ali računske metode iz standarda ISO 10156, kakor je bil spremenjen, Plini in plinske mešanice – Določitev potenciala požara in oksidativnosti za izbiro izhodnih ventilov jeklenk, in standarda ISO 10156-2, kakor je bil spremenjen, Plinske jeklenke – Plini in plinske mešanice – Določitev stopnje oksidativnosti strupenih in korozivnih plinov in plinskih mešanic.

2.5. **Plini pod tlakom**

2.5.1. **Opredelitev pojmov**

- 2.5.1.1. Plini pod tlakom so plini, ki so shranjeni v posodi pod tlakom 200 kPa (manometer) ali več, ali ki so utekočinjeni ali utekočinjeni in ohlajeni.

Vsebujejo stisnjene pline, utekočinjene pline, raztopljene pline in ohlajene utekočinjene pline.

- 2.5.1.2. Kritična temperatura je temperatura, nad katero se čisti plin ne more utekočiniti, ne glede na stopnjo stisnjenosti.

2.5.2. **Kriteriji za razvrstitev**

Plini se razvrstijo glede na agregatno stanje pri pakiranju v eno od štirih skupin v skladu s tabelo 2.5.1:

Tabela 2.5.1

Kriteriji za pline pod tlakom

Skupina	Kriteriji
Stisnjeni plin	Plin, ki je pri pakiranju pod tlakom popolnoma plinast pri – 50 °C; vključno z vsemi plini s kritično temperaturo ≤ -50 °C.
Utekočinjeni plin	Plin, ki je pri pakiranju pod tlakom delno tekoč pri temperaturah nad – 50 °C. Razlikuje se med: (i) utekočinjenim plinom pod visokim tlakom: plin s kritično temperaturo med – 50 °C in + 65 °C; in (ii) utekočinjenim plinom pod nizkim tlakom: plin s kritično temperaturo nad + 65 °C.
Ohlajen utekočinjeni plin	Plin, ki je pri pakiranju delno utekočinjen zaradi nizke temperature.
Raztopljeni plin	Plin, ki je pri pakiranju pod tlakom raztopljen v topilo s tekočo fazo.

2.5.3. **Obvestilo o nevarnosti**

Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriteriji za razvrstitev v ta razred nevarnosti, v skladu s tabelo 2.5.2.

Tabela 2.5.2

Elementi etikete za pline pod tlakom

Razvrstitev	Stisnjen plin	Utekočinjen plin	Ohlajen utekočinjen plin	Raztopljen plin
Piktogrami GHS				
Opozorilna beseda	Pozor	Pozor	Pozor	Pozor
Stavek o nevarnosti	H280: Vsebuje plin pod tlakom; segrevanje lahko povzroči eksplozijo	H280: Vsebuje plin pod tlakom; segrevanje lahko povzroči eksplozijo	H281: Vsebuje ohlajen utekočinjen plin; lahko povzroči ozeblino ali poškodbe	H280: Vsebuje plin pod tlakom; segrevanje lahko povzroči eksplozijo
Previdnostni stavek – preprečevanje			P282	
Previdnostni stavek – odziv			P336 P315	
Previdnostni stavek – shranjevanje	P410 + P403	P410 + P403	P403	P410 + P403
Previdnostni stavek – odstranjevanje				

2.5.4. **Dodatni preudarki pri razvrstitvi**

Za to skupino plinov morajo biti zagotovljene naslednje informacije:

- parni tlak pri 50 °C;
- agregatno stanje pri 20 °C ob standardnem tlaku okolja;
- kritična temperatura.

Podatki so na voljo v literaturi, lahko se izračunajo ali določijo s testiranjem. Večina čistih plinov je že razvrščena v Priporočilih Združenih narodov o prevozu nevarnega blaga, vzorčni predpisi.

2.6. **Vnetljive tekočine**2.6.1. **Opredelitev pojmov**

Vnetljiva tekočina je tekočina, ki ima plamenišče največ pri 60 °C.

2.6.2. **Kriteriji za razvrstitev**

2.6.2.1. Vnetljiva tekočina se razvrsti v eno od treh kategorij tega razreda v skladu s tabelo 2.6.1:

Tabela 2.6.1

Kriteriji za vnetljive tekočine

Kategorija	Kriteriji
1	Plamenište < 23 °C in začetno vrelišče ≤ 35 °C
2	Plamenište < 23 °C in začetno vrelišče > 35 °C
3	Plamenište ≥ 23 °C in ≤ 60 °C ⁽¹⁾

⁽¹⁾ Za namene te uredbe plinska olja, dizel in lahka kurilna olja, ki imajo razpon plamenišča med ≥ 55 °C in ≤ 75 °C, se lahko obravnavajo kot kategorija 3.

2.6.3. **Obvestilo o nevarnosti**

Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 2.6.2.

Tabela 2.6.2

Elementi etikete za vnetljive tekočine

Razvrstitev	Kategorija 1	Kategorija 2	Kategorija 3
Piktogrami GHS			
Opozorilna beseda	Nevarno	Nevarno	Pozor
Stavek o nevarnosti	H224: Zelo lahko vnetljiva tekočina in hlapi	H225: Lahko vnetljiva tekočina in hlapi	H226: Vnetljiva tekočina in hlapi
Previdnostni stavek – preprečevanje	P210 P233 P240 P241 P242 P243 P280	P210 P233 P240 P241 P242 P243 P280	P210 P233 P240 P241 P242 P243 P280
Previdnostni stavek – odziv	P303 + P361 + P353 P370 + P378	P303 + P361 + P353 P370 + P378	P303 + P361 + P353 P370 + P378
Previdnostni stavek – shranjevanje	P403 + P235	P403 + P235	P403 + P235
Previdnostni stavek – odstranjevanje	P501	P501	P501

2.6.4. **Dodatni preudarki pri razvrstitvi**

- 2.6.4.1. Za razvrstitev vnetljivih tekočin so potrebni podatki o plamenišču in začetnem vrelišču. Podatki so na voljo v literaturi, lahko se izračunajo ali določijo s testiranjem. Če podatkov ni na voljo, se plamenišče in začetno vrelišče določita s testiranjem. Za določanje plamenišča se uporabi metoda z zaprto posodo.

- 2.6.4.2. Za zmesi ⁽¹⁾, ki vsebujejo znane vnetljive tekočine v danih koncentracijah, čeprav lahko vsebujejo nehlapne sestavine, npr. polimere ali dodatke, plamenišča ni treba določiti s testi, če je plamenišče zmesi, izračunano po metodi iz oddelka 2.6.4.3, vsaj za 5 °C ⁽²⁾ višje od relevantnega kriterija razvrstitve in če:
- (a) je sestava zmesi natančno znana (če ima snov poseben razpon sestave, se za oceno izbere sestava z najnižjim izračunanim plameniščem);
 - (b) je spodnja meja eksplozivnosti vsake sestavine znana (uporabiti je treba ustrezno korelacijo, kadar so ti podatki ekstrapolirani na drugačne temperature kot v testnih pogojih), prav tako metoda za izračun spodnje meje eksplozivnosti;
 - (c) sta temperaturna odvisnost nasičenega parnega tlaka in koeficient dejavnosti znana za vsako sestavino, ki je prisotna v zmesi;
 - (d) je tekoča faza homogena.
- 2.6.4.3. Ustrezna metoda je opisana v Gmehling in Rasmussen (Ind. Eng. Fundament, 21, 186, (1982)). Za zmes, ki vsebuje nehlapne sestavine, se plamenišče izračuna na podlagi hlapnih sestavin. Velja, da nehlapna sestavina le malo zmanjša delni tlak topil in je izračunano plamenišče le malo nižje od izmerjene vrednosti.
- 2.6.4.4. Možne testne metode za določanje plamenišča vnetljivih tekočin so navedene v tabeli 2.6.3.

Tabela 2.6.3

Metode za določanje plamenišča vnetljivih tekočin

Evropski standardi:	EN ISO 1516, kakor je bil spremenjen. Določanje plamenišča z/brez – metoda z zaprto posodo
	EN ISO 1523, kakor je bil spremenjen. Določanje plamenišča – ravnotežna metoda z zaprto posodo
	EN ISO 2719, kakor je bil spremenjen. Določanje plamenišča – metoda Pensky-Martens z zaprto posodo
	EN ISO 3679, kakor je bil spremenjen. Določanje plamenišča – hitra ravnotežna metoda z zaprto posodo
	EN ISO 3680, kakor je bil spremenjen. Določanje plamenišča z/brez – hitra ravnotežna metoda z zaprto posodo
	EN ISO 13736, kakor je bil spremenjen. Naftni derivati in druge tekočine – Določanje plamenišča – metoda Abel z zaprto posodo
<i>Nacionalni standardi:</i>	
Association française de normalisation, AFNOR	NF M07-036, kakor je bil spremenjen. Določanje plamenišča – metoda Abel-Pensky z zaprto posodo (identično z DIN 51755)
British Standards Institute	BS 2000 Del 170, kakor je bil spremenjen. (identično z EN ISO 13736)
Deutsches Institut für Normung	DIN 51755 (plamenišče pod 65 °C), kakor je bil spremenjen. Naftni derivati in druge tekočine – Določanje plamenišča – metoda Abel-Pensky z zaprto posodo (identično z NF M07-036)

⁽¹⁾ Do danes je bila računska metoda potrjena za zmesi, ki vsebujejo do 6 hlapnih sestavin. Te sestavine so lahko vnetljive tekočine, kot so ogljikovodiki, etri, alkoholi, estri (razen akrilatov) in voda. Vendar metoda še ni potrjena za zmesi, ki vsebujejo halogenirano žveplo in/ali fosforne spojine ter reaktivne akrilate.

⁽²⁾ Če je izračunano plamenišče manj kot 5 °C višje od ustreznega kriterija razvrstitve, uporaba računske metode ni nujna in je treba plamenišče določiti s testi.

- 2.6.4.5. Tekočine s plameniščem, višjim od 35 °C, ni treba razvrstiti v kategorijo 3, če so bili dobljeni negativni rezultati pri testu gorljivosti L.2 iz oddelka 32 dela III Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev.

2.7. Vnetljive trdne snovi

2.7.1. Opredelitev pojmov

- 2.7.1.1. Vnetljiva trdna snov je trdna snov, ki je hitro vnetljiva ali ki lahko povzroči ogenj ali k njemu prispeva s trenjem.

Hitro vnetljive trdne snovi so snovi ali zmesi v prahu, granulah ali pastih, ki so nevarne, če se lahko hitro vnamejo s kratkim stikom z virom vžiga, kot je goreča vžigalica, in če se ogenj hitro širi.

2.7.2. Kriteriji za razvrstitev

- 2.7.2.1. Snovi ali zmesi v prahu, granulah ali pastih (razen kovinskega prahu ali prahu kovinskih zlitin – glej 2.7.2.2) se razvrstijo kot hitro vnetljive trdne snovi, kadar je trajanje gorenja enega ali več potekov testov, opravljenih v skladu z metodo iz pododdelka 33.2.1 dela III Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev, krajši od 45 sekund ali je hitrost gorenja večja od 2,2 mm/s.
- 2.7.2.2. Kovinski prah ali prah kovinskih zlitin se razvrsti kot vnetljiva trdna snov, če se lahko vžge in se reakcija razširi na celoten vzorec v 10 minutah ali prej.
- 2.7.2.3. Vnetljiva trdna snov se v skladu s tabelo 2.7.1 razvrsti v eno od dveh kategorij tega razreda po testni metodi N.1 iz 33.2.1 Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev:

Tabela 2.7.1

Kriteriji za vnetljive trdne snovi

Kategorija	Kriteriji
1	Test hitrosti gorenja Snovi in zmesi, razen kovinskega prahu: (a) območje vlage ne zaustavi ognja, in (b) trajanje gorenja < 45 sekund ali hitrost gorenja > 2,2 mm/s. Kovinski prah trajanje gorenja ≤ 5 minut
2	Test hitrosti gorenja Snovi in zmesi, razen kovinskega prahu: (a) območje vlage zaustavi ogenj za vsaj 4 minute, in (b) trajanje gorenja < 45 sekund ali hitrost gorenja > 2,2 mm/s. Kovinski prah trajanje gorenja > 5 minut in ≤ 10 minut.

Opomba:

Test se opravi s snovjo ali zmesjo v fizikalni obliki, kot je navedena. Če bo na primer za namene dobave ali prevoza določena kemična snov prevzela drugačno fizikalno obliko od tiste, za katero so bili opravljeni testi, in se za novo fizikalno obliko snovi ocenjuje, da bo dosegla bistveno drugačne rezultate pri testu razvrstitve, se opravi tudi test za novo obliko te snovi.

2.7.3. **Obvestilo o nevarnosti**

Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 2.7.2.

Tabela 2.7.2

Elementi etikete za vnetljive trdne snovi

Razvrstitev	Kategorija 1	Kategorija 2
Piktogrami GHS		
Opozorilna beseda	Nevarno	Pozor
Stavek o nevarnosti	H228: Vnetljiva trdna snov	H228: Vnetljiva trdna snov
Previdnostni stavek – preprečevanje	P210 P240 P241 P280	P210 P240 P241 P280
Previdnostni stavek – odziv	P370 + P378	P370 + P378
Previdnostni stavek – shranjevanje		
Previdnostni stavek – odstranjevanje		

2.8. **Samoreaktivne snovi in zmesi**2.8.1. **Opredelitev pojmov**

2.8.1.1. Samoreaktivne snovi ali zmesi so termično nestabilne tekočine ali trdne snovi ali zmesi, ki lahko tudi brez prisotnosti kisika (zraka) razpadejo v močni eksotermni reakciji. Ta opredelitev izključuje snovi in zmesi, razvrščene kot eksplozivni, organski peroksidi ali oksidanti v skladu s tem delom.

2.8.1.2. Za samoreaktivno snov ali zmes velja, da je eksplozivna, kadar lahko formulacija pri laboratorijskem testiranju detonira, deflagrira ali burno reagira pri segrevanju v zaprtem prostoru.

2.8.2. **Kriteriji za razvrstitev**

2.8.2.1. Vsaka samoreaktivna snov ali zmes se razvrsti v ta razred kot samoreaktivna snov ali zmes, razen:

- (a) če gre za eksploziv v skladu s kriteriji iz 2.1;
- (b) če gre za oksidativno tekočino ali trdno snov v skladu s kriteriji iz 2.13 ali 2.14, razen zmesi oksidativnih snovi, ki vsebujejo 5 % ali več vnetljivih organskih snovi in se zato razvrstijo kot samoreaktivne snovi v skladu s postopkom iz 2.8.2.2 spodaj;
- (c) če gre za organski peroksid v skladu s kriteriji iz 2.15;
- (d) če je toplota razpada nižja od 300 J/g; ali
- (e) če temperatura samopospešujočega razpadanja (self-accelerating decomposition temperature – SADT) presega 75 °C za 50 kg pakiranec ⁽¹⁾.

⁽¹⁾ Glej pododdelke 28.1, 28.2, 28.3 in tabelo 28.3 Priporočil ZN o prevozu nevarnega blaga: Priročnik testov in kriterijev.

- 2.8.2.2. Za zmesi oksidativnih snovi, ki izpolnjujejo kriterije za razvrstitev kot oksidativne snovi, ki vsebujejo 5 % ali več vnetljivih organskih snovi in ne izpolnjujejo kriterijeviz točk (a), (c), (d) ali (e) oddelka 2.8.2.1., se uporablja postopek razvrstitve za samoreaktivne snovi.

Takšna zmes, ki ima lastnosti samoreaktivne snovi vrste B do F (glej 2.8.2.3), se razvrsti kot samoreaktivna snov.

Kadar se test izvaja v pakirani obliki, embalaža pa se spremeni, se opravijo nadaljnji testi, če se šteje, da sprememba embalaže vpliva na rezultat testa.

- 2.8.2.3. Samoreaktivne snovi in zmesi se razvrstijo v eno od sedmih kategorij „vrste od A do G“ tega razreda v skladu z naslednjimi načeli:

- (a) vsaka samoreaktivna snov ali zmes, ki lahko v embalaži detonira ali hitro deflagrira, se opredeli kot samoreaktivna snov VRSTE A;
- (b) vsaka samoreaktivna snov ali zmes, ki ima eksplozivne lastnosti in v embalaži ne detonira niti deflagrira, ampak lahko v tej embalaži termično eksplodira, se opredeli kot samoreaktivna snov VRSTE B;
- (c) vsaka samoreaktivna snov ali zmes, ki ima eksplozivne lastnosti in v embalaži ne more detonirati, deflagrirati ali termično eksplodirati, se opredeli kot samoreaktivna snov VRSTE C;
- (d) vsaka samoreaktivna snov ali zmes, ki pri laboratorijskem testiranju:
 - (i) delno detonira, ne deflagrira in ne reagira burno pri segrevanju v zaprtem prostoru; ali
 - (ii) ne detonira, počasi deflagrira in ne reagira burno pri segrevanju v zaprtem prostoru; ali
 - (iii) ne detonira ali deflagrira in srednje burno reagira pri segrevanju v zaprtem prostoru;se opredeli kot samoreaktivna snov VRSTE D;
- (e) vsaka samoreaktivna snov ali zmes, ki pri laboratorijskem testiranju ne detonira, ne deflagrira in šibko reagira ali ne reagira pri segrevanju v zaprtem prostoru, se opredeli kot samoreaktivna snov VRSTE E;
- (f) vsaka samoreaktivna snov ali zmes, ki pri laboratorijskem testiranju ne detonira v kavitacijskem stanju, ne deflagrira in šibko reagira ali ne reagira pri segrevanju v zaprtem prostoru ter je le šibko eksplozivna ali ni eksplozivna, se opredeli kot samoreaktivna snov VRSTE F;
- (g) vsaka samoreaktivna snov ali zmes, ki pri laboratorijskem testiranju ne detonira v kavitacijskem stanju, ne deflagrira in ne reagira pri segrevanju v zaprtem prostoru, ki, pod pogojem, da je termično stabilna, ni eksplozivna (temperatura samopospešujočega razpada (SADT) je od 60 °C do 75 °C za 50 kg pakiranec), in kadar se pri tekočih zmesih za desenzibilizacijo uporablja redčilo, ki ima vrelišče vsaj 150 °C, se opredeli kot samoreaktivna snov VRSTE G. Če zmes ni termično stabilna ali se za desenzibilizacijo uporabi redčilo, ki ima vrelišče nižje od 150 °C, se zmes opredeli kot samoreaktivna snov VRSTE F.

Kadar se test izvaja v pakirani obliki, embalaža pa se spremeni, se opravijo naslednji testi, če se šteje, da sprememba embalaže vpliva na rezultat testa.

- 2.8.2.4. *Kriteriji za nadzor temperature*

Pri samoreaktivnih snoveh je treba nadzorovati temperaturo, če je SADT nižja ali enaka 55 °C. Testne metode za določanje SADT ter izpeljava nadzornih in kritičnih temperatur so navedeni v oddelku 28 dela II Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev. Izbrani test se izvede tako, da je reprezentativen glede na velikost in material embalaže.

2.8.3. **Obvestilo o nevarnosti**

Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 2.8.1.

Tabela 2.8.1

Elementi etikete za samoreaktivne snovi in zmesi

Razvrstitev	Vrsta A	Vrsta B	Vrsti C in D	Vrsti E in F	Vrsta G
Piktogrami GHS		 			Tej kategoriji nevarnosti elementi etikete niso dodeljeni
Opozorilna beseda	Nevarno	Nevarno	Nevarno	Pozor	
Stavek o nevarnosti	H240: Segrevanje lahko povzroči eksplozijo	H241: Segrevanje lahko povzroči požar ali eksplozijo	H242: Segrevanje lahko povzroči požar	H242: Segrevanje lahko povzroči požar	
Previdnostni stavek – preprečevanje	P210 P220 P234 P280	P210 P220 P234 P280	P210 P220 P234 P280	P210 P220 P234 P280	
Previdnostni stavek – odziv	P370 + P378 P370 + P380 + P375	P370 + P378 P370 + P380 + P375	P370 + P378	P370 + P378	
Previdnostni stavek – shranjevanje	P403 + P235 P411 P420	P403 + P235 P411 P420	P403 + P235 P411 P420	P403 + P235 P411 P420	
Previdnostni stavek – odstranjevanje	P501	P501	P501	P501	

Za vrsto G niso določeni elementi za obveščanje o nevarnosti, ampak se bo to vprašanje preučilo v zvezi z značilnostmi drugih razredov nevarnosti.

2.8.4. **Dodatni preudarki pri razvrstitvi**


2.8.4.1. Lastnosti samoreaktivnih snovi ali zmesi, ki so odločilne za razvrstitev, se določijo s testi. Razvrstitev samoreaktivne snovi ali zmesi se izvede v skladu s testnimi serijami A do H, kot je navedeno v delu II Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev. Postopek za razvrstitev je opisan v diagramu 2.8.1.

2.8.4.2. Postopkov za razvrstitev samoreaktivnih snovi in zmesi ni treba uporabiti, če:

- v molekuli ni kemijskih skupin, ki so povezane z eksplozivnostjo ali samoreaktivnostjo. Primeri takšnih skupin so navedeni v tabelah A6.1 in A6.2 Dodatka 6 Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev; ali
- ocenjena SADT za posamezno organsko snov ali homogeno zmes organske snovi za 50 kg pakiranec presega 75 °C ali je energija eksotermnega razpada manjša od 300 J/g. Začetna temperatura in energija razpada se lahko ocenita s primerno kalorimetrično tehniko (glej pododdelek 20.3.3.3 dela II Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev).

Diagram 2.8.1

Samoreaktivne snovi in zmesi

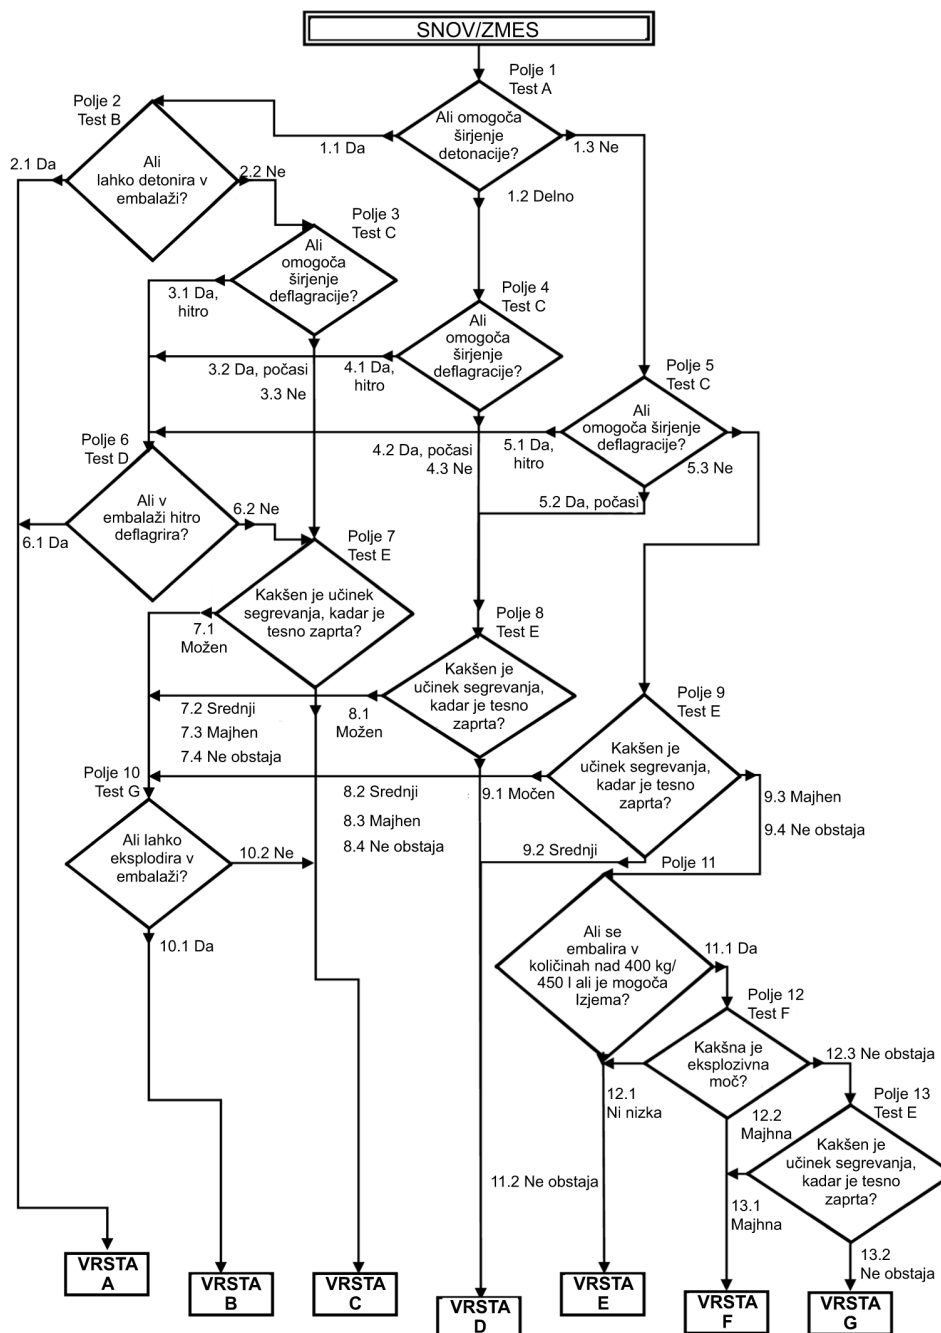

2.9. Piroforne tekočine

2.9.1. Opredelitev pojmov

Pirofora tekočina je tekoča snov ali zmes, ki se lahko tudi v majhnih količinah ob stiku z zrakom vžge v petih minutah.

2.9.2. Kriteriji za razvrstitev

- 2.9.2.1. Pirofora tekočina se v skladu s tabelo 2.9.1 razvrsti v eno kategorijo tega razreda po testni metodi N.3 iz pododdelka 33.3.1.5 dela III Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev:

Tabela 2.9.1

Kriteriji za piroforne tekočine

Kategorija	Kriteriji
1	Tekočina se vžge v petih minutah, kadar je dodana inertni nosilni snovi in izpostavljena zraku, ali se vžge ali ožge filtrirni papir v stiku z zrakom v petih minutah.

2.9.3. Obvestilo o nevarnosti

Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 2.9.2.

Tabela 2.9.2

Elementi etikete za piroforne tekočine

Razvrstitev	Kategorija 1
Piktogram GHS	
Opozorilna beseda	Nevarno
Stavek o nevarnosti	H250: Samodejno se vžge na zraku
Previdnostni stavek – preprečevanje	P210 P222 P280
Previdnostni stavek – odziv	P302 + P334 P370 + P378
Previdnostni stavek – shranjevanje	P422
Previdnostni stavek – odstranjevanje	

2.9.4. Dodatni preudarki pri razvrstitvi

- 2.9.4.1. Postopka razvrstitve pirofornih tekočin ni treba uporabiti, kadar izkušnje pri proizvodnji ali ravnanju kažejo, da se snov ali zmes v stiku z zrakom pri običajnih temperaturah ne vžge samodejno (tj. snov je stabilna pri sobni temperaturi daljše časovno obdobje (dnevi)).

2.10. Piroforne trdne snovi**2.10.1. Opredelitev pojmov**

Pirofora trdna snov je trdna snov ali zmes, ki se lahko že v majhnih količinah pri stiku z zrakom v petih minutah vžge.

2.10.2. Kriteriji za razvrstitev

- 2.10.2.1. Pirofora trdna snov se v skladu s tabelo 2.10.1 razvrsti v eno kategorijo tega razreda po testni metodi N.2 iz pododdelka 3.3.3.1.4 dela III Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev:

Tabela 2.10.1

Kriteriji za piroforne trdne snovi

Kategorija	Kriteriji
1	Trdna snov se pri stiku z zrakom vžge v petih minutah.

Opomba:

Test se opravi s snovjo ali zmesjo v fizikalni obliki, kot je navedena. Če bo na primer za namene dobave ali prevoza določena kemična snov prevzela drugačno fizikalno obliko od tiste, za katero so bili opravljeni testi, in se za novo fizikalno obliko snovi ocenjuje, da bo dosegla bistveno drugačne rezultate pri testu razvrstitve, se opravi tudi test za novo obliko te snovi.

2.10.3. Obvestilo o nevarnosti

Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 2.10.2.

Tabela 2.10.2

Elementi etikete za piroforne trdne snovi

Razvrstitev	Kategorija 1
Piktogram GHS	
Opozorilna beseda	Nevarno
Stavek o nevarnosti	H250: Samodejno se vžge na zraku
Previdnostni stavek – preprečevanje	P210 P222 P280
Previdnostni stavek – odziv	P335 + P334 P370 + P378
Previdnostni stavek – shranjevanje	P422
Previdnostni stavek – odstranjevanje	

2.10.4. Dodatni preudarki pri razvrstitvi

- 2.10.4.1. Postopka razvrstitve pirofornih trdnih snovi ni treba uporabiti, kadar izkušnje pri proizvodnji ali ravnanju kažejo, da se snov ali zmes v stiku z zrakom pri običajnih temperaturah ne vžge samodejno (tj. snov je stabilna pri sobni temperaturi daljše časovno obdobje (dnevi)).

2.11. Samosegrevajoče se snovi in zmesi

2.11.1. Opredelitev pojmov

- 2.11.1.1. Samosegrevajoča se snov ali zmes je tekočina, trdna snov ali zmes, razen piroforne tekočine ali trdne snovi, ki se pri reakciji z zrakom brez dovajanja energije sama segreva; ta snov ali zmes se razlikuje od piroforne tekočine ali trdne snovi tako, da se vžge le v veliki količini (kilogrami) in po daljšem času (ure ali dnevi).

2.11.1.2. Samosegrevanje snovi ali zmesi, zaradi katerega se lahko snovi ali zmesi samodejno vžgejo, povzročata reakcija snovi ali zmesi s kisikom (v zraku) in toplota, ki se razvije in se ne odvaja dovolj hitro v okolico. Samovžig nastane, kadar stopnja nastajanja toplote presega stopnjo toplotne izgube in je dosežena temperatura samovžiga.

2.11.2. **Kriteriji za razvrstitev**

2.11.2.1. Snov ali zmes se razvrsti kot samosegrevajoča se snov ali zmes tega razreda, če pri testih, izvedenih v skladu s testno metodo Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev, pododdelek 33.3.1.6 del III:

- (a) ob pozitivnem rezultatu s 25-milimetrskim kubičnim vzorcem pri 140 °C;
- (b) ob pozitivnem rezultatu pri testu s 100-milimetrskim kubičnim vzorcem pri 140 °C in ob negativnem rezultatu testa s 100-milimetrskim kubičnim vzorcem pri 120 °C ter je treba snov ali zmes pakirati v embalaži s prostornino več kot 3 m³;
- (c) ob pozitivnem rezultatu pri testu s 100-milimetrskim kubičnim vzorcem pri 140 °C in ob negativnem rezultatu pri testu s 100-milimetrskim kubičnim vzorcem pri 100 °C ter je treba snov ali zmes pakirati v embalaži s prostornino več kot 450 litrov;
- (d) ob pozitivnem rezultatu pri testu s 100-milimetrskim kubičnim vzorcem pri 140 °C in ob pozitivnem rezultatu pri testu s 100-milimetrskim kubičnim vzorcem pri 100 °C.

2.11.2.2. Samosegrevajoča se snov ali zmes se razvrsti v eno od dveh kategorij tega razreda, če so rezultati testa, izvedenega v skladu s testno metodo N.4 iz pododdelka 33.3.1.6 dela III Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev, v skladu s kriteriji iz tabele 2.11.1:

Tabela 2.11.1

Kriteriji za samosegrevajoče se snovi in zmesi

Kategorija	Kriteriji
1	Pozitiven rezultat ob testu s 25-milimetrskim kubičnim vzorcem pri 140 °C.
2	(a) pozitiven rezultat ob testu s 100-milimetrskim kubičnim vzorcem pri 140 °C in negativen rezultat pri testu s 25-milimetrskim kubičnim vzorcem pri 140 °C in je treba snov ali zmes pakirati v embalaži s prostornino več kot 3 m³; ali (b) pozitiven rezultat ob testu s 100-milimetrskim kubičnim vzorcem pri 140 °C, negativen rezultat pri testu s 25-milimetrskim kubičnim vzorcem pri 140 °C, pozitiven rezultat ob testu s 100-milimetrskim kubičnim vzorcem pri 120 °C in je treba snov ali zmes pakirati v embalaži s prostornino več kot 450 litrov; ali (c) pozitiven rezultat ob testu s 100-milimetrskim kubičnim vzorcem pri 140 °C in negativen rezultat pri testu s 25-milimetrskim kubičnim vzorcem pri 140 °C ter pozitiven rezultat ob testu s 100-milimetrskim kubičnim vzorcem pri 100 °C.

Opomba:

Test se opravi s snovjo ali zmesjo v fizikalni obliki, kot je navedena. Če bo na primer za namene dobave ali prevoza določena kemična snov prevzela drugačno fizikalno obliko od tiste, za katero so bili opravljeni testi, in se za novo fizikalno obliko snovi ocenjuje, da bo dosegla bistveno drugačne rezultate pri testu razvrstitve, se opravi tudi test za novo obliko te snovi.

2.11.2.3. Snovi in zmesi, za katere temperatura samovžiga presega 50 °C za prostornino 27m³, se ne razvrstijo kot samosegrevajoča se snov ali zmes.

2.11.2.4. Snovi in zmesi, za katere temperatura samovžige presega 50 °C za prostornino 450 litrov, se ne uvrstijo v kategorijo 1 tega razreda.

2.11.3. **Obvestilo o nevarnosti**

Elementi etikete se v skladu s tabelo 2.11.2 uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti.

Tabela 2.11.2

Elementi etikete za samosegrevajoče se snovi in zmesi

Razvrstitev	Kategorija 1	Kategorija 2
Piktogrami GHS		
Opozorilna beseda	Nevarno	Pozor
Stavek o nevarnosti	H251: Samosegrevanje; lahko povzroči požar	H252: Samosegrevanje v velikih količinah; lahko povzroči požar
Previdnostni stavek – preprečevanje	P235 + P410 P280	P235 + P410 P280
Previdnostni stavek – odziv		
Previdnostni stavek – shranjevanje	P407 P413 P420	P407 P413 P420
Previdnostni stavek – odstranjevanje		

2.11.4. **Dodatni preudarki pri razvrstitvi**


2.11.4.1. Podrobne sheme načina odločanja za razvrstitev in teste, ki jih je treba opraviti za ugotavljanje različnih kategorij, so navedene v diagramu 2.11.1.

2.11.4.2. Postopka razvrstitve samosegrevajočih se snovi ali zmesi ni treba uporabiti, če se lahko rezultati presejalnega testa ustrezno povežejo s testom razvrstitve in se uporabi ustrezna meja varnosti. Primeri presejalnega testa so:

- test Greuer Oven (smernice VDI 2263, del 1, 1990, Test methods for the Determination of the Safety Characteristics of Dusts) z začetno temperaturo 80 K nad referenčno temperaturo za prostornino 1 liter;
- presejalni test razsutega prahu (Gibson, N. Harper, D. J. Rogers, R. Evaluation of the fire and explosion risks in drying powders, Plant Operations Progress, 4 (3), 181–189, 1985) z začetno temperaturo 60 K nad referenčno temperaturo za prostornino 1 liter.

Diagram 2.11.1.

Samosegrevajoče se snovi in zmesi

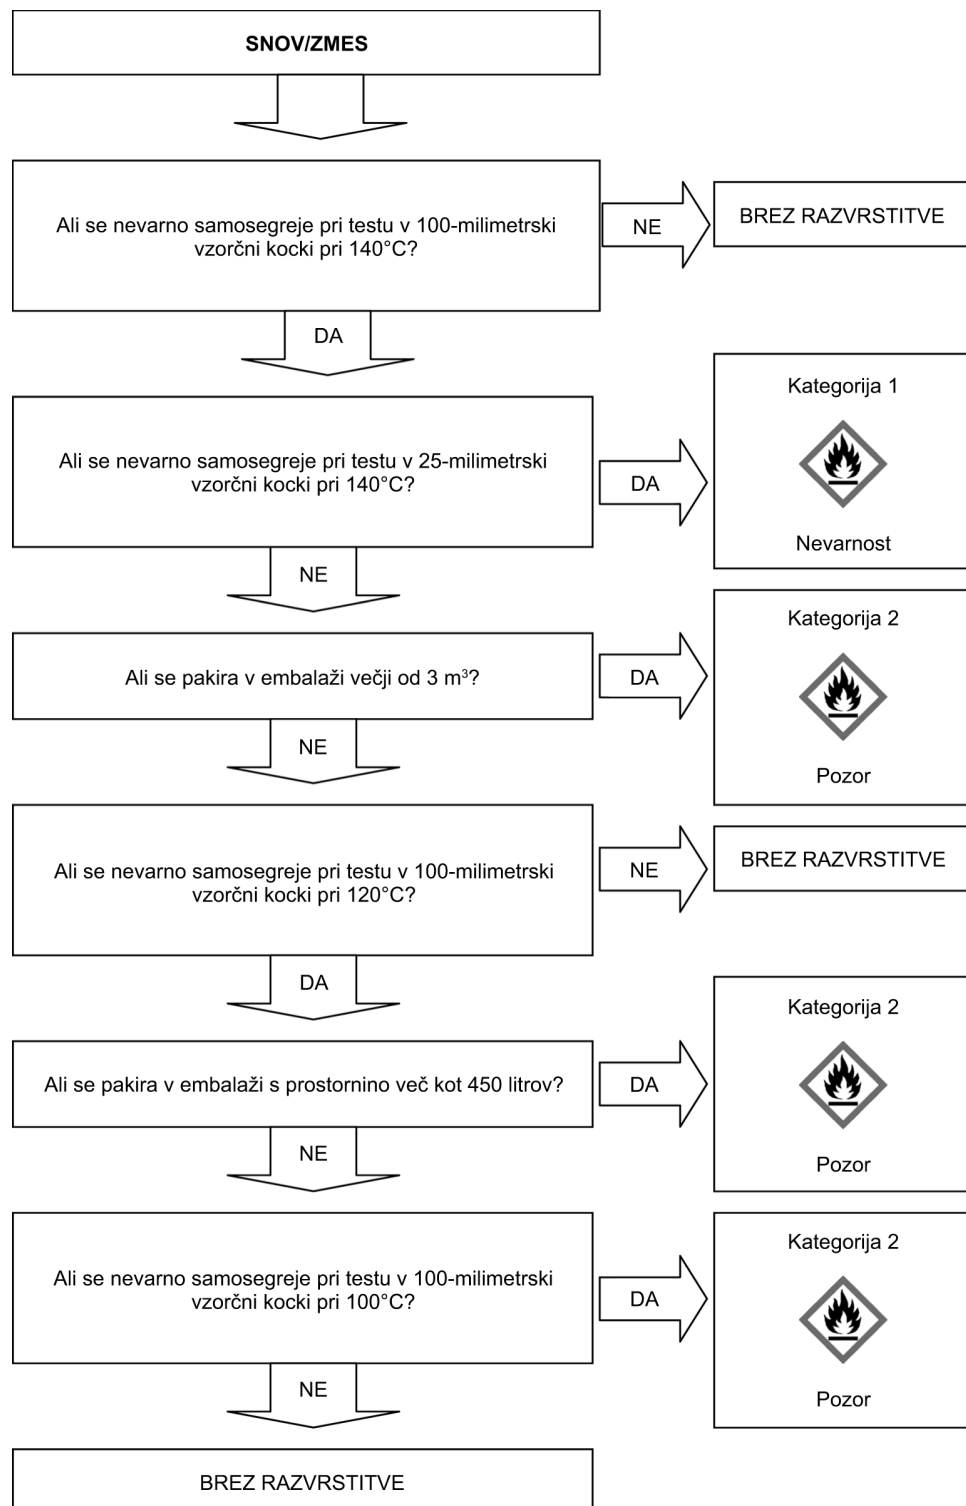

2.12. Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline

2.12.1. Opredelitev pojmov

Snovi ali zmesi, ki v stiku z vodo sproščajo vnetljive pline, so trdne ali tekoče snovi ali zmesi, ki zaradi reakcije z vodo lahko postanejo samovnetljive ali sproščajo nevarne količine vnetljivih plinov.

2.12.2. **Kriteriji za razvrstitev**

- 2.12.2.1. Snov ali zmes, ki v stiku z vodo sprošča vnetljive pline, se razvrsti v eno od treh kategorij tega razreda po testni metodi N.5 iz pododdelka 33.4.1.4 dela III Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev v skladu s tabelo 2.12.1:

Tabela 2.12.1

Kriteriji za snovi ali zmesi, ki v stiku z vodo sproščajo vnetljive pline

Kategorija	Kriteriji
1	Vsaka snov ali zmes, ki burno reagira z vodo pri temperaturi prostora, pri tem nastali plin pa se običajno samodejno vname, ali ki hitro reagira z vodo pri temperaturi prostora, tako da je stopnja sproščanja vnetljivega plina enaka ali večja od 10 litrov na kilogram snovi na minuto.
2	Vsaka snov ali zmes, ki hitro reagira z vodo pri temperaturi prostora, tako da je največja stopnja sproščanja vnetljivega plina enaka ali večja od 20 litrov na kilogram snovi na uro, in ki ne izpolnjuje kriterijev za kategorijo 1.
3	Vsaka snov ali zmes, ki počasi reagira z vodo pri temperaturi prostora, tako da je največja stopnja sproščanja vnetljivega plina enaka ali večja od 1 litra na kilogram snovi na uro, in ki ne izpolnjuje kriterijev za kategoriji 1 in 2.

Opomba:

Test se opravi s snovjo ali zmesjo v agregatnem stanju, kot je predložena. Če pa mora biti na primer ista kemikalija za dobavo ali prevoz v drugačnem agregatnem stanju od testiranega in za katerega se šteje, da verjetno bistveno spremeni rezultat v testu za razvrstitev, je treba snov testiti tudi v tem drugem agregatnem stanju.

- 2.12.2.2. Snov ali zmes se razvrsti kot snov ali zmes, ki v stiku z vodo sprošča vnetljive pline, če na kateri koli stopnji testa nastane samodejni vžig.

2.12.3. **Obvestilo o nevarnosti**

Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 2.12.2.

Tabela 2.12.2

Elementi etikete za snovi ali zmesi, ki v stiku z vodo sproščajo vnetljive pline

Razvrstitev	Kategorija 1	Kategorija 2	Kategorija 3
Piktogrami GHS			
Opozorilna beseda	Nevarno	Nevarno	Pozor
Stavek o nevarnosti	H260: V stiku z vodo se sproščajo vnetljivi plini, ki se lahko samodejno vžgejo	H261: V stiku z vodo se sproščajo vnetljivi plini	H261: V stiku z vodo se sproščajo vnetljivi plini
Previdnostni stavek – preprečevanje	P223 P231 + P232 P280	P223 P231 + P232 P280	P231 + P232 P280
Previdnostni stavek – odziv	P335 + P334 P370 + P378	P335 + P334 P370 + P378	P370 + P378
Previdnostni stavek – shranjevanje	P402 + P404	P402 + P404	P402 + P404

Razvrstitev	Kategorija 1	Kategorija 2	Kategorija 3
Previdnostni stavek – odstranjevanje	P501	P501	P501

2.12.4. **Dodatni preudarki pri razvrstitvi**

2.12.4.1. Postopka za razvrstitev v ta razred ni treba uporabiti, če:

- (a) kemijska struktura snovi ali zmesi ne vsebuje kovin ali polkovin; ali
- (b) izkušnje pri proizvodnji ali ravnanju kažejo, da snov ali zmes ne reagira z vodo, npr. snov je proizvedena z vodo ali oprana z vodo; ali
- (c) snov ali zmes je topna v vodi in tvori stabilno zmes.

2.13. **Oksidativne tekočine**

2.13.1. **Opredelitev pojmov**

Oksidativna tekočina je tekoča snov ali zmes, ki sama po sebi ni nujno vnetljiva in lahko na splošno zaradi oddajanja kisika povzroči vžig drugih materialov ali prispeva k njemu.

2.13.2. **Kriteriji za razvrstitev**

2.13.2.1. Oksidativna tekočina se v skladu s tabelo 2.13.1 razvrsti v eno od treh kategorij tega razreda po testni metodi O.2 iz pododdelka 34.4.2. dela III Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev:

Tabela 2.13.1

Kriteriji za oksidativne tekočine

Kategorija	Kriteriji
1	Vsaka snov ali zmes, ki se v zmesi s celulozo v masnem razmerju 1:1 samodejno vžge, ali pri kateri je čas dviga srednjega tlaka njene zmesi s celulozo v masnem razmerju 1:1 krajši od časa dviga srednjega tlaka v zmesi 50-odstotne perklorove kisline in celuloze v masnem razmerju 1:1
2	Vsaka snov ali zmes, za katero je v zmesi s celulozo v masnem razmerju 1:1 čas dviga srednjega tlaka krajši ali enak času dviga srednjega tlaka za zmes 40-odstotne vodne raztopine natrijevega klorata in celuloze v masnem razmerju 1:1 in ki ne izpolnjuje kriterijev za kategorijo 1
3	Vsaka snov ali zmes, za katero je v zmesi s celulozo v masnem razmerju 1:1 čas dviga srednjega tlaka krajši ali enak času dviga srednjega tlaka za zmes 65-odstotne vodne raztopine dušikove kisline in celuloze v masnem razmerju 1:1 in ki ne izpolnjuje kriterijev za kategorijo 1 in 2.

2.13.3. **Obvestilo o nevarnosti**

Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterijev za razvrstitev v ta razred nevarnosti, v skladu s tabelo 2.13.2.

Tabela 2.13.2

Elementi etikete za oksidativne tekočine

Razvrstitev	Kategorija 1	Kategorija 2	Kategorija 3
Piktogrami GHS			

Razvrstitev	Kategorija 1	Kategorija 2	Kategorija 3
Opozorilna beseda	Nevarno	Nevarno	Pozor
Stavek o nevarnosti	H271: Lahko povzroči požar ali eksplozijo; močna oksidativna snov	H272: Lahko okrepi požar; oksidativna snov	H272: Lahko okrepi požar; oksidativna snov
Previdnostni stavek – preprečevanje	P210 P220 P221 P280 P283	P210 P220 P221 P280	P210 P220 P221 P280
Previdnostni stavek – odziv	P306 + P360 P371 + P380 + P375 P370 + P378	P370 + P378	P370 + P378
Previdnostni stavek – shranjevanje			
Previdnostni stavek – odstranjevanje	P501	P501	P501

2.13.4. **Dodatni preudarki pri razvrstitvi**

2.13.4.1. Za organske snovi ali zmesi se postopek razvrstitve za ta razred ne uporablja, če:

- (a) snov ali zmes ne vsebuje kisika, fluora ali klora ali
- (b) snov ali zmes vsebuje kisik, fluor ali klor in so ti elementi kemijsko vezani le z ogljikom ali vodikom.

2.13.4.2. Za anorganske snovi ali zmesi se postopek razvrstitve za ta razred ne uporablja, če ne vsebujejo kisika ali atomov halogenov.

2.13.4.3. Kadar rezultati testa niso v skladu z znanimi izkušnjami pri ravnanju s snovmi in zmesmi, ki se izkažejo za oksidativne, ter njihovi uporabi imajo presoje na podlagi znanih izkušenj prednost pred rezultati testa.

2.13.4.4. Kadar se za snovi ali zmesi zaradi kemijskih reakcij, ki niso značilne za oksidativne snovi ali zmesi, poveča tlak (preveč ali premalo), se test iz pododdelka 34.4.2 dela III Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev ponovi z inertno snovjo, npr. diatomitom (diatomejska zemlja – kieselgur) namesto celuloze, zato da se pojasni narava reakcije in preveri neustrezen pozitiven rezultat.

2.14. **Oksidativne trdne snovi**

2.14.1. **Opredelitev pojmov**

Oksidativna trdna snov je trdna snov ali zmes, ki sama po sebi ni nujno vnetljiva in lahko na splošno zaradi oddajanja kisika povzroči vžig drugih materialov ali prispeva k njemu.

2.14.2. **Kriteriji za razvrstitev**

2.14.2.1. Oksidativna trdna snov se v skladu s tabelo 2.14.1 razvrsti v eno od treh kategorij tega razreda po testni metodi O.1 iz pododdelka 34.4.1 dela III Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev:

Tabela 2.14.1

Kriteriji za oksidativne trdne snovi

Kategorija	Kriteriji
1	Vsaka snov ali zmes, za katero je v zmesi testiranega vzorca s celulozo v masnem razmerju 4:1 ali 1:1 srednje trajanje gorenja krajše od srednjega trajanja gorenja zmesi kalijevega bromata in celuloze v masnem razmerju 3:2.
2	Vsaka snov ali zmes, za katero je v zmesi testiranega vzorca s celulozo v masnem razmerju 4:1 ali 1:1 srednje trajanje gorenja enako ali krajše od srednjega trajanja gorenja zmesi kalijevega bromata in celuloze v masnem razmerju 2:3 in ki ne izpolnjuje kriterijev za kategorijo 1.
3	Vsaka snov ali zmes, za katero je v zmesi testiranega vzorca s celulozo v masnem razmerju 4:1 ali 1:1 srednje trajanje gorenja enako ali krajše od srednjega trajanja gorenja zmesi kalijevega bromata in celuloze v masnem razmerju 3:7 in ki ne izpolnjuje kriterijev za kategoriji 1 in 2.

Opomba 1:

Pri nekaterih oksidativnih trdnih snoveh obstaja pod določenimi pogoji nevarnost eksplozije (kadar so shranjene v velikih količinah). Nekatere vrste amonijevega nitrata lahko v skrajnih pogojih povečajo nevarnost eksplozije, za oceno te nevarnosti pa se lahko izvede test odpornosti proti detonaciji (oznaka BC, Priloga 3, test 5). Na varnostni list se vpišejo ustrezne informacije.

Opomba 2:

Test se opravi s snovjo ali zmesjo v fizikalni obliki, kot je navedena. Če bo na primer za namene dobave ali prevoza določena kemična snov prevzela drugačno fizikalno obliko od tiste, za katero so bili opravljeni testi, in se za novo fizikalno obliko snovi ocenjuje, da bo dosegla bistveno drugačne rezultate pri testu razvrstitve, se opravi tudi test za novo obliko te snovi.

2.14.3.

Obvestilo o nevarnosti

Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 2.14.2.

Tabela 2.14.2

Elementi etikete za oksidativne trdne snovi

	Kategorija 1	Kategorija 2	Kategorija 3
Piktogrami GHS			
Opozorilna beseda	Nevarno	Nevarno	Pozor
Stavek o nevarnosti	H271: Lahko povzroči požar ali eksplozijo; močna oksidativna snov	H272: Lahko okrepi požar; oksidativna snov	H272: Lahko okrepi požar; oksidativna snov
Previdnostni stavek – preprečevanje	P210 P220 P221 P280 P283	P210 P220 P221 P280	P210 P220 P221 P280
Previdnostni stavek – odziv	P306 + P360 P371 + P380 + P375 P370 + P378	P370 + P378	P370 + P378
Previdnostni stavek – shranjevanje			

	Kategorija 1	Kategorija 2	Kategorija 3
Previdnostni stavek – odstranjevanje	P501	P501	P501

2.14.4. **Dodatni preudarki pri razvrstitvi**

2.14.4.1. Za organske snovi ali zmesi se postopek razvrstitve za ta razred ne uporablja, če:

- (a) snov ali zmes ne vsebuje kisika, fluora ali klora ali
- (b) snov ali zmes vsebuje kisik, fluor ali klor in so ti elementi kemijsko vezani le z ogljikom ali vodikom.

2.14.4.2. Za anorganske snovi ali zmesi se postopek razvrstitve za ta razred ne uporablja, če ne vsebujejo kisika ali atomov halogenov.

2.14.4.3. Kadar rezultati testa niso v skladu z znanimi izkušnjami pri ravnanju s snovmi in zmesmi, ki se izkažejo za oksidativne, ter njihovi uporabi imajo presoje na podlagi znanih izkušenj prednost pred rezultati testa.

2.15. **Organski peroksidi**

2.15.1. **Opredelitev pojmov**

2.15.1.1. Organski peroksidi so tekoče ali trdne organske snovi, ki vsebujejo dvovalentno vez –O–O– in se lahko štejejo za derivate vodikovega peroksida, kadar enega ali oba vodikova atoma nadomestita organska radikala. Izraz organski peroksid vključuje zmesi organskega peroksida (formulacije), ki vsebujejo vsaj en organski peroksid. Organski peroksidi so termično nestabilne snovi ali zmesi, ki lahko v eksotermni samopospešujoči reakciji razpadejo. Poleg tega imajo lahko eno ali več naslednjih lastnosti:

- (i) lahko eksplozivno razpadejo;
- (ii) hitro gorijo;
- (iii) so občutljivi na udarce ali trenje;
- (iv) nevarno reagirajo z drugimi snovmi.

2.15.1.2. Organski peroksid se šteje za eksplozivnega, kadar lahko zmes (formulacija) pri laboratorijskem testiranju eksplodira, se hitro vžge ali burno reagira pri segrevanju v zaprtem prostoru.

2.15.2. **Kriteriji za razvrstitev**

2.15.2.1. Vsak organski peroksid se razvrsti v ta razred, razen če vsebuje:

- (a) največ 1,0 % razpoložljivega kisika iz organskih peroksidov in največ 1,0 % vodikovega peroksida; ali
- (b) največ 0,5 % razpoložljivega kisika iz organskih peroksidov ter več kot 1,0 % in največ 7,0 % vodikovega peroksida.

Opomba:

Vsebnost razpoložljivega kisika (%) v zmesi organskega peroksida se izračuna po formuli:

$$16 \times \sum_i^n \left(\frac{n_i \times c_i}{m_i} \right)$$

pri čemer je:

- n_i = število skupin peroksidov na molekulo organskega peroksida i ;
- c_i = koncentracija (masni delež v %) organskega peroksida i ;
- m_i = molekulska masa organskega peroksida i .

2.15.2.2. Organski peroksidi se razvrstijo v eno od sedmih kategorij „vrste A do G“ tega razreda v skladu z naslednjimi načeli:

- (a) vsak organski peroksid, ki lahko hitro detonira ali deflagrira, kadar je zapakiran, se opredeli kot organski peroksid VRSTE A;
- (b) vsak organski peroksid, ki je eksploziven in niti ne detonira niti hitro ne deflagrira, kadar je v zapakiran, ampak lahko termično eksplodira v tej embalaži, se opredeli kot organski peroksid VRSTE B;
- (c) vsak organski peroksid, ki je eksploziven in ne more detonirati ali deflagrirati, kadar je zapakiran, ali termično eksplodirati, se opredeli kot organski peroksid VRSTE C;
- (d) vsak organski peroksid, ki pri laboratorijskem testiranju:
 - (i) delno detonira, ne deflagrira hitro in ne reagira burno pri segrevanju v zaprtem prostoru; ali
 - (ii) sploh ne detonira, počasi deflagrira in ne reagira burno pri segrevanju v zaprtem prostoru; ali
 - (iii) sploh ne detonira ali deflagrira in reagira srednje burno pri segrevanju v zaprtem prostoru;se opredeli kot organski peroksid VRSTE D;
- (e) vsak organski peroksid, ki pri laboratorijskem testiranju niti ne detonira niti hitro ne deflagrira in šibko reagira ali sploh ne reagira pri segrevanju v zaprtem prostoru, se opredeli kot organski peroksid VRSTE E;
- (f) vsak organski peroksid, ki pri laboratorijskem testiranju niti ne detonira v kavitacijskem stanju niti ne deflagrira in šibko reagira ali sploh ne reagira pri segrevanju v zaprtem prostoru ter ima šibko eksplozivno moč ali nima eksplozivne moči, se opredeli kot organski peroksid VRSTE F;
- (g) vsak organski peroksid, ki pri laboratorijskem testiranju niti ne detonira v kavitacijskem stanju niti ne deflagrira, ne reagira pri segrevanju v zaprtem prostoru in nima eksplozivne moči, če je termično stabilen, tj. SADT je 60 °C ali več za 50-kilogramsko embalažo ⁽¹⁾, in kadar se pri tekočih zmesih za desenzibilizacijo uporablja redčilo, ki ima vrelišče vsaj 150 °C, se opredeli kot organski peroksid VRSTE G. Če organski peroksid ni termično stabilen ali se redčilo, ki ima vrelišče pod 150 °C, uporabi za desenzibilizacijo, se organski peroksid opredeli kot organski peroksid VRSTE F.

Kadar se test izvaja v pakirani obliki, embalaža pa se spremeni, se opravijo nadaljnji testi, če se šteje, da sprememba embalaže vpliva na rezultat testa.

2.15.2.3. *Kriteriji za nadzor temperature*

Pri naslednjih organskih peroksidih je treba nadzorovati temperaturo:

- (a) organski peroksid vrste B in C, pri katerem je $SADT \leq 50\text{ °C}$;
- (b) organski peroksid vrste D, ki reagira srednje burno pri segrevanju v zaprtem prostoru ⁽²⁾ in pri katerem je $SADT \leq 50\text{ °C}$ ali reagira šibko ali ne reagira pri segrevanju v zaprtem prostoru, kadar je $SADT \leq 45\text{ °C}$; in
- (c) organski peroksid vrste E in F, pri katerem je $SADT \leq 45\text{ °C}$.

⁽¹⁾ Glej pododdelke 28.1, 28.2, 28.3 in tabelo 28.3 Priporočil ZN o prevozu nevarnega blaga: Priročnik testov in kriterijev.

⁽²⁾ Kakor določa testna serija E v skladu z delom II Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev.

Testne metode za določanje SADT ter izpeljava nadzorne in kritične temperature so navedeni v oddelku 28 dela II Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev. Izbrani test se izvede tako, da je reprezentativen glede na velikost in material embalaže.

2.15.3. Obvestilo o nevarnosti

Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 2.15.1.

Tabela 2.15.1

Elementi etikete za organske peroksidge

Razvrstitev	Vrsta A	Vrsta B	Vrsti C in D	Vrsti E in F	Vrsta G
Piktogrami GHS		 			Tej kategoriji nevarnosti elementi etikete niso dodeljeni
Opozorilna beseda	Nevarno	Nevarno	Nevarno	Pozor	
Stavek o nevarnosti	H240: Segrevanje lahko povzroči eksplozijo	H241: Segrevanje lahko povzroči požar ali eksplozijo	H242: Segrevanje lahko povzroči požar	H242: Segrevanje lahko povzroči požar	
Previdnostni stavek – preprečevanje	P210 P220 P234 P280	P210 P220 P234 P280	P210 P220 P234 P280	P210 P220 P234 P280	
Previdnostni stavek – odziv					
Previdnostni stavek – shranjevanje	P411 + P235 P410 P420	P411 + P235 P410 P420	P411 + P235 P410 P420	P411 + P235 P410 P420	
Previdnostni stavek – odstranjevanje	P501	P501	P501	P501	

Za vrsto G niso določeni elementi za obveščanje o nevarnosti, ampak se bo to vprašanje preučilo v zvezi z značilnostmi drugih razredov nevarnosti.


2.15.4. Dodatni preudarki pri razvrstitvi

2.15.4.1. Organski peroksidi so razvrščeni glede na opredelitev na podlagi kemijske strukture ter razpoložljivega kisika in vodikovega peroksida v zmesi (glej 2.15.2.1). Lastnosti organskih peroksidov, ki so potrebne za razvrstitev, se določijo s testi. Razvrstitev organskih peroksidov se izvede v skladu s testnimi serijami A do H, kot je opisano v delu II Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev. Postopek za razvrstitev je opisan v diagramu 2.15.1.

2.15.4.2. Zmesi že razvrščenih organskih peroksidov se lahko razvrstijo enako kot vrsta organskega peroksida z najbolj nevarno sestavino. Ker pa lahko dve stabilni sestavini oblikujeta termično manj stabilno zmes, se določi SADT zmesi.

Opomba: Skupek posameznih delov je lahko bolj nevaren od posameznih sestavin.

Diagram 2.15.1

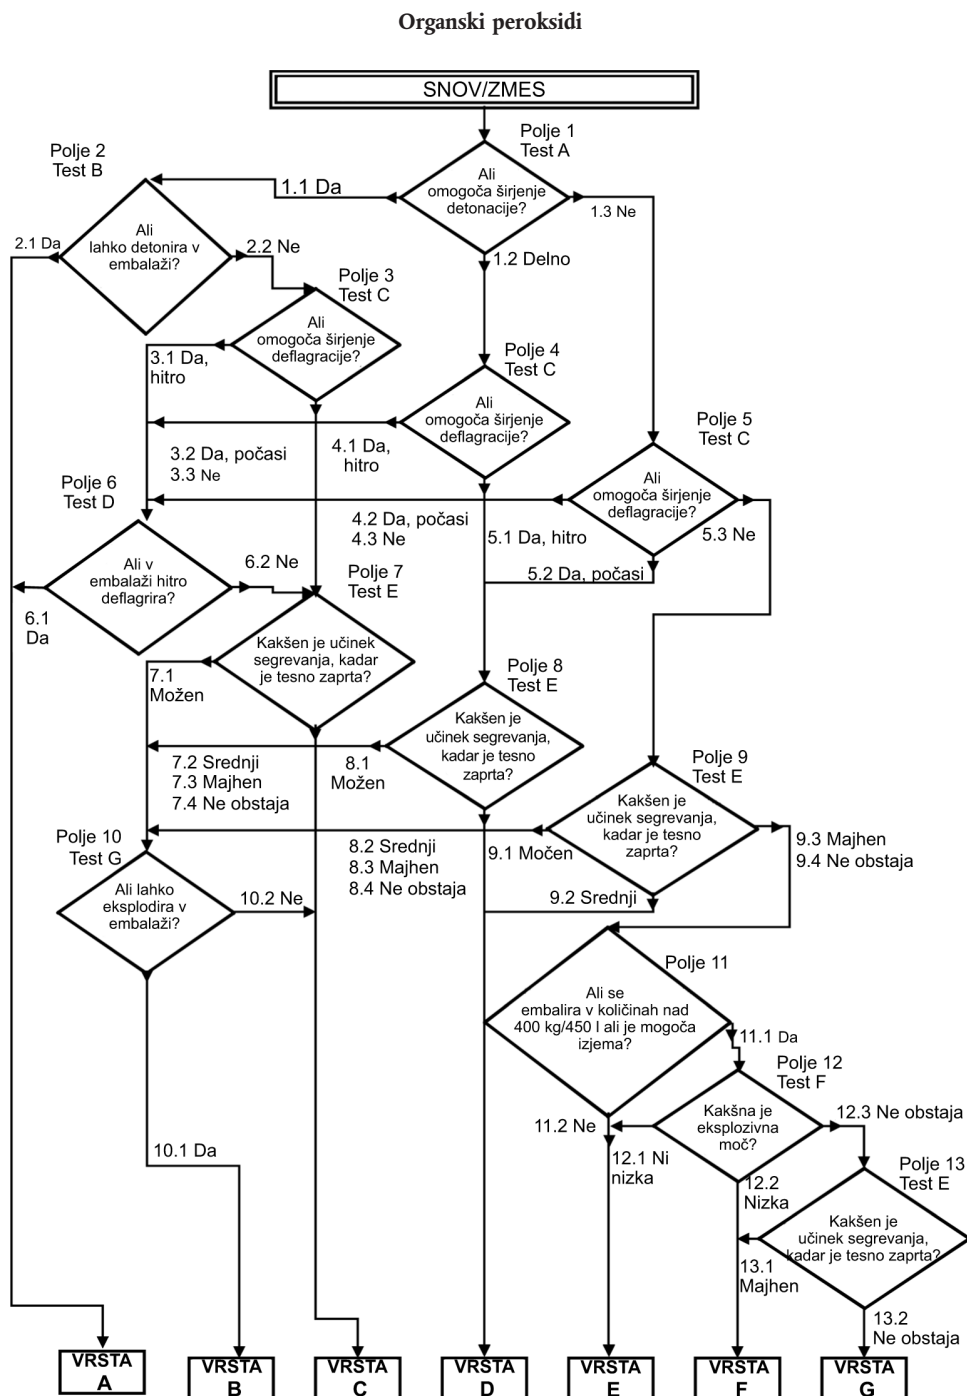

2.16. Jedko za kovine

2.16.1. Opredelitev pojmov

Snov ali zmes, ki je jedka za kovine, je snov ali zmes, ki s kemijskim delovanjem bistveno poškoduje ali celo uniči kovine.

2.16.2. Kriteriji za razvrstitev

- 2.16.2.1. Snov ali zmes, ki je jedka za kovine, se v skladu s tabelo 2.16.1 razvrsti v eno kategorijo tega razreda s testom iz pododdelka 37.4 dela III Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev:

Tabela 2.16.1

Kriteriji za snovi in zmesi, ki so jedke za kovine

Kategorija	Kriteriji
1	Stopnja jedkosti za bodisi jeklene bodisi aluminijeve površine, ki presega 6,25 mm na leto pri testni temperaturi 55 °C, kadar se test izvede na obeh materialih.

Opomba:

Kadar začetni test na jeklu ali aluminiju pokaže, da je preskušena snov ali zmes jedka, potem nadaljnji testi na drugih kovinah niso potrebni.

2.16.3. **Obvestilo o nevarnosti**

Elementi etikete se uporabljajo za snovi in zmesi, ki izpolnjujejo kriterijev za razvrstitev v ta razred nevarnosti, v skladu s tabelo 2.16.2.

Tabela 2.16.2

Elementi etikete za snovi in zmesi, ki so jedke za kovine

Razvrstitev	Kategorija 1
Piktogram GHS	
Opozorilna beseda	Pozor
Stavek o nevarnosti	H290: Lahko je jedko za kovine
Previdnostni stavek – preprečevanje	P234
Previdnostni stavek – odziv	P390
Previdnostni stavek – shranjevanje	P406
Previdnostni stavek – odstranjevanje	

2.16.4. **Dodatni preudarki pri razvrstitvi**

2.16.4.1. Stopnja jedkosti se lahko izmeri v skladu s testno metodo iz pododdelka 37.4 dela III Priporočil Združenih narodov o prevozu nevarnega blaga: Priročnik testov in kriterijev. Za test se uporabi vzorec iz naslednjih materialov:

- (a) za testiranje jekla se uporabljajo vrste jekla:
 - S235JR+CR (1.0037 ali St 37-2),
 - S275J2G3+CR (1.0144 ali St 44-3), ISO 3574, kakor je bil spremenjen, enotni sistem oštevilčenja (UNS) G 10200, ali SAE 1020;
- (b) za testiranje aluminija: vrste 7075-T6 ali AZ5GU-T6 brez obloge.

3. DEL 3: NEVARNOSTI ZA ZDRAVJE

3.1. Akutna strupenost

3.1.1. *Opredelilne pojmov*

3.1.1.1. Akutna strupenost so tisti škodljivi učinki, ki se pojavijo po oralnem vnosu enega odmerka snovi ali zmesi ali več odmerkov ali po vnosu takšnih odmerkov prek kože v 24 urah ali vnosu prek dihalnih poti pri izpostavljenosti štirih ur.

3.1.1.2. Razred nevarnosti akutna strupenost se deli na:

- akutno oralno strupenost;
- akutno dermalno strupenost;
- akutno strupenost pri vdihavanju.

3.1.2. *Kriteriji za razvrstitev snovi kot akutno strupenih*

3.1.2.1. Snovi se lahko uvrstijo v eno od štirih kategorij strupenosti na podlagi akutne strupenosti z oralnim vnosom, vnosom prek kože ali prek dihalnih poti po kriterijih glede na vrednosti iz tabele 3.1.1. Vrednosti akutne strupenosti so izražene kot (približne) vrednosti LD₅₀ (oralno, dermalno) ali LC₅₀ (vdihavanje) ali kot ocena akutne strupenosti (ATE). Pojasnjevalne opombe so navedene pod tabelo 3.1.1.

Tabela 3.1.1

Kategorije nevarnosti akutne strupenosti in ocene akutne strupenosti (ATE), ki opredeljujejo posamezne kategorije

Način izpostavljenosti	Kategorija 1	Kategorija 2	Kategorija 3	Kategorija 4
Oralno (mg/kg telesne teže) glej opombo (a)	ATE ≤ 5	5 < ATE ≤ 50	50 < ATE ≤ 300	300 < ATE ≤ 2 000
Dermalno (mg/kg telesne teže) glej opombo (a)	ATE ≤ 50	50 < ATE ≤ 200	200 < ATE ≤ 1 000	1 000 < ATE ≤ 2 000
S plini (ppmv) ⁽¹⁾ glej: opombo (a) opombo (b)	ATE ≤ 100	100 < ATE ≤ 500	500 < ATE ≤ 2 500	2 500 < ATE ≤ 20 000
S hlapi (mg/l) glej: opombo (a) opombo (b) opombo (c)	ATE ≤ 0,5	0,5 < ATE ≤ 2,0	2,0 < ATE ≤ 10,0	10,0 < ATE ≤ 20,0
S prahom in meglicami (mg/l) glej: opombo (a) opombo (b)	ATE ≤ 0,05	0,05 < ATE ≤ 0,5	0,5 < ATE ≤ 1,0	1,0 < ATE ≤ 5,0

⁽¹⁾ Koncentracije plinov so izražene v delcih na milijon po prostornini (ppmv).

Opombe k tabeli 3.1.1:

(a) Ocena akutne strupenosti (ATE) za razvrstitev snovi ali sestavine v zmesi se dobi tako, da se uporabi:

- LD₅₀/LC₅₀, kadar je na voljo,

- ustrezna vrednost pretvorbe iz tabele 3.1.2, ki je povezana z rezultati testa območja, ali
 - ustrezna vrednost pretvorbe iz tabele 3.1.2, ki je povezana s kategorijo razvrstitve.
- (b) Splošne mejne koncentracije za strupenost pri vdihavanju v tabeli temeljijo na štiriurnem testu izpostavljenosti. Obstoječi podatki o strupenosti pri vdihavanju, ki so bili dobljeni pri enourni izpostavljenosti, se lahko pretvorijo z delitvijo s faktorjem 2 za pline in hlapne ter s faktorjem 4 za prah in meglice.
- (c) Za nekatere snovi ali zmesi testnega ozračja ne sestavljajo le hlapci, ampak zmesi iz tekočih in parnih faz. Za druge snovi ali zmesi je lahko testno ozračje sestavljeno iz hlapov, ki so blizu plinski fazi. V teh primerih razvrstitev temelji na naslednjih ppmv: kategorija 1 (100 ppmv), kategorija 2 (500 ppmv), kategorija 3 (2 500 ppmv), kategorija 4 (20 000 ppmv).

Izrazi „prah“, „meglica“ in „hlapi“ so opredeljeni takole:

- Prah: trdni delci snovi ali zmesi, ki se sprostijo v plinu (običajno zrak);
- Meglica: tekoče kapljice snovi ali zmesi, ki se sprostijo v plinu (običajno zrak);
- Hlapi: plinasta oblika snovi ali zmesi, ki se sprosti iz tekočega ali trdnega stanja.

Prah običajno nastane z mehanskimi postopki. Meglico običajno povzroči zgostitev prezasičenih hlapov ali fizično razprševanje tekočin. Delci prahu in kapljice meglice imajo običajno velikost od manj kot 1 do 100 μm .

3.1.2.2. *Posebni preudarki pri razvrstitvi snovi kot akutno strupenih*

- 3.1.2.2.1 Najprimernejša testna vrsta za evalvacijo akutne strupenosti z oralnim vnosom in vnosom prek dihalnih poti je podgana, medtem ko sta za evalvacijo akutne dermalne strupenosti najprimernejša podgana ali kunec. Kadar so na voljo podatki o testu za akutno strupenost za več živalskih vrst, se z znanstveno presojo izbere najprimernejša vrednost LD₅₀ iz veljavnih, dobro opravljenih testov.

3.1.2.3. *Posebni preudarki pri razvrstitvi snovi kot akutno strupenih prek dihalnih poti*


- 3.1.2.3.1 Enote za strupenosti pri vdihavanju so odvisne od oblike vdihnjenih snovi. Vrednosti za prah in meglice so izražene v mg/l, vrednosti za pline pa v ppmv. Zaradi upoštevanja težav pri testiranju hlapov, ki so lahko sestavljeni iz zmesi tekočih in parnih faz, tabela vključuje vrednosti v enotah mg/l. Razvrstitev za tiste hlapne, ki so bližje plinski fazi, pa temelji na ppmv.
- 3.1.2.3.2 Pri razvrstitvi za akutno strupenost je zlasti pomembno, da se uporabijo jasno določene vrednosti v zelo strupenih kategorijah za prah in meglice. Vdihnjeni delci s srednjim masnim aerodinamičnim premerom (MMAD) od 1 do 4 mikronov se bodo naložili po celotnem območju dihalnih poti podgane. Ta razpon velikosti delca ustreza največjemu odmerku približno 2 mg/l. Da bodo testi na živalih lahko uporabljani za izpostavljenost človeka bi bilo prah in meglice pri podganah najbolje testirati v tem razponu.
- 3.1.2.3.3 Če so na voljo podatki, ki kažejo, da je mehanizem strupenosti vključeval učinek jedkosti, se razen razvrstitve za strupenost z vdihavanjem snov ali zmes označi tudi kot „jedka za dihalne poti“ (glej opombo 1 v 3.1.4.1). Jedkost za dihalne poti je opredeljena kot uničenje tkiva dihalnih poti po enkratnem omejenem obdobju izpostavljenosti, podobno kot pri jedkosti za kožo; to vključuje uničenje sluznice. Evalvacija jedkosti lahko temelji na strokovni presoji, pri čemer se uporabljajo dokazi, kot so: izkušnje na ljudeh in živalih, obstoječi podatki (in vitro), vrednosti pH, informacije o podobnih snoveh ali vsi drugi bistveni podatki.

3.1.3. *Kriteriji za razvrstitev zmesi kot akutno strupenih*

- 3.1.3.1. Kriteriji za razvrstitev snovi za akutno strupenost iz oddelka 3.1.2 temeljijo na podatkih o smrtnem odmerku (testnih ali izpeljanih). Za zmesi je treba pridobiti ali izpeljati informacije, ki omogočajo uporabo kriterijev za razvrstitev zmesi. Pristop pri razvrstitvi akutne strupenosti je stopenjski in odvisen od količine razpoložljivih informacij o zmesi in njenih sestavinah. Shematski prikaz diagrama 3.1.1 prikazuje postopek, ki ga je treba upoštevati.

- 3.1.3.2. Pri razvrstitvi zmesi za akutno strupenost se lahko upoštevajo vsi načini izpostavljenosti, potreben pa je le en način izpostavljenosti, če se ta način (ocenjen ali testiran) upošteva za vse sestavine. Če je akutna strupenost ugotovljena za več kot en način izpostavljenosti, bo pri razvrščanju uporabljena skupina resnejših nevarnosti. Za obvestilo o nevarnosti se upoštevajo vse informacije, ki so na voljo, in opredelijo vsi bistveni načini izpostavljenosti.
- 3.1.3.3. Da se lahko za razvrstitev nevarnosti zmesi uporabijo vsi razpoložljivi podatki, so postavljene nekatere domneve, ki se po potrebi uporabljajo v stopenjskem pristopu:
- (a) „bistvene sestavine“ zmesi so tiste, ki so prisotne v koncentracijah 1 % (masnega deleža za trdne snovi, tekočine, hlape, meglice ter paro in volumskega deleža za pline) ali več, razen če se utemeljeno meni, da je sestavina, ki je prisotna v koncentraciji, manjši od 1 %, še vedno bistvena za razvrstitev zmesi kot akutno strupene (glej tabelo 1.1);
- (b) kadar se razvrščena zmes uporablja kot sestavina druge zmesi, se lahko uporabi dejanska ali izpeljana ocena akutne strupenosti (ATE) za to zmes pri računanju razvrstitve nove zmesi po formulah iz oddelka 3.1.3.6.1 in odstavka 3.1.3.6.2.3.

Diagram 3.1.1

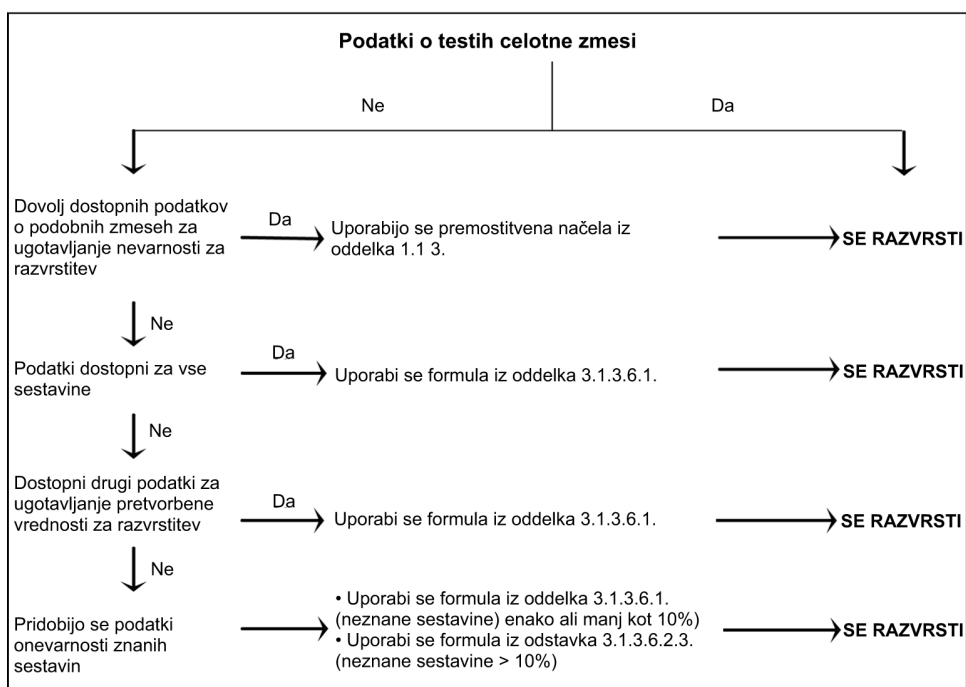Stopenjski pristop za razvrstitev zmesi za akutno strupenost:

- 3.1.3.4. Razvrstitev zmesi, kadar so na voljo podatki o akutni strupenosti za celotno zmes
- 3.1.3.4.1 Kadar se določa akutna strupenost same testirane zmesi, se ta razvrsti v skladu z istimi kriteriji, kot se uporabljajo za snovi iz tabele 3.1.1. Če podatkov za zmes ni na voljo, se uporabijo postopki iz oddelkov 3.1.3.5 in 3.1.3.6.
- 3.1.3.5. Razvrstitev zmesi, kadar ni na voljo podatkov o akutni strupenosti za celotno zmes: premostitvena načela
- 3.1.3.5.1 Kadar zmes ni testirana za določanje akutne strupenosti, ampak je za ustrezno opredelitev nevarnosti zmesi dovolj podatkov o posameznih sestavinah in podobnih testnih zmesih, se ti podatki uporabijo v skladu s premostitvenimi načeli iz oddelka 1.1.3.

3.1.3.5.2 Kadar je zmes razredčena z vodo ali drugim popolnoma nestrupenim materialom, se lahko strupenost zmesi izračuna s podatki o testu nerazredčene zmesi.

3.1.3.6. Razvrstitev zmesi na podlagi sestavin zmesi (metoda dodajanja)

3.1.3.6.1 Dostopni podatki za vse sestavine

Da bi zagotovili ustrezno razvrstitev zmesi in da bi bil potreben le en izračun za vse sisteme, področja in kategorije, se ocena akutne strupenosti (acute toxicity estimate – ATE) sestavin pridobi na naslednji način:

- (a) vključijo se sestavine z znano akutno strupenostjo, ki so v kateri koli kategoriji akutne strupenosti iz tabele 3.1.1;
- (b) ne upoštevajo se sestavine, za katere se domneva, da niso akutno strupene (npr. voda, sladkor);
- (c) ne upoštevajo se sestavine, če mejni test z oralnim vnosom ne kaže akutne strupenosti pri 2 000 mg/kg telesne teže.

Sestavine, za katere se uporablja ta odstavek, se štejejo za sestavine z znano oceno akutne strupenosti (ATE).

Ocena akutne strupenosti zmesi se določi z izračunom na podlagi vrednosti ATE za vse bistvene sestavine v skladu z naslednjo formulo za oralno, dermalno strupenost ali strupenost pri vdihavanju:

$$\frac{100}{ATE_{zmes}} = \sum_i \frac{C_i}{ATE_i}$$

kjer:

- C_i = koncentracija sestavine i (% w/w ali % v/v)
- i = posamezna sestavina od 1 do n
- n = število sestavin
- ATE_i = ocena akutne strupenosti sestavine i.

3.1.3.6.2. Razvrstitev zmesi, kadar ni na voljo podatkov za vse sestavine

3.1.3.6.2.1 Kadar ocena akutne strupenosti ni na voljo za posamezno sestavino zmesi, vendar se lahko iz informacij, ki so na voljo, na primer iz informacij spodaj, izpelje vrednost pretvorbe, kakor je določeno v tabeli 3.1.2, se uporabi formula iz oddelka 3.1.3.6.1.

To vključuje oceno:

- (a) ekstrapolacije med ocenami za oralno, dermalno akutno toksičnost in akutno strupenost pri vdihavanju ⁽¹⁾. Za takšno oceno so morda potrebni ustrezni farmakodinamični in farmakokinetični podatki;
- (b) dokazov o izpostavljenosti ljudi, ki kažejo strupene učinke, vendar ne zagotavljajo podatkov o smrtnem odmerku;
- (c) dokazov katerih koli testov analiz strupenosti za snov, ki kažejo učinke akutne strupenosti, vendar ne zagotavljajo nujno podatkov o smrtnem odmerku; ali
- (d) podatkov o zelo podobnih snoveh, pri čemer se uporabljajo informacije o razmerjih med strukturo in aktivnostjo.

⁽¹⁾ Za sestavine z oceno akutne strupenosti, ki niso znane za način izpostavljenosti, ki bi bil najprimernejši, se lahko vrednosti ekstrapolirajo z načina ali načinov izpostavljenosti, za katere so vrednosti znane, do najprimernejšega načina. Pridobivanje podatkov o dermalnem načinu izpostavljenosti in načinu izpostavljenosti pri vdihavanju za sestavine ni vedno obvezno. Vendar je treba v formuli uporabiti vrednosti iz zahtevanega načina izpostavljenosti, če zahteve po podatkih za posebne sestavine vključujejo oceno akutne strupenosti za dermalni način izpostavljenosti in način izpostavljenosti pri vdihavanju.

Ta pristop na splošno zahteva bistvene dodatne tehnične informacije ter visoko usposobljenega in izkušenega strokovnjaka (strokovna presoja, glej oddelek 1.1.1), da bi zanesljivo ocenili akutno strupenost. Če takšnih informacij ni na voljo, nadaljujte po odstavku 3.1.3.6.2.3.

- 3.1.3.6.2.2 Če se v zmesi uporabi sestavina brez kakršne koli uporabne informacije s koncentracijo 1 % ali več, se ugotovi, da se zmesi ne more dodeliti dokončna ocena akutne strupenosti. V takšnem primeru se zmes razvrsti le na podlagi znanih sestavin in se doda izjava, da x odstotkov zmesi vsebuje sestavino(-e) z neznano strupenostjo.
- 3.1.3.6.2.3 Če je skupna koncentracija sestavine/sestavin z neznano akutno strupenostjo ≤ 10 %, potem se uporabi formula iz oddelka 3.1.3.6.1. Če je skupna koncentracija sestavine (sestavin) z neznano akutno strupenostjo > 10 %, potem se popravi formula iz oddelka 3.1.3.6.1 in se prilagodi za celoten odstotek neznane sestavine (neznanih sestavin):

$$\frac{100 - (\sum C_{\text{neznane}} > 10 \%) }{ETA_{\text{zmes}}} = \sum \frac{C_i}{ETA_i}$$

Tabela 3.1.2

Pretvorba iz razpona vrednosti akutne strupenosti, pridobljenih s testi (ali kategorij nevarnosti akutne strupenosti), v ocenjeno vrednost akutne strupenosti za razvrstitev za zadevne načine izpostavljenosti

Načini izpostavljenosti	Kategorija razvrstitve ali razpon ocene akutne strupenosti, pridobljene s testi	Pretvorjena ocenjena vrednost akutne strupenosti (glej opombo 1)
oralno (mg/kg telesne teže)	0 < kategorija 1 $\leq$ 5 5 < kategorija 2 $\leq$ 50 50 < kategorija 3 $\leq$ 300 300 < kategorija 4 $\leq$ 2 000	0,5 5 100 500
dermalno (mg/kg telesne teže)	0 < kategorija 1 $\leq$ 50 50 < kategorija 2 $\leq$ 200 200 < kategorija 3 $\leq$ 1 000 1 000 < kategorija 4 $\leq$ 2 000	5 50 300 1 100
s plini (ppmv)	0 < kategorija 1 $\leq$ 100 100 < kategorija 2 $\leq$ 500 500 < kategorija 3 $\leq$ 2 500 2 500 < kategorija 4 $\leq$ 20 000	10 100 700 4 500
s hlapi (mg/l)	0 < kategorija 1 $\leq$ 0,5 0,5 < kategorija 2 $\leq$ 2,0 2,0 < kategorija 3 $\leq$ 10,0 10,0 < kategorija 4 $\leq$ 20,0	0,05 0,5 3 11
s prahom/meglice (mg/l)	0 < kategorija 1 $\leq$ 0,05 0,05 < kategorija 2 $\leq$ 0,5 0,5 < kategorija 3 $\leq$ 1,0 1,0 < kategorija 4 $\leq$ 5,0	0,005 0,05 0,5 1,5

Opomba 1:

Te vrednosti so namenjene izračunu ocene akutne strupenosti za razvrstitev zmesi na podlagi sestavin in niso rezultati testov.

3.1.4. Obvestilo o nevarnosti

- 3.1.4.1. Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 3.1.3.

Tabela 3.1.3

Elementi etikete za akutno strupenost

Razvrstitev	Kategorija 1	Kategorija 2	Kategorija 3	Kategorija 4
Piktogrami GHS				
Opozorilna beseda	Nevarno	Nevarno	Nevarno	Pozor
Stavek o nevarnosti: — oralno	H300: Smrtno pri zaužitju	H300: Smrtno pri zaužitju	H301: Strupeno pri zaužitju	H302: Zdravju škodljivo pri zaužitju
— dermalno	Smrtno v stiku s kožo	Smrtno v stiku s kožo	H311: Strupeno v stiku s kožo	H312: Zdravju škodljivo v stiku s kožo
— Vdihavanje (glej opombo 1)	Smrtno pri vdi- havanju	H330: Smrtno pri vdihavanju	H331: Strupeno pri vdihavanju	H332: Zdravju škodljivo pri vdi- havanju
Previdnostni stavek – preprečevanje (oralno)	P264 P270	P264 P270	P264 P270	P264 P270
Previdnostni stavek – odziv (oralno)	P301 + P310 P321 P330	P301 + P310 P321 P330	P301 + P310 P321 P330	P301 + P312 P330
Previdnostni stavek – shranjevanje (oralno)	P405	P405	P405	
Previdnostni stavek – odstranjevanje (oralno)	P501	P501	P501	P501
Previdnostni stavek – preprečevanje (der- malno)	P262 P264 P270 P280	P262 P264 P270 P280	P280	P280
Previdnostni stavek – odziv (dermalno)	P302 + P350 P310 P322 P361 P363	P302 + P350 P310 P322 P361 P363	P302 + P352 P312 P322 P361 P363	P302 + P352 P312 P322 P363
Previdnostni stavek – shranjevanje (dermalno)	P405	P405	P405	
Previdnostni stavek – odstranjevanje (der- malno)	P501	P501	P501	P501
Previdnostni stavek – preprečevanje (vdiha- vanje)	P260 P271 P284	P260 P271 P284	P261 P271	P261 P271
Previdnostni stavek – odziv (vdihavanje)	P304 + P340 P310 P320	P304 + P340 P310 P320	P304 + P340 P311 P321	P304 + P340 P312
Previdnostni stavek – shranjevanje (vdiha- vanje)	P403 + P233 P405	P403 + P233 P405	P403 + P233 P405	
Previdnostni stavek – odstranjevanje (vdiha- vanje)	P501	P501	P501	

Opomba 1:

Če so na voljo podatki, ki kažejo, da je mehanizem strupenosti jedkost, se razen razvrstitve za strupenost z vdihavanjem snov ali zmes označi tudi kot EUH071: „jedko za dihalne poti“ – glej nasvet iz 3.1.2.3.3. Poleg ustreznega piktograma se za akutno strupenost lahko doda piktogram za jedkost (uporabljen za jedkost za kožo in oči) skupaj z izjavo „jedko za dihalne poti“.

Opomba 2:

Če se v zmesi uporabi sestavina s koncentracijo 1 % ali več, glede katere ni na voljo nikakršnih uporabnih informacij, se zmes označi z dodatno izjavo, da „x odstotkov zmesi vsebuje sestavino(-e) z neznano strupenostjo“ – glej informacije v 3.1.3.6.2.2.

3.2. Jedkost za kožo/draženje kože**3.2.1. Opredelitev pojmov:**

- 3.2.1.1. Jedkost za kožo je nastanek trajne poškodbe kože; zlasti vidnega odmiranja prek povrhnjice v usnjico po nanosu testne snovi do štirih ur. Za reakcije jedkosti so značilne razjede, krvavitve, krvave hraste in, po koncu 14-dnevnega opazovanja, izguba barve zaradi beljenja kože, izpadanje dlak celotnega območja in brazgotine. Nejasne poškodbe se ocenjujejo histopatološko.

Draženje kože je nastanek popravljive poškodbe kože po nanosu testne snovi do štirih ur.

3.2.2. Kriteriji za razvrstitev snovi

- 3.2.2.1. Pri določanju zmožnosti snovi za jedkost in draženje je treba pred izvedbo testov upoštevati več dejavnikov. Trdne snovi (prah) lahko postanejo jedke ali dražilne, kadar so vlažne ali v stiku z vlažno kožo ali sluznico. Obstoječe izkušnje ljudi in podatki o živalih, vključno s podatki za enkratno ali ponavljajočo izpostavljenost, so glavni elementi analize, ker zagotavljajo informacije, neposredno povezane z učinki na kožo. Kot pomoč pri odločitvah o razvrstitvi se lahko uporabijo tudi druge možnosti in vitro, ki so bile potrjene in sprejete (glej člen 5). V nekaterih primerih je za odločitev o razvrstitvi lahko na voljo dovolj informacij za strukturno povezane zmesi.
- 3.2.2.2. Prav tako lahko skrajne meje pH, kot so ≤ 2 in $\geq 11,5$ pomenijo možno povzročanje učinkov na kožo, zlasti ko je znana pufirska kapaciteta, čeprav korelacija ni popolna. Na splošno se za takšne snovi pričakuje, da imajo bistvene učinke na kožo. Če upoštevanje alkalne/kisle rezerve kaže, da snov ali zmes ni nujno jedka kljub nizki ali visoki vrednosti pH, potem je treba opraviti nadaljnje teste za potrditev tega, če je mogoče z ustreznim potrjenim testom in vitro.
- 3.2.2.3. Če je snov ali zmes zelo strupena v stiku s kožo, raziskava o draženju kože/jedkosti za kožo ni izvedljiva, ker količina testne snovi, ki bi se uporabila, znatno presega strupen odmerek in zato povzroči smrt živali. Pri opazovanju draženja kože/jedkosti za kožo v študijah o akutni strupenosti in opazovanju prek mejnega odmerka dodatno testiranje ni potrebno, če so uporabljena redčila in so testirane vrste enakovredne.
- 3.2.2.4. Vse zgornje informacije, ki so na voljo o snovi, se uporabijo pri določanju potrebe za testiranje draženja kože in vivo.
- Čeprav bi informacije lahko dobili z evalvacijo enega parametra znotraj stopnje (glej odstavek 3.2.2.5), npr. jedka alkalija z ekstremnim pH se šteje kot jedka za kožo, ima prednost upoštevanje vseh obstoječih informacij in celovito določanje zanesljivosti dokazov. To je zlasti res, če so na voljo informacije le o nekaterih parametrih. Na splošno so najpomembnejše obstoječe izkušnje ljudi in podatki o ljudeh, izkušnje na živalih in podatki o testih na živalih, potem pa drugi viri informacij, vendar je potrebno določanje za vsak primer posebej.
- 3.2.2.5. Pri ocenjevanju začetnih informacij se po potrebi upošteva stopenjski pristop, v nekaterih primerih pa vsi elementi niso pomembni.

3.2.2.6. *Jedkost*

3.2.2.6.1 Na podlagi rezultatov testiranja na živalih se snov razvrsti kot jedka, kakor je prikazano v tabeli 3.2.1. Jedka snov je snov, ki povzroča uničenje tkiva kože, zlasti vidno odmiranje skozi povrhnjico v usnjico, pri vsaj eni testirani živali po izpostavljenosti do štirih ur. Za reakcije jedkosti so značilne razjede, krvavitve, krvave hraste in, po koncu 14-dnevnega opazovanja, izguba barve zaradi beljenja kože, izpadanje dlak celotnega območja in brazgotine. Nejasne poškodbe se obravnavajo histopatološko.

3.2.2.6.2 Znotraj kategorije jedkosti obstajajo tri podkategorije: podkategorija 1A – odzivi so zabeleženi po največ treh minutah izpostavljenosti in največ eni uri opazovanja; podkategorija 1B – odzivi so opisani po izpostavljenosti od treh minut do ene ure in opazovanju do 14 dni; in podkategorija 1C – odzivi se pojavijo po izpostavljenosti od ene do štirih ur in opazovanju do 14 dni.

3.2.2.6.3 Uporabo podatkov o ljudeh obravnavata odstavka 3.2.2.1 in 3.2.2.4 ter odstavki 1.1.1.3, 1.1.1.3 in 1.1.1.5.

Tabela 3.2.1

Kategorija in podkategorije jedkosti za kožo

	Podkategorije jedkosti	Jedko pri ≥ 1 od 3 živali	
		Izpostavljenost	Opazovanje
Kategorija 1: Jedko	1A	≤ 3 minute	≤ 1 ura
	1B	> 3 minute – ≤ 1 ura	≤ 14 dni
	1C	> 1 ura – ≤ 4 ure	≤ 14 dni

3.2.2.7. *Draženje*

3.2.2.7.1 V tabeli 3.2.2 je navedena le ena kategorija za draženje (kategorija 2), ki izhaja iz rezultatov testov na živalih. Uporabo podatkov o ljudeh obravnavata odstavka 3.2.2.1 in 3.2.2.4 ter odstavki 1.1.1.3, 1.1.1.4 in 1.1.1.5. Glavno kriterijevo za kategorijo draženja je, da je pri vsaj dveh od treh testiranih živalih srednja vrednost $\geq 2,3 - \leq 4,0$.

Tabela 3.2.2

Kategorija za draženje kože

Kategorija	Kriteriji
Kategorija 2: Dražilno	(1) Srednja vrednost $\geq 2,3 - \leq 4,0$ za eritem/krasto na opeklini ali za edem pri vsaj 2 ali 3 testiranih živalih, iz razvrščanja 24, 48 in 72 ur po odstranitvi obliža ali z zapoznelimi reakcijami iz ocen v 3 zaporednih dneh po začetku kožne reakcije; ali
	(2) vnetje, ki ne izgine do konca obdobja opazovanja, običajno 14 dni, pri vsaj dveh živalih, zlasti ob upoštevanju izpadanja dlak (omejeno območje), hiperkeratoze, hiperplazije in luščenja; ali
	(3) v nekaterih primerih se lahko pojavijo očitne razlike pri odzivu živali, tako da se pri posamezni živali pojavijo zelo izraziti pozitivne reakcije na kemično izpostavljenost, ki pa so vendarle manjše od zgoraj navedenih kriterijev.

3.2.2.8. *Pripombe na odzive, dobljene s testi na živalih za draženje kože*

3.2.2.8.1. Odzivi živali na draženje pri testu so lahko tako kot pri jedkosti zelo spremenljivi. Bistveni kriteriji za razvrstitev snovi kot dražilne za kožo, kot je navedeno v odstavku 3.2.2.7.1, je srednja vrednost rezultatov za eritem/krasto na opeklini ali edem, izračunana za vsaj dve od treh testiranih živali. Ločen kriterij za draženje pokriva primere, v katerih je odziv draženja znaten, vendar manjši od kriterija srednjega rezultata, ki se zahteva za pozitiven rezultat testa. Na primer testna snov je lahko označena kot dražilna, če vsaj ena od treh testnih živali kaže zelo visoko srednjo vrednost med študijo, vključno s poškodbami, ki ne izginejo ob koncu obdobja opazovanja, ki je ponavadi 14 dni. Tudi drugi odzivi lahko izpolnjujejo ta kriterij. Vendar mora biti potrjeno, da so odzivi posledica kemične izpostavljenosti.

- 3.2.2.8.2. Popravljljivost poškodb kože je še en izmed kriterijev pri evalviranju odzivov draženja. Če vnetje ne izgine do konca obdobja opazovanja pri dveh ali več testiranih živalih, ob upoštevanju izpadanja dlak (omejena površina), hiperkeratoze, hiperplazije in luščenja, potem se material šteje kot dražilni.

3.2.3. **Kriteriji za razvrstitev zmesi**

3.2.3.1. *Razvrstitev zmesi, kadar so na voljo podatki za celotno zmes*

- 3.2.3.1.1. Zmes se razvrsti na podlagi kriterijev za snovi in ob upoštevanju testne strategije in strategije evalviranja za razvoj podatkov za te razrede nevarnosti.

- 3.2.3.1.2. V nasprotju z drugimi razredi nevarnosti so za jedkost za kožo za nekatere vrste snovi in zmesi na voljo nadomestni testi, ki lahko dajo natančne rezultate za razvrstitev in so tudi preprosti ter razmeroma poceni. Pri obravnavanju testiranja zmesi se razvrščevalce spodbuja k uporabi strategije stopenjskega določanja zanesljivosti dokazov, ki je vključena v kriterije za razvrstitev snovi za jedkost za kožo in draženje (odstavek 3.2.2.5), da bi pomagali zagotoviti točno razvrstitev in se izognili nepotrebnemu testiranju na živalih. Zmes se šteje kot jedka za kožo (kategorija 1 jedko za kožo), če je vrednost pH bodisi 2 ali manj bodisi 11,5 ali več. Če upoštevanje alkalne/kisle rezerve kaže, da snov ali zmes ni nujno jedka kljub nizki ali visoki vrednosti pH, potem je treba opraviti nadaljnje teste za potrditev tega, če je mogoče z ustreznim potrjenim testom in vitro.

3.2.3.2. *Razvrstitev zmesi, kadar ni na voljo podatkov za celotno zmes: premostitvena načela*

- 3.2.3.2.1. Kadar zmes ni testirana za določanje draženja kože/jedkosti za kožo, ampak je za ustrezno opredelitev nevarnosti zmesi dovolj podatkov o posameznih sestavinah in podobnih testiranih zmesih, se ti podatki uporabijo v skladu s premostitvenimi načeli iz oddelka 1.1.3.

3.2.3.3. *Razvrstitev zmesi, kadar so na voljo podatki za vse ali le nekatere sestavine zmesi*

- 3.2.3.3.1. Da se lahko za razvrstitev nevarnosti zmesi uporabijo vsi razpoložljivi podatki za draženje kože/jedkost za kožo, so postavljene naslednje domneve, ki se po potrebi uporabljajo v stopenjskem pristopu:

Domneva: „bistvene sestavine“ zmesi so tiste, ki so prisotne v koncentracijah 1 % (masnega deleža za trdne snovi, tekočine, prah, meglice ter hlapne in volumskega deleža za pline) ali več, razen če se domneva (npr. v primeru jedkih sestavin), da je sestavina, ki je prisotna v koncentraciji, manjši od 1 %, lahko še vedno bistvena za razvrstitev zmesi kot dražilne/jedke za kožo.

- 3.2.3.3.2. Na splošno pristop pri razvrstitvi zmesi kot dražilnih ali jedkih za kožo, kadar so na voljo podatki o sestavinah, vendar ne o celotni zmesi, temelji na teoriji dodajanja, tako da vsaka jedka ali dražilna sestavina prispeva k celotnim dražilnim ali jedkim lastnostim zmesi, sorazmerno z močjo in koncentracijo. Za jedke sestavine se uporabi utežni faktor 10, kadar so prisotne v koncentraciji pod splošno mejno koncentracijo za razvrstitev v kategorijo 1, vendar imajo koncentracijo, ki bo prispevala k razvrstitvi zmesi kot dražilne. Zmes se razvrsti kot jedka ali dražilna, kadar vsota koncentracij takšnih sestavin presega mejno koncentracijo.

- 3.2.3.3.3. Spodnja tabela 3.2.3 navaja splošne mejne koncentracije, ki se uporabljajo pri določanju, ali se zmes obravnava kot dražilna ali jedka za kožo.

- 3.2.3.3.4.1 Zlasti je treba paziti pri razvrščanju nekaterih vrst zmesi, ki vsebujejo snovi, kot so kisline in baze, anorganske soli, aldehidi, fenoli in surfaktanti. Pristop iz odstavkov 3.2.3.3.1 in 3.2.3.3.2 morda ni primeren, ker je veliko takšnih snovi jedkih ali dražilnih pri koncentracijah < 1 %.

- 3.2.3.3.4.2 Za zmesi, ki vsebujejo močne kisline ali baze, se pH uporablja kot kriterij za razvrstitev (glej odstavek 3.2.3.1.2), ker bo pH boljši kazalnik jedkosti od mejnih koncentracij iz tabele 3.2.3.

- 3.2.3.3.4.3 Zmes, ki vsebuje sestavine, jedke ali dražilne za kožo, in se ne more razvrstiti na podlagi pristopa dodajanja (tabela 3.2.3) zaradi kemijskih lastnosti, zaradi katerih je ta pristop neizvedljiv, se razvrsti v kategorijo jedko za kožo 1A, 1B ali 1C, kadar vsebuje ≥ 1 % sestavine, razvrščene v kategorijo 1A, 1B ali 1C ali kategorijo 2, kadar vsebuje ≥ 3 % dražilne sestavine. Razvrstitev zmesi s sestavinami, za katere se ne uporablja pristop iz tabele 3.2.3, je povzeta v tabeli 3.2.4 spodaj.

- 3.2.3.3.5. Včasih lahko zanesljivi podatki kažejo, da nevarnost sestavine za jedkost/draženje kože ne bo očitna, kadar presega splošne mejne koncentracije, navedene v tabelah 3.2.3 in 3.2.4. V teh primerih se zmes razvrsti glede na navedene podatke (glej tudi člena 10 in 11). V drugih primerih, ko se pričakuje, da nevarnost sestavine za jedkost/draženje kože ni očitna, ker se pojavi pri koncentracijah, ki so nad splošnimi mejnimi koncentracijami, navedenimi v tabelah 3.2.3 in 3.2.4, se preveri možnost izvedbe testa zmesi. V teh primerih se uporabi strategija stopenjskega določanja zanesljivosti dokazov, kot je navedeno v odstavku 3.2.2.5.
- 3.2.3.3.6. Če obstajajo podatki, ki kažejo, da je (so) sestavina(-e) jedka(-e) ali dražilna(-e) pri koncentraciji < 1 % (jedko) ali < 3 % (dražilno), se zmes ustrezno razvrsti.

Tabela 3.2.3

Splošne mejne koncentracije sestavin, razvrščenih kot nevarne za kožo zaradi jedkosti/dražilnosti (kategorija 1 ali 2), pri katerih se tudi zmes razvrsti kot jedka/dražilno za kožo

Vsota sestavin, razvrščenih kot:	Koncentracija, pri kateri se zmes razvrsti v naslednje kategorije:	
	jedka za kožo	dražilna za kožo
	Kategorija 1 (glej opombo spodaj)	Kategorija 2
Jedko za kožo (kategorije 1A, 1B, 1C)	≥ 5 %	≥ 1 % ampak < 5 %
dražilno za kožo kategorije 2		≥ 10 %
(10 × jedko za kožo kategorije 1A, 1B, 1C) + dražilno za kožo kategorije 2		≥ 10 %

Opomba:

Vsota vseh sestavin zmesi, razvrščenih v kategorijo jedko za kožo 1A, 1B oziroma 1C, mora biti ≥ 5 %, da se lahko zmes razvrsti kot jedka za kožo kategorije 1A, 1B oziroma 1C. Če je vsota sestavin, jedkih za kožo kategorije 1A, < 5 %, vendar je vsota sestavin kategorije 1A + 1B ≥ 5 %, se zmes razvrsti kot jedka za kožo kategorije 1B. Podobno se zmes razvrsti kot jedka za kožo kategorije 1C, če je vsota sestavin, jedkih za kožo kategorije 1A + 1B < 5 %, vendar je vsota sestavin kategorije 1A + 1B + 1C ≥ 5 %.

Tabela 3.2.4

Splošne mejne koncentracije sestavin zmesi, za katero se ne uporablja pristop dodajanja, pri katerih se tudi zmes razvrsti kot jedka/dražilna za kožo

Sestavina:	Koncentracija:	Zmes, razvrščena kot: dražilna za kožo
Kislina s pH ≤ 2	≥ 1 %	Kategorija 1
Baza s pH ≥ 11,5	≥ 1 %	Kategorija 1
Druge jedke sestavine (kategorije 1A, 1B, 1C), za katere se ne uporablja dodajanje	≥ 1 %	Kategorija 1
Druge dražilne sestavine (kategorija 2), za katere se ne uporablja dodajanje, vključno s kislinami in bazami	≥ 3 %	Kategorija 2

3.2.4. Obvestilo o nevarnosti

- 3.2.4.1. Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 3.2.5.

Tabela 3.2.5

Elementi etikete za jedkost za kožo/draženje kože

Razvrstitev	Kategorija 1A/1B/1C	Kategorija 2
Piktogrami GHS		
Opozorilna beseda	Nevarno	Pozor
Stavek o nevarnosti	H314: Povzroča hude opekline kože in poškodbe oči	H315: Povzroča draženje kože
Previdnostni stavek – preprečevanje	P260 P264 P280	P264 P280
Previdnostni stavek – odziv	P301 + P330 + P331 P303 + P361 + P353 P363 P304 + P340 P310 P321 P305 + P351 + P338	P302 + P352 P321 P332 + P313 P362
Previdnostni stavek – shranjevanje	P405	
Previdnostni stavek – odstranjevanje	P501	

3.3. Huda poškodba oči/draženje oči

3.3.1. Opredelitev pojmov:

- 3.3.1.1. Huda poškodba oči je povzročitev poškodbe tkiva očesa ali resne fizične okvare vida po nanosu testne snovi na sprednjo površino očesa, ki ni v celoti popravljiva v 21 dneh po nanosu.

Draženje oči je povzročitev sprememb v očesu po nanosu testne snovi na sprednjo površino očesa, ki so v celoti popravljive v 21 dneh po nanosu.

3.3.2. Kriteriji za razvrstitev snovi

- 3.3.2.1. Sistem razvrstitve za snovi vključuje stopenjsko shemo testiranja in ocenjevanja ter združuje obstoječe informacije o hudih poškodbah očesnega tkiva in draženju oči (vključno s podatki o preteklih izkušnjah ljudi ali živali) in tudi preudarke o (Q)SAR ter opravljanjem potrjenih testov in vitro, da bi se izognili nepotrebnim testom na živalih.
- 3.3.2.2. Pred vsakim testom in vivo na hude poškodbe oči/draženje oči se preverijo vse obstoječe informacije o snovi. Predhodne odločitve lahko pogosto temeljijo na obstoječih podatkih, ali snov povzroča hude (tj. trajne) poškodbe oči. Če se snov lahko razvrsti na podlagi teh podatkov, ni potrebno testiranje.
- 3.3.2.3. Pri določanju zmožnosti snovi za povzročanje hude poškodbe ali draženje oči je treba pred testi upoštevati več dejavnikov. Zbrane izkušnje o ljudeh in živalih so glavni elementi analize, ker zagotavljajo informacije, neposredno povezane z učinki na oko. V nekaterih primerih je za odločitev o nevarnosti lahko na voljo dovolj informacij za strukturno povezane zmesi. Prav tako lahko skrajne meje pH, kot so ≤ 2 in $\geq 11,5$, povzročijo hude poškodbe oči, zlasti v povezavi z veliko pufirsko kapaciteto. Na splošno se za takšne snovi pričakuje, da imajo bistvene učinke na kožo. Možno jedkost za kožo je treba evalvirati pred obravnavo hude

poškodbe/draženja oči, da bi se izognili testiranju lokalnega učinka na oči z jedkimi snovmi za kožo. Jedke snovi za kožo se obravnavajo tudi kot povzročitelji hudih poškodb oči (kategorija 1), dražilne snovi za kožo pa se obravnavajo kot povzročitelji draženja oči (kategorija 2). Kot pomoč pri odločitvah o razvrstitvi se lahko uporabijo tudi druge možnosti in vitro, ki so bile potrjene in sprejete (glej člen 5).

- 3.3.2.4. Vse zgornje informacije, ki so na voljo o snovi ali zmesi, se uporabijo pri določanju potrebe za testiranje draženja oči in vivo. Čeprav bi informacije lahko dobili z oceno enega parametra znotraj stopnje (npr. jedka alkalija z ekstremnim pH se šteje kot lokalno jedka), se pri celovitem določanju zanesljivosti dokazov upoštevajo vse obstoječe informacije, zlasti kadar so na voljo informacije le o nekaterih parametrih. Na splošno je najpomembnejša strokovna presoja, ob upoštevanju izkušenj ljudi s snovjo, potem pa rezultati testa draženja kože in dobro potrjenih nadomestnih metod. Testiranju na živalih z jedkimi snovmi ali zmesmi se je treba, kadar je le mogoče, izogibati.
- 3.3.2.5. Pri evalviranju začetnih informacij se po potrebi upošteva stopenjski pristop, v nekaterih primerih pa vsi elementi niso pomembni.
- 3.3.2.6. *Trajni učinki na oči/huda poškodba oči (kategorija 1)*
- 3.3.2.6.1. Snovi, pri katerih obstaja možnost hude poškodbe oči, so razvrščene v kategorijo 1 (trajni učinki na oči). Snovi so razvrščene v to kategorijo nevarnosti na podlagi rezultatov testiranja na živalih, v skladu z kriteriji iz tabele 3.3.1. Ta opažanja vključujejo živali s 4. stopnjo poškodbe roženice in drugimi hudimi reakcijami (npr. uničenje roženice), ugotovljene kadar koli med testiranjem, in tudi trdovratno motnjo roženice, spremembo barve roženice z barvilom, zarasline, panus in oviranje delovanja šarenice ali drugimi učinki, ki poškodujejo vid. V zvezi s tem se za trdovratne poškodbe štejejo tiste, ki niso popolnoma popravljive v obdobju opazovanja, običajno 21 dni. Snovi so razvrščene tudi v kategorijo 1, če izpolnjujejo kriterije za motnjo roženice ≥ 3 ali iritis $> 1,5$, ugotovljen pri dražovem testu oči s kunci, pri čemer pa se takšne hude poškodbe običajno ne popravijo v 21 dneh obdobja opazovanja.

Tabela 3.3.1

Kategorija za trajne učinke na oči

Kategorija	Kriteriji
Trajni učinki na oči (kategorija 1)	Če snov po nanosu na oči živali povzroči: — vsaj pri eni živali učinke na roženico, šarenico ali očesno veznico, za katere se ne pričakuje, da se bodo popravili, ali se niso popolnoma popravili med opazovanjem, običajno 21 dni; in/ali — vsaj pri dveh od treh testnih živalih pozitiven učinek: — motnje roženice ≥ 3 in/ali — iritis $> 1,5$ izračunan kot srednji rezultat po ocenjevanju 24, 48 in 72 ur po namestitvi testne snovi.

- 3.3.2.6.2. Uporaba podatkov o ljudeh je obravnavana v odstavkih 3.3.2.1 in 3.3.2.4 ter odstavkih 1.1.1.3, 1.1.1.4 in 1.1.1.5.
- 3.3.2.7. *Popravljivi učinki na oči (kategorija 2)*
- 3.3.2.7.1. Snovi, pri katerih obstaja možnost povzročitve trajne poškodbe oči, so razvrščene v kategorijo 2 (dražilno za oči).

Tabela 3.3.2

Kategorija za popravljive učinke na oči

Kategorija	Kriteriji
Dražilno za oči (kategorija 2)	Če snov po nanosu na oči živali povzroči: — vsaj pri dveh od treh testnih živalih pozitiven učinek: — motnost roženice ≥ 1 in/ali — iritis ≥ 1, in/ali — pordelost veznice > 2 in/ali — edem veznice (kemoza) ≥ 2, — izračunan kot srednji rezultat po ocenjevanju 24, 48 in 72 ur po namestitvi testne snovi ter ki se v celoti popravi med opazovanjem 21 dni.

3.3.2.7.2. Za tiste snovi, za katere je značilna očitna spremenljivost odzivov živali, se ta informacija upošteva pri določanju razvrstitve.

3.3.3. **Kriteriji za razvrstitev zmesi**

3.3.3.1. Razvrstitev zmesi, kadar so na voljo podatki za celotno zmes

3.3.3.1.1. Zmes bo razvrščena na podlagi kriterijev za snovi in ob upoštevanju testne strategije in strategije ocenjevanja za razvoj podatkov za te razrede nevarnosti.

3.3.3.1.2. V nasprotju z drugimi razredi nevarnosti so za jedkost za kožo za nekatere vrste zmesi na voljo nadomestni testi, ki dajo natančne rezultate za razvrstitev in so tudi preprosti ter razmeroma poceni. Pri obravnavanju testiranja zmesi se razvrščevalce spodbuja k uporabi strategije stopenjskega določanja zanesljivosti dokazov, ki je vključena v kriterije za razvrstitev snovi za jedkost za kožo in hude poškodbe oči ter draženje oči, da bi pomagali zagotoviti točno razvrstitev in se izognili nepotrebnemu testiranju na živalih. Za zmes se šteje, da povzroča hude poškodbe oči (kategorija 1), če je vrednost pH bodisi $\leq 2,0$ bodisi $\geq 11,5$. Če upoštevanje alkalne/kisle rezerve kaže, da zmes nima nujno zmožnosti hude poškodbe oči, kljub nizki ali visoki vrednosti pH, potem je treba opraviti nadaljnje teste za potrditev tega, če je mogoče z ustreznim potrjenim testom in vitro.

3.3.3.2. Razvrstitev zmesi, kadar ni na voljo podatkov za celotno zmes: premostitvena načela

3.3.3.2.1. Kadar sama zmes ni testirana, da bi se ugotovila jedkost za kožo ali možnost hude poškodbe oči ali draženja, ampak je za ustrezno opredelitev nevarnosti zmesi dovolj podatkov o posameznih sestavinah in podobnih testiranih zmesih, se ti podatki uporabijo v skladu s premostitvenimi načeli iz oddelka 1.1.3.

3.3.3.3. Razvrstitev zmesi, kadar so na voljo podatki za vse ali le nekatere sestavine zmesi

3.3.3.3.1. Da se lahko za razvrstitev lastnosti zmesi uporabijo vsi razpoložljivi podatki za draženje oči/hude poškodbe oči, so postavljene naslednje domneve, ki se po potrebi uporabljajo v stopenjskem pristopu:

Domneva: „bistvene sestavine“ zmesi so tiste, ki so prisotne v koncentracijah 1 % (masnega deleža za trdne snovi, tekočine, prah, meglice ter hlape in volumskega deleža za pline) ali več, razen če se utemeljeno meni (npr. pri jedkih sestavinah), da je sestavina, ki je prisotna v koncentraciji, manjši od 1 %, še vedno bistvena za razvrstitev zmesi kot dražilne za oči/hude poškodbe oči.

3.3.3.3.2. Na splošno pristop pri razvrstitvi zmesi kot dražilnih za oči ali hudo škodljivih za oči, kadar so na voljo podatki o sestavinah, vendar ne o celotni zmesi, temelji na teoriji dodajanja, tako da vsaka jedka ali dražilna sestavina prispeva k celotnim dražilnim ali jedkim lastnostim zmesi, sorazmerno z močjo in koncentracijo. Za jedke sestavine se uporabi utežni faktor 10, kadar so prisotne v koncentraciji pod splošno mejno koncentracijo za razvrstitev v kategorijo 1, vendar imajo koncentracijo, ki bo prispevala k razvrstitvi zmesi kot dražilne. Zmes se razvrsti kot hudo škodljiva za oči ali dražilna za oči, kadar vsota koncentracij takšnih sestavin presega mejno koncentracijo.

- 3.3.3.3.3. Spodnja tabela 3.3.3 navaja splošne mejne koncentracije, ki se uporabljajo pri določanju, ali se zmes razvrsti kot dražilna ali hudo škodljiva za oči.
- 3.3.3.3.4.1. Zlasti je treba paziti pri razvrščanju nekaterih vrst zmesi, ki vsebujejo snovi, kot so kisline in baze, anorganske soli, aldehidi, fenoli in surfaktanti. Pristop iz odstavkov 3.3.3.3.1 in 3.3.3.3.2 mogoče ni izvedljiv, ker je veliko takšnih snovi jedkih ali dražilnih pri koncentracijah < 1 %.
- 3.3.3.3.4.2. Za zmesi, ki vsebujejo močne kisline ali baze, se uporablja pH kot kriterij za razvrstitev (glej odstavek 3.3.2.3), ker bo pH boljši kazalnik za hude poškodbe oči od splošnih mejnih koncentracij iz tabele 3.3.3.
- 3.3.3.3.4.3. Zmes, ki vsebuje jedke ali dražilne sestavine, ki se ne morejo razvrstiti na podlagi pristopa dodajanja (tabela 3.3.3) zaradi kemičnih lastnosti, zaradi katerih je ta pristop neizvedljiv, se razvrsti v kategorijo 1 zaradi učinkov na oko, kadar vsebuje ≥ 1 % jedke sestavine, in v kategorijo 2, kadar vsebuje ≥ 3 % dražilne sestavine. Razvrstitev zmesi s sestavinami, za katere se ne uporablja pristop iz tabele 3.3.3, je povzeta v tabeli 3.3.4 spodaj.
- 3.3.3.3.5. Včasih lahko zanesljivi podatki kažejo, da popravljivi/trajni učinki sestavine na oči ne bodo očitni, kadar presegajo splošne mejne koncentracije, navedene v tabelah 3.3.3 in 3.3.4. V teh primerih se zmes razvrsti v skladu s temi podatki. V drugih primerih, ko se pričakuje, da nevarnosti za jedkost/draženje kože ali popravljivi/trajni učinki sestavine na oči ne bodo očitni, kadar presegajo splošne mejne koncentracije, navedene v tabelah 3.3.3 in 3.3.4, se preveri možnost izvedbe testa zmesi. V teh primerih se uporabi strategija stopenjskega določanja zanesljivosti dokazov.
- 3.3.3.3.6. Če obstajajo podatki, ki kažejo, da je lahko sestavina(-e) jedka(-e) ali dražilna(-e) pri koncentraciji < 1 % (jedko) ali < 3 % (dražilno), se zmes ustrezno razvrsti.

Tabela 3.3.3

Splošne mejne koncentracije sestavin zmesi, razvrščenih kot jedko za kožo kategorije 1 in kategorije 1 ali 2 učinkov na oči, pri katerih se zmes razvrsti zaradi učinkov na oči (v kategorijo 1 ali 2)

Vsota sestavin, razvrščenih kot:	Koncentracija, pri kateri se zmes razvrsti v naslednje kategorije:	
	Trajni učinki na oči	Popravljivi učinki na oči
	Kategorija 1	Kategorija 2
Učinki na oči kategorije 1 ali jedko za kožo kategorije 1A, 1B, 1C	≥ 3 %	≥ 1 % ampak < 3 %
Učinki na oči kategorije 2		≥ 10 %
(10 × učinki na oči kategorije 1) + učinki na oči kategorije 2		≥ 10 %
Jedko za kožo kategorije 1A, 1B, 1C + učinki na oči kategorije 1	≥ 3 %	≥ 1 %, vendar < 3 %
10 × (jedko za kožo kategorije 1A, 1B, 1C + učinki na oči kategorije 1) + učinki na oči kategorije 2		≥ 10 %

Tabela 3.3.4

Splošne mejne koncentracije sestavin zmesi, za katere se ne uporablja pristop dodajanja, pri katerih se tudi zmes razvrsti kot nevarna za oči

Sestavina	Nasičenost	Zmes, razvrščena kot: učinki na oči
Kislina s pH ≤ 2	≥ 1 %	Kategorija 1
Baza s pH $\geq 11,5$	≥ 1 %	Kategorija 1
Druge jedke sestavine (kategorija 1), za katere se ne uporablja pristop dodajanja	≥ 1 %	Kategorija 1

Sestavina	Nasičenost	Zmes, razvrščena kot: učinki na oči
Druge dražilne sestavine (kategorija 2), za katere se ne uporablja dodajanje, vključno s kislinami in bazami	≥ 3 %	Kategorija 2

3.3.4. Obvestilo o nevarnosti

- 3.3.4.1. Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 3.3.5.

Tabela 3.3.5

Elementi etikete za hude poškodbe oči/draženje oči

Razvrstitev	Kategorija 1	Kategorija 2
Piktogrami GHS		
Opozorilna beseda	Nevarno	Pozor
Stavek o nevarnosti	H318: Povzroča hude poškodbe oči	H319: Povzroča hudo draženje oči
Previdnostni stavek – preprečevanje	P280	P264 P280
Previdnostni stavek – odziv	P305 + P351 + P338 P310	P305 + P351 + P338 P337 + P313
Previdnostni stavek – shranjevanje		
Previdnostni stavek – odstranjevanje		

3.4. Preobčutljivost dihal ali kože

3.4.1. Opredelitev pojmov in splošni preudarki

- 3.4.1.1. Povzročitelj preobčutljivosti dihal je snov, ki povzroča preobčutljivost dihalnih poti po njenem vdihavanju.
- 3.4.1.2. Povzročitelj preobčutljivosti kože je snov, ki povzroči alergijski odziv po stiku s kožo.
- 3.4.1.3. Za namene oddelka 3.4 preobčutljivost vključuje dve stopnji: prva stopnja je indukcija posebnega imunskega spomina v posamezniku z izpostavljenostjo alergenom. Druga stopnja je izvajanje (elicitation), tj. sprožitev celičnega ali protitelesnega alergijskega odziva z izpostavljenostjo preobčutljivega posameznika alergenom.
- 3.4.1.4. Vzorec indukcije, ki ji sledi stopnja izvajanja, je skupen preobčutljivosti dihal in preobčutljivosti kože. Pri preobčutljivosti kože je potrebna stopnja indukcije, v kateri se imunski sistem nauči odziva; lahko se pojavijo klinični simptomi, kadar je naknadna izpostavljenost dovolj, da izvabi vidno kožno reakcijo (stopnja izvajanja). Zato testi napovedovanja običajno sledijo temu vzorcu, ki zajema stopnjo indukcije, pri čemer se odziv nanjo meri s standardizirano stopnjo izvajanja, ki običajno vključuje test z obliži. Lokalna analiza limfnih vozlov je izjema, ki neposredno meri odziv indukcije. Dokaz o preobčutljivosti kože pri ljudeh se običajno oceni z diagnostičnim testom z obliži.
- 3.4.1.5. Običajno so pri preobčutljivosti kože in dihal za izvajanje potrebne nižje ravni kot za indukcijo. Določbe za opozarjanje preobčutljivih posameznikov na prisotnost ciljnega povzročitelja preobčutljivosti v zmesi so navedene v oddelku 3.4.4.

3.4.1.6. Razred nevarnosti za preobčutljivost dihal ali kože se deli na:

- preobčutljivost dihal;
- preobčutljivost kože.

3.4.2. **Kriteriji za razvrstitev snovi**

3.4.2.1. *Povzročitelji preobčutljivosti dihal*

Snovi se razvrstijo kot povzročitelji preobčutljivosti dihal (kategorija 1) v skladu z kriteriji iz tabele 3.4.1:

Tabela 3.4.1

Kategorija nevarnosti za povzročitelje preobčutljivosti dihal

Kategorija	Kriteriji
Kategorija 1	Snovi se razvrstijo kot povzročitelji preobčutljivosti dihal (kategorija 1) v skladu z naslednjimi kriteriji: (a) če obstajajo dokazi pri ljudeh, da lahko snov povzroči posebno preobčutljivost pri vdihavanju in/ali (b) če obstajajo pozitivni rezultati ustreznih testov na živalih.

3.4.2.1.1. Dokazi pri ljudeh

3.4.2.1.1.1. Dokaz, da snov lahko povzroči posebno preobčutljivost pri vdihavanju, običajno temelji na izkušnjah ljudi. V zvezi s tem se preobčutljivost pri vdihavanju običajno zaznava kot astma, vendar se upoštevajo tudi druge reakcije preobčutljivosti pri vdihavanju, kot so rinitis/vnetje očesne veznice in alveolitis. Stanje ima klinične lastnosti alergijskega odziva. Vendar ni nujno, da so izraženi imunološki mehanizmi.

3.4.2.1.1.2. Pri obravnavanju dokazov pri ljudeh je za odločanje o razvrstitvi treba upoštevati, razen dokazov iz primerov:

- (a) velikost izpostavljene populacije;
- (b) obseg izpostavljenosti.

Uporaba podatkov o ljudeh je obravnavana v odstavkih 1.1.1.3, 1.1.1.4 in 1.1.1.5.

3.4.2.1.1.3. Zgoraj omenjeni dokazi so lahko:

- (a) klinična anamneza in podatki ustreznih testov funkcije pljuč, povezani z izpostavljenostjo snovi, potrjeni z drugimi podpornimi dokazi, ki lahko vključujejo:
 - (i) imunološki test in vivo (npr. test z vbadanjem kože);
 - (ii) imunološki test in vitro (npr. serološko analizo);
 - (iii) raziskave, ki kažejo na druge posebne preobčutljivostne odzive, pri katerih imunološki mehanizmi delovanja niso dokazani, npr. ponavljajoče draženje nižje stopnje, farmakološko povzročeni učinki;
 - (iv) kemijsko zgradbo snovi, za katero je znano, da povzroča preobčutljivost pri vdihavanju;
- (b) podatke iz enega ali več testov pozitivnega bronhialnega izzivanja s snovjo, izvedenih po priznanih navodilih za določanje reakcije na posamezno preobčutljivost.

3.4.2.1.1.4. Klinična anamneza vključuje zdravstveno in poklicno anamnezo, da se določi odnos med izpostavljenostjo posamezni snovi in razvojem preobčutljivosti pri vdihavanju. Pomembne informacije zajemajo tudi dejavnike, ki poslabšujejo stanje doma in na delovnem mestu, začetek in razvoj bolezni, družinsko anamnezo in zdravstveno anamnezo obravnavanega pacienta. Zdravstvena anamneza vključuje opombe o drugih alergijah in boleznih dihal od otroštva naprej ter morebitne podatke o kajenju.

3.4.2.1.1.5. Rezultati testov pozitivnega bronhialnega izzivanja že sami po sebi dajejo dovolj dokazov za razvrstitev. Vendar se šteje, da je v praksi veliko zgoraj navedenih testov že opravljenih.

3.4.2.1.2. Študije na živalih

3.4.2.1.2.1. Podatki ustreznih študij na živalih ⁽¹⁾, ki lahko kažejo na zmožnost snovi, da povzroča preobčutljivost pri vdihavanju pri človeku ⁽²⁾, lahko vključujejo:

- (i) meritve imunoglobulina E (IgE) in drugih posebnih imunoloških parametrov pri miših;
- (ii) posebne pulmonarne odzive pri morskih prašičkih.

3.4.2.2. Povzročitelji preobčutljivosti kože

3.4.2.2.1. Snovi se razvrstijo kot povzročitelji preobčutljivosti kože (kategorija 1) v skladu s kriteriji iz tabele 3.4.2:

Tabela 3.4.2

Kategorija nevarnosti za povzročitelje preobčutljivosti kože

Kategorija	Kriteriji
Kategorija 1	Snovi se razvrstijo kot povzročitelji preobčutljivosti kože (kategorija 1) v skladu z naslednjimi kriteriji: (i) če obstajajo dokazi pri ljudeh, da lahko snov povzroči preobčutljivost v stiku s kožo pri velikem številu ljudi, ali (ii) če obstajajo pozitivni rezultati ustreznih testov na živalih (glej posebne kriterije v odstavku 3.4.2.2.4.1).

3.4.2.2.2. Posebni preudarki

3.4.2.2.2.1. Za razvrstitev snovi kot povzročitelja preobčutljivosti kože dokazi vključujejo kar koli ali vse od naslednjega:

- (a) pozitivne podatke testa z obliži, običajno opravljeni na več kot eni dermatološki kliniki;
- (b) epidemiološke študije, ki kažejo na alergijski kontaktni dermatitis, ki ga povzroča snov. Natančno je treba preučiti zlasti primere, ko so bili značilni simptomi izraženi pri velikem deležu izpostavljenih oseb, čeprav je bilo število izpostavljenih majhno;
- (c) pozitivne podatke ustreznih študij na živalih;
- (d) pozitivne podatke eksperimentalnih študij pri človeku (glej člen 7.3);
- (e) dobro dokumentirane posamezne primere alergijskega kontaktnega dermatitisa, običajno opravljene na več kot eni dermatološki kliniki.

Uporaba podatkov o ljudeh je obravnavana v odstavkih 1.1.1.3, 1.1.1.4 in 1.1.1.5.

3.4.2.2.2.2. Pozitivni učinki pri ljudeh ali živalih običajno upravičujejo razvrstitev. Dokazi študij na živalih (glej oddelek 3.4.2.2.4) so običajno veliko bolj zanesljivi od dokazov o izpostavljenosti ljudi. Kadar so na voljo dokazi pri ljudeh in živalih ter si rezultati nasprotujejo, pa je treba evalvirati kakovost in zanesljivost dokaza iz obeh virov, da se razreši vprašanje razvrstitve za vsak primer posebej. Običajno se podatki o ljudeh za razvrstitev glede na nevarnost ne pridobivajo z nadzorovanimi testi s prostovoljci, ampak kot del ocene tveganja za potrditev odsotnosti učinkov pri testih na živalih. Zato pozitivni podatki o preobčutljivosti kože pri ljudeh izhajajo iz študij nadzora primera ali drugih manj natančno opredeljenih študij. Podatke o ljudeh je zato treba ocenjevati previdno, ker pogostost primerov kaže, razen inherentnih lastnosti snovi, tudi dejavnike, kot so stanje izpostavljenosti, biološko razpoložljivost, individualno dovzetnost in sprejete preventivne ukrepe. Negativni podatki o ljudeh običajno ne morejo ovreči pozitivnih rezultatov iz študij na živalih.

⁽¹⁾ Zaenkrat niso na voljo nikakršni priznani živalski modeli za testiranje preobčutljivosti pri vdihavanju.

⁽²⁾ Mehanizmi, s katerimi snovi povzročajo simptome astme, še niso v celoti znani. Kot preventivni ukrepi so te snovi obravnavane kot povzročitelji preobčutljivosti dihal. Vendar se ne smejo šteti kot povzročitelji preobčutljivosti dihal, če se lahko dokaže, da te snovi povzročajo simptome astme z draženjem le pri ljudeh z bronhialno hiperreaktivnostjo.

3.4.2.2.2.3. Če ni izpolnjen nobeden od zgoraj omenjenih pogojev, snovi ni treba razvrstiti kot povzročitelja preobčutljivosti kože. Vendar lahko povezava dveh ali več kazalnikov preobčutljivosti kože, ki so navedeni spodaj, spremeni odločitev, ki se presodi za vsak primer posebej.

- (a) posamezni primeri alergijskega kontaktnega dermatitisa;
- (b) epidemiološke študije z omejeno uporabnostjo, npr. pri katerih naključja ali nagnjenost niso bili izločeni z zadostno zanesljivostjo;
- (c) podatki testov na živalih, opravljenih v skladu z obstoječimi navodili, ki ne izpolnjujejo kriterijev za pozitivne rezultate iz odstavka 3.4.2.2.4.1, vendar so dovolj blizu meji, da jih je mogoče šteti kot zadovoljive;
- (d) pozitivni podatki nestandardnih metod;
- (e) pozitivni podatki strukturno podobnih snovi.

3.4.2.2.3. Imunološka kontaktna koprivnica

3.4.2.2.3.1. Nekatere snovi, ki izpolnjujejo kriterije za razvrstitev kot povzročitelji preobčutljivosti dihal, lahko poleg tega povzročajo imunološko kontaktno koprivnico. Obravnavati je treba razvrstitev teh snovi tudi kot povzročitelje preobčutljivosti kože in vključitev informacij v zvezi s kontaktno koprivnico na oznako ali varnostni list tako, da se uporabijo ustrezne varnostne informacije.

3.4.2.2.3.2. Za snovi, ki povzročajo znake imunološke kontaktne koprivnice, vendar ne izpolnjujejo kriterijev za povzročitelja preobčutljivosti kože, je treba preučiti razvrstitev te snovi ali zmesi kot povzročitelja preobčutljivosti kože. Za identifikacijo snovi, ki povzročajo imunološko kontaktno koprivnico, za zdaj ni na voljo priznanega modela za teste na živalih. Zato se take snovi običajno razvrščajo na podlagi dokazov pri ljudeh, podobno kot pri določanju preobčutljivosti za kožo.

3.4.2.2.4. Študije na živalih

3.4.2.2.4.1. Kadar je pri pomožni testni metodi z morskimi prašički za ugotavljanje preobčutljivosti kože preobčutljivostna reakcija vsaj pri 30 % testnih živali, je odziv pozitiven. Pri drugi testni metodi z morskimi prašički se odziv šteje kot pozitiven, če se preobčutljivost pokaže vsaj pri 15 % živali. Uporabijo se testne metode za preobčutljivost kože, opisane v Uredbi (ES) št. 440/2008, sprejete v skladu s členom 13(3) Uredbe (ES) št. 1907/2006 („Uredba o testnih metodah“), ali druge metode, če so ustrezno potrjene in je navedena znanstvena utemeljitev.

3.4.3. **Kriteriji za razvrstitev zmesi**

3.4.3.1. *Razvrstitev zmesi, kadar so na voljo podatki za celotno zmes*

3.4.3.1.1. Kadar so za zmes na voljo zanesljivi in kakovostni dokazi o izkušnjah ljudi ali ustrezne študije s testnimi živalmi, kot je navedeno v kriterijih za snovi, se zmes lahko razvrsti po oceni zanesljivosti dokazov teh podatkov. Pri evalviranju podatkov o zmesih je potrebna previdnost, da zaradi uporabljenega odmerka rezultati ne postanejo nezanesljivi.

3.4.3.2. *Razvrstitev zmesi, kadar ni na voljo podatkov za celotno zmes: premostitvena načela*

3.4.3.2.1. Kadar zmes ni testirana za ugotavljanje povzročanja preobčutljivosti, ampak je za ustrezno opredelitev nevarnosti zmesi dovolj podatkov o posameznih sestavinah in podobnih testiranih zmesih, se ti podatki uporabijo v skladu s premostitvenimi načeli iz oddelka 1.1.3.

3.4.3.3. *Razvrstitev zmesi, kadar so na voljo podatki za vse sestavine ali za le nekatere sestavine zmesi*

3.4.3.3.1. Zmes se razvrsti kot povzročitelj preobčutljivosti dihal ali kože, kadar je vsaj ena sestavina razvrščena kot povzročitelj preobčutljivosti dihal ali kože in je prisotna na ravni ustrezne splošne mejne koncentracije ali nad to ravni, kot je navedeno v tabeli 3.4.3 za trdno snov/tekočino in plin.

3.4.3.3.2. Nekatere snovi, razvrščene kot povzročitelji preobčutljivosti, lahko pri posameznikih, ki so že preobčutljivi na snov ali zmes, izzovejo odziv, tudi kadar so prisotne v zmesi pod koncentracijami iz tabele 3.4.1 (glej opombo 1 k tabeli 3.4.3).

Tabela 3.4.3

Splošne mejne koncentracije sestavin zmesi, razvrščenih kot povzročitelji preobčutljivosti kože ali dihal, pri katerih se razvrsti tudi zmes

Sestavina, razvrščena kot:	Koncentracija, pri kateri se zmes razvrsti v naslednje kategorije:		
	Povzročitelj preobčutljivosti kože	Povzročitelj preobčutljivosti dihal	
	Vsa agregatna stanja	Trdna snov/tekočina	Plin
Povzročitelj preobčutljivosti kože	≥ 0,1 % (Opomba 1)	—	—
	≥ 1,0 % (Opomba 2)	—	—
Povzročitelj preobčutljivosti dihal	—	≥ 0,1 % (Opomba 1)	≥ 0,1 % (Opomba 1)
	—	≥ 1,0 % (Opomba 3)	≥ 0,2 % (Opomba 3)

Opomba 1:

Ta mejna koncentracija se na splošno uporablja za izvajanje posebnih zahtev za označevanje iz oddelka 2.8 Priloge II za zaščito že preobčutljivih posameznikov. Za zmes, ki vsebuje sestavino nad to koncentracijo, se zahteva varnostni list.

Opomba 2:

Pri tej mejni koncentraciji se tudi zmes razvrsti kot povzročitelj preobčutljivosti kože.

Opomba 3:

Pri tej mejni koncentraciji se tudi zmes razvrsti kot povzročitelj preobčutljivosti dihal.

3.4.4. Obvestilo o nevarnosti

- 3.4.4.1. Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 3.4.4

Tabela 3.4.4

Elementi etikete za preobčutljivost dihal ali kože

Razvrstitev	Preobčutljivost dihal	Preobčutljivost kože
	Kategorija 1	Kategorija 1
Piktogrami GHS		
Opozorilna beseda	Nevarno	Pozor
Stavek o nevarnosti	H334: Lahko povzroči simptome alergije ali astme ali težave z dihanjem pri vdihavanju	H317: Lahko povzroči alergijski odziv kože
Previdnostni stavek – preprečevanje	P261 P285	P261 P272 P280

Razvrstitev	Preobčutljivost dihal	Preobčutljivost kože
	Kategorija 1	Kategorija 1
Previdnostni stavek – odziv	P304 + P341 P342 + P311	P302 + P352 P333 + P313 P321 P363
Previdnostni stavek – shranjevanje		
Previdnostni stavek – odstranjevanje	P501	P501

3.5. Mutagenost za zarodne celice

3.5.1. Opredelitev pojmov in splošni preudarki

3.5.1.1. Mutacija je trajna sprememba količine ali strukture genskega materiala v celici. Izraz „mutacija“ se uporablja za dedne genetske spremembe, ki se lahko kažejo v spremembah DNK, kadar so znane (vključno s posebnimi spremembami baznih parov in translokacijami kromosomov), in na iz teh sprememb izvirajoči fenotipski ravni. Izraza „mutageno“ in „mutagenost“ se bosta uporabljala za aktivne snovi, ki povečujejo število mutacij pri populacijah celic in/ali organizmov.

3.5.1.2. Bolj splošna izraza „genotoksičen“ in „genotoksičnost“ se uporabljata za aktivne snovi ali postopke, ki spreminjajo strukturo, vsebino informacij ali ločevanje DNK, vključno s tistimi, ki povzročajo poškodbe DNK z oviranjem običajnih postopkov podvajanja ali ki na nefiziološki način (začasno) spreminjajo podvajanje. Rezultati testov genotoksičnosti se običajno obravnavajo kot kazalniki mutagenih učinkov.

3.5.2. Kriteriji za razvrstitev snovi

3.5.2.1. Razred nevarnosti zadeva predvsem snovi, ki lahko povzročijo mutacije v zarodnih celicah ljudi, ki se lahko prenesejo na potomce. Vendar se rezultati testov mutagenosti ali genotoksičnosti in vitro ter in vivo na somatskih in zarodnih celicah sesalcev upoštevajo pri razvrstitvi snovi in zmesi v ta razred nevarnosti.

3.5.2.2. Za razvrstitev glede na mutagenost za zarodne celice se snovi uvrstijo v eno od dveh kategorij, kot kaže tabela 3.5.1.

Tabela 3.5.1

Kategorije nevarnosti za mutagene snovi zarodnih celic

Kategorije	Kriteriji
KATEGORIJA 1:	Snovi, ki povzročajo dedne mutacije ali se obravnavajo kot povzročitelji dednih mutacij v zarodnih celicah ljudi. Snovi, ki povzročajo dedne mutacije v zarodnih celicah ljudi.
Kategorija 1A:	Razvrstitev v kategorijo 1A temelji na pozitivnem dokazu epidemioloških študij na ljudeh. Snovi, ki se obravnavajo kot povzročitelji dednih mutacij v zarodnih celicah ljudi.

Kategorije	Kriteriji
Kategorija 1B:	Razvrstitev v kategorijo 1B temelji na: — pozitivnih rezultatih testov mutagenosti dednih zarodnih celic na sesalcih in vivo ali — pozitivnih rezultatih testov mutagenosti somatskih celic na sesalcih in vivo v povezavi z nekaterimi dokazi, da lahko snov povzroči mutacije zarodnih celic. Ti podporni dokazi lahko izhajajo iz testov mutagenosti/genotoksičnosti zarodnih celic in vivo ali s prikazom zmožnosti snovi ali njenega(-ih) metabolita(-ov), da medsebojno vpliva(-jo) na genski material zarodnih celic ali — pozitivni rezultati testov, ki kažejo mutagene učinke v zarodnih celicah ljudi, brez prikaza prenosa na potomce; na primer pogostejša aneuploidija v moških spolnih celicah izpostavljenih oseb.
KATEGORIJA 2:	Snovi, ki vzbujajo skrb zaradi morebitnega povzročanja dednih mutacij v zarodnih celicah ljudi. Razvrstitev v kategorijo 2 temelji na: — pozitivnih dokazih testov na sesalcih in/ali v nekaterih primerih poskusov in vitro: — testov mutagenosti somatskih celic na sesalcih in vivo ali — drugih testov genotoksičnosti somatskih celic in vivo, ki jih podpirajo pozitivni rezultati testov mutagenosti in vitro. Opomba: Snovi, ki so pozitivne pri testih mutagenosti na sesalcih in vitro in ki kažejo tudi kemijsko razmerje med strukturo in aktivnostjo za znane mutagene snovi zarodnih celic, se obravnavajo pri razvrstitvi kot mutagene snovi kategorije 2.

3.5.2.3. *Posebni preudarki pri razvrstitvi snovi kot mutagenih snovi za zarodne celice*

3.5.2.3.1. Za razvrstitev se obravnavajo rezultati testov, ki določajo mutagene in/ali genotoksične učinke v zarodnih in/ali somatskih celicah izpostavljenih živali. Obravnavajo se tudi mutageni in/ali genotoksični učinki, ugotovljeni pri testih in vitro.

3.5.2.3.2. Sistem temelji na nevarnosti in razvršča snovi na podlagi njihove inherentne zmožnosti za povzročanje mutacij v zarodnih celicah. Zato sistem ni namenjen (kvantitativni) oceni tveganja snovi.

3.5.2.3.3. Razvrstitev glede na dedne učinke v zarodnih celicah ljudi se izvede na podlagi dobro opravljenih, ustrezno potrjenih testov, če je mogoče v skladu z Uredbo (ES) št. 440/2008 sprejeto v skladu s členom 13(3) Uredbe (ES) št. 1907/2006 (Uredba o testnih metodah), kot so testi naštet v nadaljevanju. Evalviranje rezultatov testa se izvede s strokovno presojo, za razvrstitev pa se preuči zanesljivost vseh dokazov, ki so na voljo.

3.5.2.3.4. Testi mutagenosti dednih zarodnih celic *in vivo* kot sta:

— Test dominantne smrtna mutacije pri glodavcih

— Test dedne translokacije pri miših

3.5.2.3.5. Testi mutagenosti somatskih celic *in vivo* kot so:

— Test kromosomskih aberacij v kostnem mozgu sesalcev

— Naključni test na miših

— Test mikronukleusov v eritrocitih sesalcev

3.5.2.3.6. Testi mutagenosti/genotoksičnosti zarodnih celic kot so:

(a) Testi mutagenosti:

— Test kromosomskih aberacij v spermatogonijih sesalcev

— Test sprematidnih mikrojeder

(b) Testi genotoksičnosti:

- Analiza izmenjave med sestrinskima kromatidama spermatogonijev
- Nenačrtna sinteza DNK (UDS) v celicah testisov

3.5.2.3.7. Testi genotoksičnosti v somatskih zarodnih celicah kot so:

- Nenačrtna sinteza DNK (UDS) jeter in vivo
- Izmenjava med sestrinskima kromatidama v kostnem mozgu sesalcev

3.5.2.3.8. Testi mutagenosti in vitro:

- Test kromosomskih aberacij sesalcev in vitro
- Test genskih mutacij v celicah sesalcev in vitro
- Testi bakterijskih povratnih mutacij

3.5.2.3.9. Razvrstitev posameznih snovi temelji na določitvi zanesljivosti vseh dostopnih dokazov, ob uporabi strokovne presoje (glej 1.1.1). Za razvrstitev se lahko uporabi tudi samo en dobro opravljen test, vendar le kadar zagotavlja jasne in nedvoumne pozitivne rezultate. Če se pojavijo novi, ustrezno potrjeni testi, jih uporabimo skupaj z drugimi dokazi. Upošteva se tudi pomen uporabljenega načina izpostavljenosti v študiji o snovi v primerjavi z načinom izpostavljenosti ljudi.

3.5.3. **Kriteriji za razvrstitev zmesi**

3.5.3.1. Razvrstitev zmesi, kadar so na voljo podatki za vse sestavine ali za le nekatere sestavine zmesi

3.5.3.1.1. Snov se razvrsti kot mutagena, kadar je vsaj ena sestavina razvrščena kot mutagena snov kategorije 1A, kategorije 1B ali kategorije 2 in je prisotna na ravni ustrezne splošne mejne koncentracije ali nad njo, kot je navedeno v tabeli 3.5.2 za ustrezno kategorijo 1A, kategorijo 1B in kategorijo 2.

Tabela 3.5.2

Splošne mejne koncentracije sestavin zmesi, razvrščenih kot mutagenih snovi v zarodnih celicah, pri katerih se razvrsti tudi zmes.

Sestavina, razvrščena kot:	Mejna koncentracija, pri kateri se zmes razvrsti v naslednje kategorije:		
	Mutagena snov kategorije 1A	Mutagena snov kategorije 1B	Mutagena snov kategorije 2
Mutagena snov kategorije 1A	≥ 0,1 %	—	—
Mutagena snov kategorije 1B	—	≥ 0,1 %	—
Mutagena snov kategorije 2	—	—	≥ 1,0 %

Opomba:

Mejne koncentracije v zgornji tabeli se uporabljajo za trdne snovi in tekočine (po masnem deležu) in tudi za pline (po volumskem deležu).

3.5.3.2. Razvrstitev zmesi, kadar so na voljo podatki za celotno zmes.

3.5.3.2.1. Razvrstitev zmesi se opravi na podlagi dostopnih testnih podatkov za ciljne sestavine zmesi ob uporabi mejnih koncentracij za sestavine, razvrščene kot mutagene snovi zarodnih celic. Podatki testov za zmesi se lahko uporabijo pri razvrstitvah za vsak primer posebej, kadar se pokažejo učinki, ki niso bili izpeljani iz ocene na podlagi posameznih sestavin. V takšnih primerih morajo biti rezultati o testih za celotno zmes povsem nedvoumni, pri čemer se upoštevajo odmerki in drugi dejavniki, kot so trajanje, opazovanja, občutljivost in statistična analiza testnih sistemov za mutagenost za zarodne celice. Ustrezna dokumentacija, ki spremlja razvrstitev, se hrani in da na voljo za pregled na zahtevo.

3.5.3.3. *Razvrstitev zmesi, kadar ni na voljo podatkov za celotno zmes: premostitvena načela*

3.5.3.3.1. Kadar zmes ni testirana zaradi ugotavljanja nevarnosti mutagenosti zarodnih celic, ampak je za ustrezno opredelitev nevarnosti zmesi na voljo dovolj podatkov o posameznih sestavinah in podobnih testiranih zmesih (ob upoštevanju odstavka 3.5.3.2.1), se ti podatki uporabijo v skladu z ustreznimi premostitvenimi načeli iz oddelka 1.1.3.

3.5.4. **Obvestilo o nevarnosti**

3.5.4.1. Elementi etikete se uporabljajo v skladu s tabelo 3.5.3 za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti.

Tabela 3.5.3

Elementi etikete za mutagenost za zarodne celice

Razvrstitev	Kategorija 1A ali kategorija 1B	Kategorija 2
Piktogrami GHS		
Opozorilna beseda	Nevarno	Pozor
Stavek o nevarnosti	H340: Lahko povzroči genetske okvare (navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti)	H341: Sum povzročitve genetskih okvar (navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti)
Previdnostni stavek – preprečevanje	P201 P202 P281	P201 P202 P281
Previdnostni stavek – odziv	P308 + P313	P308 + P313
Previdnostni stavek – shranjevanje	P405	P405
Previdnostni stavek – odstranjevanje	P501	P501

3.5.5. **Dodatni preudarki pri razvrstitvi**

Vedno bolj se sprejema dejstvo, da proces kemijsko inducirane tumorigeneze pri človeku in živalih zajema genetske spremembe, na primer v protoonkogenih in/ali genih, zaviralcih rasti tumorjev v somatskih celicah. Zato ima prikaz mutagenih lastnosti snovi v somatskih in/ali zarodnih celicah sesalcev in vivo posledice za možno klasifikacijo teh snovi kot rakotvornih (glej tudi Rakotvornost, oddelek 3.6, odstavek 3.6.2.2.6).

3.6. **Rakotvornost**

3.6.1. **Opredelitev pojmov**

3.6.1.1. Rakotvorna snov je snov ali zmes snovi, ki povzroča raka ali povečuje njegovo pojavnost. Snovi, ki so povzročile benigne in maligne tumorje pri dobro opravljenih eksperimentalnih študijah na živalih, se obravnavajo kot snovi, za katere se domneva ali sumi, da so rakotvorne snovi za ljudi, razen če obstajajo trdni dokazi, da mehanizem tvorjenja tumorja ni povezan z ljudmi.

3.6.2. **Kriteriji za razvrstitev snovi**

3.6.2.1. Zaradi razvrščanja glede na rakotvornost se snovi uvrstijo v eno od dveh kategorij na podlagi trdnosti dokazov in dodatnih preudarkih (zanesljivost dokazov). V nekaterih primerih se lahko odobri razvrstitev na podlagi načina izpostavljenosti, če obstajajo trdni dokazi, da noben drug način izpostavljenosti ne povzroča nevarnosti.

Tabela 3.6.1

Kategorije nevarnosti za rakotvorne snovi

Kategorije	Kriteriji
KATEGORIJA 1:	Snovi, za katere je znano ali se domneva, da so rakotvorne za ljudi Snov se razvrsti v kategorijo 1 glede na rakotvornost na podlagi epidemioloških podatkov in/ali podatkov o živalih. Snov se lahko dodatno loči kot kategorija 1A, kamor spadajo snovi, za katere je znano, da imajo zmožnost za rakotvornost za ljudi, večinoma na podlagi dokazov pri ljudeh ali kot
Kategorija 1A: Kategorija 1B:	Kategorija 1B, Snovi, za katere se domneva, da imajo zmožnost za rakotvornost za ljudi; opredelitev v veliki meri temelji na dokazih pri živalih. Razvrstitev v kategorijo 1A in 1B temelji na trdnosti dokazov in dodatnih preudarkih (glej oddelek 3.6.2.2). Takšni dokazi lahko izhajajo iz: — študij na ljudeh, ki vzpostavljajo vzročni odnos med izpostavljenostjo ljudi snovi in razvojem raka (znana rakotvorna snov za ljudi) ali — testov na živalih, za katere je dovolj ⁽¹⁾ dokazov za ugotovitev rakotvornosti za živali (domnevno rakotvorna snov za ljudi) Poleg tega se lahko na podlagi znanstvene presoje za vsak primer posebej odloči o domnevni rakotvornosti za ljudi, kadar se izhaja iz študij, ki katerih rezultat so omejeni dokazi o rakotvornosti za ljudi v povezavi z omejenimi dokazi o rakotvornosti pri testnih živalih.
KATEGORIJA 2:	Snovi, pri katerih obstaja sum rakotvornosti za ljudi Uvrstitev snovi v kategorijo 2 temelji na dokazih iz študij na ljudeh in/ali živalih, ki pa niso dovolj prepričljivi za uvrstitev snovi v kategorijo 1A ali 1B na podlagi zanesljivosti dokazov skupaj z dodatnimi preudarki (glej oddelek 3.6.2.2). Takšni dokazi lahko izhajajo iz omejenih ⁽¹⁾ dokazov rakotvornosti v študijah na ljudeh ali omejenih dokazov rakotvornosti v študijah na živalih.

⁽¹⁾ Opomba: Glej 3.6.2.2.4.

3.6.2.2. Posebni preudarki pri razvrstitvi snovi kot rakotvornih

3.6.2.2.1. Razvrstitev snovi kot rakotvorne temelji na dokazu iz zanesljivih in sprejetih študij ter se uporabi pri snoveh, ki imajo inherentno lastnost povzročitve raka. Ocene temeljijo na vseh obstoječih podatkih, strokovno pregledanih objavljenih študijah in dodatnih priznanih podatkih.

3.6.2.2.2. Razvrstitev snovi kot rakotvorne je postopek, ki vsebuje dve medsebojno povezani ugotovitvi: oceno o zanesljivosti dokazov in obravnavanje vseh drugih ustreznih informacij za uvrstitev snovi z zmožnostjo povzročanja raka pri ljudeh v kategorije nevarnosti.

3.6.2.2.3. Presoja zanesljivosti dokazov vključuje navedbo števila tumorjev iz študij na ljudeh in živalih ter določitev njihove ravni statistično pomembnosti. Zadostni dokazi pri ljudeh kažejo vzročnost med izpostavljenostjo ljudi in razvojem raka, medtem ko zadostni dokazi pri živalih kažejo vzročni odnos med snovjo in povečano pojavnostjo tumorjev. Na omejene dokaze pri ljudeh kaže pozitivna povezava med izpostavljenostjo in rakom, vendar vzročnega odnosa ni mogoče potrditi. Omejeni dokazi pri živalih so dani, kadar podatki kažejo rakotvorne učinke, vendar jih ni dovolj. Uporabljena sta izraza „zadosten“ in „omejen“ kot ju je opredelila Mednarodna agencija za raziskavo raka (IARC) in pomenita:

(a) Rakotvornost pri ljudeh

Dokazi o rakotvornosti iz študij na ljudeh se razvrstijo v eno od naslednjih kategorij:

- zadosten dokaz o rakotvornosti: ugotovljen je vzročni odnos med izpostavljenostjo aktivni snovi in rakom pri ljudeh. To pomeni, da je bil ugotovljen pozitiven odnos med izpostavljenostjo in rakom v študijah, kjer lahko naključje, pristranskost in zavajajoče dejavnike izločimo s primerno stopnjo verjetnosti;

- omejen dokaz o rakotvornosti: Ugotovljena je bila pozitivna povezava med izpostavljenostjo aktivni snovi in rakom; verjeten je vzročen odnos, vendar ne moremo z zadostno gotovostjo izključiti naključja, pristranskosti in zavajajočih dejavnikov.

(b) Rakotvornost pri testnih živalih

Rakotvornost pri testnih živalih lahko ocenimo s klasičnimi biološkimi testi, ki vključujejo gensko spremenjene živali, in drugimi in vivo biološkimi testi, ki se osredotočajo na eno ali več kritičnih stopenj rakotvornosti. V primeru odsotnosti podatkov iz klasičnih dolgoročnih bioloških testov ali iz testov na vseh stopnjah razvoja novotvorb, je treba sistematično pozitivne rezultate v več modelih, ki obravnavajo več stopenj v večstopenjskem procesu rakotvornosti, upoštevati pri oceni stopnje dokazov o rakotvornosti pri testnih živalih. Dokazi o rakotvornosti pri testnih živalih se razvrstijo v eno od naslednjih kategorij:

- zadosten dokaz o rakotvornosti: ugotovljena je bila vzročna zveza med aktivno snovjo in povečano pojavnostjo malignih neoplazem ali ustrezno kombinacijo benignih in malignih neoplazem (a) pri dveh ali več živalskih vrstah ali (b) v dveh ali več neodvisnih študijah, ki so bile izvedene ob različnem času ali v različnih laboratorijih ali pod različnimi protokoli. Tudi povečana pojavnost tumorjev pri obeh spolih ene vrste v dobro izvedeni študiji, v idealnem primeru v skladu z dobro laboratorijsko prakso, lahko zagotovi zadostne dokaze. Ena sama študija pri eni vrsti in spolu lahko zagotovi zadostne dokaze o rakotvornosti, če se maligne neoplazme pojavijo v neobičajnem številu, na neobičajnem kraju, v neobičajnih oblikah tumorjev ali pri neobičajni starosti nastanka ali kadar se tumor pojavi v velikem obsegu na številnih mestih;
- omejen dokaz o rakotvornosti: podatki kažejo rakotvoren učinek, a jih je premalo za dokončno oceno, na primer ker (a) so dokazi o rakotvornosti omejeni na en sam test; (b) obstajajo nerazrešena vprašanja glede ustreznosti oblike, izvajanja ali razlage študij; (c) aktivna snov poveča pojavnost zgolj benignih neoplazem ali poškodb z določenim neoplastičnim potencialom; ali (d) je dokaz o rakotvornosti omejen na študije, ki kažejo napredujočo dejavnost le v nekaterih tkivih ali organih.

3.6.2.2.4. Dodatni preudarki [kot del določitve zanesljivosti dokazov (glej 1.1.1)]. Razen določanja trdnosti dokazov glede rakotvornosti je treba obravnavati veliko drugih dejavnikov, ki vplivajo na verjetnost, da snov pomeni nevarnost povzročanja rakotvornosti pri ljudeh. Celoten seznam dejavnikov, ki vplivajo na to določanje, bi bil zelo dolg, vendar so nekateri pomembnejši dejavniki obravnavani tukaj.

3.6.2.2.5. Ti dejavniki lahko povečujejo ali zmanjšujejo sum rakotvornosti pri ljudeh. Relativna teža vsakega dejavnika je odvisna od količine in prepričljivosti posameznih dokazov. Na splošno so za zmanjšanje suma potrebne bolj popolne informacije kot za povečanje. Kadar se ugotovitve o nastanku tumorjev ocenjujejo za vsak primer posebej, je treba uporabiti še dodatne preudarke in druge dejavnike.

3.6.2.2.6. Pri ocenjevanju stopnje zaskrbljenosti zaradi suma rakotvornosti se lahko upoštevajo naslednji pomembni dejavniki:

- (a) vrsta tumorja in ozadje primera;
- (b) odzivi z več lokacij;
- (c) napredovanje poškodb k malignosti;
- (d) zmanjšana latenca tumorja.
- (e) ali so odzivi pri enem ali obeh spolih;
- (f) ali so odzivi pri eni ali več vrstah;

- (g) obstoj strukturne podobnosti s snovjo, za katero obstajajo dokazi rakotvornosti;
- (h) načini izpostavljenosti;
- (i) primerjava absorpcije, porazdelitve, metabolizma in izločanja med testi na živalih in ljudeh;
- (j) možnost zavajajočih učinkov čezmerne strupenosti pri testnih odmerkih;
- (k) način delovanja in njegov pomen za ljudi, kot so citotoksičnost s spodbujanjem rasti, mitogeneza, imunosupresija, mutagenost.

Mutagenost: v celotnem postopku razvoja raka so genski pojavi nesporno najpomembnejši. Zato lahko dokazi o mutageni dejavnosti in vivo kažejo na to, da ima snov zmožnost za rakotvorne učinke.

3.6.2.2.7. Snov, ki ni testirana glede na rakotvornost, se lahko v nekaterih primerih razvrsti v kategorijo 1A, kategorijo 1B ali kategorijo 2 na podlagi podatkov o tumorju iz strukturno podobne snovi, skupaj z bistveno podporo obravnave drugih pomembnih dejavnikov, kot so oblikovanje skupnega pomembnega metabolita, npr. za barvila, ki so kemijsko sorodna benzidinu.

3.6.2.2.8. Pri razvrstitvi se upošteva, ali se snov na naveden(-e) način(-e) absorbira ali ne; ali obstajajo le lokalni tumorji na mestu vnosa za testirane načine in ali ustrezno testiranje z drugimi pomembnimi načini ne pokaže rakotvornosti.

3.6.2.2.9. Pomembno je, da se pri razvrščanju upošteva vse, kar je znano o fizikalno-kemijskih, toksikokinetičnih in toksikodinamičnih lastnostih snovi ter vse pomembne informacije, ki so na voljo o podobnih kemijskih snoveh, tj. razmerje med strukturo in aktivnostjo.

3.6.3. **Kriteriji za razvrstitev zmesi**

3.6.3.1. Razvrstitev zmesi, kadar so na voljo podatki za vse sestavine ali za le nekatere sestavine zmesi.

3.6.3.1.1. Zmes se razvrsti kot rakotvorna, kadar je vsaj ena sestavina razvrščena kot rakotvorna snov kategorije 1A, kategorije 1B ali kategorije 2 in je prisotna na ravni ustrezne splošne mejne koncentracije ali nad njo, kot je navedeno v tabeli 3.6.2 za ustrezno kategorijo 1A, kategorijo 1B in kategorijo 2.

Tabela 3.6.2

Splošne mejne koncentracije sestavin zmesi, razvrščenih kot kancerogenih, pri katerih se razvrsti tudi zmes.

Sestavina, razvrščena kot:	Splošna mejna koncentracija, pri kateri se zmes razvrsti v naslednje kategorije:		
	Rakotvorna snov kategorije 1A	Rakotvorna snov kategorije 1B	Rakotvorna snov kategorije 2
Rakotvorna snov kategorije 1A	≥ 0,1 %	—	—
Rakotvorna snov kategorije 1B	—	≥ 0,1 %	—
Rakotvorna snov kategorije 2	—	—	≥ 1,0 % [opomba 1]

Opomba:

Mejne koncentracije v zgornji tabeli se uporabljajo za trdne snovi in tekočine (po masnem deležu) in tudi za pline (po volumskem deležu).

Opomba 1:

Če je v zmesi prisotna rakotvorna snov kategorije 2 kot sestavina s koncentracijo ≥ 0,1 %, je za zmes na zahtevo na voljo varnostni list (SDS).

3.6.3.2. Razvrstitev zmesi, kadar so na voljo podatki za celotno zmes

3.6.3.2.1. Razvrstitev zmesi se opravi na podlagi dostopnih testnih podatkov za posamezne sestavine zmesi ob uporabi mejnih koncentracij, opredeljenih kot rakotvornih. Podatki testov za zmesi se lahko uporabijo pri razvrstitvah za vsak primer posebej, kadar se pokažejo učinki, ki niso bili izpeljani iz ocene na podlagi posameznih sestavin. V takšnih primerih morajo biti rezultati o testih za celotno zmes povsem nedvoumni, pri čemer se upoštevajo odmerki in drugi dejavniki, kot so trajanje, opažanja, občutljivost in statistična analiza testnih sistemov za rakotvornost. Ustrezna dokumentacija, ki spremlja razvrstitev, se hrani in da na voljo za pregled na zahtevo.

3.6.3.3. Razvrstitev zmesi, kadar podatki za celotno zmes niso na voljo: premostitvena načela

3.6.3.3.1. Kadar zmes ni testirana za določanje nevarnosti za rakotvornost, ampak je za ustrezno opredelitev nevarnosti zmesi na voljo dovolj podatkov o posameznih sestavinah in podobnih testiranih zmesih (ob upoštevanju odstavka 3.6.3.2.1), se ti podatki uporabijo v skladu z ustreznimi premostitvenimi načeli iz oddelka 1.1.3.

3.6.4. Obvestilo o nevarnosti

3.6.4.1. Elementi etikete se v skladu s tabelo 3.6.3 uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti.

Tabela 3.6.3

Elementi etikete za rakotvornost

Razvrstitev	Kategorija 1A ali kategorija 1B	Kategorija 2
Piktogrami GHS		
Opozorilna beseda	Nevarno	Pozor
Stavek o nevarnosti	H350: Lahko povzroči raka (navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti)	H351: Sum povzročitve raka (navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti)
Previdnostni stavek – preprečevanje	P201 P202 P281	P201 P202 P281
Previdnostni stavek – odziv	P308 + P313	P308 + P313
Previdnostni stavek – shranjevanje	P405	P405
Previdnostni stavek – odstranjevanje	P501	P501

3.7. Strupenost za razmnoževanje

3.7.1. Opredelitve pojmov in splošni preudarki

3.7.1.1. Strupenost za razmnoževanje vključuje škodljive učinke na spolno delovanje in plodnost pri odraslih moških in ženskah ter strupenost za razvoj pri potomcih. Spodnje opredelitve so prilagojene dogovorjenim delovnim opredelitvam iz dokumenta št. 225 Mednarodnega programa za kemijsko varnost, zdravstveni kriteriji za okolje (IPCS/EHC), Načela ocenjevanja zdravstvenih tveganj za razmnoževanje, povezano z izpostavljanjem kemikalijam (Principles for Evaluating Health Risks to Reproduction Associated with Exposure to Chemicals). Za razvrstitev se znana povzročitev genetskih dednih učinkov pri potomcih obravnava v oddelku 3.5 Mutagenost za zarodne celice, ker je v tem sistemu razvrstitve bolj primerno obravnavati takšne učinke v ločenem razredu nevarnosti glede na mutagenost za zarodne celice.

V tem sistemu razvrstitve je strupenost za razmnoževanje razdeljena v dve glavni poglavji:

- (a) škodljivi učinki na spolno delovanje in plodnost;
- (b) škodljivi učinki na razvoj potomcev.

Nekateri strupeni učinki za razmnoževanje se ne morejo točno določiti kot škodljivost za spolno delovanje in plodnost ali strupenost za razvoj. Kljub temu se snovi s temi učinki ali zmesi, ki jih vsebujejo, razvrstijo kot strupene snovi za razmnoževanje.

3.7.1.2. Zaradi sistema razvrstitve se razred nevarnosti strupenost za razmnoževanje deli na:

- škodljive učinke
 - na spolno delovanje in plodnost ali
 - razvoj;
- učinke na dojenje ali prek dojenja.

3.7.1.3 *Škodljivi učinki na spolno delovanje in plodnost*

Vsi učinki snovi, ki ima zmožnost ovirati spolno delovanje in plodnost. To vključuje med drugim spremembe ženskega in moškega sistema za razmnoževanje, škodljive učinke na pojav pubertete, na nastanek in prenos gamete, na pravičen cikel razmnoževanja, na spolno vedenje, plodnost, porod, rezultate nosečnosti, prezgodnjo reproduktivno senescenco ter spremembe drugih funkcij, ki so odvisne od celovitosti sistema za razmnoževanje.

3.7.1.4 *Škodljivi učinki na razvoj potomcev*

Strupenost za razvoj v najširšem pomenu vključuje vse učinke, ki ovirajo normalen razvoj plodu pred rojstvom ali po njem in so posledica izpostavljenosti katerega koli od staršev pred spočetjem ali izpostavljenosti razvijajočega potomca v obdobju pred rojstvom ali po njem do spolnega dozorevanja. Kljub temu je razvrstitev pod naslovom strupenosti za razvoj namenjena predvsem opozarjanju o nevarnosti za nosečnice ter moške in ženske s sposobnostjo razmnoževanja. Zaradi pragmatičnih razlogov razvrstitve zato strupenost za razvoj pomeni predvsem škodljive učinke, povzročene med nosečnostjo ali zaradi izpostavljenosti staršev. Ti učinki se lahko pokažejo kadar koli v življenjski dobi organizma. Glavni pokazatelji strupenosti za razvoj vključujejo (1) smrt organizma v razvoju, (2) anomalije strukture, (3) spremenjeno rast in (4) nezadostno delovanje.

3.7.1.5. V strupenost za razmnoževanje so vključeni tudi škodljivi učinki na dojenje ali prek dojenja, vendar so zaradi sistema razvrstitve takšni učinki obravnavani posebej (glej tabelo 3.7.1(b)). Razlog za to je želja, da se omogoči razvrstitev snovi posebej za škodljivi učinek na dojenje, kar omogoča posebno opozorilo o nevarnosti tega učinka za doječe matere.

3.7.2. **Kriteriji za razvrstitev snovi**

3.7.2.1. *Kategorije nevarnosti*

3.7.2.1.1. Za razvrstitev strupenosti za razmnoževanje se snovi uvrstijo v eno od dveh kategorij. V vsaki kategoriji se učinki na spolno delovanje in plodnost ter razvoj obravnavajo ločeno. Poleg tega so učinki na dojenje uvrščeni v posebno kategorijo nevarnosti.

Tabela 3.7.1 (a)

Kategorije nevarnosti za strupene snovi za razmnoževanje

Kategorije	Kriteriji
KATEGORIJA 1	Snovi, za katere je znano ali se domneva, da so strupene za razmnoževanje za ljudi Snovi so razvrščene v kategorijo 1 glede na strupenost za razmnoževanje, kadar je znano, da povzročajo škodljive učinke na spolno delovanje in plodnost ali na razvoj ljudi ali kadar obstajajo dokazi študij na živalih, ki so, če je mogoče, dopolnjeni z drugimi informacijami, na podlagi katerih se močno domneva, da lahko snov ovira razmnoževanje pri ljudeh. Razvrstitev snovi se dodatno loči glede na to, ali dokazi za razvrstitev temeljijo predvsem na podatkih o ljudeh (kategorija 1A) ali živalih (kategorija 1B).
Kategorija 1A	Snovi, za katere je znano, da so strupene za razmnoževanje za ljudi Razvrstitev snovi v kategorijo 1A večinoma temelji na dokazih pri ljudeh.
Kategorija 1B	Snovi, za katere se domneva, da so strupene za razmnoževanje za ljudi Razvrstitev snovi v kategorijo 1B večinoma temelji na podatkih iz študij na živalih. Takšni podatki so jasen dokaz škodljivega učinka na spolno delovanje in plodnost ali na razvoj v odsotnosti drugih strupenih učinkov ali pa se škodljivi učinek na razmnoževanje, če se pojavi skupaj z drugimi strupenimi učinki, ne šteje za sekundarno splošno posledico drugih strupenih učinkov. Kadar obstajajo informacije o mehanizmih, ki povzročajo dvom o pomembnosti učinka na ljudi, pa je primernejša razvrstitev v kategorijo 2.
KATEGORIJA 2	Snovi, pri katerih obstaja sum, da so strupene za razmnoževanje za ljudi Snovi so razvrščene v kategorijo 2 glede na strupenost za razmnoževanje, kadar obstajajo dokazi pri ljudeh ali testnih živalih, ki so, če je mogoče, dopolnjeni z drugimi informacijami, o škodljivem učinku na spolno delovanje in plodnost ali na razvoj in kadar dokazi niso dovolj prepričljivi za uvrstitev snovi v kategorijo 1. Zaradi pomanjkljivosti študije je lahko kakovost dokazov manj prepričljiva, zato je primernejša razvrstitev v kategorijo 2. Takšni učinki morajo biti opaženi, kadar ni drugih strupenih učinkov ali pa se škodljivi učinek na razmnoževanje, če se pojavi skupaj z drugimi strupenimi učinki, ne šteje za drugotno splošno posledico drugih strupenih učinkov.

Tabela 3.7.1 (b)

Kategorija nevarnosti za učinke na dojenje

UČINKI NA DOJENJE ALI PREK DOJENJA
Učinki na dojenje ali prek dojenja so uvrščeni v posebno kategorijo nevarnosti. Znano je, da za veliko snovi ni informacij o zmožnosti povzročanja škodljivih učinkov na potomce prek dojenja. Snovi, ki jih telo absorbira in za katere je znano, da ovirajo dojenje, ali ki so lahko v materinem mleku (vključno z metaboliti) v zadostnih količinah, da bi lahko ogrozile zdravje dojenega otroka, se uvrstijo in označijo tako, da je navedena ta nevarna lastnost za dojene dojenčke. Razvrstitev se lahko določi glede na: (a) dokaze pri ljudeh, ki kažejo na nevarnost za dojenčke v obdobju dojenja; in/ali (b) rezultate ene ali dveh generacijskih raziskav na živalih, ki dajejo jasne dokaze o škodljivem učinku na potomce zaradi prenosa v mleku ali škodljivem učinku na kakovost mleka; in/ali (c) študije o absorpciji, metabolizmu, distribuciji in izločanju, ki pokažejo verjetnost, da je snov v materinem mleku prisotna v količinah, ki je lahko strupena.

3.7.2.2. Podlaga za razvrstitev

- 3.7.2.2.1. Razvrstitev temelji na podlagi zgoraj opisanih ustreznih kriterijev in ocene zanesljivosti vseh dokazov (glej 1.1.1). Razvrstitev kot strupena snov za razmnoževanje je namenjena snovem, ki imajo posebno inherentno lastnost, da povzročajo škodljiv učinek na razmnoževanje, zato se v to skupino ne razvrstijo snovi, če je takšen učinek le splošna drugotna posledica drugih strupenih učinkov.

Razvrstitev snovi temelji na kategorijah nevarnosti po naslednji prednostni razvrstitvi: kategorija 1A, kategorija 1B, kategorija 2 in dodatna kategorija za učinke na dojenje ali prek dojenja. Če snov izpolnjuje kriterije za uvrstitev v obe od glavnih kategorij (na primer v kategorijo 1B za učinke na spolno delovanje in plodnost ter tudi v kategorijo 2 na razvoj), se navedeta obe razločevanji za nevarnosti z izjavo o nevarnosti. Razvrstitev v dodatno kategorijo za učinke na dojenje ali prek dojenja se opravi ne glede na razvrstitev v kategorijo 1A, kategorijo 1B ali kategorijo 2.

- 3.7.2.2.2. Pri evalvaciji strupenih učinkov na potomce v razvoju je pomembno upoštevati možen vpliv strupenosti pri materi (glej oddelek 3.7.2.4).
- 3.7.2.2.3. Da bi bili dokazi pri ljudeh glavna podlaga za razvrstitev v kategorijo 1A, morajo obstajati zanesljivi dokazi o škodljivem učinku na razmnoževanje ljudi. Dokazi, uporabljeni za razvrstitev, so v idealnem primeru iz dobro opravljenih epidemioloških študij, ki vključujejo uporabo ustreznega nadzora, uravnoteženih ocen in primerne preučevanja pristranskih ali zavajajočih dejavnikov. Manj natančni podatki iz študij na živalih se dopolnijo z ustreznimi podatki iz študij na testnih živalih, upošteva pa se razvrstitev v kategorijo 1B.
- 3.7.2.3. *Zanesljivost dokazov*
- 3.7.2.3.1. Snov se razvrsti kot strupena za razmnoževanje na podlagi ocene zanesljivosti vseh dokazov, glej oddelek 1.1.1. To pomeni, da se vse razpoložljive informacije v zvezi z določanjem strupenosti za razmnoževanje obravnavajo skupaj, kot so epidemiološke študije in poročila o primerih pri ljudeh ter posebne študije o razmnoževanju, skupaj z rezultati subkroničnih, kroničnih in posebnih študij na živalih, ki dajejo pomembne informacije v zvezi s strupenostjo za organe za razmnoževanje in povezane endokrine organe. Lahko se vključi tudi ocenjevanje snovi, ki so kemijsko sorodne snovi iz študije, zlasti kadar je malo informacij o snovi. Na zanesljivost razpoložljivih dokazov vplivajo dejavniki, kot so kakovost študij, konsistentnost rezultatov, vrsta in resnost učinkov, strupenost pri materi pri študijah s testi na živalih, raven statistične značilnosti za razlike v skupini, število prizadetih končnih točk, pomen načina vnosa za ljudi in nepristranskost. Pri določitvi zanesljivosti dokazov se skupaj zberejo vsi pozitivni in negativni rezultati. Če ena pozitivna študija, opravljena v skladu z dobrimi znanstvenimi načeli in statistično ali biološko pomembnimi pozitivnimi rezultati, lahko upraviči razvrstitev (glej tudi 3.7.2.2.3).
- 3.7.2.3.2. Toksikokinetične študije na živalih in ljudeh, rezultati študije v zvezi z mestom delovanja in mehanizmom ali načinom delovanja lahko dajo pomembne informacije, ki zmanjšajo ali povečajo sum nevarnosti za zdravje ljudi. Če se prepričljivo potrdi, da jasno opredeljen mehanizem ali način delovanja ni pomemben za ljudi, ali kadar so toksikokinetične razlike tako izrazite, da je gotovo, da se nevarna lastnost ne bo izrazila pri ljudeh, potem se snov, ki povzroča škodljiv učinek na razmnoževanje pri testnih živalih, ne razvrsti.
- 3.7.2.3.3. Če so v nekaterih študijah o strupenosti za razmnoževanje na testnih živalih ugotovljeni samo učinki z nizko ali minimalno toksikološko pomembnostjo, potem ni nujno, da je njihov rezultat razvrstitev. Ti učinki so lahko majhne spremembe v parametrih semena ali v pojavnosti spontanih poškodb ploda, majhne spremembe v razmerjih skupnih različic ploda, kot so opažene pri pregledih skeleta ali pri teži plodu, ali majhne razlike v ocenah razvoja po rojstvu.
- 3.7.2.3.4. Podatki iz študij na živalih so v najboljšem primeru jasen dokaz posebne strupenosti za razmnoževanje ob pomanjkanju drugih sistemskih strupenih učinkov. Če pa se strupenost za razvoj pojavi skupaj z drugimi strupenimi učinki pri samici, se oceni možen vpliv splošnih škodljivih učinkov, kolikor je to mogoče. Zaželeno je, da se kot del zanesljivosti dokazov najprej obravnavajo škodljivi učinki na zarodek/plod in potem oceni strupenost pri materi, skupaj z vsemi drugimi dejavniki, ki so verjetno vplivali na te učinke. Na splošno se učinki na razvoj, ki se obravnavajo pri strupenih odmerkih pri materi, ne smejo samodejno zanemariti. Učinki na razvoj, ki se obravnavajo pri strupenih odmerkih pri materi, se lahko zanemarijo le za vsak primer posebej, kadar se ugotovi ali ovrže vzročni odnos.
- 3.7.2.3.5. Če so na voljo ustrezne informacije, je treba poskušati določiti, ali je vzrok strupenosti za razvoj poseben mehanizem pri materi ali splošen drugoten mehanizem, kot je stres matere in porušeno fiziološko ravnoesje telesa. Na splošno se prisotnost strupenosti pri materi ne uporablja za zavrnitev ugotovitev o učinkih na zarodek/plod, razen če se lahko jasno potrdi, da so to drugotni splošni učinki. To velja zlasti takrat, kadar so učinki na potomce znatni, npr. trajni učinki, kot so nepravilnosti strukture. V nekaterih primerih je mogoče domnevati, da je strupenost za razmnoževanje rezultat drugotne strupenosti pri materi, in zanemariti učinke, če je snov tako strupena, da se samice ne morejo razvijati in so resno oslabele, niso sposobne hraniti mladičev ali so ti izčrpani ali umirajo.

3.7.2.4. Strupenost pri materi

- 3.7.2.4.1. Na razvoj potomca v nosečnosti in v zgodnjem obdobju po rojstvu lahko vplivajo strupeni učinki v materi prek splošnih mehanizmov, povezanih s stresom in porušnim fiziološkim ravnovesjem telesa matere, ali s posebnimi mehanizmi pri materi. Pri razlagi rezultata razvoja za določitev razvrstitve učinkov za razvoj je pomembno upoštevati možen vpliv strupenosti pri materi. To vprašanje je zapleteno zaradi negotovosti, ki so povezane z razmerjem med strupenostjo pri materi in rezultatom razvoja. Strokovna presoja in pristop določitve zanesljivosti dokazov, skupaj z vsemi razpoložljivimi študijami, se uporabita za določitev stopnje vpliva, ki se pripiše strupenosti pri materi, pri razlagi kriterijev za razvrstitev učinkov za razvoj. Najprej se upoštevajo škodljivi učinki na zarodek/plod in potem strupenost pri materi, skupaj z vsemi drugimi dejavniki, ki so verjetno vplivali na te učinke, kot zanesljivost dokazov, ki pomaga pri doseganju dogovora o razvrstitvi.
- 3.7.2.4.2. Na podlagi pragmatičnega opazanja lahko strupenost pri materi, odvisno od resnosti, vpliva na razvoj prek splošnih drugotnih mehanizmov, ki povzročajo učinke, kot so znižana teža ploda, zakasnela okostenitev in možna resorpcija ter določene nepravilnosti nekaterih potez pri nekaterih vrstah. Vendar omejeno število študij, ki so preučevale razmerje med učinki na razvoj in splošno strupenostjo pri materi, niso dokazale doslednega, ponovljivega razmerja pri vrstah. Učinki na razvoj, ki se pojavijo tudi ob pojavu strupenosti pri materi, se obravnavajo kot dokaz strupenosti za razvoj, razen če se lahko nedvoumno dokaže za vsak primer posebej, da so učinki na razvoj drugotna posledica strupenosti pri materi. Poleg tega se razvrstitev obravnava, kadar so strupeni učinki pri potomcih znatni, tj. trajni učinki, kot so nepravilnosti strukture, smrtnost zarodka/ploda, pomembne pomanjkljivosti delovanja po rojstvu.
- 3.7.2.4.3. Razvrstitev se ne zmanjša samodejno za snovi, ki povzročajo strupenost za razvoj le v povezavi s strupenostjo pri materi, čeprav je bil dokazan poseben mehanizem pri materi. V takšnem primeru je razvrstitev v kategorijo 2 primernejša od razvrstitve v kategorijo 1. Če pa je snov tako strupena, da povzroči smrt matere ali resno oslabelost ali so samice izčrpane in ne morejo hraniti mladičev, je smiselno domnevati, da je strupenost za razvoj le drugotna posledica strupenosti pri materi, in zanemariti učinek na razvoj. Razvrstitev ni nujna v primeru manjših razvojnih sprememb, pri manjšem zmanjšanju telesne teže zarodka/ploda ali zakasneli okostenitvi, opaženih v povezavi s strupenostjo pri materi.
- 3.7.2.4.4. Nekatere končne točke za ocenjevanje učinkov so navedene spodaj. Podatke o teh končnih točkah, če so na voljo, je treba evalvirati glede na njihovo statistično ali biološko pomembnost in razmerje med odmerkom in odzivom.

Maternalna umrljivost:

povečana pojavnost umrljivosti med obravnavanimi samicami med nadzorom se šteje kot dokaz strupenosti pri materi, če je povečanje povezano z odmerkom, in se lahko pripiše sistemski strupenosti testne snovi. Maternalna umrljivost, ki presega 10 %, se šteje za prekomerno in podatki za takšen odmerek se običajno ne obravnavajo pri nadaljnjem ocenjevanju.

Indeks parjenja

(št. živali s semenskimi tekočinami ali spermo/št. parjenih živali $\times 100$) ⁽¹⁾

Indeks plodnosti

(št. živali z vsadki/št. parjenj $\times 100$)

Čas brejosti

(če se odobri porod)

Telesna teža in sprememba telesne teže:

Obravnava spremembe telesne teže matere in/ali usklajene (popravljen) telesne teže matere se vključi v ocenjevanje strupenosti pri materi, kadar so takšni podatki na voljo. Izračun usklajene (popravljen) povprečne spremembe telesne teže matere, ki je razlika med začetno in končno telesno težo brez teže noseče

⁽¹⁾ Priznava se, da na indeks parjenja in indeks plodnosti lahko vpliva samec.

maternice (ali druga možnost, vsota teže plodov), lahko pokaže, ali je učinek maternalen ali intrauterin. Pri kuncih pridobljena telesna teža ni uporaben kazalnik strupenosti pri materi zaradi običajnih nihanj telesne teže med brejostjo.

Poraba hrane in vode (če je pomembna):

Opazovanje bistvenega zmanjšanja povprečne porabe hrane in vode pri obravnavanih samicah v primerjavi s kontrolno skupino je koristno pri ocenjevanju strupenosti pri materi, zlasti kadar se test na snov dodaja v prehrano ali pitno vodo. Spremembe porabe hrane in vode je treba evalvirati skupaj s telesno težo mater pri določanju, ali ugotovljeni učinki kažejo strupenost pri materi ali, preprosteje, neužitnost testne snovi v hrani ali vodi.

Klinično vrednotenje (vključno s kliničnimi znaki, sledilnimi snovmi, hematologijo in kliničnimi kemijskimi študijami):

Opažanja večje pojavnosti pomembnih kliničnih znakov strupenosti pri obravnavanih samicah glede na kontrolno skupino je koristno pri evalviranju strupenosti pri materi. Če se to uporabi, kot podlaga za ocenjevanje strupenosti pri materi, se v študijo vključijo vrste, pojavnost, stopnja in trajanje kliničnih znakov. Klinični znaki zastupitve pri materi vključujejo: komo, izčrpanost, hiperaktivnost, izgubo posturalnega refleksa, nekoordiniranost gibov (ataksijo) ali težko dihanje.

Podatki, pridobljeni post mortem:

Povečana pojavnost in/ali resnost ugotovitev, pridobljenih post mortem, lahko kaže na strupenost pri materi. To lahko vključuje velike ali mikroskopske patološke ugotovitve ali podatke o teži organov, vključno z absolutno težo organov, razmerje med težo organov in telesa ali razmerje med težo organov in možganov. Opazovanje bistvene spremembe povprečne teže domnevnih ciljnih organov pri obravnavanih samicah v primerjavi samicami v kontrolni skupini se lahko šteje kot dokaz strupenosti pri materi, kadar je podprto z ugotovitvami o škodljivih histopatoloških učinkih na prizadetih organih.

3.7.2.5. Podatki o živalih in poskusu

3.7.2.5.1. Na voljo je veliko mednarodno sprejetih testnih metod; med njimi so testiranje strupenosti za razvoj pri potomcih (npr. smernica za testiranje OECD 414) in metode za testiranje strupenosti pri eni ali dveh generacijah (npr. smernice za testiranje OECD 415 in 416).

3.7.2.5.2. Za utemeljitev razvrstitve se lahko uporabijo tudi rezultati presejalnih testov (npr. smernice OECD 421 – presejalni test strupenosti za razmnoževanje/razvoj in 422 – kombinirane študije strupenosti pri ponovljenih odmerkih s presejalnim testom strupenosti za razmnoževanje/razvoj), čeprav ni sporno, da je kakovost tega dokaza manj zanesljiva od kakovosti dokazov, pridobljenih iz popolnih študij.

3.7.2.5.3. Škodljivi učinki ali spremembe pri kratkoročnih ali dolgoročnih študijah strupenosti pri ponovljenih odmerkih, za katere se domneva, da verjetno škodujejo funkciji razmnoževanja in se pojavijo v odsotnosti pomembne splošne strupenosti, se lahko uporabijo kot podlaga za razvrstitev, npr. histopatološke spremembe spolnih žlez.

3.7.2.5.4. Dokazi iz testov in vitro ali testov, ki se ne izvajajo na sesalcih, ter o podobnih snoveh, ki izhajajo iz razmerja med strukturo in aktivnostjo (SAR), lahko prispevajo k postopku razvrstitve. V vseh podobnih primerih je treba uporabiti strokovno presojo za oceno ustreznosti podatkov. Neustrezni podatki se ne uporabijo kot temeljna podlaga za razvrstitev.

3.7.2.5.5. Zaželeno je, da se pri študijah na živalih uporabljajo ustrezni načini vnosa, ki so podobni možnim načinom izpostavljenosti ljudi. Pri študijah o strupenosti za razmnoževanje se običajno uporablja oralni način vnosa, takšne študije pa so običajno primerne za evalvacijo nevarnih lastnosti snovi v zvezi s strupenostjo za razmnoževanje. Snov, ki povzroča škodljiv učinek na razmnoževanje pri testnih živalih, se ne razvrsti, če se lahko prepričljivo potrdi, da jasno opredeljen mehanizem ali način delovanja ni pomemben za ljudi, ali kadar so toksikokinetične razlike označene tako, da je gotovo, da se nevarna lastnost ne bo izrazila pri ljudeh.

3.7.2.5.6. Študije, ki vključujejo načine vnosa, kakršni sta intravenozna in intraperitonealna injekcija, ki povzročijo izpostavljenost organov za razmnoževanje nerealno visokim ravnom testne snovi ali povzročijo lokalno škodo organom za razmnoževanje, vključno z draženjem, je treba razlagati izjemno previdno in kot samostojne študije običajno niso podlaga za razvrstitev.

- 3.7.2.5.7. Obstaja splošno soglasje glede mejnega odmerka, nad katerim se šteje, da nastanek škodljivega učinka ne zadostuje za razvrstitev, vendar ni soglasja glede vključitve določene količine kot mejnega odmerka v kriterije. Nekatere smernice za testne metode sicer opredeljujejo mejni odmerek, druge pa pri navedbi mejnega odmerka dodajajo, da so lahko večji odmerki nujni, če je predpostavljena izpostavljenost ljudi tako visoka, da ustreza stopnja izpostavljenosti pri manjšem odmerku ne bi bila dosežena. Zaradi toksikokinetičnih razlik med vrstami določanje posebnega mejnega odmerka morda ni primerno takrat, kadar so ljudje bolj občutljivi od živalskega modela.
- 3.7.2.5.8. Načeloma se snov običajno ne razvrsti zaradi škodljivih učinkov na razmnoževanje, ki se kažejo le pri zelo visokih odmerkih v študijah na živalih (na primer odmerki, ki povzročajo izčrpanost, resno izgubo teka, pretirano smrtnost), razen če so na voljo druge informacije, npr. o toksikokinetiki, ki kažejo, da so lahko ljudje bolj dovzetni od živali, zaradi katerih je razvrstitev ustrezná. Nadaljnje smernice za to področje lahko preberete v poglavju o strupenosti pri materi (3.7.2.4).
- 3.7.2.5.9. Vendar je opredelitev dejanskega „mejnega odmerka“ odvisna od testne metode, ki je bila uporabljena za pridobivanje rezultatov testa, npr. v smernici za testiranje za študije strupenosti pri velikih odmerkih, vnesenih oralno, je priporočen najvišji odmerek 1 000 mg/kg kot mejni odmerek, če pričakovani odziv pri človeku ne kaže, da je potreben višji odmerek.
- 3.7.3. **Kriteriji za razvrstitev zmesi**
- 3.7.3.1. Razvrstitev zmesi, kadar so na voljo podatki za vse sestavine ali za le nekatere sestavine zmesi
- 3.7.3.1.1. Zmes se razvrsti kot strupena snov za razmnoževanje, kadar je vsaj ena sestavina razvrščena kot strupena snov za razmnoževanje kategorije 1A, kategorije 1B ali kategorije 2 in je prisotna na ravni ustrezne splošne mejne koncentracije ali nad njo, kot je navedeno v tabeli 3.7.2 za kategorijo 1A, kategorijo 1B oziroma kategorijo 2.
- 3.7.3.1.2. Zmes se razvrsti zaradi učinkov na dojenje ali prek dojenja, kadar je vsaj ena sestavina razvrščena zaradi učinkov na dojenje ali prek dojenja in je prisotna na ravni ustrezne splošne mejne koncentracije ali nad njo, kot je navedeno v tabeli 3.7.2 za dodatno kategorijo za učinke za dojenje ali prek dojenja.

Tabela 3.7.2

Splošne mejne koncentracije sestavin zmesi, razvrščenih kot strupene snovi za razmnoževanje ali zaradi učinkov na dojenje ali prek dojenja, pri katerih se razvrsti tudi zmes

Sestavina, razvrščena kot:	Splošna mejna koncentracija, pri kateri se zmes razvrsti v naslednje kategorije:			
	Strupena snov za razmnoževanje kategorije 1A	Strupena snov za razmnoževanje kategorije 1B	Strupena snov za razmnoževanje kategorije 2	Dodatna kategorija za učinke na dojenje ali prek dojenja
Strupena snov za razmnoževanje kategorije 1A	≥ 0,3 % [opomba 1]			
Strupena snov za razmnoževanje kategorije 1B		≥ 0,3 % [opomba 1]		
Strupena snov za razmnoževanje kategorije 2			≥ 3,0 % [opomba 1]	
Dodatna kategorija za učinke na dojenje ali prek dojenja				≥ 0,3 % [opomba 1]

Opomba

Mejne koncentracije v zgornji tabeli se uporabljajo za trdne snovi in tekočine (po masnem deležu) in tudi za pline (po volumskem deležu).

Opomba 1

Če je v zmesi prisotna strupena snov za razmnoževanje kategorije 1 ali kategorije 2 ali snov, razvrščena zaradi učinkov na dojenje ali prek dojenja, kot sestavina s koncentracijo nad 0,1 %, se za zmes na zahtevo da na voljo varnostni list (SDS).

3.7.3.2. Razvrstitev zmesi, kadar so na voljo podatki za celotno zmes

3.7.3.2.1. Razvrstitev zmesi se opravi na podlagi dostopnih testnih podatkov za posamezne sestavine zmesi ob uporabi mejnih koncentracij za sestavine zmesi. Podatki testov za zmesi se lahko uporabijo pri razvrstitvah za vsak primer posebej, kadar se pokažejo učinki, ki niso bili izpeljani iz evalvacije na podlagi posameznih sestavin. V takšnih primerih morajo biti rezultati o testih za celotno zmes povsem nedvoumni, pri čemer se upoštevajo odmerek in drugi dejavniki, kot so trajanje, opažanja, občutljivost in statistična analiza testnih sistemov za razmnoževanje. Ustrezna dokumentacija, ki spremlja razvrstitev, se hrani in da na voljo za pregled na zahtevo.

3.7.3.3. Razvrstitev zmesi, kadar podatkov za celotno zmes ni na voljo: premostitvena načela

3.7.3.3.1. Kadar zmes, ob upoštevanju odstavka 3.7.3.2.1, ni testirana za določanje strupenosti za razmnoževanje, ampak je za ustrezno opredelitev nevarnosti zmesi dovolj podatkov o posameznih sestavinah in podobnih testiranih zmesih, se ti podatki uporabijo v skladu z veljavnimi premostitvenimi načeli iz oddelka 1.1.3.

3.7.4. Obvestilo o nevarnosti

3.7.4.1. Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 3.7.3.

Tabela 3.7.3

Elementi etikete za strupenost za razmnoževanje

Razvrstitev	Kategorija 1A ali kategorija 1B	Kategorija 2	Dodatna kategorija za učinke na dojenje ali prek dojenja
Piktogrami GHS			Ni piktograma
Opozorilna beseda	Nevarno	Pozor	Brez opozorilne besede
Stavek o nevarnosti	H360: Lahko škoduje plodnosti ali nerojenemu otroku (navesti posebni učinek, če je znan; navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti)	H361: Sum škodljivosti za plodnost ali nerojenega otroka (navesti posebni učinek, če je znan; navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti)	H362: Lahko škoduje dojenim otrokom.
Previdnostni stavek – preprečevanje	P201 P202 P281	P201 P202 P281	P201 P260 P263 P264 P270
Previdnostni stavek – odziv	P308 + P313	P308 + P313	P308 + P313
Previdnostni stavek – shranjevanje	P405	P405	
Previdnostni stavek – odstranjevanje	P501	P501	

3.8. **Specifična strupenost za ciljne organe – enkratna izpostavljenost**

3.8.1. ***Opredelitev pojmov in splošni preudarki***

3.8.1.1. Specifična strupenost za ciljne organe (enkratna izpostavljenost) je opredeljena kot specifična strupenost za ciljne organe zaradi enkratne izpostavljenosti snovi ali zmesi, ki ne povzroči smrti. Sem spadajo vsi pomembni popravljivi in trajni, takojšnji in/ali zapozneli učinki na zdravje, ki lahko škodujejo delovanju in niso posebej omenjeni v oddelkih 3.1 do 3.7 in 3.10 (glej tudi 3.8.1.6).

3.8.1.2. Razvrstitev opredeljuje snov ali zmes kot strupeno snov za ciljne organe, ki lahko kot takšna škodljivo učinkuje na zdravje izpostavljenih ljudi.

3.8.1.3. Ti škodljivi učinki zaradi enkratne izpostavljenosti vključujejo dosledne in prepoznavne strupene učinke pri ljudeh ali toksikološko pomembne spremembe, ki vplivajo na delovanje ali morfologijo tkiva/organa ali povzročajo resne biokemične ali hematološke spremembe organizma pri testnih živalih, te spremembe pa so bistvene za zdravje ljudi.

3.8.1.4. Pri ocenjevanju se upoštevajo bistvene spremembe enega organa ali biološkega sistema in tudi splošne in manj resne spremembe, ki vključujejo več organov.

3.8.1.5. Specifična strupenost za ciljne organe se lahko pojavi pri katerem koli načinu, ki je pomemben za ljudi, tj. predvsem oralno, dermalno ali pri vdihavanju.

3.8.1.6. Specifična strupenost za ciljne organe po ponavljajoči izpostavljenosti se razvrsti v skladu s poglavjem Specifična strupenost za ciljne organe – ponavljajoča izpostavljenost (poglavje 3.9) in je zato izključena iz oddelka 3.8. Drugi posebni strupeni učinki, navedeni spodaj, so ocenjeni posebej in zato niso vključeni tukaj:

- (a) akutna strupenost (oddelek 3.1),
- (b) jedkost za kožo/draženje kože (oddelek 3.2),
- (c) hude poškodbe oči/draženje oči (oddelek 3.3),
- (d) preobčutljivost dihal ali kože (oddelek 3.4),
- (e) mutagenost za zarodne celice (oddelek 3.5),
- (f) rakotvornost (oddelek 3.6),
- (g) Strupenost za razmnoževanje (oddelek 3.7), in
- (h) strupenost pri vdihavanju (oddelek 3.10).

3.8.1.7. Razred nevarnosti specifična strupenost za ciljne organe – enkratna izpostavljenost je razdeljen na:

- Specifična strupenost za ciljne organe – enkratna izpostavljenost, kategoriji 1, 2,
- Specifična strupenost za ciljne organe (STOT) – enkratna izpostavljenost, kategorija 3.

Glej tabelo 3.8.1.

Tabela 3.8.1

Kategorije strupenosti za ciljne organe – enkratna izpostavljenost

Kategorije	Kriteriji
Kategorija 1	Snovi, ki imajo pri ljudeh precejšen strupeni učinek ali se lahko zanje na podlagi dokazov iz študij na testnih živalih predvideva, da imajo pri ljudeh po enkratni izpostavljenosti precejšen strupeni učinek. Snovi so razvrščene v kategorijo 1 glede na specifično strupenost za ciljne organe (enkratna izpostavljenost) na podlagi: (a) zanesljivih in kakovostnih dokazov pri ljudeh ali iz epidemioloških študij ali (b) opazovanj iz ustreznih študij na testnih živalih, ki so pokazale precejšnje in/ali resne strupene učinke, pomembne za zdravje ljudi, pri splošno nizki koncentraciji izpostavljenosti. Orientacijski odmerki/mejne koncentracije so navedeni spodaj (glej 3.8.2.1.9) in se uporabijo kot del evalvacije zanesljivosti dokazov.
Kategorija 2	Snovi, za katere se lahko na podlagi dokaza iz študij na testnih živalih predvideva, da lahko škodujejo zdravju ljudi po enkratni izpostavljenosti. Snovi so razvrščene v kategorijo 2 glede na specifično strupenost za ciljne organe (enkratna izpostavljenost) na podlagi opazovanj iz ustreznih študij na testnih živalih, pri katerih so bili ugotovljeni precejšnji strupeni učinki, pomembni za zdravje ljudi, pri na splošno nizki koncentraciji izpostavljenosti. Orientacijski odmerki/mejne koncentracije so navedeni spodaj (glej 3.8.2.1.9) kot pomoč pri razvrstitvi. V izjemnih primerih se lahko za uvrstitev snovi v kategorijo 2 uporabijo tudi dokazi pri ljudeh (glej 3.8.2.1.6).
Kategorija 3	Kratkotrajni učinki za ciljne organe. Ta kategorija vključuje le narkotične učinke in draženje dihalnih poti. To so učinki za ciljne organe, zaradi katerih snov ne izpolnjuje kriterijev za razvrstitev v zgoraj navedeno kategorijo 1 ali 2. To so učinki, ki škodljivo spreminjajo človeške funkcije za kratek čas po izpostavljenosti in ki jih lahko ljudje v primernem času prebolijo brez bistvenih sprememb strukture ali funkcij. Snovi so razvrščene posebej za te učinke v skladu z 3.8.2.2.

Opomba: Treba je poskusiti določiti primarni ciljni organ za učinkovanje strupenosti in ustrezno razvrstiti snovi med npr. hepatotoksine, nevrotoksine. Skrbno se evalvirajo podatki in, kadar je mogoče, izključijo drugotni učinki (hepatotoksini na primer lahko povzročijo drugotne učinke na živčni ali gastrointestinalni sistem).

3.8.2. Kriteriji za razvrstitev snovi**3.8.2.1. Snovi kategorije 1 in kategorije 2**

3.8.2.1.1. Snovi so ločeno razvrščene glede na takojšnje učinke ali učinke z zakasnitvijo, pri čemer se uporablja strokovna presoja (glej 1.1.1.), na podlagi zanesljivosti vseh dostopnih dokazov, vključno s priporočenimi orientacijskimi vrednostmi (glej 3.8.2.1.9). Snovi se uvrstijo v kategorijo 1 ali 2, odvisno od narave in resnosti ugotovljenega(-ih) učinka(-ov) (tabela 3.8.1).

3.8.2.1.2. Določi(-jo) se način(-i) izpostavljenosti, pri katerem(-ih) razvrščena snov povzroči škodo (glej 3.8.1.5).

3.8.2.1.3. Razvrstitev se opravi s strokovno presojo (glej oddelek 1.1.1) na podlagi zanesljivosti vseh dostopnih dokazov, vključno s spodaj navedenimi smernicami.

3.8.2.1.4. Zanesljivost dokazov vseh podatkov (glej oddelek 1.1.1), vključno z izvidi pri ljudeh, epidemiologijo in študijami na testnih živalih, se uporabi kot podkrepitev odločitve o razvrstitvi strupenih učinkov za ciljne organe.

3.8.2.1.5. Potrebne informacije za evalvacijo strupenosti za ciljne organe izhajajo iz enkratne izpostavljenosti ljudi, npr. izpostavljenost doma, na delovnem mestu ali v okolju, ali iz študij na testnih živalih. Pri standardnih študijah na podganah in miših, s katerimi se pridobivajo te informacije, gre za študije o akutni strupenosti, ki lahko vključujejo klinična opažanja in podrobne makroskopske in mikroskopske preiskave, ki omogočijo določitev strupenih učinkov na ciljna tkiva/organe. Pomembne informacije se lahko pridobijo tudi s študijami o akutni strupenosti, opravljenih na drugih vrstah.

3.8.2.1.6. Izjemoma in na podlagi strokovne presoje je primerno nekatere snovi, pri katerih obstajajo dokazi o strupenosti za ciljne organe pri ljudeh, uvrstiti v kategorijo 2:

- (a) kadar zanesljivost dokazov pri ljudeh ne zadostuje za razvrstitev v kategorijo 1 in/ali
- (b) na podlagi narave in resnosti učinkov.

Ravni odmerka/koncentracije pri ljudeh se ne upoštevajo pri razvrstitvi, vsi dostopni dokazi iz študij na živalih pa morajo biti v skladu z razvrstitvijo v kategorijo 2. To pomeni, da se snov razvrsti v kategorijo 1, če so na voljo tudi podatki o snovi za živali, ki utemeljujejo razvrstitev snovi v kategorijo 1.

3.8.2.1.7. Učinki, ki se uporabijo kot podkrepitev za razvrstitev v kategorijo 1 in 2

3.8.2.1.7.1. Dokazi, ki pokažejo dosledno in prepoznavno povezavo med enkratno izpostavljenostjo s snovjo in strupenim učinkom, so podkrepitev za razvrstitev.

3.8.2.1.7.2. Dokazi iz izkušenj/izvidov pri ljudeh so običajno omejeni na poročila o škodljivih posledicah za zdravje in pogosto ne vsebujejo jasnih podatkov o pogojih izpostavljenosti in znanstvenih podrobnosti, ki se pridobijo z dobro opravljenimi študijami na testnih živalih.

3.8.2.1.7.3. Dokazi iz ustreznih študij na testnih živalih v obliki kliničnih opažanj ter makroskopskih in mikroskopskih patoloških preiskav lahko vsebujejo veliko več podrobnosti, kar lahko pogosto razkrije nevarnosti, ki morda niso življenjsko nevarne, vendar lahko škodljivo vplivajo na delovanje organizma. Zato je treba pri postopku razvrstitve upoštevati vse dostopne dokaze in njihov vpliv na zdravje ljudi, to med drugim vključuje naslednje učinke pri ljudeh in/ali živalih:

- (a) boleznost pri enkratni izpostavljenosti;
- (b) pomembne funkcionalne spremembe, ki niso zgolj prehodne in se pojavijo na dihalih, osrednjem ali perifernem živčevju, drugih organih ali sistemih organov, vključno z znaki zastoja osrednjega živčnega sistema in učinki na posebna čutila (npr. vid, sluh in vonj);
- (c) vse konstantne in bistvene škodljive spremembe kliničnih, biokemičnih, hematoloških parametrov ali parametrov pri analizi urina;
- (d) hude okvare organov, ki se ugotovijo pri obdukciji in/ali pozneje ugotovijo ali potrdijo z mikroskopskim pregledom;
- (e) razširjene ali hude nekroze, fibroze ali granulomi v vitalnih organih z regenerativno sposobnostjo;
- (f) morfološke spremembe, ki so morda popravljive, vendar jasno kažejo na izrazito motnjo pri delovanju organa;
- (g) obsežnejše odmiranje celic (vključno z razpadanjem in zmanjšanim številom celic) v vitalnih organih, ki nimajo regenerativne sposobnosti.

3.8.2.1.8. Učinki, ki se ne morejo uporabiti kot podkrepitev za razvrstitve v kategorijo 1 in 2

Lahko se pokažejo tudi učinki, ki ne upravičijo razvrstitve. Med takšne učinke pri ljudeh in/ali živalih med drugim spadajo:

- (a) klinična opažanja ali majhne spremembe pri pridobivanju telesne teže, uživanju hrane ali vode, katerih vzrok je lahko strupenost snovi, vendar sami po sebi ne pomenijo „hude“ strupenosti;
- (b) neznatne spremembe kliničnih, biokemičnih, hematoloških parametrov ali parametrov analize urina in/ali kratkotrajni učinki, kadar so takšne spremembe ali učinki dvomljivega ali zanemarljivega toksikološkega pomena;
- (c) spremembe teže organov, vendar brez opaznih motenj delovanja organov;
- (d) prilagoditveni odzivi, ki nimajo toksikološkega pomena;
- (e) mehanizmi strupenosti, ki jih snov povzroča le pri nekaterih vrstah organizmov, za katere je z gotovostjo dokazano, da niso pomembni za zdravje ljudi, ne utemeljujejo razvrstitve;

- 3.8.2.1.9. Orientacijske vrednosti, ki pomagajo pri razvrstitvi na podlagi rezultatov iz študij na testnih živalih v kategorijo 1 in 2
- 3.8.2.1.9.1. Kot pomoč pri odločanju, ali se snov razvrsti ali ne in kako se razvrsti (v kategorijo 1 ali 2), so prikazane „orientacijske vrednosti“ glede ravni odmerka/koncentracije, ki se upoštevajo pri ravni odmerka/koncentraciji, za katero se ugotovi, da znatno vpliva na zdravje. Glavni razlog za navedbo takšnih orientacijskih vrednosti je, da so vse snovi potencialno strupene in da mora biti določena tista raven odmerka/koncentracija, nad katero je učinek nedvomno strupen.
- 3.8.2.1.9.2. Kadar se v študijah na živalih ugotovijo bistveni strupeni učinki, ki utemeljujejo razvrstitev snovi, potem lahko primerjava ravni odmerka/koncentracije, pri kateri se ti učinki pokažejo, s predlaganimi orientacijskimi vrednostmi zagotovi uporabne informacije, ki pomagajo evalvirati, ali je snov treba razvrstiti (ker so strupeni učinki posledica nevarnih lastnosti in tudi odmerka/koncentracije).
- 3.8.2.1.9.3. Razponi orientacijskih vrednosti (C) za izpostavljenost z enim odmerkom, ki povzroči bistvene nesmrtonosne strupene učinke, so enaki razponom, ki se uporabljajo za testiranje akutne strupenosti, kot je navedeno v tabeli 3.8.2.

Tabela 3.8.2

Razpon orientacijskih vrednosti za izpostavljenost z enim odmerkom^a

Način izpostavljenosti	Enote	Kategorija 1	Razpon orientacijskih vrednosti za:	
			Kategorija 2	Kategorija 3
Oralno (podgana)	mg/kg telesne teže	$C \leq 300$	$2\,000 \geq C > 300$	orientacijske vrednosti se ne upoštevajo ^b
Dermalno (podgana ali kunec)	mg/kg telesne teže	$C \leq 1\,000$	$2\,000 \geq C > 1\,000$	
Vdihavanje plina (podgana)	ppmv/4 h	$C \leq 2\,500$	$20\,000 \geq C > 2\,500$	
Vdihavanje hlapov (podgana)	mg/l/4 h	$C \leq 10$	$20 \geq C > 10$	
Vdihavanje prahu/meglice/dima (podgana)	mg/l/4 h	$C \leq 1,0$	$5,0 \geq C > 1,0$	

Opomba:

- (a) Orientacijske vrednosti in razponi iz tabele 3.8.2 so le smernice in se uporabljajo kot del določanja zanesljivosti dokazov in kot pomoč pri odločitvi o razvrstitvi. Te vrednosti niso mišljene kot stroge razmejitvene vrednosti.
- (b) Orientacijske vrednosti niso določene za snovi iz kategorije 3, ker ta razvrstitev temelji predvsem na podatkih o ljudeh. Podatki o živalih, če so na voljo, se uporabijo pri evalvaciji zanesljivosti dokazov.

3.8.2.1.10. Drugi preudarki

- 3.8.2.1.10.1. Kadar je za snov značilna le uporaba podatkov o živalih (običajno za nove snovi, vendar tudi za mnoge obstoječe snovi), potem postopek razvrstitve vključuje navedbo orientacijske vrednosti o ravni odmerka/koncentraciji kot enega od elementov pri določanju zanesljivosti dokazov.
- 3.8.2.1.10.2. Kadar so na voljo dobro utemeljeni podatki o ljudeh, ki kažejo na strupen učinek za ciljne organe, za katerega se lahko zanesljivo ugotovi, da je nastal zaradi enkratne izpostavljenosti snovi, se snov običajno razvrsti. Pozitivni podatki o ljudeh, ne glede na verjeten odmerek, imajo prednost pred podatki o živalih. Če se snov sprva ne razvrsti, ker se šteje, da specifična strupenost za ciljne organe ni pomembna ali bistvena za ljudi, in če nato postanejo dostopni podatki o izvidih pri ljudeh, ki kažejo strupen učinek za ciljne organe, se snov vendarle razvrsti.

3.8.2.1.10.3. Snov, ki ni testirana glede strupenosti za ciljne organe, se po potrebi lahko razvrsti na podlagi podatkov iz potrjenega razmerja med strukturo in aktivnostjo ter ekstrapolacije na podlagi strokovne presoje s strukturno podobne snovi, ki je bila predhodno razvrščena, upoštevajo pa se tudi drugi pomembni dejavniki, kot je oblikovanje skupnih pomembnih metabolitov.

3.8.2.1.10.4. Nasičena koncentracija hlapov se po potrebi uporabi kot dodaten element posebnega varovanja zdravja in varnosti.

3.8.2.2. *Snovi kategorije 3: Kratkotrajni učinki za ciljne organe*

3.8.2.2.1. Kriteriji za draženje dihalnih poti

Kriteriji za razvrstitev snovi v kategorijo 3 za draženje dihalnih poti:

- (a) Upoštevajo se učinki draženja dihalnih poti (za katere je značilna omejena pordelost, edem, pruritis in/ali bolečine), ki ovirajo delovanje s simptomi, kot so kašelj, bolečina, dušenje in težave z dihanjem. Ta evalvacija bo temeljila predvsem na podatkih o ljudeh.
- (b) Subjektivna opažanja pri ljudeh se lahko podprejo z objektivnimi meritvami očitnega draženja dihalnih poti (RTI) (npr. elektrofiziološki odzivi, biološki označevalci v izpiralnih tekočinah za vnetje v nosu ali dihalih).
- (c) Simptomi, opaženi pri ljudeh, se morajo značilno pojaviti pri izpostavljeni populaciji in ne le kot osamljena idiosinkratična reakcija ali odziv, sprožen le pri posameznikih s preobčutljivimi dihalnimi potmi. Nejasne ugotovitve o „draženju“ se ne upoštevajo, ker se ta izraz na splošno uporablja za opisovanje veliko občutkov, vključno z vonjem, neprijetnim okusom, srbenjem, pomanjkanjem vlage, ki niso pomembne za razvrstitev za draženje dihalnih poti.
- (d) Za zdaj ni potrjenih testov na živalih, ki posebej obravnavajo RTI, vendar se lahko uporabne informacije dobijo iz testov strupenosti pri vdihavanju pri enkratni in ponavljajoči izpostavljenosti. Študije na živalih recimo lahko zagotovijo uporabne informacije v zvezi s kliničnimi znaki strupenosti (dispneja, rinitis ipd.) in hispatologijo (na primer hiperemija, edemi, minimalno vnetje, odebeljena sluznica), ki so popravljivi in lahko kažejo značilne klinične simptome, opisane zgoraj. Takšne študije na živalih se lahko uporabijo pri ocenjevanju zanesljivosti dokazov.
- (e) Ta posebna razvrstitev se uporabi le, kadar se ne pojavijo resnejši učinki na organe, vključno z dihalni.

3.8.2.2.2. Kriteriji za narkotične učinke

Kriteriji za razvrstitev snovi v kategorijo 3 za narkotične učinke:

- (a) Upošteva se zastoj osrednjega živčnega sistema, vključno z narkotičnimi učinki pri ljudeh, kot so zaspanost, omamljenost, zmanjšana pozornost, izguba refleksov, pomanjkanje koordinacije in vrtoglavica. Ti učinki se lahko pokažejo tudi kot hud glavobol ali slabost in lahko povzročijo zmanjšano razsodnost, omotico, razdražljivost, utrujenost, okvaro spomina, poslabšanje zaznavanja, koordinacije in odzivnega časa ali zaspanost.
- (b) Narkotični učinki, ugotovljeni pri študijah na živalih, lahko vključujejo otrplost, pomanjkanje koordinacije, pomanjkanje posturalnega refleksa in ataksijo. Če ti učinki niso kratkotrajni, potem se uporabijo kot podkrepitev za razvrstitev v kategorijo 1 ali 2 glede na specifično strupenost za ciljne organe pri enkratni izpostavljenosti.

3.8.3. **Kriteriji za razvrstitev zmesi**

3.8.3.1. Zmesi se razvrstijo po istih kriterijevih, kot se uporabljajo za snovi, ali kot je opisano spodaj. Tako kot snovi se lahko tudi zmesi razvrstijo glede na specifično strupenost za ciljne organe po enkratni izpostavljenosti.

3.8.3.2. *Razvrstitev zmesi, kadar so na voljo podatki za celotno zmes*

3.8.3.2.1. Kadar so za zmes na voljo zanesljivi in kakovostni dokazi o izkušnjah ljudi ali ustrezne študije s testnimi živalmi, kot je navedeno v kriterijevih za snovi, se zmes razvrsti po oceni zanesljivosti dokazov teh podatkov (glej 1.1.1.4). Pri evalvaciji podatkov o zmesih je potrebna previdnost, da zaradi odmerka, trajanja, opazovanja ali analize rezultati ne postanejo nezanesljivi.

- 3.8.3.3. Razvrstitev zmesi, kadar ni na voljo podatkov za celotno zmes: premostitvena načela
- 3.8.3.3.1. Kadar zmes ni testirana za določanje strupenosti za ciljne organe, ampak je za ustrezno opredelitev nevarnosti zmesi dovolj podatkov o posameznih sestavinah in podobnih testiranih zmesih, se ti podatki uporabijo v skladu s premostitvenimi načeli iz oddelka 1.1.3.
- 3.8.3.4. Razvrstitev zmesi, kadar so na voljo podatki za vse ali le nekatere sestavine zmesi
- 3.8.3.4.1. Kadar ni zanesljivih dokazov ali podatkov o testu za posebno zmes in se za razvrstitev ne morejo uporabiti premostitvena načela, potem razvrstitev zmesi temelji na razvrstitvi sestavin. V tem primeru se zmes razvrsti kot strupena snov za ciljne organe (ciljni organ se navede), in sicer po enkratni izpostavljenosti, kadar je vsaj ena sestavina razvrščena kot strupena snov za ciljne organe kategorije 1 ali kategorije 2 in je prisotna na ravni ustrezne splošne mejne koncentracije ali nad njo, kot določa tabela 3.8.3 spodaj za kategorijo 1 oziroma 2.
- 3.8.3.4.2. Te splošne mejne koncentracije in naknadne razvrstitve se ustrezno uporabljajo za strupene snovi za ciljne organe pri enem odmerku.
- 3.8.3.4.3. Zmesi se razvrstijo posebej za eno ali obe strupenosti z enim odmerkom ali ponovljenimi odmerki.

Tabela 3.8.3

Splošne mejne koncentracije sestavin zmesi, razvrščenih kot strupene snovi za ciljne organe, pri katerih se tudi zmes razvrsti v kategorijo 1 ali 2

Sestavina, razvrščena kot:	Splošne mejne koncentracije, pri katerih se zmes razvrsti v naslednje kategorije:	
	Kategorija 1	Kategorija 2
Kategorija 1 Specifično strupena snov za ciljne organe	koncentracija $\geq 10\%$	$1,0\% \leq \text{koncentracija} < 10\%$
Kategorija 2 Specifično strupena snov za ciljne organe		koncentracija $\geq 10\%$ [(opomba 1)]

Opomba 1:

Če je v zmesi prisotna strupena snov za ciljne organe kategorije 2 kot sestavina s koncentracijo $\geq 1,0\%$, je za zmes na zahtevo na voljo varnostni list (SDS).

- 3.8.3.4.4. Kadar se strupene snovi, ki vplivajo na več kot en sistem organov, kombinirajo, je treba upoštevati morebitno povečanje strupenosti in medsebojni sinergijski vpliv, ker lahko nekatere snovi povzročijo strupenost za ciljni organ pri koncentraciji $< 1\%$, na to je treba biti pozoren tedaj, kadar se za druge sestavine v zmesi ve, da lahko povečajo strupen učinek.
- 3.8.3.4.5. Previdnost je potrebna pri ekstrapolaciji strupenosti zmesi, ki vsebuje sestavino(-e) kategorije 3. Primerna je splošna mejna koncentracija 20% , vendar je treba upoštevati, da je lahko ta mejna koncentracija višja ali nižja, odvisno od tega, katera sestavina kategorije 3 je vsebovana, in da se nekateri učinki, kot je draženje dihalnih poti, morda pod določeno koncentracijo ne pojavijo, medtem ko se lahko drugi učinki, kot so narkotični učinki, pojavijo tudi pod vrednostjo 20% . V tem primeru je potrebna strokovna presoja.
- 3.8.4. **Obvestilo o nevarnosti**
- 3.8.4.1. Elementi etikete za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, se uporabljajo v skladu s tabelo 3.8.4.

Table 3.8.4

Elementi etikete za specifično strupenost za ciljne organe po enkratni izpostavljenosti

Razvrstitev	Kategorija 1	Kategorija 2	Kategorija 3
Piktogrami GHS			
Opozorilna beseda	Nevarno	Pozor	Pozor
Stavek o nevarnosti	H370: Škoduje organom (ali navesti vse organe, na katere vpliva, če je znano) (navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti)	H371: Lahko škoduje organom (ali navesti vse organe, na katere vpliva, če je znano) (navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti)	H335: Lahko povzroči draženje dihalnih poti; ali H336: lahko povzroči zaspanost ali omotico
Previdnostni stavek – preprečevanje	P260 P264 P270	P260 P264 P270	P261 P271
Previdnostni stavek – odziv	P307 + P311 P321	P309 + P311	P304 + P340 P312
Previdnostni stavek – shranjevanje	P405	P405	P403 + P233 P405
Previdnostni stavek – odstranjevanje	P501	P501	P501

3.9. Specifična strupenost za ciljne organe – ponavljajoča izpostavljenost**3.9.1. Opredelitev pojmov in splošni preudarki**

- 3.9.1.1. Specifična strupenost za ciljne organe (ponavljajoča izpostavljenost) je specifična strupenost za ciljne organe zaradi ponavljajoče izpostavljenosti snovi ali zmesi. Sem spadajo vsi pomembni popravljivi in nepopravljivi, takojšnji in/ali zapozneli učinki na zdravje, ki lahko škodujejo delovanju. To pa ne vključuje drugih posebnih strupenih učinkov, ki so posebej obravnavani v oddelkih od 3.1 do 3.8 in 3.10.
- 3.9.1.2. Razvrstitev glede na strupenost za ciljne organe (ponavljajoča izpostavljenost) opredeljuje snov kot strupeno snov za ciljne organe, ki ima lahko kot takšna škodljive učinke na zdravje ljudi, ki so ji izpostavljeni.
- 3.9.1.3. Ti škodljivi učinki na zdravje vključujejo dosledne in prepoznavne strupene učinke pri ljudeh ali toksikološko pomembne spremembe, ki vplivajo na delovanje ali morfologijo tkiva/organa ali ki povzročijo resne biokemične ali hematološke spremembe organizma testnih živalih, te spremembe pa so pomembne za zdravje ljudi.
- 3.9.1.4. Pri ocenjevanju se upoštevajo bistvene spremembe enega organa ali biološkega sistema in tudi splošne in manj resne spremembe, ki vključujejo več organov.
- 3.9.1.5. Specifična strupenost za ciljne organe se lahko pojavi pri katerem koli načinu, ki je pomemben za ljudi, tj. predvsem oralno, dermalno ali pri vdihavanju.
- 3.9.1.6. Nesmrtonosni strupeni učinki po enkratni izpostavljenosti so razvrščeni v skladu s poglavjem Specifična strupenost za ciljne organe – enkratna izpostavljenost (oddelek 3.8) in so zato izključeni iz oddelka 3.9.

3.9.2. **Kriteriji za razvrstitev snovi**

- 3.9.2.1. Snovi so razvrščene kot specifično strupene snovi za ciljne organe po ponavljajoči izpostavljenosti na podlagi strokovne presoje (glej 1.1.1) in zanesljivosti vseh dostopnih dokazov, vključno s priporočenimi orientacijskimi vrednostmi, ki upoštevajo trajanje izpostavljenosti in raven odmerka/koncentracijo, ki je povzročila takšne učinke), (glej 3.9.2.9), in so uvrščene v eno od dveh kategorij, odvisno od narave in resnosti obravnavanih učinkov (tabela 3.9.1).

Tabela 3.9.1

Kategorije specifične strupenosti za ciljne organe – ponavljajoča izpostavljenost

Kategorije	Kriteriji
Kategorija 1	Snovi, ki so povzročile bistveno strupenost pri ljudeh ali se lahko zanje na podlagi dokaza iz študij na testnih živalih predvideva, da lahko povzročijo bistveno strupenost pri ljudeh po ponavljajoči izpostavljenosti. Snovi so razvrščene v kategorijo 1 za sistemsko strupenost za ciljne organe (ponavljajoča izpostavljenost) na podlagi: — zanesljivih in kakovostnih dokazov pri ljudeh ali iz epidemioloških študij ali — opazovanj iz ustreznih študij na testnih živalih, ki so pokazale bistvene in/ali resne strupene učinke, pomembne za zdravje ljudi, pri splošno nizki koncentraciji izpostavljenosti. Orientacijske ravni odmerka/mejne koncentracije so navedene spodaj (glej 3.9.2.9) in se uporabijo pri ocenjevanju zanesljivosti dokazov.
Kategorija 2	Snovi, za katere se lahko na podlagi dokaza iz študij na testnih živalih predvideva, da lahko škodujejo zdravju ljudi po ponavljajoči izpostavljenosti. Snovi so razvrščene v kategorijo 2 glede na strupenost za ciljne organe (ponavljajoča izpostavljenost) na podlagi opazovanj iz ustreznih študij na testnih živalih, pri katerih so bili povzročeni bistveni strupeni učinki, pomembni za zdravje ljudi, pri na splošno nizki koncentraciji izpostavljenosti. Orientacijske ravni odmerka/mejne koncentracije so navedene spodaj (glej 3.9.2.9) kot pomoč pri razvrstitvi. V izjemnih primerih se lahko za uvrstitev snovi v kategorijo 2 uporabijo tudi dokazi pri ljudeh (glej 3.9.2.6).

Opomba:

Treba je poskusiti določiti primarni ciljni organ za učinkovanje strupenosti in ustrezno razvrstiti snovi med npr. hepatotoksine, nevrotoksine. Skrbno se evalvirajo podatki in, kadar je mogoče, izključijo drugotni učinki (hepatotoksini lahko povzročijo drugotne učinke na živčni ali gastrointestinalni sistem).

- 3.9.2.2. Določi(-jo) se način(-i) izpostavljenosti, na katerega(-e) škoduje razvrščena snov.
- 3.9.2.3. Razvrstitev se opravi s strokovno presojo (glej oddelek 1.1.1) na podlagi zanesljivosti vseh dostopnih dokazov, vključno s spodaj navedenimi smernicami.
- 3.9.2.4. Zanesljivost dokazov vseh podatkov (glej oddelek 1.1.1), vključno z izvidi pri ljudeh, epidemiologijo in študijami na testnih živalih, se uporabi kot podkrepitev odločitve o razvrstitvi specifično strupenih učinkov za ciljne organe. Tako se upošteva tudi pomemben del podatkov o strupenosti, ki so bili v preteklih letih zbrani v industriji. Evalvacija tako temelji na vseh obstoječih podatkih, vključno s strokovno pregledanimi objavljenimi študijami in dodatnimi sprejemljivimi podatki.
- 3.9.2.5. Potrebne informacije za evalvacijo specifične strupenosti za ciljne organe izhajajo iz ponavljajoče izpostavljenosti ljudi, npr. izpostavljenost doma, na delovnem mestu ali v okolju, ali iz študij na testnih živalih. Pri standardnih študijah na podganah in miših, s katerimi se pridobivajo te informacije, gre za 28-dnevne, 90-dnevne študije ali študije v celotnem življenjskem obdobju (do dveh let), ki vključujejo hematološke, klinično kemijske ter podrobne makroskopske in mikroskopske preiskave, ki omogočijo določitev strupenih učinkov na ciljna tkiva/organe. Uporabijo se tudi podatki iz študij pri ponovljenih odmerkih za druge vrste, če so na voljo. Dokazi o specifični strupenosti za ciljne organe, ki se lahko uporabijo pri ocenjevanju razvrstitve, se lahko pridobijo tudi z drugimi dolgoročnimi študijami o izpostavljenosti, npr. glede na rakotvornost, nevrotoksičnost ali strupenost za razmnoževanje.

3.9.2.6. Izjemoma in na podlagi strokovne presoje je primerno nekatere snovi, pri katerih obstajajo dokazi o specifični strupenosti za ciljne organe pri ljudeh, uvrstiti v kategorijo 2:

- (a) kadar zanesljivost dokazov pri ljudeh ne zadostuje za razvrstitev v kategorijo 1 in/ali
- (b) na podlagi narave in resnosti učinkov.

Ravni odmerka/koncentracije pri ljudeh se ne upoštevajo pri razvrstitvi, vsi dostopni dokazi iz študij na živalih pa morajo biti v skladu z razvrstitvijo v kategorijo 2. To pomeni, da se snov razvrsti v kategorijo 1, če so na voljo tudi podatki o snovi za živali, ki utemljujejo razvrstitev snovi v kategorijo 1.

3.9.2.7. *Učinki, ki se uporabijo kot podkrepitev pri razvrstitvi glede na specifično strupenost za ciljne organe po ponavljajoči izpostavljenosti*

3.9.2.7.1. Zanesljivi dokazi, ki pokažejo dosledno in prepoznavno povezavo med ponavljajočo izpostavljenostjo s snovjo in strupenim učinkom, so podkrepitev za razvrstitev.

3.9.2.7.2. Dokazi iz izkušenj/izvidov pri ljudeh so običajno omejeni na poročila o škodljivih posledicah za zdravje in pogosto ne vsebujejo jasnih podatkov o pogojih izpostavljenosti in znanstvenih podrobnosti, ki se pridobijo z dobro opravljenimi študijami na testnih živalih.

3.9.2.7.3. Dokazi iz ustreznih študij na testnih živalih v obliki kliničnih opažanj ter hematoloških, klinično kemijskih, makroskopskih in mikroskopskih patoloških preiskav lahko vsebujejo veliko več podrobnosti, kar lahko pogosto razkrije nevarnosti, ki morda niso življenjsko nevarne, vendar lahko škodljivo vplivajo na delovanje organizma. Zato se pri postopku razvrstitve upoštevajo vsi dostopni dokazi in njihov vpliv na zdravje ljudi, to med drugim vključuje naslednje strupene učinke pri ljudeh in/ali živalih:

- (a) obolevnost ali smrt pri ponavljajoči ali dolgotrajni izpostavljenosti. Obolevnost ali smrt je lahko posledica ponavljajoče izpostavljenosti tudi pri sorazmerno majhnih odmerkih/koncentracijah zaradi bioakumulacije snovi ali njenih metabolitov in/ali zaradi prevlade ponavljajoče izpostavljenosti snovi ali njenim metabolitom nad postopkom razstrupljanja;
- (b) pomembne funkcionalne spremembe osrednjega ali perifernega živčevja ali drugih organskih sistemov, vključno z znaki zastoja osrednjega živčnega sistema in učinki na posebna čutila (npr. vid, sluh in vonj);
- (c) vse konstantne in bistvene škodljive spremembe kliničnih, biokemičnih, hematoloških parametrov ali parametrov pri analizi urina;
- (d) hude okvare organov, ki se ugotovijo pri obdukciji in/ali pozneje ugotovijo ali potrdijo z mikroskopskim pregledom;
- (e) razširjene ali hude nekroze, fibroze ali granulomi v vitalnih organih z regenerativno sposobnostjo;
- (f) morfološke spremembe, ki so morda popravljive, vendar jasno kažejo na motnjo opazovanega organa (npr. huda zamaščenost jeter);
- (g) obsežnejše odmiranje celic (vključno z razpadanjem in zmanjšanim številom celic) v vitalnih organih, ki nimajo regenerativne sposobnosti.

3.9.2.8. *Učinki, ki se ne morejo uporabiti kot podkrepitev za razvrstitve glede na specifično strupenost za ciljne organe po ponavljajoči izpostavljenosti*

3.9.2.8.1. Lahko se pokažejo tudi učinki pri ljudeh in/ali živalih, ki ne upravičijo razvrstitve. Med takšne učinke med drugim spadajo:

- (a) klinična opažanja ali majhne spremembe pri pridobivanju telesne teže, uživanju hrane ali vode, katerih vzrok je strupenost snovi, vendar sami po sebi ne pomenijo „hude“ strupenosti;
- (b) neznatne spremembe klinične biokemije, parametrov hematologije ali analize urina in/ali kratkotrajni učinki, kadar so takšne spremembe ali učinki dvomljivega ali zanemarljivega toksikološkega pomena;
- (c) spremembe teže organov, vendar brez opaznih motenj delovanja organov;

- (d) prilagoditveni odzivi, ki nimajo toksikološkega pomena;
- (e) mehanizmi strupenosti, ki jih povzroča snov le pri nekaterih vrstah organizmov, tj. z gotovostjo dokazano, da niso pomembni za zdravje ljudi, in ne utemeljujejo razvrstitve.

3.9.2.9. *Orientacijske vrednosti, ki pomagajo pri razvrstitvi na podlagi rezultatov iz študij na testnih živalih*

- 3.9.2.9.1. Kadar so pri študijah na testnih živalih v ospredju le opažanja učinkov, trajanje izpostavljenosti pri poskusu in raven odmerka/koncentracija pa ni niso navedeni, potem ni bil upoštevan bistven element toksikologije, da so namreč vse snovi potencialno strupene, strupenost pa je odvisna od ravni odmerka/koncentracije in trajanja izpostavljenosti. Pri večini študij na testnih živalih v smernicah za testiranje nastopajo zgornje vrednosti mejnega odmerka.
- 3.9.2.9.2. Kot pomoč pri odločanju, ali se snov razvrsti ali ne in kako se razvrsti (v kategorijo 1 ali 2), so prikazane „orientacijske vrednosti“ glede ravni odmerka/koncentracije, ki se upoštevajo pri ravni odmerka/koncentraciji, za katero se ugotovi, da znatno vpliva na zdravje. Glavni razlog za navedbo takšnih orientacijskih vrednosti je, da so vse snovi potencialno strupene in da mora biti določena tista raven odmerka/koncentracija, nad katero je učinek nedvomno strupen. Tudi študije s ponovljenimi odmerki na testnih živalih so oblikovane tako, da se pri največjem uporabljenem odmerku pokaže strupenost, da bi se čim bolj približale cilju testa, zato se pri večini študij vsaj pri največji ravni odmerka pokažejo strupeni učinki. Zato ne zadostuje zgolj ugotavljanje povzročenih učinkov, ampak tudi raven odmerka/koncentracije, pri kateri nastanejo in kako pomembni so za ljudi.
- 3.9.2.9.3. Kadar se v študijah na živalih ugotovijo bistveni strupeni učinki, ki utemeljujejo razvrstitev snovi, potem lahko primerjava trajanja izpostavljenosti pri poskusu in ravni odmerka/koncentracije, pri kateri se ti učinki pokažejo, s predlaganimi orientacijskimi vrednostmi zagotovi uporabne informacije, ki pomagajo oceniti, ali je snov treba razvrstiti (ker so strupeni učinki posledica nevarnih lastnosti in tudi ravni odmerka/koncentracije ter trajanja izpostavljenosti).
- 3.9.2.9.4. Na odločitev o razvrstitvi lahko vpliva tudi primerjava z orientacijskimi vrednostmi o ravni odmerka/koncentraciji, pri katerih ali pod katerimi je bil opažen pomemben strupen učinek.
- 3.9.2.9.5. Orientacijske vrednosti se nanašajo na učinke, ki se pojavijo pri običajni 90-dnevni študiji o strupenosti na podganah. Uporabijo se lahko kot podlaga za ekstrapolacijo ustreznih orientacijskih vrednosti za študije o strupenosti z daljšim ali krajšim trajanjem z ekstrapolacijo odmerka/trajanja izpostavljenosti, primerljivo haberjevemu pravilu o vdihavanju, po katerem je raven odmerka, pri kateri se pokaže učinek, neposredno sorazmeren izpostavljeni koncentraciji in trajanju izpostavljenosti. To se ocenjuje za vsak primer posebej; npr. za 28-dnevno študijo se spodnje orientacijske vrednosti povečajo za trikrat.
- 3.9.2.9.6. Kadar so v 90-dnevni študiji s ponovljenimi odmerki na testnih živalih opaženi pomembni strupeni učinki pri orientacijskih vrednostih (C) v tabeli 3.9.2 ali pod njimi, je primerna razvrstitev v kategorijo 1:

Tabela 3.9.2

Orientacijske vrednosti kot pomoč pri razvrstitvi v kategorijo 1

Način izpostavljenosti	Enote	Orientacijske vrednosti (raven odmerka/koncentracija)
Oralno (podgana)	mg/kg telesne teže na dan	$C \leq 10$
Dermalno (podgana ali kunec)	mg/kg telesne teže na dan	$C \leq 20$
Vdihavanje plina (podgana)	ppmv/6 ur na dan	$C \leq 50$
Vdihavanje hlapov (podgana)	mg/liter/6 ur na dan	$C \leq 0,2$
Vdihavanje prahu/meglice/dima (podgana)	mg/liter/6 ur na dan	$C \leq 0,02$

- 3.9.2.9.7. Kadar so v 90-dnevni študiji s ponovljenimi odmerki na testnih živalih opaženi pomembni strupeni učinki znotraj razpona orientacijskih vrednostih (C), kakor so navedene v tabeli 3.9.3, je primerna razvrstitev v kategorijo 2:

Tabela 3.9.3

Orientacijske vrednosti kot pomoč pri razvrstitvi v kategorijo 2

Način izpostavljenosti	Enote	Razpon orientacijskih vrednosti: (raven odmerka/koncentracija)
Oralno (podgana)	mg/kg telesne teže na dan	$10 < C \leq 100$
Dermalno (podgana ali kunec)	mg/kg telesne teže na dan	$20 < C \leq 200$
Vdihavanje plina (podgana)	ppmv/6 ur na dan	$50 < C \leq 250$
Vdihavanje hlapov (podgana)	mg/liter/6 ur na dan	$0,2 < C \leq 1,0$
Vdihavanje prahu/meglvice/dima (podgana)	mg/liter/6 ur na dan	$0,02 < C \leq 0,2$

3.9.2.9.8. Orientacijske vrednosti in razponi iz odstavkov 3.9.2.9.6 in 3.9.2.9.7 so le smernice in se uporabljajo kot del določanja zanesljivosti dokazov in kot pomoč pri odločitvi o razvrstitvi. Te vrednosti niso mišljene kot stroge razmejitvene vrednosti.

3.9.2.9.9. Zato je mogoče, da se lahko poseben profil strupenosti pojavi pri študijah na živalih s ponovljenimi odmerki pri odmerku/koncentraciji pod orientacijsko vrednostjo, npr. < 100 mg/kg telesne teže/dan oralno, vendar se lahko zaradi narave učinka, npr. nevrotoksičnosti, ki se pojavi le pri samcih podgan posebne pasme, za katero je značilna občutljivost za ta učinek, snov ne razvrsti. Nasprotno se lahko pri študijah na živalih pokaže poseben profil strupenosti nad orientacijsko vrednostjo, npr. ≥ 100 mg/kg telesne teže oralno, in poleg tega obstajajo dodatne informacije iz drugih virov, npr. iz drugih dolgoročnih študij o vnosu, ali izkušnje pri ljudeh, ki podpirajo ugotovitve, da je zaradi zanesljivosti dokazov razvrstitev preudarna.

3.9.2.10. *Drugi preudarki*

3.9.2.10.1. Kadar je za snov značilna le uporaba podatkov o živalih (običajno za nove snovi, vendar tudi za mnoge obstoječe snovi), potem postopek razvrstitve vključuje navedbo orientacijske vrednosti o ravni odmerka/koncentraciji kot enega od elementov pri določanju zanesljivosti dokazov.

3.9.2.10.2. Kadar so na voljo dobro utemeljeni podatki o ljudeh, ki kažejo na specifično strupen učinek za ciljne organe, za katerega se lahko zanesljivo ugotovi, da je nastal zaradi ponavljajoče ali dolgotrajne izpostavljenosti snovi, se snov običajno razvrsti. Pozitivni podatki o ljudeh, ne glede na verjeten odmerek, imajo prednost pred podatki o živalih. Če se snov sprva ne razvrsti, ker se specifična strupenost za ciljne organe ni pojavila pri orientacijski vrednosti ravni odmerka/koncentracije za testiranje na živalih ali pod njo, in če nato postanejo dostopni podatki o izvidih pri ljudeh, ki kažejo specifičen strupen učinek za ciljne organe, se snov vendarle razvrsti.

3.9.2.10.3. Snov, ki ni testirana glede specifične strupenosti za ciljne organe, se po potrebi lahko razvrsti na podlagi podatkov iz potrjenega razmerja med strukturo in aktivnostjo ter ekstrapolacije na podlagi strokovne presoje s strukturno podobne snovi, ki je bila predhodno razvrščena, upoštevajo pa se tudi drugi pomembni dejavniki, kot je oblikovanje skupnih pomembnih metabolitov.

3.9.2.10.4. Nasičena koncentracija hlapov se po potrebi uporabi kot dodaten element posebnega varovanja zdravja in varnosti.

3.9.3. **Kriteriji za razvrstitev zmesi**

3.9.3.1. Zmesi se razvrstijo po istih kriterijih, kot se uporabljajo za snovi, ali kot je opisano spodaj. Tako kot snovi se lahko tudi zmesi razvrstijo glede na specifično strupenost za ciljne organe po ponavljajoči izpostavljenosti.

3.9.3.2. *Razvrstitev zmesi, kadar so na voljo podatki za celotno zmes*

3.9.3.2.1. Kadar so za zmes na voljo zanesljivi in kakovostni dokazi o izkušnjah ljudi ali ustrezne študije s testnimi živalmi, kot je navedeno v kriterijih za snovi (glej 1.1.1.4), se zmes razvrsti po oceni zanesljivosti dokazov teh podatkov. Pri evalvaciji podatkov o zmesih je potrebna previdnost, da zaradi odmerka, trajanja, opazovanja ali analize rezultati ne postanejo nezanesljivi.

- 3.9.3.3. Razvrstitev zmesi, kadar ni na voljo podatkov za celotno zmes: premostitvena načela
- 3.9.3.3.1. Kadar zmes ni testirana za določanje specifične strupenosti za ciljne organe, ampak je za ustrezno opredelitev nevarnosti zmesi dovolj podatkov o posameznih sestavinah in podobnih testiranih zmesih, se ti podatki uporabijo v skladu s premostitvenimi načeli iz oddelka 1.1.3.
- 3.9.3.4. Razvrstitev zmesi, kadar so na voljo podatki za vse ali le nekatere sestavine zmesi
- 3.9.3.4.1. Kadar ni zanesljivih dokazov ali podatkov o testu za posebno zmes in se za razvrstitev ne morejo uporabiti premostitvena načela, potem razvrstitev zmesi temelji na razvrstitvi sestavin. V tem primeru se zmes razvrsti kot specifično strupena snov za ciljne organe (posamezen organ se navede), in sicer po enkratni izpostavljenosti, ponavljajoči izpostavljenosti ali obeh, kadar je vsaj ena sestavina razvrščena kot specifično strupena snov za ciljne organe kategorije 1 ali kategorije 2 in je prisotna na ravni ustrezne splošne mejne koncentracije ali nad njo, kot določa tabela 3.9.4 za kategorijo 1 oziroma 2.

Tabela 3.9.4

Splošne mejne koncentracije sestavin zmesi, razvrščenih kot specifično strupene snovi za ciljne organe, pri katerih se razvrsti tudi zmes

Sestavina, razvrščena kot:	Splošne mejne koncentracije, pri katerih se zmes razvrsti v naslednje kategorije:	
	Kategorija 1	Kategorija 2
Kategorija 1 Specifično strupena snov za ciljne organe	koncentracija $\geq 10\%$	$1,0\% \leq$ koncentracija $< 10\%$
Kategorija 2 Specifično strupena snov za ciljne organe		koncentracija $\geq 10\%$ [[opomba 1]]

Opomba 1

Če je v zmesi prisotna specifično strupena snov za ciljne organe kategorije 2 kot sestavina s koncentracijo $\geq 1,0\%$, je za zmes na zahtevo na voljo varnostni list.

- 3.9.3.4.2. Te splošne mejne koncentracije in naknadne razvrstitve se uporabljajo za specifično strupene snovi za ciljne organe pri ponovljenih odmerkih.
- 3.9.3.4.3. Zmesi se razvrstijo posebej za eno ali obe strupenosti z enim odmerkom ali ponovljenimi odmerki.
- 3.9.3.4.4. Kadar se strupene snovi, ki vplivajo na več kot en sistem organov, kombinirajo, je treba upoštevati morebitno povečanje strupenosti in medsebojni sinergijski vpliv, ker lahko nekatere snovi povzročijo strupenost za ciljni organ pri koncentraciji $< 1\%$, na to je treba biti pozoren tedaj, kadar se za druge sestavine v zmesi ve, da lahko povečajo strupen učinek.
- 3.9.4. **Obvestilo o nevarnosti**
- 3.9.4.1. Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriteriji za razvrstitev v ta razred nevarnosti, v skladu s tabelo 3.9.5.

Tabela 3.9.5

Elementi etikete za strupenost za ciljne organe po ponavljajoči izpostavljenosti

Razvrstitev	Kategorija 1	Kategorija 2
Piktogrami GHS		
Opozorilna beseda	Nearno	Pozor

Razvrstitev	Kategorija 1	Kategorija 2
Stavek o nevarnosti	H372: Škoduje organom (navesti vse organe, na katere vpliva, če je znano) pri dolgotrajni ali ponavljajoči se izpostavljenosti (navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti)	H373: Lahko škoduje organom (navesti vse organe, na katere vpliva, če je znano) pri dolgotrajni ali ponavljajoči se izpostavljenosti (navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti)
Previdnostni stavek – preprečevanje	P260 P264 P270	P260
Previdnostni stavek – odziv	P314	P314
Previdnostni stavek – shranjevanje		
Previdnostni stavek – odstranjevanje	P501	P501

3.10. Nevarnost pri vdihavanju

3.10.1. *Opredelitev pojmov in splošni preudarki*

3.10.1.1. Ti kriteriji se uporabljajo za razvrstitev snovi ali zmesi, ki so lahko nevarne za ljudi zaradi strupenosti pri vdihavanju.

3.10.1.2. „Vdihavanje“ pomeni vhod tekočine ali trdne snovi ali zmesi neposredno skozi ustno ali nosno votlino ali posredno z bruhanjem v sapnik in spodnji respiratorni sistem.

3.10.1.3. Strupenost pri vdihavanju vključuje resne akutne učinke, kot je s kemikalijami povzročena pljučnica, različne stopnje poškodb pljuč ali smrt zaradi vdihavanja.

3.10.1.4. Vdihavanje se začne v trenutku vdiha in traja toliko časa, kolikor je potrebno za en vdih, ko se povzročitelj ustavi na stičišču zgornjih dihal in prebavi na območju grla in žrela.

3.10.1.5. Snov ali zmes se lahko vdihne pri bruhanju, ki nastopi po njenem zaužitju. To se upošteva pri označevanju, zlasti kadar je zaradi akutne strupenosti primerno priporočilo, da snov povzroča bruhanje po zaužitju. Če pa je snov/zmes nevarna tudi zaradi strupenosti pri vdihavanju, se priporočilo o povzročanju bruhanja ustrezno prilagodi.

3.10.1.6. *Posebni preudarki*

3.10.1.6.1. Pri pregledu medicinske literature o kemijskem vdihavanju je bilo ugotovljeno, da so nekateri ogljikovodiki (naftni destilati) in nekateri klorirani ogljikovodiki nevarni pri vdihavanju za ljudi.

3.10.1.6.2. Kriteriji za razvrstitev se nanašajo na kinematično viskoznost. Pretvorba med dinamično in kinematično viskoznostjo se opravi z naslednjo formulo:

$$\frac{\text{dinamična viskoznost (mPa s)}}{\text{gostota (g/cm}^3\text{)}} = \text{kinematična viskoznost (mm}^2\text{/s)}$$

3.10.1.6.3. Razvrstitev izdelkov v obliki aerosolov/meglic

Snovi ali zmesi v oblikah aerosola in meglic (izdelek) so običajno v posodah, kot so tlačne posode, razpršilci s sprožilom in črpalko. Ključno pri razvrščanju teh izdelkov je, ali se v ustih oblikujejo v skupek, ki se potem lahko vdihne. Če je meglica ali aerosol v tlačni posodi sestavljena iz dovolj drobnih delcev, se skupek morda ne oblikuje. Če pa izdelek iz tlačne posode prši v toku, se skupek lahko oblikuje in potem lahko vdihne. Običajno je meglica v razpršilcu s sprožilom in črpalko groba, zato se lahko oblikuje skupek, ki se potem lahko vdihne. Kadar se mehanizem črpalke lahko odstrani in se vsebina lahko pogoltne, se preuči primerna razvrstitev snovi ali zmesi.

3.10.2. **Kriteriji za razvrstitev snovi**

Tabela 3.10.1

Kategorija nevarnosti glede na strupenost pri vdihavanju

Kategorija	Kriteriji
Kategorija 1	Snovi, za katere je znano, da so nevarne zaradi strupenosti pri vdihavanju za ljudi, ali ki jih je treba obravnavati, kot da so nevarne zaradi strupenosti pri vdihavanju za ljudi. Snov se razvrsti v kategorijo 1: (a) na podlagi zanesljivih in kakovostnih dokazov pri ljudeh ali (b) če gre za ogljikovodik s kinematično viskoznostjo 20,5 mm²/s ali manj, izmerjeno pri 40 °C.

Opomba:

Med snovi iz kategorije 1 med drugim spadajo nekateri ogljikovodiki, terpentinsko in borovo olje.

3.10.3. **Kriteriji za razvrstitev zmesi**

3.10.3.1. Razvrstitev, kadar so na voljo podatki za celotno zmes

Zmes se razvrsti v kategorijo 1 na podlagi zanesljivih in kakovostnih dokazov pri ljudeh.

3.10.3.2. Razvrstitev, kadar ni na voljo podatkov za celotno zmes: premostitvena načela

3.10.3.2.1 Kadar zmes ni testirana za določanje strupenosti pri vdihavanju, ampak je za ustrezno opredelitev nevarnosti zmesi dovolj podatkov o posameznih sestavinah in podobnih testiranih zmesih, se ti podatki uporabijo v skladu s premostitvenimi načeli iz oddelka 1.1.3. Koncentracija strupenih snovi pri vdihavanju pri uporabi premostitvenega načela za razredčevanje mora kljub temu znašati 10 % ali več.

3.10.3.3. Razvrstitev, kadar so na voljo podatki za vse ali le nekatere sestavine zmesi

3.10.3.3.1 Kategorija 1

3.10.3.3.1.1 Zmes, ki skupaj vsebuje vsaj 10 % takšne(-ih) snovi, ki je (so) razvrščena(-e) v kategorijo 1, in ima kinematično viskoznost 20,5 mm²/s ali manj, izmerjeno pri 40 °C, se razvrsti v kategorijo 1.

3.10.3.3.1.2 Kadar zmes tvori dva ali več različnih slojev, od katerih en sloj vsebuje 10 % ali več takšne(-ih) snovi, ki (je) so razvrščena(-e) v kategorijo 1, in ima kinematično viskoznost 20,5 mm²/s ali manj, izmerjeno pri 40 °C, se celotna zmes razvrsti v kategorijo 1.

3.10.4. **Obvestilo o nevarnosti**

3.10.4.1. Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 3.10.2.

Tabela 3.10.2

Elementi etikete za strupenost pri vdihavanju

Razvrstitev	Kategorija 1
Piktogram GHS	
Opozorilna beseda	Nevarno
Stavek o nevarnosti	H304: Pri zaužitju in vstopu v dihalne poti je lahko smrtno.

Razvrstitev	Kategorija 1
Previdnostni stavek – preprečevanje	
Previdnostni stavek – odziv	P301 + P310 P331
Previdnostni stavek – shranjevanje	P405
Previdnostni stavek – odstranjevanje	P501

4. DEL 4: NEVARNOSTI ZA OKOLJE

4.1. **Nearno za vodno okolje**

4.1.1. ***Opredelevitev pojmov in splošni preudarki***

4.1.1.1. *Opredelevitev pojmov*

Akutna strupenost za vodno okolje pomeni inherentno lastnost snovi, ki škodi organizmu pri kratkotrajni izpostavljenosti tej snovi.

Razpoložljivost snovi pomeni obseg, v katerem ta snov postane topna ali disperzibilna. Razpoložljivost kovin pomeni obseg, v katerem se lahko delež kovinskih ionov v kovinski spojini (M^n) loči od preostanka spojine (molekule).

Biološka razpoložljivost pomeni obseg, v katerem se snov absorbira v organizmu in razširi v ciljnem delu znotraj organizma. Odvisna je od fizikalno-kemijskih lastnosti snovi, anatomije in fiziologije organizma, farmakokinetike in načina izpostavljenosti. Razpoložljivost ni pogoj za biološko razpoložljivost.

Kopičenje v organizmih pomeni neto količino snovi, ki ostane v organizmu po njenem sprejetju, preoblikovanju in odstranjevanju ob vseh načinih izpostavljenosti (tj. zrak, voda, sediment/tla in hrana).

Biokoncentracija pomeni neto količino snovi, ki ostane v organizmu po njenem sprejetju, preoblikovanju in odstranjevanju zaradi izpostavljenosti vodi.

Kronična strupenost za vodno okolje pomeni inherentno lastnost snovi, ki povzroča škodljive učinke na vodne organizme med izpostavljenostjo, in se določi glede na življenjski krog organizma.

Razgradnja pomeni razpad organskih molekul na manjše molekule in nazadnje na ogljikov dioksid, vodo in soli.

4.1.1.2. *Osnovni elementi*

4.1.1.2.0. Nearno za vodno okolje se deli na:

- akutno nearnost za vodno okolje;
- kronično (dolgotrajno) nearnost za vodno okolje.

4.1.1.2.1. Osnovni elementi za razvrstitev na podlagi učinkov na vodno okolje so:

- akutna strupenost za vodno okolje;
- zmožnost za kopičenje v organizmih ali dejansko kopičenje v organizmih;
- razgradnja (biotska ali abiotska) pri organskih kemikalijah in
- kronična strupenost za vodno okolje.

4.1.1.2.2. Prednost imajo podatki, pridobljeni s standardiziranimi testnimi metodami iz člena 8(3). V praksi se uporabijo tudi podatki iz drugih standardiziranih testnih metod, kot so nacionalne metode, kadar se štejejo za enakovredne. Kadar so na voljo veljavni podatki, dobljeni z nestandardnimi testnimi metodami in ne-testnimi metodami, se upoštevajo pri razvrstitvi, če izpolnjujejo pogoje iz oddelka 1 Priloge XI k Uredbi (ES) št. 1907/2006. Na splošno se podatki o strupenosti za sladkovodne in morske vrste štejejo za primerne, da se uporabijo v razvrstitvi, če je uporabljena testna metoda enakovredna. Kadar ti podatki niso na voljo, temelji razvrstitev na najboljših razpoložljivih podatkih. Glej tudi del 1.

4.1.1.3. *Drugi preudarki*

4.1.1.3.1. Za razvrstitev snovi in zmesi med nearne za okolje je treba ugotoviti nearnosti, ki jih imajo za vodno okolje. Za vodno okolje se obravnavajo vodni organizmi, ki živijo v vodi, in vodni ekosistem, katerega del so. Zato je podlaga za ugotavljanje nearnosti strupenost snovi ali zmesi za vodno okolje, čeprav se to spremeni tako, da se po potrebi upoštevajo nadaljnje informacije v zvezi z razgradnjo in kopičenjem v organizmih.

4.1.1.3.2. Čeprav sistem razvrščanja velja za vse snovi in zmesi, je nesporno, da v nekaterih posebnih primerih Agencija izda smernice.

4.1.2. **Kriteriji za razvrstitev snovi**

4.1.2.1. Splošen sistem razvrščanja snovi je sestavljen iz ene razvrstitvene kategorije akutnosti in treh razvrstitvenih kategorij kroničnosti. Razvrstitvene kategorije akutnosti in kroničnosti se uporabljajo neodvisno druga od druge. Kriteriji za razvrstitev snovi v kategorijo akutnosti 1 se določijo le na podlagi podatkov o akutni strupenosti za vodno okolje (EC_{50} ali LC_{50}). Kriteriji za razvrstitev snovi v kategorije kroničnosti zajemajo dve vrsti informacij, tj. podatke o akutni strupenosti za vodno okolje in podatke o usodi v okolju (podatki o razgradljivosti in kopičenju v organizmih).

4.1.2.2. Sistem vključuje tudi posebno razvrstitveno kategorijo (opredeljeno kot kategorija: kronično 4), ki ima funkcijo nekakšne „varnostne mreže“ in se uporablja, kadar razpoložljivi podatki ne omogočajo razvrstitve na podlagi formalnih kriterijev, vendar obstajajo razlogi za zaskrbljenost (glej primer v tabeli 4.1.0).

4.1.2.3. Znotraj sistema razvrščanja je nesporno, da sta glavni inherentni nevarnosti za vodne organizme akutna in kronična strupenost snovi. Za vsako od lastnosti sta določeni ločeni kategoriji nevarnosti, ki pomenita različni ravni ugotovljene nevarnosti. Za opredelitev ustrezne(-ih) kategorije(-ij) nevarnosti se običajno uporabijo najnižje razpoložljive vrednosti strupenosti. Vendar je v nekaterih okoliščinah primernejši pristop določitve zanesljivosti dokazov.

4.1.2.4. Glavna nevarnost snovi, opredeljene kot nevarne za vodno okolje, je kronična strupenost, čeprav tudi akutna strupenost z vrednostjo $L(E)C_{50} \leq 1$ mg/l velja za nevarno. Inherentne lastnosti, zaradi katerih se snov razvrsti v kategorijo kronične (dolgotrajne) nevarnosti, so njena počasna razgradljivost in/ali zmožnosti biokoncentracije v kombinaciji z akutno strupenostjo.

4.1.2.5. Snovi, ki so tudi pri koncentracijah, ki so znatno nižje od 1 mg/l, akutno strupene, prispevajo kot sestavine zmesi tudi pri nizki koncentraciji k strupenosti zmesi, zato se jim običajno določi večji ponder, kadar se uporabi metoda seštevanja razvrstitev (glej opombo 1 tabel 4.1.0 in 4.1.3.5.5).

4.1.2.6. Kriteriji za razvrstitev snovi kot „nevarnih za vodno okolje“ so navedena v tabeli 4.1.0.

Tabela 4.1.0

Razvrstitvene kategorije nevarnosti za vodno okolje

Akutna (kratkotrajna) nevarnost za vodno okolje	
kategorija akutnosti 1	(opomba 1)
96 ur LC_{50} (za ribe)	≤ 1 mg/l in/ali
48 ur EC_{50} (za rake)	≤ 1 mg/l in/ali
72 ali 96 ur ErC_{50} (za alge ali druge vodne rastline)	≤ 1 mg/l (opomba 2)
Kronična (dolgotrajna) nevarnost za vodno okolje	
Kategorija kroničnosti 1	(opomba 1)
96 ur LC_{50} (za ribe)	≤ 1 mg/l in/ali
48 ur EC_{50} (za rake)	≤ 1 mg/l in/ali
72 ali 96 ur ErC_{50} (za alge ali druge vodne rastline)	≤ 1 mg/l (opomba 2)
poleg tega snov ni hitro razgradljiva in/ali ima eksperimentalno določen $BCF \geq 500$ (ali, če ne obstaja, log $K_{ow} \geq 4$).	
Kategorija kroničnosti 2	
96 ur LC_{50} (za ribe)	> 1 do ≤ 10 mg/l in/ali
48 ur EC_{50} (za rake)	> 1 do ≤ 10 mg/l in/ali
72 ali 96 ur ErC_{50} (za alge ali druge vodne rastline)	> 1 do ≤ 10 mg/l (opomba 2)
poleg tega snov ni hitro razgradljiva in/ali ima eksperimentalno določen $BCF \geq 500$ (ali, če ne obstaja, log $K_{ow} \geq 4$), razen če so NOEC za kronično strupenost > 1 mg/l.	

Kategorija kroničnosti 3	
96 ur LC ₅₀ (za ribe)	> 10 do ≤ 100 mg/l in/ali
48 ur EC ₅₀ (za rake)	> 10 do ≤ 100 mg/l in/ali
72 ali 96 ur ErC ₅₀ (za alge ali druge vodne rastline)	>10 do ≤ 100 mg/l (opomba 2)
poleg tega snov ni hitro razgradljiva in/ali ima eksperimentalno določen BCF ≥ 500 (ali, če ne obstaja, log K _{ow} ≥ 4), razen če so NOEC za kronično strupenost > 1 mg/l.	
Razvrstitev zaradi možne nevarnosti „varnostna mreža“	
Kategorija kroničnosti 4	
Kadar dostopni podatki ne omogočajo razvrstitve v skladu z navedenimi kriteriji, vendar obstajajo razlogi za zaskrbljenost. To vključuje na primer slabo topne snovi, za katere ni ugotovljena akutna strupenost pri vrednostih do topnosti v vodi (opomba 3) in ki niso hitro razgradljive ter imajo eksperimentalno določen BCF ≥ 500 (ali, če ne obstaja, log K _{ow} ≥ 4), ki kaže zmožnost kopičenja v organizmih, bodo razvrščene v to kategorijo, razen če obstajajo drugi znanstveni dokazi, ki kažejo, da razvrstitev ni potrebna. Med takšne dokaze spadajo vrednosti NOEC za kronično strupenost > topnost v vodi ali > 1 mg/l ali dokazi o hitri razgradnji v okolju.	

Opomba 1

Pri razvrstitvi snovi v kategorijo akutnosti 1 in/ali kategorijo kroničnosti 1 je treba hkrati določiti ustrezeni M-faktor. (glej tabelo 4.1.3).

Opomba 2

Razvrstitev temelji na ErC₅₀ [= EC₅₀ (stopnja rasti)]. Kadar podlaga za EC₅₀ ni določena ali EC₅₀ ni sporočen, temelji razvrstitev na najnižjem razpoložljivem EC₅₀.

Opomba 3

Opredelevitev „ni akutno strupena“ pomeni, da vrednost(i) L(E)C₅₀ presega(jo) vrednost za topnost v vodi. Uporablja se tudi za slabo topne snovi, (topnost v vodi < 1 mg/l), za katere je dokazano, da s testom akutnosti ne bi bilo mogoče ugotoviti prave inherentne strupenosti.

4.1.2.7. Strupenost za vodno okolje

4.1.2.7.1. Akutna strupenost za vodno okolje se običajno določi z LC₅₀ pri ribah (96 ur), EC₅₀ pri raki (48 ur) in/ali EC₅₀ pri algah (72 ali 96 ur). Te vrste obsegajo celo vrsto prehranjevalnih ravni in taksonov ter se štejejo za predstavnike vseh vodnih organizmov, upoštevajo pa se tudi podatki o drugih vrstah (npr. *Lemna* spp.), če je metodologija testa ustrezna. Testi inhibicije rasti vodnih rastlin se običajno štejejo za teste kroničnosti, vendar se vrednosti EC₅₀ za namen razvrstitve obravnavajo kot vrednosti za akutnost (glej opombo 2).

4.1.2.7.2. Za določanje kronične strupenosti za vodno okolje za razvrstitev se uporabijo tudi podatki, dobljeni v skladu s standardiziranimi testnimi metodami iz člena 8(3), pa tudi rezultati, dobljeni z mednarodno sprejetimi testnimi metodami. Uporabijo se vrednosti NOEC ali druge enakovredne vrednosti L(E)C_x (npr. EC₁₀).

4.1.2.8. Kapičenje v organizmih

4.1.2.8.1. Kapičenje snovi v vodnih organizmih lahko povzroča dolgotrajne strupene učinke, čeprav so dejanske koncentracije v vodi majhne. Zmožnost kopičenja organskih snovi v organizmih se običajno določi s porazdelitvenim koeficientom oktanol/voda, običajno kot log K_{ow}. Razmerje med log K_{ow} organske snovi in njeno biokoncentracijo, izmerjeno z biokoncentracijskim faktorjem (BCF) pri ribah, je v znanstveni literaturi zelo dobro podprta. Mejna vrednost log K_{ow} ≥ 4 se uporablja le za ugotavljanje tistih snovi, ki imajo dejansko zmožnost biokoncentracije. Čeprav se s tem ugotovi zmožnost kopičenja v organizmih, je eksperimentalno določen BCF primernejši in se prednostno uporablja, če je na voljo. Vrednost BCF ≥ 500 pri ribah kaže na zmožnost biokoncentracije, kar se upošteva pri razvrščanju.

4.1.2.9. *Hitra razgradljivost organskih snovi*

4.1.2.9.1. Snovi, ki se hitro razgradijo, je mogoče hitro odstraniti iz okolja. Čeprav se lahko tudi zaradi teh snoveh pojavijo nezaželeni učinki, zlasti ob razlitju ali nesreči, pa so ti lokalizirani in kratkotrajni. Nezmožnost hitre razgradnje v okolju pomeni, da se snov lahko v vodi razširi na veliko območje in v daljšem obdobju učinkuje strupeno.

4.1.2.9.2. Eden od načinov ugotavljanja hitre razgradljivosti vključuje presejalne teste biorazgradnje, s katerimi se določi, ali je organska snov „lahko biološko razgradljiva“. Kadar ti podatki niso na voljo, velja količnik $BOD(5 \text{ dni})/COD \geq 0,5$ kot indikator za hitro razgradljivost. Zato se šteje, da se snov, ki izpolnjuje zahteve tega presejalnega testa, „hitro“ razgrajuje v vodnem okolju in zato verjetno ni dolgotrajno obstojna. Nasprotno pa ne pomeni nujno, da se snov, ki ne izpolni zahtev presejalnega testa, v okolju ne bo hitro razgradila. Zato se lahko upoštevajo tudi drugi dokazi hitre razgradnje v okolju, ki so zlasti pomembni, kadar snovi zavirajo mikrobiološko aktivnost pri koncentracijah, ki se uporabljajo za standardno testiranje. Zato je vključeno nadaljnje merilo razvrstitve, ki omogoča uporabo podatkov, ki dokazujejo, da se je snov dejansko biotsko ali abiotsko razgradila v vodnem okolju za $> 70 \%$ v 28 dneh. Če se v razmerah, ki obstajajo v realnem okolju, ugotovi razgradnja, potem velja merilo „hitre razgradljivosti“.

4.1.2.9.3. Veliko podatkov o razgradnji je na voljo v obliki razpolovnih dob razgradnje in se lahko uporabijo za določitev hitre razgradljivosti, vendar le, če se doseže končna biorazgradnja snovi, tj. popolna mineralizacija. Primarna biorazgradnja običajno ne zadostuje pri oceni hitre razgradljivosti, razen če je mogoče pokazati, da produkti razgradnje ne izpolnjujejo kriterijev, da bi bili razvrščeni kot nevarni za vodno okolje.

4.1.2.9.4. V uporabljenih kriterijih se odražajo dejstvo, da je razgradnja v okolju lahko biotska ali abiotska. Hidroliza se lahko upošteva, če produkti hidrolize ne izpolnjujejo kriterije, da bi bili razvrščeni kot nevarni za vodno okolje.

4.1.2.9.5. Snovi se štejejo za hitro razgradljive v okolju, če izpolnjujejo naslednji kriteriji:

(a) če se v 28-dnevnih študijah o hitri biorazgradljivosti dosežejo vsaj naslednje stopnje razgradljivosti;

(i) pri testih na podlagi raztopljenega organskega ogljika: 70 %

(ii) pri testih na podlagi porabe kisika ali nastajanja ogljikovega dioksida: 60 % teoretične maksimalne vrednosti.

Te stopnje biorazgradljivosti je treba doseči v 10 dneh od začetka razgradnje, ki se začne, ko se razgradi 10 % snovi ali

(b) če so na voljo le podatki BOD in COD, kadar je razmerje $BOD5/COD \geq 0,5$, ali

(c) če so na voljo drugi prepričljivi znanstveni dokazi, ki kažejo, da se snov lahko razgradi (biotsko in/ali abiotsko) v vodnem okolju za $> 70 \%$ v 28 dneh.

4.1.2.10. *Anorganske spojine in kovine*

4.1.2.10.1. Za anorganske spojine in kovine ima koncept razgradljivosti, ki se uporablja za organske spojine, omejen ali neznatni pomen. Takšne snovi se nasprotno pretvarjajo z običajnimi procesi v okolju, pri katerih se poveča ali zmanjša biološka razpoložljivost strupenih snovi. Tudi podatke o kopičenju v organizmih je treba uporabljati previdno ⁽¹⁾.

4.1.2.10.2. Slabo topne anorganske spojine in kovine so lahko akutno ali kronično strupene za vodno okolje, odvisno od inherentne strupenosti biološko razpoložljivih anorganskih snovi ter stopnje in količine teh snovi, ki pridejo v raztopino.

⁽¹⁾ Agencija bo predložila posebne smernice o tem, kako se lahko ti podatki uporabijo za takšne snovi glede izpolnjevanja zahtev meril za razvrstitve.

4.1.3. Kriteriji za razvrstitev zmesi

- 4.1.3.1. Sistem za razvrščanje zmesi zajema vse razvrstitvene kategorije, ki se uporabljajo za snovi, tj. kategorijo akutnosti 1 in kategorije kroničnosti 1–4. Da bi se za razvrstitev glede na nevarnost za vodno okolje uporabili vsi razpoložljivi podatki, se upošteva naslednje, kadar je primerno:

„Bistvene sestavine“ zmesi so tiste, ki so razvrščene v „kategorijo akutnosti 1“ ali „kategorijo kroničnosti 1“ in so prisotne v koncentraciji 0,1 % (masni delež) ali več, in tiste, ki so razvrščene v „kategorijo kroničnosti 2“, „kategorijo kroničnosti 3“ ali „kategorijo kroničnosti 4“ in so prisotne v koncentraciji 1 % (masni delež) ali več, razen če se domneva (npr. pri zelo strupenih sestavinah (glej 4.1.3.5.5.5)), da je sestavina, ki je prisotna v manjši koncentraciji, še vedno lahko bistvena za razvrstitev zmesi kot nevarne za vodno okolje. Na splošno se za snovi, ki so razvrščene v „kategorijo akutnosti 1“ ali v „kategorijo kroničnosti 1“, upošteva koncentracija (0,1/M) %. (Za razlago M-faktorja glej 4.1.3.5.5.5.)


- 4.1.3.2. Razvrščanje nevarnosti za vodno okolje poteka v več stopnjah in je odvisno od vrste razpoložljivih informacij o zmesi in njenih sestavinah. Diagram 4.1.2 prikazuje korake v postopku.

Stopenjski pristop vključuje:

- razvrstitev na podlagi testiranih zmesi;
- razvrstitev na podlagi premostitvenih načel;
- uporabo „seštevanja razvrščenih sestavin“ in/ali „formule dodajanja“.

Slika 4.1.2

Večstopenjski pristop za razvrščanje zmesi glede na akutno in kronično (dolgotrajno) nevarnost za vodno okolje

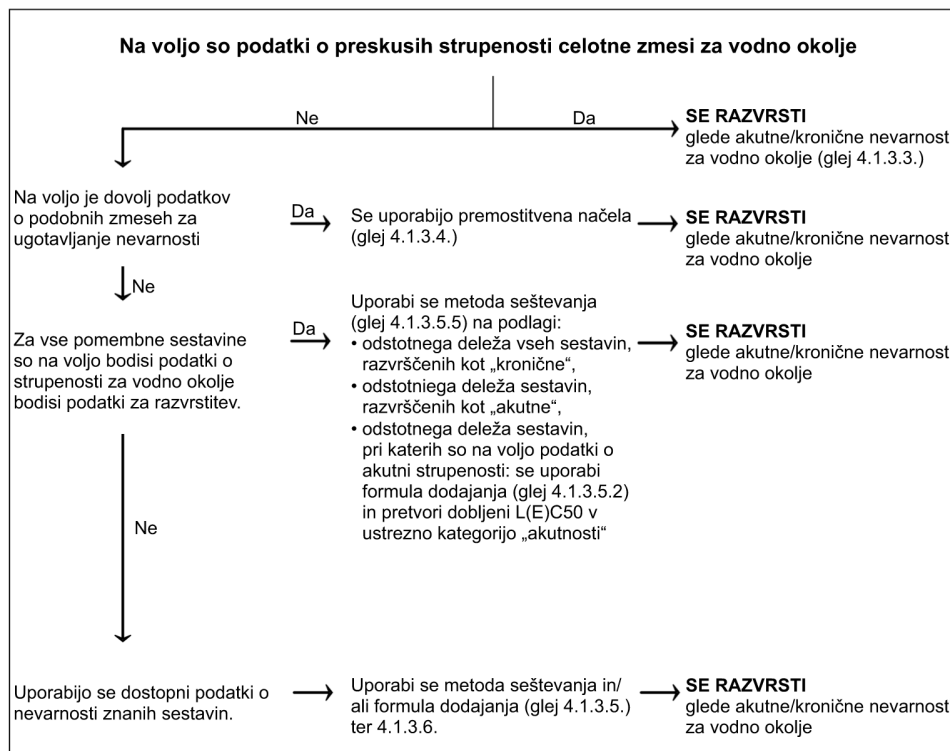

- 4.1.3.3. Razvrstitev zmesi, kadar so na voljo podatki za celotno zmes

- 4.1.3.3.1. Kadar je celotna zmes testirana za določitev strupenosti za vodno okolje, se razvrsti v skladu z merili, ki so bili določeni za snovi, vendar le za akutno nevarnost. Razvrstitev običajno temelji na podatkih za ribe, rake in alge/rastline. Razvrstitev zmesi na podlagi podatkov o LC₅₀ ali EC₅₀ za celotno zmes v kategorije kroničnosti ni mogoča, ker so potrebni tako podatki o strupenosti kot tudi usodi v okolju in ker ni na voljo podatkov

o razgradljivosti ali kopičenju v organizmih za celotne zmesi. Kriterijev za razvrstitev v kategorijo kroničnosti ni mogoče uporabiti, ker interpretacija podatkov iz testov razgradljivosti zmesi in njihovega kopičenja v organizmih ni mogoča; to je mogoče le pri posameznih snoveh.

4.1.3.3.2. Kadar so na voljo podatki o testih akutne strupenosti (LC_{50} ali EC_{50}) za celotno zmes, se ti podatki ter informacije v zvezi z razvrstitvijo sestavin v kategorijo kronične (dolgotrajne) nevarnosti uporabijo pri dokončni razvrstitvi testiranih zmesi. Kadar so na voljo tudi podatki o kronični strupenosti (NOEC), se uporabijo tudi ti podatki.

(a) $L(E)C_{50}$ (LC_{50} ali EC_{50}) testirane zmesi ≤ 100 mg/l in NOEC testirane zmesi ≤ 1 mg/l ali neznano:

- zmes se razvrsti v kategorijo akutnosti 1 (LC_{50} ali EC_{50} testirane zmesi ≤ 1 mg/l) ali razvrstitev v kategorijo akutne strupenosti ni potrebna (LC_{50} ali EC_{50} testirane zmesi > 1 mg/l);
- uporaba metode seštevanja (glej 4.1.3.5.5) za razvrstitev v kategorijo kroničnosti (kategorija kroničnosti 1, 2, 3, 4 ali razvrstitev v kategorijo kroničnosti ni potrebna).

(b) $L(E)C_{50}$ testirane zmesi ≤ 100 mg/l in NOEC testirane zmesi > 1 mg/l:

- razvrstitev v kategorijo akutne nevarnosti ni potrebna;
- uporaba metode seštevanja (glej 4.1.3.5.5) za razvrstitev v kategorijo kroničnosti 1; če zmes ni razvrščena v kategorijo kroničnosti 1, ni potrebna razvrstitev v kategorijo kroničnosti.

(c) $L(E)C_{50}$ testirane zmesi > 100 mg/l ali nad topnostjo v vodi in NOEC testirane zmesi ≤ 1 mg/l ali neznano:

- razvrstitev v kategorijo akutne nevarnosti ni potrebna;
- uporaba metode seštevanja (glej 4.1.3.5.5) za razvrstitev v kategorijo kroničnosti (kategorija kroničnosti 4 ali razvrstitev v kategorijo kroničnosti ni potrebna).

(d) $L(E)C_{50}$ testirane zmesi > 100 mg/l ali nad topnostjo v vodi in NOEC testirane zmesi > 1 mg/l:

- razvrstitev v kategorijo akutne ali kronične (dolgotrajne) nevarnosti ni potrebna.

4.1.3.4. Razvrstitev zmesi, kadar ni na voljo podatkov za celotno zmes: premostitvena načela

4.1.3.4.1. Kadar zmes ni testirana za ugotavljanje nevarnosti za vodno okolje, ampak je za ustrezno opredelitev nevarnosti zmesi dovolj podatkov o posameznih sestavinah in podobnih testiranih zmesih, se ti podatki uporabijo v skladu s premostitvenimi načeli iz oddelka 1.1.3. Ob uporabi premostitvenega načela, ki velja za razredčevanja, pa se uporabi odstavka 4.1.3.4.2 in 4.1.3.4.3.

4.1.3.4.2. Razredčevanje: kadar zmes nastane z razredčenjem druge zmesi ali snovi, ki je razvrščena kot nevarna za vodno okolje, razredčilo pa je razvrščeno v enako ali nižjo kategorijo nevarnosti za vodno okolje kot najmanj nevarna sestavina prvotne zmesi in se zanj ne pričakuje, da bo vplivalo na nevarnosti drugih sestavin za okolje, potem se lahko zmes razvrsti enako kot prvotna zmes ali snov.

4.1.3.4.3. Kadar zmes nastane z razredčenjem druge razvrščene zmesi ali snovi z vodo ali drugim popolnoma nestrupenim materialom, se lahko strupenost zmesi izračuna na podlagi podatkov o nerazredčeni zmesi ali snovi.

4.1.3.5. Razvrstitev zmesi, kadar so na voljo podatki za vse ali le nekatere sestavine zmesi

4.1.3.5.1. Razvrstitev zmesi temelji na seštevku razvrstitve njenih sestavin. Delež sestavin, razvrščenih v kategorijo akutnosti ali kroničnosti, se vključi neposredno v metodo seštevanja. Podrobnosti o metodi seštevanja so opisane v 4.1.3.5.5.

- 4.1.3.5.2. Kadar sestavine zmesi (še) niso razvrščene (v kategorijo akutnosti 1 in/ali kategorijo kroničnosti 1, 2, 3 ali 4), se upoštevajo ustrezni dostopni podatki za te sestavine. Kadar je na voljo dovolj podatkov o strupenosti za več kot eno sestavino zmesi, se skupna strupenost teh sestavin izračuna po naslednji formuli dodajanja, rezultat izračuna o strupenosti pa se uporabi za uvrstitev tega dela zmesi v kategorijo akutnosti, ki se potem uporabi pri metodi seštevanja.

$$\frac{\sum C_i}{L(E)C_{50m}} = \sum \frac{C_i}{L(E)C_{50i}}$$

kjer:

C_i = koncentracija sestavine i (masni odstotek)

$L(E)C_{50i}$ = (mg/l) LC_{50} ali EC_{50} za sestavino i

η = število sestavin

$L(E)C_{50m}$ = $L(E) C_{50}$ dela zmesi, za katerega so na voljo podatki o testu

- 4.1.3.5.3. Pri uporabi formule dodajanja za del zmesi je priporočljivo pri izračunu strupenosti tega dela zmesi za vsako snov uporabiti vrednosti strupenosti, ki se nanašajo na isto taksonomsko skupino (tj. ribe, vodne bolhe, alge ali enakovreden organizem), nato pa uporabiti najvišjo dobljeno strupenost (najnižja vrednost) (tj. z uporabo najbolj občutljive taksonomske skupine od treh). Kadar podatki o strupenosti za posamezno sestavino niso na voljo za isto taksonomsko skupino, pa se vrednost strupenosti posamezne sestavine izbere na enak način, kot vrednosti strupenosti za razvrstitev snovi, tj. uporabi se višja strupenost (za najbolj občutljiv testni organizem). Na podlagi izračunane akutne strupenosti in istih kriterijev, ki veljajo za snovi, se nato oceni, ali se ta del zmesi razvrsti v kategorijo akutnosti 1.

- 4.1.3.5.4. Če je zmes razvrščena na več načinov, se uporabi metoda, ki daje bolj konservativne rezultate.

4.1.3.5.5. Metoda seštevanja

4.1.3.5.5.1. Utemeljitev

- 4.1.3.5.5.1.1. Pri kategorijah akutnosti kategorije 1 ali kategorijah kroničnosti kategorij 1 do 3 za razvrstitev snovi se kriteriji za določitev strupenosti med posameznimi kategorijami razlikujejo za faktor 10. Snovi, ki so razvrščene kot zelo strupene, lahko zato prispevajo k razvrstitvi zmesi v kategorijo manjše strupenosti. Pri izračunu teh razvrstitvenih kategorij je zato treba upoštevati prispevek vseh snovi, ki so razvrščene v kategorijo akutnosti 1/kategorijo kroničnosti 1, kategorijo kroničnosti 2 in kategorijo kroničnosti 3.

- 4.1.3.5.5.1.2. Kadar zmes vsebuje sestavine, razvrščene v kategorijo akutnosti 1 ali kategorijo kroničnosti 1, je treba upoštevati, da te sestavine, kadar je njihova akutna strupenost nižja od 1 mg/l, prispevajo k strupenosti zmesi tudi pri nizki koncentraciji. Tako strupene so pogosto lahko aktivne sestavine v pesticidih, pa tudi nekatere druge snovi, kot so organokovinske spojine. Posledica uporabe običajnih splošnih mejnih koncentracij v takšnih okoliščinah je, da je zmes razvrščena v nižji razred, kot bi sicer morala biti. Za upoštevanje zelo strupenih sestavin se zato uporabijo množilni faktorji, kot je opisano v odstavku 4.1.3.5.5.5.

4.1.3.5.5.2. Postopek razvrstitve

- 4.1.3.5.5.2.1. Strožja razvrstitev zmesi na splošno prevlada nad manj strogo, tj. razvrstitev snovi glede na kronično strupenost v kategorijo kroničnosti 1 prevlada nad razvrstitvijo v kategorijo kroničnosti 2. Če je zmes razvrščena v kategorijo kroničnosti 1, je postopek razvrstitve torej že končan. Strožja razvrstitev od kategorije kroničnosti 1 ni mogoče. Postopka razvrščanja zato ni treba nadaljevati.

4.1.3.5.5.3. Razvrstitev v kategorijo akutnosti 1

- 4.1.3.5.5.3.1. Najprej se upoštevajo vse sestavine, razvrščene v kategorijo akutnosti 1. Če je seštevek teh sestavin večji od 25 %, se celotna zmes razvrsti v kategorijo akutnosti 1.

- 4.1.3.5.5.3.2. Razvrščanje zmesi glede na akutno nevarnost na podlagi seštevka razvrščenih sestavin je povzeto v tabeli 4.1.1.

Tabela 4.1.1

Razvrstitev zmesi glede na akutno nevarnost na podlagi seštevka razvrščenih sestavin

Seštevka sestavin, razvrščenih v:	Zmes je razvrščena v:
kategorijo akutnosti $1 \times m^{(a)} \geq 25 \%$	kategorija akutnosti 1
^(a) Za razlago M-faktorja glej 4.1.3.5.5.5.	

- 4.1.3.5.5.4. Razvrstitev v kategorije kroničnosti 1, 2, 3 in 4

- 4.1.3.5.5.4.1. Najprej se upoštevajo vse sestavine, razvrščene v kategorijo kroničnosti 1. Če je seštevka teh sestavin, pomnožen z ustreznimi M-faktorji, enak ali večji od 25 %, se celotna zmes razvrsti v kategorijo kroničnosti 1. Če je rezultat izračuna razvrstitev zmesi v kategorijo kroničnosti 1, je postopek razvrstitve končan.

- 4.1.3.5.5.4.2. Če zmes ni razvrščena v kategorijo kroničnosti 1, se preuči razvrstitev zmesi v kategorijo kroničnosti 2. Zmes je razvrščena v kategorijo kroničnosti 2, če je desetkratnik vsote vseh sestavin, razvrščenih v kategorijo kroničnosti 1, pomnožen z ustreznimi M-faktorji in seštet z vsoto vseh sestavin, razvrščenih v kategorijo kroničnosti 2, enak ali večji od 25 %. Če je rezultat izračuna razvrstitev zmesi v kategorijo kroničnosti 2, je postopek razvrstitve končan.

- 4.1.3.5.5.4.3. Če zmes ni razvrščena niti v kategorijo kroničnosti 1 niti kategorijo kroničnosti 2, se preuči razvrstitev zmesi v kategorijo kroničnosti 3. Zmes je razvrščena v kategorijo kroničnosti 3, če je 100-kratna vsota vseh sestavin, razvrščenih v kategorijo kroničnosti 1, pomnožena z ustreznimi M-faktorji in seštet z 10-kratno vsoto vseh sestavin, razvrščenih v kategorijo kroničnosti 2, seštet z vsoto vseh sestavin, razvrščenih v kategorijo kroničnosti 3, večja od 25 %.

- 4.1.3.5.5.4.4. Če zmes še vedno ni razvrščena v kategorijo kroničnosti 1, 2 ali 3, se preuči razvrstitev zmesi v kategorijo kroničnosti 4. Zmes je razvrščena v kategorijo kroničnosti 4, če je vsota deležev sestavin, razvrščenih v kategorijo kroničnosti 1, 2, 3 in 4, enaka ali večja od 25 %.

- 4.1.3.5.5.4.5. Razvrstitev zmesi kot kronično (dolgotrajno) nevarnih na podlagi tega seštevka razvrščenih sestavin je povzeta v tabeli 4.1.2.

Tabela 4.1.2

Razvrstitev zmesi glede na kronično (dolgotrajno) nevarnost na podlagi seštevka razvrščenih sestavin

Seštevka sestavin, razvrščenih v:	Zmes je razvrščena v:
kategorijo akutnosti $1 \times m^{(a)} \geq 25 \%$	kategorija kroničnosti 1
$(m \times 10 \times \text{kategorija kroničnosti 1}) + \text{kategorija kroničnosti 2} \geq 25 \%$	kategorija kroničnosti 2
$(m \times 100 \times \text{kategorija kroničnosti 1}) + (10 \times \text{kategorija kroničnosti 2}) + \text{kategorija kroničnosti 3} \geq 25 \%$	kategorija kroničnosti 3
$\text{kategorija kroničnosti 1} + \text{kategorija kroničnosti 2} + \text{kategorija kroničnosti 3} + \text{kategorija kroničnosti 4} \geq 25 \%$	kategorija kroničnosti 4
^(a) Za razlago M-faktorja glej 4.1.3.5.5.5.	

4.1.3.5.5.5. Zmesi z zelo strupenimi sestavinami

4.1.3.5.5.5.1. Sestavine, ki so razvrščene v kategorijo akutnosti 1 in kategorijo kroničnosti 1, njihova strupenost pa je pod 1 mg/l, prispevajo k strupenosti zmesi celo pri nizkih koncentracijah, zato se jim pri uporabi metode seštevanja razvrstitev običajno določi višji ponder. Če zmes vsebuje sestavine, razvrščene v kategorijo akutnosti 1, se uporabi eno od naslednjega:

- stopenjski pristop iz 4.1.3.5.5.3 in 4.1.3.5.5.4, pri katerem se uporabi ponderirana vsota, ki se dobi tako, da se koncentracije sestavin iz kategorije akutnosti 1 in kategorije kroničnosti 1 množijo s faktorjem, namesto da bi se deleži zgolj sešteli skupaj. To pomeni, da se koncentracija iz „kategorije akutnosti 1“ v levem stolpcu tabele 4.1.1 in koncentracija iz „kategorije kroničnosti 1“ v levem stolpcu tabele 4.1.2 pomnožita z ustreznim M-faktorjem. M-faktorji, ki se uporabljajo za te sestavine, se določijo na podlagi vrednosti strupenosti, kot je povzeto v tabeli 4.1.3 spodaj. Za razvrstitev zmesi, ki vsebuje sestavine iz kategorije akutnosti/kroničnosti 1, je zato treba poznati vrednost M-faktorja, da lahko uporabi metodo seštevanja;
- Formula dodajanja (glej 4.1.3.5.2), kadar so na voljo podatki o strupenosti za vse zelo strupene sestavine v zmesi in obstajajo zanesljivi dokazi, da so vse druge sestavine, vključno s tistimi, o katerih ni na voljo podatkov o strupenosti, malo strupene ali sploh niso strupene ter ne prispevajo k nevarnosti zmesi za okolje.

Tabela 4.1.3

Množilni faktorji za zelo strupene sestavine zmesi

Vrednost $L(E)C_{50}$	Množilni faktor (M)
$0,1 < L(E)C_{50} \leq 1$	1
$0,01 < L(E)C_{50} \leq 0,1$	10
$0,001 < L(E)C_{50} \leq 0,01$	100
$0,0001 < L(E)C_{50} \leq 0,001$	1 000
$0,00001 < L(E)C_{50} \leq 0,0001$	10 000
(naprej z intervali s faktorjem 10)	

4.1.3.6. Razvrstitev zmesi s sestavinami, za katere ni na voljo nikakršnih uporabnih informacij

4.1.3.6.1. Če za eno ali več zadevnih sestavin ni na voljo nikakršnih uporabnih informacij o akutni in/ali kronični (dolgotrajni) nevarnosti za vodno okolje, se šteje, da zmesi ni mogoče uvrstiti v eno ali več dokončnih kategorij nevarnosti. V takšnem primeru se zmes razvrsti le na podlagi znanih sestavin, varnostni list pa vsebuje dodatno izjavo, da: „vsebuje x % zmesi z neznano nevarnostjo za vodno okolje“.

4.1.4. Obvestilo o nevarnosti

4.1.4.1. Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 4.1.4.

Tabela 4.1.4

Elementi etikete za nevarnost za vodno okolje

AKUTNO	
	Kategorija 1
Piktogram GHS	
Opozorilna beseda	Pozor
Stavek o nevarnosti	H400: Zelo strupeno za vodne organizme

AKUTNO				
	Kategorija 1			
Previdnostni stavek – preprečevanje	P273			
Previdnostni stavek – odziv	P391			
Previdnostni stavek – shranjevanje				
Previdnostni stavek – odstranjevanje	P501			
KRONIČNO				
	Kategorija 1	Kategorija 2	Kategorija 3	Kategorija 4
Piktogrami GHS			Ni piktograma	Ni piktograma
Opozorilna beseda	Pozor	Opozorilna beseda se ne uporablja	Opozorilna beseda se ne uporablja	Opozorilna beseda se ne uporablja
Stavek o nevarnosti	H410: Zelo strupeno za vodne organizme, z dolgotrajnimi učinki	H411: Strupeno za vodne organizme, z dolgotrajnimi učinki	H412: Škodljivo za vodne organizme, z dolgotrajnimi učinki.	H413: Lahko ima dolgotrajne škodljive učinke na vodne organizme
Previdnostni stavek – preprečevanje	P273	P273	P273	P273
Previdnostni stavek – odziv	P391	P391		
Previdnostni stavek – shranjevanje				
Previdnostni stavek – odstranjevanje	P501	P501	P501	P501

5. DEL 5: DODATNI RAZRED NEVARNOSTI EU

5.1. **Nevarno za ozonski plašč**5.1.1. **Opredelitev pojmov in splošni preudarki**

5.1.1.1. Snov, nevarna za ozonski plašč, pomeni snov, ki je na podlagi razpoložljivih dokazov o njenih lastnostih ter predvideni ali pričakovani usodi in obnašanju v okolju lahko nevarna za strukturo in/ali delovanje stratosferskega ozonskega plašča. To vključuje snovi iz Priloge I k Uredbi (ES) št. 2037/2000 Evropskega parlamenta in Sveta z dne 29. junija 2000 o snoveh, ki tanjšajo ozonski plašč ⁽¹⁾ in njene poznejše spremembe.

5.1.2. **Kriteriji za razvrstitev snovi**

5.1.2.1. Snov se razvrsti kot nevarna za ozonski plašč, če razpoložljivi dokazi o njenih lastnostih ter predvideni ali pričakovani usodi in obnašanju v okolju kažejo, da je lahko nevarna za strukturo in/ali delovanje stratosferskega ozonskega plašča.

5.1.3. **Kriteriji za razvrstitev zmesi**

5.1.3.1. Zmesi se razvrstijo kot nevarne za ozonski plašč na podlagi posamezne koncentracije ene snovi ali več snovi, ki jo (jih) vsebuje zmes in je (so) razvrščena(-e) kot nevarna(-e) za ozonski plašč v skladu s tabelo 5.1.

Tabela 5.1

Splošne mejne koncentracije za snovi (v zmesi), razvrščene kot nevarne za ozonski plašč, pri katerih se tudi zmes razvrsti kot nevarna za ozonski plašč

Razvrstitev snovi	Razvrstitev zmesi
Nevarno za ozonski plašč	$C \geq 0,1 \%$

5.1.4. **Obvestilo o nevarnosti**

5.1.4.1. Elementi etikete se uporabljajo za snovi ali zmesi, ki izpolnjujejo kriterije za razvrstitev v ta razred nevarnosti, v skladu s tabelo 5.2.

Tabela 5.2

Elementi etikete za nevarnost za ozonski plašč

Simbol/piktogram	
Opozorilna beseda	Nevarno
Stavek o nevarnosti	EUH059: Nevarno za ozonski plašč
Previdnostni stavki	P273 P501

⁽¹⁾ UL L 244, 29.9.2000, str. 1.

PRILOGA II

POSEBNA PRAVILA ZA OZNAČEVANJE IN PAKIRANJE NEKATERIH SNOVI IN ZMESI

Ta priloga je sestavljena iz petih delov:

- Del 1 vsebuje posebna pravila za označevanje nekaterih razvrščenih snovi in zmesi.
- Del 2 določa pravila za dodatne stavke o nevarnosti, ki jih je treba vključiti na etiketi nekaterih zmesi.
- Del 3 določa posebna pravila za embalažo.
- Del 4 določa posebna pravila za označevanje fitofarmacevtskih sredstev.
- Del 5 opredeljuje seznam nevarnih snovi in zmesi, za katere se uporablja člen 29(3).

1. DEL 1: DODATNE INFORMACIJE O NEVARNOSTI

Stavke, določene v oddelkih 1.1 in 1.2, se snovem in zmesem, razvrščenim glede na fizikalno nevarnost, nevarnost za zdravje ali nevarnost za okolje dodeli v skladu s členom 25(1).

1.1. **Fizikalne lastnosti**

1.1.1. ***EUH001 – „Eksplozivno v suhem stanju“***

Za eksplozivne snovi in zmesi iz oddelka 2.1 Priloge I, ki se dajo v promet prepojene z vodo ali alkoholi ali razredčene z drugimi snovmi za preprečitev eksplozivnosti.

1.1.2. ***EUH006 – „Eksplozivno v stiku z zrakom ali brez stika z zrakom“***

Za snovi in zmesi, ki so nestabilne pri sobni temperaturi, npr. aceten.

1.1.3. ***EUH014 – „Burno reagira z vodo“***

Za snovi in zmesi, ki burno reagirajo z vodo, npr. acetil klorid, alkalijske kovine, titanov tetraklorid.

1.1.4. ***EUH018 – „Pri uporabi lahko tvori vnetljivo/eksplozivno zmes hlapni-zrak“***

Za snovi in zmesi, ki same niso razvrščene kot vnetljive, vendar lahko tvorijo vnetljive ali eksplozivne zmesi hlapov z zrakom. Pri snoveh to velja za halogenirane ogljikovodike, pri zmesih pa za tiste, ki imajo hlapno vnetljivo sestavino ali ki izgubijo hlapno nevnetljivo sestavino.

1.1.5. ***EUH019 – „Lahko tvori eksplozivne peroksidge“***

Za snovi in zmesi, ki med skladiščenjem lahko tvorijo eksplozivne peroksidge, npr. dietil eter, 1,4-dioksan.

1.1.6. ***EUH044 – „Nevarnost eksplozije ob segrevanju v zaprtem prostoru“***

Za snovi in zmesi, ki same niso razvrščene kot eksplozivne v skladu z oddelkom 2.1 Priloge I, vendar lahko ob segrevanju v dovolj tesno zaprtem prostoru reagirajo eksplozivno. Zlasti snovi, ki eksplozivno razpadejo ob segrevanju v jaklenem sodu, vendar nimajo takšnega učinka ob segrevanju v manj robustnih posodah.

1.2. Lastnosti, ki vplivajo na zdravje**1.2.1. EUH029 – „V stiku z vodo se sprošča strupen plin“**

Za snovi in zmesi, ki v stiku z vodo ali vlažnim zrakom tvorijo pline, razvrščene kot akutno nevarne kategorij 1, 2 ali 3, v nevarnih količinah, npr. aluminijev fosfid, fosforjev pentasulfid.

1.2.2. EUH031 – „V stiku s kislinami se sprošča strupen plin“

Za snovi in zmesi, ki reagirajo s kislinami, pri čemer se sproščajo plini, razvrščeni kot akutno strupeni kategorije 3, v nevarnih količinah, npr. natrijev hipoklorit, barijev polisulfid.

1.2.3. EUH032 – „V stiku s kislinami se sprošča zelo strupen plin“

Za snovi in zmesi, ki reagirajo s kislinami, pri čemer se sproščajo plini, razvrščeni kot akutno strupeni kategorij 1 ali 2, v nevarnih količinah, npr. vodikov cianid, natrijev azid.

1.2.4. EUH066 – „Ponavljajoča izpostavljenost lahko povzroči nastanek suhe ali razpokane kože“

Za snovi in zmesi, ki so lahko sporne zaradi povzročanja nastanka suhe kože, luskavosti ali kožnih razpok, vendar ne izpolnjujejo meril za draženje kože iz oddelka 3.2 Priloge I, in sicer bodisi na podlagi:

— opazanj v praksi ali

— ustreznih dokazov glede njihovih predvidenih vplivov na kožo.

1.2.5. EUH070 – „Strupeno ob stiku z očmi“

Za snovi ali zmesi, za katere je test draženja oči pokazal vidne znake sistemske strupenosti ali smrtnosti med preskusnimi živalmi, ki je verjetno posledica absorpcije snovi ali zmesi skozi sluznico očesa. Stavek se uporabi tudi, če obstajajo dokazi za sistemsko strupenost po stiku z očmi pri ljudeh.

Stavek se uporabi tudi, če snov ali zmes vsebuje drugo snov, pri kateri je označen ta učinek, če je njena koncentracija enaka ali večja od 0,1 %, razen če je v delu 3 Priloge VI določeno drugače.

1.2.6. EUH071 – „Jedko za dihalne poti“

Za snovi in zmesi poleg razvrstitve za strupenost pri vdihavanju, če so na voljo podatki, ki kažejo, da je mehanizem strupenosti jedkost, v skladu z oddelkom 3.1.2.3.3 in opombo 1 k tabeli 3.1.3 v Prilogi I.

Za snovi in zmesi, ki se lahko vdihnejo, poleg razvrstitve jedkosti za kožo, če niso na voljo testni podatki.

2. DEL 2: POSEBNA PRAVILA ZA DODATNE ELEMENTE ETIKETE ZA NEKATERE ZMESI

Stavki, določeni v oddelkih 2.1 in 2.10, se dodelijo zmesem v skladu s členom 25(6).

2.1. Zmesi, ki vsebujejo svinec

Etiketa na embalaži barv in lakov, ki vsebujejo svinec v koncentracijah nad 0,15 % (izraženo v teži kovine) skupne teže zmesi, pri čemer so te koncentracije določene po standardu ISO 6503/1984, vključuje stavek:

EUH201 – „Vsebuje svinec. Ne sme se nanašati na površine, ki bi jih lahko žvečili ali sesali otroci.“

Na embalažah, manjših od 125 ml, je stavek lahko takšen:

EUH207 – „Pozor! Vsebuje svinec.“

2.2. Zmesi, ki vsebujejo cianoakrilate

Etiketa na neposredni embalaži lepil, izdelanih na osnovi cianoakrilatov, vključuje stavek:

EUH202 – „Cianoakrilat. Nevarno. Kožo in oči zlepi v nekaj sekundah. Hraniti zunaj dosega otrok.“

Embalaži se dodajo ustrezni napotki za varno uporabo.

2.3. Cementi in cementne mešanice

Razen če so cementi ali cementne mešanice že razvrščeni in označeni kot snovi, ki povzročajo preobčutljivost, s stavkom o nevarnosti H317 „Lahko povzroči alergijski odziv kože“, etiketa na embalaži cementov in cementnih mešanic, ki vsebujejo, kadar so hidrirani, topni krom (VI) v količini nad 0,0002 % skupne suhe teže cementa, vključuje stavek:

EUH203 – „Vsebuje krom (VI). Lahko povzroči alergijski odziv.“

Če so uporabljeni reducenti, embalaža cementov ali mešanic, ki vsebujejo cement, vključuje informacije o datumu pakiranja, pogojih in času skladiščenja, ki ustrezajo vzdrževanju aktivnosti reducenta in ohranjanju vsebnosti topnega kroma VI pod 0,0002 %.

2.4. Zmesi, ki vsebujejo izocianate

Etiketa na embalaži zmesi, ki vsebujejo izocianate (kot monomere, oligomere, prepolimere itd. ali kot njihove zmesi), razen če je to že označeno, vključuje stavek:

EUH204 – „Vsebuje izocianate. Lahko povzroči alergijski odziv.“

2.5. Zmesi, ki vsebujejo epoksidne sestavine s povprečno molekulsko maso ≤ 700

Etiketa na embalaži zmesi, ki vsebujejo epoksidne sestavine s povprečno molekulsko maso ≤ 700 , razen če je to že označeno, vključuje stavek:

EUH205 – „Vsebuje epoksidne sestavine. Lahko povzroči alergijski odziv.“

2.6. Zmesi za splošno uporabo, ki vsebujejo aktivni klor

Etiketa na embalaži zmesi, ki vsebujejo več kot 1 % aktivnega klora, vključuje stavek:

EUH206 – „Pozor! Ne uporabljajte skupaj z drugimi izdelki. Lahko se sproščajo nevarni plini (klor).“

2.7. Zmesi, ki vsebujejo kadmij (zlitine) in so namenjene uporabi pri spajkanju ali varjenju

Etiketa na embalaži teh zmesi vključuje stavek:

EUH207 – „Pozor! Vsebuje kadmij. Med uporabo nastajajo nevarni dimi. Preberite informacije proizvajalca. Upoštevajte navodila za varno uporabo.“

2.8. Zmesi, ki niso razvrščene kot zmesi, ki povzročajo preobčutljivost, vendar vsebujejo najmanj eno snov, ki povzroča preobčutljivost

Etiketa na embalaži zmesi, ki vsebujejo najmanj eno snov, razvrščeno kot snov, ki povzroča preobčutljivost, prisotna pa je v koncentraciji, ki je enaka ali večja od 0,1 %, ali v koncentraciji, ki je enaka ali večja od koncentracije, navedene v posebni opombi za snov v delu 3 Priloge VI, vključuje stavek:

EUH208 – „Vsebuje (ime snovi, ki povzroča preobčutljivost). Lahko povzroči alergijski odziv.“

2.9. Tekoče zmesi, ki vsebujejo halogenirane ogljikovodike

Etiketa na embalaži tekočih zmesi, ki nimajo plamenišča ali je njihovo plamenišče višje od 60 °C, vendar ne višje od 93 °C, ter vsebujejo halogenirane ogljikovodike in več kot 5 % lahko vnetljivih ali vnetljivih snovi, vključuje enega od naslednjih stavkov, odvisno od tega, ali so navedene snovi lahko vnetljive ali vnetljive:

EUH209 – „Med uporabo utegne postati lahko vnetljivo.“ ali

EUH209A – „Med uporabo utegne postati vnetljivo.“

2.10. Zmesi, ki niso namenjene za splošno uporabo

Za zmesi, ki niso razvrščene kot nevarne, vendar vsebujejo:

- $\geq 0,1$ % snovi, razvrščene kot povzročitelj preobčutljivosti kože kategorije 1, povzročitelj preobčutljivosti dihal kategorije 1, ali karcinogen kategorije 2; ali
- $\geq 0,1$ % snovi, razvrščene kot strupena za razmnoževanje kategorij 1A, 1B ali 2, ali ki učinkuje na dojenje ali prek dojenja; ali
- vsaj eno snov koncentracije ≥ 1 % mase za neplinaste zmesi in $\geq 0,2$ % volumna za plinaste zmesi:
 - ali razvrščene z drugimi nevarnostmi za zdravje ali okolje ali
 - za katere obstajajo v Skupnosti omejitve izpostavljenosti na delovnem mestu

etiketa na embalaži vsebuje stavek:

EUH210 – „Varnostni list na voljo na zahtevo.“

2.11. Aerosoli

Poudariti je treba, da za označevanje aerosolov veljajo določbe o označevanju v skladu s točkama 2.2 in 2.3 Priloge k Direktivi 75/324/EGS.

3. DEL 3: POSEBNA PRAVILA ZA EMBALAŽO

3.1. Določbe v zvezi z zapirali, varnimi za otroke

3.1.1. Embalaža, ki mora biti opremljena z zapirali, varnimi za otroke

- 3.1.1.1. Vsa embalaža, ki vsebuje snov ali zmes, ki je namenjena za splošno uporabo in je razvrščena kot akutno strupena kategorij 1 do 3, specifična strupenost za ciljne organe (STOT) – enkratna izpostavljenost kategorije 1, STOT – ponavljajoča se izpostavljenost kategorije 1 ali jedka za kožo kategorije 1 je opremljena z zapirali, varnimi za otroke.
- 3.1.1.2. Vsa embalaža, ki vsebuje snov ali zmes, ki je namenjena za splošno uporabo in je nevarna za vdihavanje in razvrščena v skladu s oddelkom 3.10.2 in 3.10.3 Priloge I ter označena v skladu s oddelkom 3.10.4.1 Priloge I, razen snovi in zmesi, ki so dane v promet v obliki aerosolov ali v posodi, opremljeni z zapečatenim zapiralom za razprševanje, je opremljena z zapirali, varnimi za otroke.
- 3.1.1.3. Če ima snov ali zmes vsaj eno od spodaj navedenih snovi v koncentraciji, ki je enaka ali večja od največje navedene posamezne koncentracije, in je namenjena za splošno uporabo, mora biti posoda, ne glede na prostornino, opremljena z zapirali, varnimi za otroke.

št.	Identifikacija snovi			Mejna koncentracija
	št. CAS:	Naziv	št. ES:	
1	67-56-1	metanol	200-659-6	≥ 3 %
2	75-09-2	diklorometan	200-838-9	≥ 1 %

3.1.2 *Embalaža za večkratno zapiranje*

Zapirala, varna za otroke, ki se uporabljajo na embalaži za večkratno zapiranje, so v skladu s standardom EN ISO 8317, kakor je bil spremenjen v zvezi z „Zapirali, varnimi za otroke – zahteve in metode testiranja embalaže za večkratno zapiranje“, ki sta ga sprejela Evropski odbor za standardizacijo (CEN) in Mednarodna organizacija za standardizacijo (ISO).

3.1.3 *Embalaža za enkratno zapiranje*

Zapirala, varna za otroke, ki se uporabljajo na embalaži za enkratno zapiranje, so v skladu z najnovejšim standardom CEN EN 862, „Embalaža – embalaža, varna za otroke – zahteve in postopki testiranja embalaže za enkratno zapiranje za nefarmacevtske izdelke“, ki ga je sprejel Evropski odbor za standardizacijo (CEN).

3.1.4 *Opombe*

3.1.4.1. Skladnost z zgoraj navedenimi standardi lahko potrdijo le laboratoriji, usklajeni s standardom EN ISO/IEC 17025, kakor je bil spremenjen.

3.1.4.2. *Posebni primeri*

Če se zdi očitno, da je embalaža dovolj varna za otroke, ker ti ne morejo priti do vsebine brez orodja, testa iz oddelka 3.1.2 ali 3.1.3 ni treba opraviti.

V vseh drugih primerih in kadar je dovolj razlogov za dvom o varnosti zapirala za otroke, lahko nacionalni organ od osebe, odgovorne za dajanje izdelka v promet, zahteva potrdilo laboratorija o skladnosti iz oddelka 3.1.4.1, v katerem je navedeno:

- da je zapiralo takšne vrste, da testov iz oddelka 3.1.2. ali 3.1.3 ni treba opraviti ali
- da je bilo zapiralo preizkušeno in je bilo ugotovljeno, da je v skladu z zgoraj navedenimi standardi.

3.2. *Otipna opozorila***3.2.1. *Embalaža, ki mora biti opremljena z otipnim opozorilom***

Če so snovi ali zmesi namenjene za splošno uporabo in razvrščene glede na akutno strupenost, jedkost za kožo, mutagenost za zarodne celice kategorije 2, rakotvornost kategorije 2, strupenost za razmnoževanje kategorije 2, povzročanje preobčutljivosti dihal, STOT kategorij 1 in 2, nevarnost za vdihavanje ter vnetljivi plini, tekočine in trdne snovi kategorij 1 in 2, mora biti embalaža, ne glede na prostornino, opremljena z otipnim opozorilom o nevarnosti.

3.2.2 *Določbe o otipnih opozorilih*

3.2.2.1 Ta določba se ne uporablja za aerosole, ki so razvrščeni in označeni le kot „zelo lahko vnetljivi aerosoli“ ali „vnetljivi aerosoli“.

3.2.2.2. Tehnične specifikacije za otipna opozorila so skladna s standardom EN ISO 11683 „Embalaža – otipna opozorila na nevarnost – zahteve“, kakor je bil spremenjen.

4. *DEL 4: POSEBNA PRAVILA ZA OZNAČEVANJE FITOFARMACEVTSKIH SREDSTEV*

Brez poseganja v informacije, potrebne v skladu s členom 16 Direktive 91/414/EGS in Priloge V k navedeni direktivi, etiketa za fitofarmacevtska sredstva, za katera se uporablja Direktiva 91/414/EGS, vključuje tudi stavek:

EUH401 – „Da bi preprečili tveganja za ljudi in okolje, ravnajte v skladu z navodili za uporabo.“

5. *DEL 5: SEZNAM NEVARNIH SNOVI IN ZMESI, ZA KATERE SE UPORABLJA ČLEN 29(3)*

- Cement in beton, pripravljena za uporabo, v mokrem stanju.

PRILOGA III

SEZNAM STAVKOV O NEVARNOSTI, DODATNE INFORMACIJE O NEVARNOSTI IN DODATNI ELEMENTI ETIKETE

1. Del 1: stavki o nevarnosti

Stavek o nevarnosti se uporablja v skladu z deli 2, 3 in 4 Priloge I.

Tabela 1.1

Stavki o nevarnosti za fizikalne nevarnosti

H200 ⁽¹⁾	Jezik	2.1 – Eksplozivni, nestabilni eksplozivni
	BG	Нестабилен експлозив.
	ES	Explosivo inestable.
	CS	Nestabilní výbušnina.
	DA	Ustabilt eksplosiv.
	DE	Instabil, explosiv.
	ET	Ebapüsiv lõhkeaine.
	EL	Ασταθή εκρηκτικά.
	EN	Unstable explosives.
	FR	Explosif instable.
	GA	Pléascáin éagobhsaí.
	IT	Esplosivo instabile.
	LV	Nestabili sprādzienbīstami materiāli.
	LT	Nestabilios sprogių medžiagos.
	HU	Instabil robbanóanyagok.
	MT	Splussivi instabbli.
	NL	Instabiele ontplofbare stof.
	PL	Materiały wybuchowe niestabilne.
	PT	Explosivo instável.
	RO	Exploziv instabil.
	SK	Nestabilné výbušniny.
	SL	Nestabilni eksplozivi.
	FI	Epästabiili räjähd.
	SV	Instabilt explosivt.

⁽¹⁾ O sistemu kodifikacije za stavke o nevarnosti GHS še vedno poteka razprava v Odboru strokovnjakov pri ZN in bodo zato morda potrebne spremembe.

H201	Jezik	2.1 – Eksplozivni, podrazred 1.1
	BG	Експлозив; опасност от масова експлозия.
	ES	Explosivo; peligro de explosión en masa.
	CS	Výbušnina; nebezpečí masivního výbuchu.

H201	Jezik	2.1 – Eksploziv, podrazred 1.1
	DA	Eksplosiv, masseeksplosionsfare.
	DE	Explosiv, Gefahr der Massenexplosion.
	ET	Plahvatusohtlik; massiplahvatusoht.
	EL	Εκρηκτικό· κίνδυνος μαζικής έκρηξης.
	EN	Explosive; mass explosion hazard.
	FR	Explosif; danger d'explosion en masse.
	GA	Pléascach; guais mhórphléasctha.
	IT	Esplosivo; pericolo di esplosione di massa.
	LV	Sprādzienbīstams; masveida sprādzienbīstamība.
	LT	Sprogios medžiagos, kelia masinio sprogimo pavojų.
	HU	Robbanóanyag; teljes tömeg felrobbanásának veszélye.
	MT	Splussiv; periklu li jisplođu kollha f'daqqa.
	NL	Ontplobbare stof; gevaar voor massa-explosie.
	PL	Materiał wybuchowy; zagrożenie wybuchem masowym.
	PT	Explosivo; perigo de explosão em massa.
	RO	Exploziv; pericol de explozie în masă.
	SK	Výbušnina, nebezpečenstvo rozsiahleho výbuchu.
	SL	Eksplozivno; nevarnost eksplozije v masi.
	FI	Räjähde; massaräjähdysvaara.
	SV	Explosivt. Fara för massexplosion.

H202	Jezik	2.1 – Eksploziv, podrazred 1.2
	BG	Експлозив; сериозна опасност от разпръскване.
	ES	Explosivo; grave peligro de proyección.
	CS	Výbušnina; vážné nebezpečí zasažení částicemi.
	DA	Eksplosiv, alvorlig fare for udslyngning af fragmenter.
	DE	Explosiv; große Gefahr durch Splitter, Spreng- und Wurfstücke.
	ET	Plahvatusohtlik; suur laialipaiskumisoht.
	EL	Εκρηκτικό· σοβαρός κίνδυνος εκτόξευσης.
	EN	Explosive, severe projection hazard.
	FR	Explosif; danger sérieux de projection.
	GA	Pléascach, guais throm teilgin.
	IT	Esplosivo; grave pericolo di proiezione.
	LV	Sprādzienbīstams; augsta izmetes bīstamība.
	LT	Sprogios medžiagos, kelia didelį išsvaidymo pavojų.
	HU	Robbanóanyag; kivetés súlyos veszélye.
	MT	Splussiv, periklu serju ta' projezzjoni.
	NL	Ontplobbare stof, ernstig gevaar voor scherfwerking.

H202	Jezik	2.1 – Eksplozivni, podrazred 1.2
	PL	Materiał wybuchowy, poważne zagrożenie rozrzutem.
	PT	Explosivo, perigo grave de projecções.
	RO	Exploziv; pericol grav de proiectare.
	SK	Výbušnina, závažné nebezpečenstvo rozletenia úlomkov.
	SL	Eksplozivno, velika nevarnost za nastanek drobcev.
	FI	Räjähde; vakava sirpalevaara.
	SV	Explosivt. Allvarlig fara för splitter och kaststycken.

H203	Jezik	2.1 – Eksplozivni, podrazred 1.3
	BG	Експлозив; опасност от пожар, взрив или разпръскване.
	ES	Explosivo; peligro de incendio, de onda expansiva o de proyección.
	CS	Výbušnina; nebezpečí požáru, tlakové vlny nebo zasažení částicemi.
	DA	Eksplosiv, fare for brand, eksplosion eller udslyngning af fragmenter.
	DE	Explosiv; Gefahr durch Feuer, Luftdruck oder Splitter, Spreng- und Wurfstücke.
	ET	Plahvatusohtlik; süttimis-, plahvatus- või laialipaiskumisoht.
	EL	Εκρηκτικό· κίνδυνος πυρκαγιάς, ανατίναξης ή εκτόξευσης.
	EN	Explosive; fire, blast or projection hazard.
	FR	Explosif; danger d'incendie, d'effet de souffle ou de projection.
	GA	Pléascach; guais dóiteáin, phléasctha nó teilgin.
	IT	Esplosivo; pericolo di incendio, di spostamento d'aria o di proiezione.
	LV	Sprādzienbīstams; uguns, triecienviļņa vai izmetes bīstamība.
	LT	Sprogios medžiagos, kelia gaisro, sprogimo arba išsvaidymo pavojų.
	HU	Robbanóanyag; tűz, robbanás vagy kivetés veszélye.
	MT	Splussiv; periklu ta' nar, blast jew projezzjoni.
	NL	Ontplofbare stof; gevaar voor brand, luchtdrukwerking of scherfwerking.
	PL	Materiał wybuchowy; zagrożenie pożarem, wybuchem lub rozrzutem.
	PT	Explosivo; perigo de incêndio, sopro ou projecções.
	RO	Exploziv; pericol de incendiu, detonare sau proiectare.
	SK	Výbušnina, nebezpečenstvo požiaru, výbuchu alebo rozletenia úlomkov.
	SL	Eksplozivno; nevarnost za nastanek požara, udarnega vala ali drobcev.
	FI	Räjähde; palo-, räjähdys- tai sirpalevaara.
	SV	Explosivt. Fara för brand, tryckvåg eller splitter och kaststycken.

H204	Jezik	2.1 – Eksplozivni, podrazred 1.4
	BG	Опасност от пожар или разпръскване.
	ES	Peligro de incendio o de proyección.
	CS	Nebezpečí požáru nebo zasažení částicemi.
	DA	Fare for brand eller udslyngning af fragmenter.

H204	Jezik	2.1 – Eksplozivi, podrazred 1.4
	DE	Gefahr durch Feuer oder Splitter, Spreng- und Wurfstücke.
	ET	Süttimis- või laialipaiskumisoht.
	EL	Κίνδυνος πυρκαγιάς ή εκτόξευσης.
	EN	Fire or projection hazard.
	FR	Danger d'incendie ou de projection.
	GA	Guais dóiteáin nó teilgin.
	IT	Pericolo di incendio o di proiezione.
	LV	Uguns vai izmetes bīstamība.
	LT	Gaisro arba išsvaidymo pavojus.
	HU	Tűz vagy kivetés veszélye.
	MT	Periklu ta' nar jew ta' projezzjoni.
	NL	Gevaar voor brand of scherfwerking.
	PL	Zagrożenie pożarem lub rozrzutem.
	PT	Perigo de incêndio ou projecções.
	RO	Pericol de incendiu sau de proiectare.
	SK	Nebezpečenstvo požiaru alebo rozletenia úlomkov.
	SL	Nevarnost za nastanek požara ali drobcev.
	FI	Palo- tai sirpalevaara.
	SV	Fara för brand eller splitter och kaststycken.
H205	Jezik	2.1 – Eksplozivi, podrazred 1.5
	BG	Може да предизвика масова експлозия при пожар.
	ES	Peligro de explosión en masa en caso de incendio.
	CS	Při požáru může způsobit masivní výbuch.
	DA	Fare for masseeksplosion ved brand.
	DE	Gefahr der Massenexplosion bei Feuer.
	ET	Süttimise korral massiplahvatusoht.
	EL	Κίνδυνος μαζικής έκρηξης σε περίπτωση πυρκαγιάς.
	EN	May mass explode in fire.
	FR	Danger d'explosion en masse en cas d'incendie.
	GA	D'fhéadfadh sé go mbeadh mórléascadh i dtine.
	IT	Pericolo di esplosione di massa in caso d'incendio.
	LV	Ugunī var masveidā eksplodēt.
	LT	Per gaisrą gali sukelti masinį sproginimą.
	HU	Tűz hatására a teljes tömeg felrobbanhat.
	MT	Jista' jisplodi f'daqqa fin-nar.
	NL	Gevaar voor massa-explosie bij brand.
	PL	Może wybuchać masowo w przypadku pożaru.

H205	Jezik	2.1 – Eksplozivni, podrazred 1.5
	PT	Perigo de explosão em massa em caso de incêndio.
	RO	Pericol de explozie în masă în caz de incendiu.
	SK	Nebezpečnosť rozsiahleho výbuchu pri požiari.
	SL	Pri požaru lahko eksplodira v masi.
	FI	Koko massa voi räjähtää tulessa.
	SV	Fara för massexplosion vid brand.

H220	Jezik	2.2 – Vnetljivi plini, kategorija nevarnosti 1
	BG	Изключително запалим газ.
	ES	Gas extremadamente inflamable.
	CS	Extrémně hořlavý plyn.
	DA	Yderst brandfarlig gas.
	DE	Extrem entzündbares Gas.
	ET	Eriti tuleohtlik gaas.
	EL	Εξαιρετικά εύφλεκτο αέριο.
	EN	Extremely flammable gas.
	FR	Gaz extrêmement inflammable.
	GA	Gás fíor-inadhaite.
	IT	Gas altamente infiammabile.
	LV	Īpaši viegli uzliesmojoša gāze.
	LT	Ypač degios dujos.
	HU	Rendkívül tűzveszélyes gáz.
	MT	Gass li jaqbad malajr hafna.
	NL	Zeer licht ontvlambaar gas.
	PL	Skrajnie łatwopalny gaz.
	PT	Gás extremamente inflamável.
	RO	Gaz extrem de inflamabil.
	SK	Mimoriadne horľavý plyn.
	SL	Zelo lahko vnetljiv plin.
	FI	Erittäin helposti syttyvä kaasu.
	SV	Extremt brandfarlig gas.

H221	Jezik	2.2 – Vnetljivi plini, kategorija nevarnosti 2
	BG	Запалим газ.
	ES	Gas inflamable.
	CS	Hořlavý plyn.
	DA	Brandfarlig gas.
	DE	Entzündbares Gas.

H221	Jezik	2.2 – Vnetljivi plini, kategorija nevarnosti 2
	ET	Tuleohtlik gaas.
	EL	Εύφλεκτο αέριο.
	EN	Flammable gas.
	FR	Gaz inflammable.
	GA	Gás inadhainte.
	IT	Gas infiammabile.
	LV	Uzliesmojoša gāze.
	LT	Degios dujos.
	HU	Tűzveszélyes gáz.
	MT	Gass li jaqbad.
	NL	Ontvlambaar gas.
	PL	Gaz łatwopalny.
	PT	Gás inflamável.
	RO	Gaz inflamabil.
	SK	Horľavý plyn.
	SL	Vnetljiv plin.
	FI	Syttyvä kaasu.
	SV	Brandfarlig gas.
H222	Jezik	2.3 – Vnetljivi aerosoli, kategorija nevarnosti 1
	BG	Изключително запалим аерозол.
	ES	Aerosol extremadamente inflamable.
	CS	Extrémně hořlavý aerosol.
	DA	Yderst brandfarlig aerosol.
	DE	Extrem entzündbares Aerosol.
	ET	Eriti tuleohtlik aerosool.
	EL	Εξαιρετικά εύφλεκτο αερόλυμα.
	EN	Extremely flammable aerosol.
	FR	Aérosol extrêmement inflammable.
	GA	Aerasól fíor-inadhainte.
	IT	Aerosol altamente infiammabile.
	LV	Īpaši viegli uzliesmojošs aerosols.
	LT	Ypač degus aerosolis.
	HU	Rendkívül tűzveszélyes aeroszol.
	MT	Aerosol li jaqbad malajr hafna.
	NL	Zeer licht ontvlambare aerosol.
	PL	Skrajnie łatwopalny aerosol.
	PT	Aerossol extremamente inflamável.

H222	Jezik	2.3 – Vnetljivi aerosoli, kategorija nevarnosti 1
	RO	Aerosol extrem de inflamabil.
	SK	Mimoriadne horľavý aerosól.
	SL	Zelo lahko vnetljiv aerosol.
	FI	Erittäin helposti syttyvä aerosoli.
	SV	Extremt brandfarlig aerosol.

H223	Jezik	2.3 – Vnetljivi aerosoli, kategorija nevarnosti 2
	BG	Запалим аерозол.
	ES	Aerosol inflamable.
	CS	Hořlavý aerosol.
	DA	Brandfarlig aerosol.
	DE	Entzündbares Aerosol.
	ET	Tuleohtlik aerosool.
	EL	Εύφλεκτο αερόλυμα.
	EN	Flammable aerosol.
	FR	Aérosol inflammable.
	GA	Aerasól inadhainte.
	IT	Aerosol infiammabile.
	LV	Uzliesmojošs aerosols.
	LT	Degus aerosolis.
	HU	Tűzveszélyes aeroszol.
	MT	Aerosol li jaqbad.
	NL	Ontvlambare aerosol.
	PL	Aerozol łatwopalny.
	PT	Aerossol inflamável.
	RO	Aerosol inflamabil.
	SK	Horľavý aerosól.
	SL	Vnetljiv aerosol.
	FI	Syttyvä aerosoli.
	SV	Brandfarlig aerosol.

H224	Jezik	2.6 – Vnetljive tekočine, kategorija nevarnosti 1
	BG	Изключително запалими течност и пари.
	ES	Líquido y vapores extremadamente inflamables.
	CS	Extrémně hořlavá kapalina a páry.
	DA	Yderst brandfarlig væske og damp.
	DE	Flüssigkeit und Dampf extrem entzündbar.
	ET	Eriti tuleohtlik vedelik ja aur.

H224	Jezik	2.6 – Vnetljive tekočine, kategorija nevarnosti 1
	EL	Υγρό και ατμοί εξαιρετικά εύφλεκτα.
	EN	Extremely flammable liquid and vapour.
	FR	Liquide et vapeurs extrêmement inflammables.
	GA	Leacht fíor-inadhainte agus gal fhíor-inadhainte.
	IT	Liquido e vapore altamente infiammabili.
	LV	Īpaši viegli uzliesmojošs šķidrums un tvaiki.
	LT	Ypač degūs skystis ir garai.
	HU	Rendkívül tűzveszélyes folyadék és gőz.
	MT	Likwidu u fwar li jaqbdu malajr hafna.
	NL	Zeer licht ontvlambare vloeistof en damp.
	PL	Skrajnie łatwopalna ciecz i pary.
	PT	Líquido e vapor extremamente inflamáveis.
	RO	Lichid și vapori extrem de inflamabili.
	SK	Mimoriadne horľavá kvapalina a pary.
	SL	Zelo lahko vnetljiva tekočina in hlapi.
	FI	Erittäin helposti syttyvä neste ja höyry.
	SV	Extremt brandfarlig vätska och ånga.

H225	Jezik	2.6 – Vnetljive tekočine, kategorija nevarnosti 2
	BG	Силно запалими течност и пари.
	ES	Líquido y vapores muy inflamables.
	CS	Vysoce hořlavá kapalina a páry.
	DA	Meget brandfarlig væske og damp.
	DE	Flüssigkeit und Dampf leicht entzündbar.
	ET	Väga tuleohtlik vedelik ja aur.
	EL	Υγρό και ατμοί πολύ εύφλεκτα.
	EN	Highly flammable liquid and vapour.
	FR	Liquide et vapeurs très inflammables.
	GA	Leacht an-inadhainte agus gal an-inadhainte.
	IT	Liquido e vapore facilmente infiammabili.
	LV	Viegli uzliesmojošs šķidrums un tvaiki.
	LT	Labai degūs skystis ir garai.
	HU	Fokozottan tűzveszélyes folyadék és gőz.
	MT	Likwidu u fwar li jaqbdu malajr hafna.
	NL	Licht ontvlambare vloeistof en damp.
	PL	Wysoce łatwopalna ciecz i pary.
	PT	Líquido e vapor facilmente inflamáveis.
	RO	Lichid și vapori foarte inflamabili.

H225	Jezik	2.6 – Vnetljive tekočine, kategorija nevarnosti 2
	SK	Veľmi horľavá kvapalina a pary.
	SL	Lahko vnetljiva tekočina in hlapi.
	FI	Helposti syttyvä neste ja höyry.
	SV	Mycket brandfarlig vätska och ånga.

H226	Jezik	2.6 – Vnetljive tekočine, kategorija nevarnosti 3
	BG	Запалими течност и пари.
	ES	Líquidos y vapores inflamables.
	CS	Horľavá kapalina a páry.
	DA	Brandfarlig væske og damp.
	DE	Flüssigkeit und Dampf entzündbar.
	ET	Tuleohtlik vedelik ja aur.
	EL	Υγρό και ατμοί εύφλεκτα.
	EN	Flammable liquid and vapour.
	FR	Liquide et vapeurs inflammables.
	GA	Leacht inadhainte agus gal inadhainte.
	IT	Liquido e vapore infiammabili.
	LV	Uzliesmojošs šķidrums un tvaiki.
	LT	Degūs skystis ir garai.
	HU	Tűzveszélyes folyadék és gőz.
	MT	Likwidu u fwar li jaqbd.
	NL	Ontvlambare vloeistof en damp.
	PL	Łatwopalna ciecz i pary.
	PT	Líquido e vapor inflamáveis.
	RO	Lichid și vapori inflamabili.
	SK	Horľavá kvapalina a pary.
	SL	Vnetljiva tekočina in hlapi.
	FI	Syttyvä neste ja höyry.
	SV	Brandfarlig vätska och ånga.

H228	Jezik	2.7 – Vnetljive trdne snovi, kategorija nevarnosti 1, 2
	BG	Запалимо твърдо вещество.
	ES	Sólido inflamable.
	CS	Horľavá tuhá látka.
	DA	Brandfarligt fast stof.
	DE	Entzündbarer Feststoff.
	ET	Tuleohtlik tahke aine.
	EL	Εύφλεκτο στερεό.

H228	Jezik	2.7 – Vnetljive trdne snovi, kategorija nevarnosti 1, 2
	EN	Flammable solid.
	FR	Matière solide inflammable.
	GA	Solad inadhainte.
	IT	Solido infiammabile.
	LV	Uzliesmojoša cieta viela.
	LT	Degi kietoji medžiaga.
	HU	Tűzveszélyes szilárd anyag.
	MT	Solidu li jaqbad.
	NL	Ontvlambare vaste stof.
	PL	Substancja stała łatwopalna.
	PT	Sólido inflamável.
	RO	Solid inflamabil.
	SK	Horľavá tuhá látka.
	SL	Vnetljiva trdna snov.
	FI	Syttyvä kiinteä aine.
	SV	Brandfarligt fast ämne.
H240	Jezik	2.8 – Samoreaktivne snovi in zmesi, vrsta A 2.15 – Organski peroksidi, vrsta A
	BG	Може да предизвика експлозия при нагряване.
	ES	Peligro de explosión en caso de calentamiento.
	CS	Zahřívání může způsobit výbuch.
	DA	Eksplodingsfare ved opvarmning.
	DE	Erwärmung kann Explosion verursachen.
	ET	Kuumenemisel võib plahvatada.
	EL	Η θέρμανση μπορεί να προκαλέσει έκρηξη.
	EN	Heating may cause an explosion.
	FR	Peut exploser sous l'effet de la chaleur.
	GA	D'fhéadfadh téamh a bheith ina chúis le pléascadh.
	IT	Rischio di esplosione per riscaldamento.
	LV	Sakaršana var izraisīt eksploziju.
	LT	Kaitinant gali sprogti.
	HU	Hő hatására robbanhat.
	MT	It-tishin jista' jikkawża splużjoni.
	NL	Ontploffingsgevaar bij verwarming.
	PL	Ogrzanie grozi wybuchem.
	PT	Risco de explosão sob a acção do calor.
	RO	Pericol de explozie în caz de încălzire.

H240	Jezik	2.8 – Samoreaktivne snovi in zmesi, vrsta A 2.15 – Organski peroksidi, vrsta A
	SK	Zahrievanie môže spôsobiť výbuch.
	SL	Segrevanje lahko povzroči eksplozijo.
	FI	Räjähdyksaarallinen kuumentettaessa.
	SV	Explosivt vid uppvärmning.
H241	Jezik	2.8 – Samoreaktivne snovi in zmesi, vrsta B 2.15 – Organski peroksidi, vrsta B
	BG	Може да предизвика пожар или експлозия при нагряване.
	ES	Peligro de incendio o explosión en caso de calentamiento.
	CS	Zahřívání může způsobit požár nebo výbuch.
	DA	Brand- eller eksplosionsfare ved opvarmning.
	DE	Erwärmung kann Brand oder Explosion verursachen.
	ET	Kuumenemisel võib süttida või plahvatada.
	EL	Η θέρμανση μπορεί να προκαλέσει πυρκαγιά ή έκρηξη.
	EN	Heating may cause a fire or explosion.
	FR	Peut s'enflammer ou exploser sous l'effet de la chaleur.
	GA	D'fhéadfadh téamh a bheith ina chúis le dóiteán nó le pléascadh.
	IT	Rischio d'incendio o di esplosione per riscaldamento.
	LV	Sakaršana var izraisīt degšanu vai eksploziju.
	LT	Kaitinant gali sukelti gaisrą arba sprogtį.
	HU	Hő hatására meggyulladhat vagy robbanhat.
	MT	It-tishin jista' jikkawża nar jew splużjoni.
	NL	Brand- of ontploffingsgevaar bij verwarming.
	PL	Ogrzanie może spowodować pożar lub wybuch.
	PT	Risco de explosão ou de incêndio sob a acção do calor.
	RO	Pericol de incendiu sau de explozie în caz de încălzire.
	SK	Zahrievanie môže spôsobiť požiar alebo výbuch.
	SL	Segrevanje lahko povzroči požar ali eksplozijo.
	FI	Räjähdyks- tai palovaarallinen kuumentettaessa.
	SV	Brandfarligt eller explosivt vid uppvärmning.
H242	Jezik	2.8 – Samoreaktivne snovi in zmesi, vrste C, D, E, F 2.15 – Organski peroksidi, vrste C, D, E, F
	BG	Може да предизвика пожар при нагряване.
	ES	Peligro de incendio en caso de calentamiento.
	CS	Zahřívání může způsobit požár.
	DA	Brandfare ved opvarmning.
	DE	Erwärmung kann Brand verursachen.
	ET	Kuumenemisel võib süttida.

H242	Jezik	2.8 – Samoreaktivne snovi in zmesi, vrste C, D, E, F 2.15 – Organski peroksidi, vrste C, D, E, F
	EL	Η θέρμανση μπορεί να προκαλέσει πυρκαγιά.
	EN	Heating may cause a fire.
	FR	Peut s'enflammer sous l'effet de la chaleur.
	GA	D'fhéadfadh téamh a bheith ina chúis le dóiteán.
	IT	Rischio d'incendio per riscaldamento.
	LV	Sakaršana var izraisīt degšanu.
	LT	Kaitinant gali sukelti gaisrą.
	HU	Hő hatására meggyulladhat.
	MT	It-tishin jista' jikkawża nar.
	NL	Brandgevaar bij verwarming.
	PL	Ogrzanie może spowodować pożar.
	PT	Risco de incêndio sob a acção do calor.
	RO	Pericol de incendiu în caz de încălzire.
	SK	Zahrievanie môže spôsobiť požiar.
	SL	Segrevanje lahko povzroči požar.
	FI	Palovaarallinen kuumennettaessa.
	SV	Brandfarligt vid uppvärmning.
H250	Jezik	2.9 – Piroforne tekočine, kategorija nevarnosti 1 2.10 – Piroforne trdne snovi, kategorija nevarnosti 1
	BG	Самозапалва се при контакт с въздух.
	ES	Se inflama espontáneamente en contacto con el aire.
	CS	Při styku se vzduchem se samovolně vznítí.
	DA	Selvantænder ved kontakt med luft.
	DE	Entzündet sich in Berührung mit Luft von selbst.
	ET	Kokkupuutel õhuga süttib iseenesest.
	EL	Αυταναφλέγεται εάν εκτεθεί στον αέρα.
	EN	Catches fire spontaneously if exposed to air.
	FR	S'enflamme spontanément au contact de l'air.
	GA	Téann trí thine go spontáineach má nochtar don aer.
	IT	Spontaneamente infiammabile all'aria.
	LV	Spontāni aizdegas saskarē ar gaisu.
	LT	Veikiami oro savaime užsidega.
	HU	Levegővel érintkezve önmagától meggyullad.
	MT	Jiehu n-nar spontanjament jekk ikun espost għall-arja.
	NL	Vat spontaan vlam bij blootstelling aan lucht.
	PL	Zapala się samorzutnie w przypadku wystawienia na działanie powietrza.
	PT	Risco de inflamação espontânea em contacto com o ar.

H250	Jezik	2.9 – Piroforne tekočine, kategorija nevarnosti 1 2.10 – Piroforne trdne snovi, kategorija nevarnosti 1
	RO	Se aprinde spontan, în contact cu aerul.
	SK	Pri kontakte so vzduchuom sa spontánne vznieti.
	SL	Samodejno se vžge na zraku.
	FI	Syttyy itsestään palamaan joutuessaan kosketuksiin ilman kanssa.
	SV	Spontanantänder vid kontakt med luft.

H251	Jezik	2.11 – Samosegrevajoče se snovi in zmesi, kategorija nevarnosti 1
	BG	Самоагряхащо се: може да се запали.
	ES	Se calienta espontáneamente; puede inflamarse.
	CS	Samovolně se zahřívá: může se vznítit.
	DA	Selvopvarmende, kan selvantænde.
	DE	Selbsterhitzungsfähig; kann in Brand geraten.
	ET	Isekuumenev, võib süttida.
	EL	Αυτοθερμαίνεται: μπορεί να αναφλέξει.
	EN	Self-heating; may catch fire.
	FR	Matière auto-échauffante; peut s'enflammer.
	GA	Féintéamh: d'fhéadfadh sé dul trí thine.
	IT	Autoriscaldante; può infiammarsi.
	LV	Pašasilstošs; var aizdegties.
	LT	Savaime kaistančios, gali užsidegti.
	HU	Önmelegedő: meggyulladhat.
	MT	Jishon wahdu: jista' jiehu n-nar.
	NL	Vatbaar voor zelfverhitting; kan vlam vatten.
	PL	Substancja samonagrzewająca się: może się zapalić.
	PT	Susceptível de auto-aquecimento: risco de inflamação.
	RO	Se autoîncălzește, pericol de aprindere.
	SK	Samovol'ne sa zahrieva; môže sa vznietiť.
	SL	Samosegrevanje: lahko povzroči požar.
	FI	Itsestään kuumeneva; voi syttyä palamaan.
	SV	Självupphettande. Kan börja brinna.

H252	Jezik	2.11 – Samosegrevajoče se snovi in zmesi, kategorija nevarnosti 2
	BG	Самоагряхащо се в големи количества; може да се запали.
	ES	Se calienta espontáneamente en grandes cantidades; puede inflamarse.
	CS	Ve velkém množství se samovolně zahřívá; může se vznítit.
	DA	Selvopvarmende i store mængder, kan selvantænde.
	DE	In großen Mengen selbsterhitzungsfähig; kann in Brand geraten.
	ET	Suurtes kogustes isekuumenev, võib süttida.

H252	Jezik	2.11 – Samosegrevajoče se snovi in zmesi, kategorija nevarnosti 2
	EL	Σε μεγάλες ποσότητες αυτοθερμαίνεται: μπορεί να αναφλεγεί.
	EN	Self-heating in large quantities; may catch fire.
	FR	Matière auto-échauffante en grandes quantités; peut s'enflammer.
	GA	Féintéamh ina mhórchainníochtaí; d'fhéadfadh sé dul trí thine.
	IT	Autoriscaldante in grandi quantità; può infiammarsi.
	LV	Lielos apjomos pašsasilstošs; var aizdegties.
	LT	Laikant dideliais kiekiais savaime kaista, gali užsidegti.
	HU	Nagy mennyiségben önmelegedő; meggyulladhat.
	MT	Jishon wahdu f'kwantitajiet kbar; jista' jiehu n-nar.
	NL	In grote hoeveelheden vatbaar voor zelfverhitting; kan vlam vatten.
	PL	Substancja samonagrzewająca się w dużych ilościach; może się zapalić.
	PT	Susceptível de auto-aquecimento em grandes quantidades: risco de inflamação.
	RO	Se autoîncălzește, în cantități mari pericol de aprindere.
	SK	Vo veľkých množstvách sa samovoľne zahrieva; môže sa vznietiť.
	SL	Samosegrevanje v velikih količinah; lahko povzroči požar.
	FI	Suurina määrinä itestään kuumeneva; voi syttyä palamaan.
	SV	Självpupphettande i stora mängder. Kan börja brinna.

H260	Jezik	2.12 – Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline, kategorija nevarnosti 1
	BG	При контакт с вода отделя запалими газове, които могат да се самозапалят.
	ES	En contacto con el agua desprende gases inflamables que pueden inflamarse espontáneamente.
	CS	Při styku s vodou uvolňuje hořlavé plyny, které se mohou samovolně vznítit.
	DA	Ved kontakt med vand udvikles brandfarlige gasser, som kan selvantænde.
	DE	In Berührung mit Wasser entstehen entzündbare Gase, die sich spontan entzünden können.
	ET	Kokkupuutel veega eraldab tuleohtlikke gaase, mis võivad iseenesest süttida.
	EL	Σε επαφή με το νερό ελευθερώνει εύφλεκτα αέρια τα οποία μπορούν να αυτοαναφλεγούν.
	EN	In contact with water releases flammable gases which may ignite spontaneously.
	FR	Dégage au contact de l'eau des gaz inflammables qui peuvent s'enflammer spontanément.
	GA	I dteagmháil le huisce scaoiltear gáis inadhainte a d'fhéadfadh uathadhaint.
	IT	A contatto con l'acqua libera gas infiammabili che possono infiammarsi spontaneamente.
	LV	Nonākot saskarē ar ūdeni, izdala uzliesmojošas gāzes, kas var spontāni aizdegties.
	LT	Kontaktuodami su vandeniu išskiria degias dujas, kurios gali savaime užsidegti.
	HU	Vízzel érintkezve öngyulladásra hajlamos tűzveszélyes gázokat bocsát ki.
	MT	Meta jmiss ma' l-ilma jerhi gassijiet li jaqbdu li jistghu jiehdu n-nar spontanjament.
	NL	In contact met water komen ontvlambare gassen vrij die spontaan kunnen ontbranden.
	PL	W kontakcie z wodą uwalniają łatwopalne gazy, które mogą ulegać samozapaleniu.
	PT	Em contacto com a água liberta gases que se podem inflamar espontaneamente.

H260	Jezik	2.12 – Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline, kategorija nevarnosti 1
	RO	În contact cu apa degajă gaze inflamabile care se pot aprinde spontan.
	SK	Pri kontakte s vodou uvoľňuje horľavé plyny, ktoré sa môžu spontánne zapáliť.
	SL	V stiku z vodo se sproščajo vnetljivi plini, ki se lahko samodejno vžgejo.
	FI	Kehittää itsestään syttyviä kaasuja veden kanssa.
	SV	Vid kontakt med vatten utvecklas brandfarliga gaser som kan självantända.

H261	Jezik	2.12 – Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline, kategorija nevarnosti 2, 3
	BG	При контакт с вода отделя запалими газове.
	ES	En contacto con el agua desprende gases inflamables.
	CS	Při styku s vodou uvolňuje hořlavé plyny.
	DA	Ved kontakt med vand udvikles brandfarlige gasser.
	DE	In Berührung mit Wasser entstehen entzündbare Gase.
	ET	Kokkupuutel veega eraldab tuleohtlikke gaase.
	EL	Σε επαφή με το νερό ελευθερώνει εύφλεκτα αέρια.
	EN	In contact with water releases flammable gases.
	FR	Dégage au contact de l'eau des gaz inflammables.
	GA	I dteagmháil le huisce scaoiltear gáis inadhaite.
	IT	A contatto con l'acqua libera gas infiammabili.
	LV	Nonākot saskarē ar ūdeni, izdala uzliesmojošu gāzi.
	LT	Kontaktuodami su vandeniu išskiria degias dujas
	HU	Vízzel érintkezve tűzveszélyes gázokat bocsát ki.
	MT	Meta jmiss ma' l-ilma jerhi gassijiet li jaqbdu.
	NL	In contact met water komen ontvlambare gassen vrij.
	PL	W kontakcie z wodą uwalnia łatwopalne gazy.
	PT	Em contacto com a água liberta gases inflamáveis.
	RO	În contact cu apa degajă gaze inflamabile.
	SK	Pri kontakte s vodou uvoľňuje horľavé plyny.
	SL	V stiku z vodo se sproščajo vnetljivi plini.
	FI	Kehittää syttyviä kaasuja veden kanssa.
	SV	Vid kontakt med vatten utvecklas brandfarliga gaser.

H270	Jezik	2.4 – Oksidativni plini, kategorija nevarnosti 1
	BG	Може да предизвика или усили пожар; окислител.
	ES	Puede provocar o agravar un incendio; comburente.
	CS	Může způsobit nebo zesílit požár; oxidant.
	DA	Kan forårsage eller forstærke brand, brandnærende.
	DE	Kann Brand verursachen oder verstärken; Oxidationsmittel.

H270	Jezik	2.4 – Oksidativni plini, kategorija nevarnosti 1
	ET	Võib põhjustada süttimise või soodustada põlemist; oksüdeerija.
	EL	Μπορεί να προκαλέσει ή να αναζωπυρώσει πυρκαγιά· οξειδωτικό.
	EN	May cause or intensify fire; oxidiser.
	FR	Peut provoquer ou aggraver un incendie; comburant.
	GA	D'fhéadfadh sé a bheith ina chúis le tine nó cur le tine; ocsaídeoir.
	IT	Può provocare o aggravare un incendio; comburente.
	LV	Var izraisīt vai pastiprināt degšanu, oksidētājs.
	LT	Gali sukelti arba padidinti gaisrą, oksidatorius.
	HU	Tűzet okozhat vagy fokozhatja a tűz intenzitását, oxidáló hatású.
	MT	Jista' jikkawża jew iżid in-nar; ossidant.
	NL	Kan brand veroorzaken of bevorderen; oxiderend.
	PL	Może spowodować lub intensyfikować pożar; utleniacz.
	PT	Pode provocar ou agravar incêndios; comburente.
	RO	Poate provoca sau agrava un incendiu; oxidant.
	SK	Môže spôsobiť alebo prispieť k rozvoju požiaru; oxidačné činidlo.
	SL	Lahko povzroči ali okrepi požar; oksidativna snov.
	FI	Aiheuttaa tulipalon vaaran tai edistää tulipaloa; hapettava.
	SV	Kan orsaka eller intensifiera brand. Oxiderande.
H271	Jezik	2.13 – Oksidativne tekočine, kategorija nevarnosti 1 2.14 – Oksidativne trdne snovi, kategorija nevarnosti 1
	BG	Може да предизвика пожар или експлозия; силен окислител.
	ES	Puede provocar un incendio o una explosión; muy comburente.
	CS	Může způsobit požár nebo výbuch; silný oxidant.
	DA	Kan forårsage brand eller eksplosion, stærkt brandnærende.
	DE	Kann Brand oder Explosion verursachen; starkes Oxidationsmittel.
	ET	Võib põhjustada süttimise või plahvatuse; tugev oksüdeerija.
	EL	Μπορεί να προκαλέσει πυρκαγιά ή έκρηξη· ισχυρό οξειδωτικό.
	EN	May cause fire or explosion; strong oxidiser.
	FR	Peut provoquer un incendie ou une explosion; comburant puissant.
	GA	D'fhéadfadh sé a bheith ina chúis le tine nó le pléascadh; an-ocsáideoir.
	IT	Può provocare un incendio o un'esplosione; molto comburente.
	LV	Var izraisīt degšanu vai eksploziju, oksidētājs.
	LT	Gali sukelti gaisrą arba sproginą, stiprus oksidatorius.
	HU	Tűzet vagy robbanást okozhat; erősen oxidáló hatású.
	MT	Jista' jikkawża nar jew splużjoni; ossidant qawwi.
	NL	Kan brand of ontploffen veroorzaken; sterk oxiderend.
	PL	Może spowodować pożar lub wybuch; silny utleniacz.

H271	Jezik	2.13 – Oksidativne tekočine, kategorija nevarnosti 1 2.14 – Oksidativne trdne snovi, kategorija nevarnosti 1
	PT	Risco de incêndio ou de explosão; muito comburente.
	RO	Poate provoca un incendiu sau o explozie; oxidant puternic.
	SK	Môže spôsobiť požiar alebo výbuch; silné oxidačné činidlo.
	SL	Lahko povzroči požar ali eksplozijo; močna oksidativna snov.
	FI	Aiheuttaa tulipalo- tai räjähdysvaaran; voimakkaasti hapettava.
	SV	Kan orsaka brand eller explosion. Starkt oxiderande.
H272	Jezik	2.13 – Oksidativne tekočine, kategorija nevarnosti 2, 3 2.14 – Oksidativne trdne snovi, kategorija nevarnosti 2, 3
	BG	Може да усили пожара; окислител.
	ES	Puede agravar un incendio; comburente.
	CS	Může zesílit požár; oxidant.
	DA	Kan forstærke brand, brandnærende.
	DE	Kann Brand verstärken; Oxidationsmittel.
	ET	Võib soodustada põlemist; oksüdeerija.
	EL	Μπορεί να αναζωπυρώσει την πυρκαγιά· οξειδωτικό.
	EN	May intensify fire; oxidiser.
	FR	Peut aggraver un incendie; comburant.
	GA	D'fhéadfadh sé cur le tine; ocsaídeoir.
	IT	Può aggravare un incendio; comburente.
	LV	Var pastiprināt degšanu; oksidētājs.
	LT	Gali padidinti gaisrą, oksidatorius.
	HU	Fokozhatja a tűz intenzitását; oxidáló hatású.
	MT	Jista' jżid in-nar; ossidant.
	NL	Kan brand bevorderen; oxiderend.
	PL	Może intensyfikować pożar; utleniacz.
	PT	Pode agravar incêndios; comburente.
	RO	Poate agrava un incendiu; oxidant.
	SK	Môže prispieť k rozvoju požiaru; oxidačné činidlo.
	SL	Lahko okrepi požar; oksidativna snov.
	FI	Voi edistää tulipaloa; hapettava.
	SV	Kan intensifiera brand. Oxiderande.
H280	Jezik	2.5 – Plini pod tlakom: Stisnjeni plin Utekočnjeni plin Raztopljeni plin
	BG	Съдържа газ под налягане; може да експлодира при нагряване.
	ES	Contiene gas a presión; peligro de explosión en caso de calentamiento.

H280	Jezik	2.5 – Plini pod tlakom: Stisnjeni plin Utekočinjeni plin Raztopljeni plin
	CS	Obsahuje plyn pod tlakem; při zahřívání může vybuchnout.
	DA	Indeholder gas under tryk, kan eksplodere ved opvarmning.
	DE	Enthält Gas unter Druck; kann bei Erwärmung explodieren.
	ET	Sisaldab rõhu all olevat gaasi, kuumenemisel võib plahvatada.
	EL	Περιέχει αέριο υπό πίεση· εάν θερμανθεί, μπορεί να εκραγεί.
	EN	Contains gas under pressure; may explode if heated.
	FR	Contient un gaz sous pression; peut exploser sous l'effet de la chaleur.
	GA	Gás istigh ann, faoi bhrú; d'fhéadfadh sé pléascadh, má théitear.
	IT	Contiene gas sotto pressione; può esplodere se riscaldato.
	LV	Satur gāzi zem spiediena; karstumā var eksplodēt.
	LT	Turi slėgio veikiamų dujų, kaitinant gali sprogti.
	HU	Nyomás alatt lévő gázt tartalmaz; hő hatására robbanhat.
	MT	Fih gass taht pressjoni; jista' jisplodi jekk jissahhan.
	NL	Bevat gas onder druk; kan ontploffen bij verwarming.
	PL	Zawiera gaz pod ciśnieniem; ogrzanie grozi wybuchem.
	PT	Contém gás sob pressão; risco de explosão sob a acção do calor.
	RO	Conține un gaz sub presiune; pericol de explozie în caz de încălzire.
	SK	Obsahuje plyn pod tlakom, pri zahriatí môže vybuchnúť.
	SL	Vsebuje plin pod tlakom; segrevanje lahko povzroči eksplozijo.
	FI	Sisältää paineen alla kaasua; voi räjähtää kuumennettaessa.
	SV	Innehåller gas under tryck. Kan explodera vid uppvärmning.

H281	Jezik	2.5 – Plini pod tlakom: Ohlajen utekočinjeni plin
	BG	Съдържа охладен газ; може да причини криогенни изгаряния или наранявания.
	ES	Contiene un gas refrigerado; puede provocar quemaduras o lesiones criogénicas.
	CS	Obsahuje zchlazený plyn; může způsobit omrzliny nebo poškození chladem.
	DA	Indeholder nedkølet gas, kan forårsage kuldeskader.
	DE	Enthält tiefkaltes Gas; kann Kälteverbrennungen oder -Verletzungen verursachen.
	ET	Sisaldab külmutatud gaasi; võib põhjustada külmapõletusi või -kahjustusi.
	EL	Περιέχει αέριο υπό ψύξη· μπορεί να προκαλέσει εγκαύματα ψύχους ή τραυματισμούς.
	EN	Contains refrigerated gas; may cause cryogenic burns or injury.
	FR	Contient un gaz réfrigéré; peut causer des brûlures ou blessures cryogéniques.
	GA	Gás cuisnithe istigh ann; d'fhéadfadh sé a bheith ina chúis le dónna criógineacha nó le díobháil chrióigineach.
	IT	Contiene gas refrigerato; può provocare ustioni o lesioni criogeniche.
	LV	Satur atdzesētu gāzi; var radīt kriogēnus apdegumus vai ievainojumus.
	LT	Turi atšaldytų dujų, gali sukelti kriogeninius nušalimus arba pažeidimus.

H281	Jezik	2.5 – Plini pod tlakom: Ohlajen utekočinjeni plin
	HU	Mélyhűtött gázt tartalmaz; fagymarást vagy sérülést okozhat.
	MT	Fih gass imkessah; jista' jikkawża hruq jew dannu minn temperaturi baxxi.
	NL	Bevat sterk gekoeld gas; kan cryogene brandwonden of letsel veroorzaken.
	PL	Zawiera schłodzony gaz; może spowodować oparzenia kriogeniczne lub obrażenia.
	PT	Contém gás refrigerado; pode provocar queimaduras ou lesões criogénicas.
	RO	Conține un gaz răcit; poate cauza arsuri sau leziuni criogenice.
	SK	Obsahuje schladený plyn; môže spôsobiť kryogénne popáleniny alebo poranenia.
	SL	Vsebuje ohlajen utekočinjen plin; lahko povzroči ozeblino ali poškodbe.
	FI	Sisältää jäähdytettyä kaasua; voi aiheuttaa jäätymisvamman.
	SV	Innehåller kyld gas. Kan orsaka svåra köldskador.
H290	Jezik	2.16 – Jedko za kovine, kategorija nevarnosti 1
	BG	Може да бъде корозивно за металите.
	ES	Puede ser corrosivo para los metales.
	CS	Může být korozivní pro kovy.
	DA	Kan ætse metaller.
	DE	Kann gegenüber Metallen korrosiv sein.
	ET	Võib söövitada metalle.
	EL	Μπορεί να διαβρώσει μέταλλα.
	EN	May be corrosive to metals.
	FR	Peut être corrosif pour les métaux.
	GA	D'fhéadfadh sé a bheith creimneach do mhiotail.
	IT	Può essere corrosivo per i metalli.
	LV	Var kodīgi iedarboties uz metāliem.
	LT	Gali ėsdinti metalus.
	HU	Fémekre korrozív hatású lehet.
	MT	Jista' jkun korruziv għall-metalli.
	NL	Kan bijtend zijn voor metalen.
	PL	Może powodować korozję metali.
	PT	Pode ser corrosivo para os metais.
	RO	Poate fi corosiv pentru metale.
	SK	Môže byť korozívna pre kovy.
	SL	Lahko je jedko za kovine.
	FI	Voi syövyttää metalleja.
	SV	Kan vara korrosivt för metaller.

Tabela 1.2

Stavki o nevarnosti za zdravje

H300	Jezik	3.1 – Akutna strupenost (oralno), kategorija nevarnosti 1, 2
	BG	Смъртоносен при погълъване.
	ES	Mortal en caso de ingestión.
	CS	Při požití může způsobit smrt.
	DA	Livsfarlig ved indtagelse.
	DE	Lebensgefahr bei Verschlucken.
	ET	Allaneelamisel surmav.
	EL	Θανατηφόρο σε περίπτωση κατάποσης.
	EN	Fatal if swallowed.
	FR	Mortel en cas d'ingestion.
	GA	Marfach má shlogtar.
	IT	Letale se ingerito.
	LV	Norijot iestājas nāve.
	LT	Mirtina prarijus.
	HU	Lenyelve halálos.
	MT	Fatali jekk jinbela'.
	NL	Dodelijk bij inslikken.
	PL	Pożłknięcie grozi śmiercią.
	PT	Mortal por ingestão.
	RO	Mortal în caz de înghițire.
	SK	Smrteľný po požití.
	SL	Smrtno pri zaužitju.
	FI	Tappavaa nieltynä.
	SV	Dödligt vid förtäring.
H301	Jezik	3.1 – Akutna strupenost (oralno), kategorija nevarnosti 3
	BG	Токсичен при погълъване.
	ES	Tóxico en caso de ingestión.
	CS	Toxický při požití.
	DA	Giftig ved indtagelse.
	DE	Giftig bei Verschlucken.
	ET	Allaneelamisel mürgine.
	EL	Τοξικό σε περίπτωση κατάποσης.
	EN	Toxic if swallowed.
	FR	Toxique en cas d'ingestion.
	GA	Tocsaineach má shlogtar.

H301	Jezik	3.1 – Akutna strupenost (oralno), kategorija nevarnosti 3
	IT	Tossico se ingerito.
	LV	Toksisks, ja norij.
	LT	Toksiška prarijus.
	HU	Lenyelve mérgező.
	MT	Tossiku jekk jinbela'.
	NL	Giftig bij inslikken.
	PL	Działa toksycznie po połknięciu.
	PT	Tóxico por ingestão.
	RO	Toxic în caz de înghițire.
	SK	Toxický po požití.
	SL	Strupeno pri zaužitju.
	FI	Myrkyllistä nieltynä.
	SV	Giftigt vid förtäring.

H302	Jezik	3.1 – Akutna strupenost (oralno), kategorija nevarnosti 4
	BG	Вреден при поглъщане.
	ES	Nocivo en caso de ingestión.
	CS	Zdraví škodlivý při požití.
	DA	Farlig ved indtagelse.
	DE	Gesundheitsschädlich bei Verschlucken.
	ET	Allaneelamisel kahjulik.
	EL	Επιβλαβές σε περίπτωση κατάποσης.
	EN	Harmful if swallowed.
	FR	Nocif en cas d'ingestion.
	GA	Díobhálach má shlogtar.
	IT	Nocivo se ingerito.
	LV	Kaitīgs, ja norij.
	LT	Kenksminga prarijus.
	HU	Lenyelve ártalmas.
	MT	Jagħmel il-hsara jekk jinbela'.
	NL	Schadelijk bij inslikken.
	PL	Działa szkodliwie po połknięciu.
	PT	Nocivo por ingestão.
	RO	Nociv în caz de înghițire.
	SK	Škodlivý po požití.
	SL	Zdravju škodljivo pri zaužitju.
	FI	Haitallista nieltynä.
	SV	Skadligt vid förtäring.

H304	Jezik	3.10 – Nevarnost pri vdihavanju, kategorija nevarnosti 1
	BG	Може да бъде смъртоносен при погълчане и навлизане в дихателните пътища.
	ES	Puede ser mortal en caso de ingestión y penetración en las vías respiratorias.
	CS	Při požití a vniknutí do dýchacích cest může způsobit smrt.
	DA	Kan være livsfarligt, hvis det indtages og kommer i luftvejene.
	DE	Kann bei Verschlucken und Eindringen in die Atemwege tödlich sein.
	ET	Allaneelamisel või hingamisteedesse sattumisel võib olla surmav.
	EL	Μπορεί να προκαλέσει θάνατο σε περίπτωση κατάποσης και διείσδυσης στις αναπνευστικές οδούς.
	EN	May be fatal if swallowed and enters airways.
	FR	Peut être mortel en cas d'ingestion et de pénétration dans les voies respiratoires.
	GA	D'fhéadfadh sé a bheith marfach má shlogtar é agus má théann sé isteach sna haerbhealaí.
	HU	Lenyelve és a légutakba kerülve halálos lehet.
	IT	Può essere letale in caso di ingestione e di penetrazione nelle vie respiratorie.
	LV	Var izraisīt nāvi, ja norij vai iekļūst elpceļos.
	LT	Prarijus ir patekus į kvėpavimo takus, gali sukelti mirtį.
	MT	Jista' jkun fatali jekk jinbela' u jidhol fil-pajpijiet tan-nifs.
	NL	Kan dodelijk zijn als de stof bij inslikken in de luchtwegen terechtkomt.
	PL	Połknięcie i dostanie się przez drogi oddechowe może grozić śmiercią.
	PT	Pode ser mortal por ingestão e penetração nas vias respiratórias.
	RO	Poate fi mortal în caz de înghițire și de pătrundere în căile respiratorii.
	SK	Môže byť smrteľný po požití a vniknutí do dýchacích ciest.
	SL	Pri zaužitju in vstopu v dihalne poti je lahko smrtno.
	FI	Voi olla tappavaa nieltynä ja joutuessaan hengitysteihin.
	SV	Kan vara dödligt vid förtäring om det kommer ner i luftvägarna.
H310	Jezik	3.1 – Akutna strupenost (dermalno), kategorija nevarnosti 1, 2
	BG	Смъртоносен при контакт с кожата.
	ES	Mortal en contacto con la piel.
	CS	Při styku s kůží může způsobit smrt.
	DA	Livsfarlig ved hudkontakt.
	DE	Lebensgefahr bei Hautkontakt.
	ET	Nahale sattumisel surmav.
	EL	Θανατηφόρο σε επαφή με το δέρμα.
	EN	Fatal in contact with skin.
	FR	Mortel par contact cutané.
	GA	Marfach i dteagmháil leis an gcráiceann.
	HU	Bőrrrel érintkezve halálos.
	IT	Letale per contatto con la pelle.

H310	Jezik	3.1 – Akutna strupenost (dermalno), kategorija nevarnosti 1, 2
	LV	Nonākot saskarē ar ādu, iestājas nāve.
	LT	Mirtina susilietus su oda.
	MT	Fatali jekk imiss mal-ġilda.
	NL	Dodelijk bij contact met de huid.
	PL	Grozi śmiercią w kontakcie ze skórą.
	PT	Mortal em contacto com a pele.
	RO	Mortal în contact cu pielea.
	SK	Smrteľný pri kontakte s pokožkou.
	SL	Smrtno v stiku s kožo.
	FI	Tappavaa joutuessaan iholle.
	SV	Dödligt vid hudkontakt.
H311	Jezik	3.1 – Akutna strupenost (dermalno), kategorija nevarnosti 3
	BG	Токсичен при контакт с кожата.
	ES	Tóxico en contacto con la piel.
	CS	Toxický při styku s kůží.
	DA	Giftig ved hudkontakt.
	DE	Giftig bei Hautkontakt.
	ET	Nahale sattumisel mürgine.
	EL	Τοξικό σε επαφή με το δέρμα.
	EN	Toxic in contact with skin.
	FR	Toxique par contact cutané.
	GA	Tocsaineach i dteagmháil leis an gcraiceann.
	IT	Tossico per contatto con la pelle.
	LV	Toksisks, ja nonāk saskarē ar ādu.
	LT	Toksiška susilietus su oda.
	HU	Bőrrel érintkezve mérgező.
	MT	Tossiku meta jmiss mal-ġilda.
	NL	Giftig bij contact met de huid.
	PL	Działa toksycznie w kontakcie ze skórą.
	PT	Tóxico em contacto com a pele.
	RO	Toxic în contact cu pielea.
	SK	Toxický pri kontakte s pokožkou.
	SL	Strupeno v stiku s kožo.
	FI	Myrkyllistä joutuessaan iholle.
	SV	Giftigt vid hudkontakt.

H312	Jezik	3.1 – Akutna strupenost (dermalno), kategorija nevarnosti 4
	BG	Вреден при контакт с кожата.
	ES	Nocivo en contacto con la piel.
	CS	Zdraví škodlivý při styku s kůží.
	DA	Farlig ved hudkontakt.
	DE	Gesundheitsschädlich bei Hautkontakt.
	ET	Nahale sattumisel kahjulik.
	EL	Επιβλαβές σε επαφή με το δέρμα.
	EN	Harmful in contact with skin.
	FR	Nocif par contact cutané.
	GA	Díobhálach i dteagmháil leis an gcaiceann.
	IT	Nocivo per contatto con la pelle.
	LV	Kaitīgs, ja nonāk saskarē ar ādu.
	LT	Kenksminga susilietus su oda.
	HU	Bőrrrel érintkezve ártalmas.
	MT	Jagħmel il-ħsara meta jmiss mal-ġilda.
	NL	Schadelijk bij contact met de huid.
	PL	Działa szkodliwie w kontakcie ze skórą.
	PT	Nocivo em contacto com a pele.
	RO	Nociv în contact cu pielea.
	SK	Škodlivý pri kontakte s pokožkou.
	SL	Zdravju škodljivo v stiku s kožo.
	FI	Haitallista joutuessaan iholle.
	SV	Skadligt vid hudkontakt.
H314	Jezik	3.2 – Jedkost za kožo/draženje kože, kategorija nevarnosti 1A, 1B, 1C
	BG	Причинява тежки изгаряния на кожата и сериозно увреждане на очите.
	ES	Provoca quemaduras graves en la piel y lesiones oculares graves.
	CS	Způsobuje těžké poleptání kůže a poškození očí.
	DA	Forårsager svære forbrændinger af huden og øjenskader.
	DE	Verursacht schwere Verätzungen der Haut und schwere Augenschäden.
	ET	Põhjustab rasket nahasöövitust ja silmakahjustusi.
	EL	Προκαλεί σοβαρά δερματικά εγκαύματα και οφθαλμικές βλάβες.
	EN	Causes severe skin burns and eye damage.
	FR	Provoque des brûlures de la peau et des lésions oculaires graves.
	GA	Ina chúis le dónna tromchúiseacha craicinn agus le damáiste don tsúil.
	IT	Provoca gravi ustioni cutanee e gravi lesioni oculari.
	LV	Izraisa smagus ādas apdegumus un acu bojājumus.

H314	Jezik	3.2 – Jedkost za kožo/draženje kože, kategorija nevarnosti 1A, 1B, 1C
	LT	Smarkiai nudegina odą ir pažeidžia akis.
	HU	Súlyos égési sérülést és szemkárosodást okoz.
	MT	Jagħmel hruq serju lill-ġilda u hsara lill-ġhajnejn.
	NL	Veroorzaakt ernstige brandwonden en oogletsel.
	PL	Powoduje poważne oparzenia skóry oraz uszkodzenia oczu .
	PT	Provoca queimaduras na pele e lesões oculares graves.
	RO	Provoacă arsuri grave ale pielii și lezarea ochilor.
	SK	Spôsobuje vážne poleptanie kože a poškodenie očí.
	SL	Povzroča hude opekline kože in poškodbe oči.
	FI	Voimakkaasti ihoa syövyttävää ja silmiä vaurioittavaa.
	SV	Orsakar allvarliga frätskador på hud och ögon.
H315	Jezik	3.2 – Jedkost za kožo/draženje kože, kategorija nevarnosti 2
	BG	Предизвиква дразнене на кожата.
	ES	Provoca irritación cutánea.
	CS	Dráždí kůži.
	DA	Forårsager hudirritation.
	DE	Verursacht Hautreizungen.
	ET	Põhjustab nahaärritust.
	EL	Προκαλεί ερεθισμό του δέρματος.
	EN	Causes skin irritation.
	FR	Provoque une irritation cutanée.
	GA	Ina chúis le greannú craicinn.
	IT	Provoca irritazione cutanea.
	LV	Kairina ādu.
	LT	Dirgina odą.
	HU	Bőrirritáló hatású.
	MT	Jagħmel irritazzjoni tal-ġilda.
	NL	Veroorzaakt huidirritatie.
	PL	Działa drażniąco na skórę.
	PT	Provoca irritação cutânea.
	RO	Provoacă iritarea pielii.
	SK	Dráždi kožu.
	SL	Povzroča draženje kože.
	FI	Ärsyttää ihoa.
	SV	Irriterar huden.

H317	Jezik	3.4 – Preobčutljivost – koža, kategorija nevarnosti 1
	BG	Може да причини алергична кожна реакция.
	ES	Puede provocar una reacción alérgica en la piel.
	CS	Může vyvolat alergickou kožní reakci.
	DA	Kan forårsage allergisk hudreaktion.
	DE	Kann allergische Hautreaktionen verursachen.
	ET	Võib põhjustada allergilist nahareaktsiooni.
	EL	Μπορεί να προκαλέσει αλλεργική δερματική αντίδραση.
	EN	May cause an allergic skin reaction.
	FR	Peut provoquer une allergie cutanée.
	GA	D'fhéadfadh sé a bheith ina chúis le frithghníomh ailléirgeach craicinn.
	IT	Può provocare una reazione allergica cutanea.
	LV	Var izraisīt alerģisku ādas reakciju.
	LT	Gali sukelti alerginę odos reakciją.
	HU	Allergiás bőrreakciót válthat ki.
	MT	Jista' jikkawża reazzjoni allergika tal-ġilda.
	NL	Kan een allergische huidreactie veroorzaken.
	PL	Może powodować reakcję alergiczną skóry.
	PT	Pode provocar uma reacção alérgica cutânea.
	RO	Poate provoca o reacție alergică a pielii.
	SK	Môže vyvolať alergickú kožnú reakciu.
	SL	Lahko povzroči alergijski odziv kože.
	FI	Voi aiheuttaa allergisen ihoreaktion.
	SV	Kan orsaka allergisk hudreaktion.
H318	Jezik	3.3 – Hude poškodbe oči/draženje oči, kategorija nevarnosti 1
	BG	Предизвиква сериозно увреждане на очите.
	ES	Provoca lesiones oculares graves.
	CS	Způsobuje vážné poškození očí.
	DA	Forårsager alvorlig øjenskade.
	DE	Verursacht schwere Augenschäden.
	ET	Põhjustab raskeid silmakahjustusi.
	EL	Προκαλεί σοβαρή οφθαλμική βλάβη.
	EN	Causes serious eye damage.
	FR	Provoque des lésions oculaires graves.
	GA	Ina chúis le damáiste tromchúiseach don tsúil.
	IT	Provoca gravi lesioni oculari.
	LV	Izraisa nopietnus acu bojājumus.

H318	Jezik	3.3 – Hude poškodbe oči/draženje oči, kategorija nevarnosti 1
	LT	Smarkiai pažeidžia akis.
	HU	Súlyos szemkárosodást okoz.
	MT	Jagħmel hsara serja lill-ghajnejn.
	NL	Veroorzaakt ernstig oogletsel.
	PL	Powoduje poważne uszkodzenie oczu.
	PT	Provoca lesões oculares graves.
	RO	Provoacă leziuni oculare grave.
	SK	Spôsobuje vážne poškodenie očí.
	SL	Povzroča hude poškodbe oči.
	FI	Vaurioittaa vakavasti silmiä.
	SV	Orsakar allvarliga ögonskador.
H319	Jezik	3.3 – Hude poškodbe oči/draženje oči, kategorija nevarnosti 2
	BG	Предизвиква сериозно дразнене на очите.
	ES	Provoca irritación ocular grave.
	CS	Způsobuje vážné podráždění očí.
	DA	Forårsager alvorlig øjenirritation.
	DE	Verursacht schwere Augenreizung.
	ET	Põhjustab tugevat silmade ärritust.
	EL	Προκαλεί σοβαρό οφθαλμικό ερεθισμό.
	EN	Causes serious eye irritation.
	FR	Provoque une sévère irritation des yeux.
	GA	Ina chúis le greannú tromchúiseach don tsúil.
	IT	Provoca grave irritazione oculare.
	LV	Izraisa nopietnu acu kairinājumu.
	LT	Sukelia smarkų akių dirginimą.
	HU	Súlyos szemirritációt okoz.
	MT	Jagħmel irritazzjoni serja lill-ghajnejn.
	NL	Veroorzaakt ernstige oogirritatie.
	PL	Działa drażniąco na oczy.
	PT	Provoca irritação ocular grave.
	RO	Provoacă o iritare gravă a ochilor.
	SK	Spôsobuje vážne podráždzenie očí.
	SL	Povzroča hudo draženje oči.
	FI	Ärsyttää voimakkaasti silmiä.
	SV	Orsakar allvarlig ögonirritation.

H330	Jezik	3.1 – Akutna strupenost (vdihavanje), kategorija nevarnosti 1, 2
	BG	Смъртоносен при вдишване.
	ES	Mortal en caso de inhalación.
	CS	Při vdechování může způsobit smrt.
	DA	Livsfarlig ved indånding.
	DE	Lebensgefahr bei Einatmen.
	ET	Sissehingamisel surmav.
	EL	Θανατηφόρο σε περίπτωση εισπνοής.
	EN	Fatal if inhaled.
	FR	Mortel par inhalation.
	GA	Marfach má ionanálaítear.
	IT	Letale se inalato.
	LV	Ielpojot, iestājas nāve.
	LT	Mirtina įkvėpus.
	HU	Belélegezve halálos.
	MT	Fatali jekk jinxtamm.
	NL	Dodelijk bij inademing.
	PL	Wdychanie grozi śmiercią.
	PT	Mortal por inalação.
	RO	Mortal în caz de inhalare.
	SK	Smrteľný pri vdýchnutí.
	SL	Smrtno pri vdihavanju.
	FI	Tappavaa hengitettynä.
	SV	Dödligt vid inandning.
H331	Jezik	3.1 – Akutna strupenost (vdihavanje), kategorija nevarnosti 3
	BG	Токсичен при вдишване.
	ES	Tóxico en caso de inhalación.
	CS	Toxický při vdechování.
	DA	Giftig ved indånding.
	DE	Giftig bei Einatmen.
	ET	Sissehingamisel mürgine.
	EL	Τοξικό σε περίπτωση εισπνοής.
	EN	Toxic if inhaled.
	FR	Toxique par inhalation.
	GA	Tocsaineach má ionanálaítear.
	IT	Tossico se inalato.
	LV	Toksisks ielpojot.

H331	Jezik	3.1 – Akutna strupenost (vdihavanje), kategorija nevarnosti 3
	LT	Toksiška įkvėpus.
	HU	Belélegezve mérgező.
	MT	Tossiku jekk jinxtamm.
	NL	Giftig bij inademing.
	PL	Działa toksycznie w następstwie wdychania.
	PT	Tóxico por inalação.
	RO	Toxic în caz de inhalare.
	SK	Toxický pri vdýchnutí.
	SL	Strupeno pri vdihavanju.
	FI	Myrkyllistä hengitettynä.
	SV	Giftigt vid inandning.
H332	Jezik	3.1 – Akutna strupenost (vdihavanje), kategorija nevarnosti 4
	BG	Вреден при вдишване.
	ES	Nocivo en caso de inhalación.
	CS	Zdraví škodlivý při vdechování.
	DA	Farlig ved indånding.
	DE	Gesundheitsschädlich bei Einatmen.
	ET	Sissehingamisel kahjulik.
	EL	Επιβλαβές σε περίπτωση εισπνοής.
	EN	Harmful if inhaled.
	FR	Nocif par inhalation.
	GA	Díobhálach má ionanálaítear.
	IT	Nocivo se inalato.
	LV	Kaitīgs ieelpojot.
	LT	Kenksminga įkvėpus.
	HU	Belélegezve ártalmas.
	MT	Jagħmel il-hsara jekk jinxtamm.
	NL	Schadelijk bij inademing.
	PL	Działa szkodliwie w następstwie wdychania.
	PT	Nocivo por inalação.
	RO	Nociv în caz de inhalare.
	SK	Škodlivý pri vdýchnutí.
	SL	Zdravju škodljivo pri vdihavanju.
	FI	Haitallista hengitettynä.
	SV	Skadligt vid inandning.

H334	Jezik	3.4 – Preobčutljivost – dihalna, kategorija nevarnosti 1
	BG	Може да причини алергични или астматични симптоми или затруднения в дишането при вдишване.
	ES	Puede provocar síntomas de alergia o asma o dificultades respiratorias en caso de inhalación.
	CS	Při vdechování může vyvolat příznaky alergie nebo astmatu nebo dýchací potíže.
	DA	Kan forårsage allergi- eller astmasymptomer eller åndedrætsbesvær ved indånding.
	DE	Kann bei Einatmen Allergie, asthmaartige Symptome oder Atembeschwerden verursachen.
	ET	Sissehingamisel võib põhjustada allergia- või astma sümptomeid või hingamisraskusi.
	EL	Μπορεί να προκαλέσει αλλεργία ή συμπτώματα άσθματος ή δύσπνοια σε περίπτωση εισπνοής.
	EN	May cause allergy or asthma symptoms or breathing difficulties if inhaled.
	FR	Peut provoquer des symptômes allergiques ou d'asthme ou des difficultés respiratoires par inhalation.
	GA	D'fhéadfadh sé a bheith ina chúis le siomptóim ailléirge nó asma nó le deacrachtaí anáilthe má ionanálaítear é.
	IT	Può provocare sintomi allergici o asmatici o difficoltà respiratorie se inalato.
	LV	Ja ieelpo, var izraisīt alerģiju vai astmas simptomus, vai apgrūtināt elpošanu.
	LT	Iškvėpus gali sukelti alerginę reakciją, astmos simptomus arba apsunkinti kvėpavimą.
	HU	Belélegezve allergiás és asztmás tüneteket, és nehéz légzést okozhat.
	MT	Jista' jikkawża sintomi ta' allergija jew ta' azma jew diffikultajiet biex jittiehed in-nifs jekk jinxtamm.
	NL	Kan bij inademing allergie- of astmasymptomen of ademhalingsmoeilijkheden veroorzaken.
	PL	Może powodować objawy alergii lub astmy lub trudności w oddychaniu w następstwie wdychania.
	PT	Quando inalado, pode provocar sintomas de alergia ou de asma ou dificuldades respiratórias.
	RO	Poate provoca simptome de alergie sau astm sau dificultăți de respirație în caz de inhalare.
	SK	Pri vdýchnutí môže vyvolať alergiu alebo príznaky astmy, alebo dýchanie ťažkosti.
	SL	Lahko povzroči simptome alergije ali astme ali težave z dihanjem pri vdihavanju.
	FI	Voi aiheuttaa hengitettynä allergia- tai astmaoireita tai hengitysvaikeuksia.
	SV	Kan orsaka allergi- eller astmasymtom eller andningssvårigheter vid inandning.
H335	Jezik	3.8 – Specifična strupenost za ciljne organe – enkratna izpostavljenost, kategorija nevarnosti 3, draženje dihalnih poti
	BG	Може да предизвика дразнене на дихателните пътища.
	ES	Puede irritar las vías respiratorias.
	CS	Může způsobit podráždění dýchacích cest.
	DA	Kan forårsage irritation af luftvejene.
	DE	Kann die Atemwege reizen.
	ET	Võib põhjustada hingamisteede ärritust.
	EL	Μπορεί να προκαλέσει ερεθισμό της αναπνευστικής οδού.
	EN	May cause respiratory irritation.
	FR	Peut irriter les voies respiratoires.

H335	Jezik	3.8 – Specifična strupenost za ciljne organe – enkratna izpostavljenost, kategorija nevarnosti 3, draženje dihalnih poti
	GA	D'fhéadfadh sé a bheith ina chúis le greannú riospráide.
	IT	Può irritare le vie respiratorie.
	LV	Var izraisīt elpceļu kairinājumu.
	LT	Gali dirginti kvėpavimo takus.
	HU	Légúti irritációt okozhat.
	MT	Jista' jikkawża irritazzjoni respiratorja.
	NL	Kan irritatie van de luchtwegen veroorzaken.
	PL	Może powodować podrażnienie dróg oddechowych.
	PT	Pode provocar irritação das vias respiratórias.
	RO	Poate provoca iritarea căilor respiratorii.
	SK	Môže spôsobiť podráždenie dýchacích ciest.
	SL	Lahko povzroči draženje dihalnih poti.
	FI	Saattaa aiheuttaa hengitysteiden ärsytystä.
	SV	Kan orsaka irritation i luftvägarna.

H336	Jezik	3.8 – Specifična strupenost za ciljne organe – enkratna izpostavljenost, kategorija nevarnosti 3, omamljenost
	BG	Може да предизвика сънливост или световъртеж.
	ES	Puede provocar somnolencia o vértigo.
	CS	Může způsobit ospalost nebo závratě.
	DA	Kan forårsage sløvhed eller svimmelhed.
	DE	Kann Schläfrigkeit und Benommenheit verursachen.
	ET	Võib põhjustada unisust või peapööritust.
	EL	Μπορεί να προκαλέσει υπνηλία ή ζάλη.
	EN	May cause drowsiness or dizziness.
	FR	Peut provoquer somnolence ou vertiges.
	GA	D'fhéadfadh sé a bheith ina chúis le codlatacht nó le meadhrán.
	IT	Può provocare sonnolenza o vertigini.
	LV	Var izraisīt miegainību vai reibonūs.
	LT	Gali sukelti mieguistumą arba galvos svaigimą.
	HU	Álmosságot vagy szédülést okozhat.
	MT	Jista' jikkawża hedla jew sturdament.
	NL	Kan slaperigheid of duizeligheid veroorzaken.
	PL	Może wywoływać uczucie senności lub zawroty głowy.
	PT	Pode provocar sonolência ou vertigens.
	RO	Poate provoca somnolență sau amețeală.
	SK	Môže spôsobiť ospalosť alebo závraty.
	SL	Lahko povzroči zaspanost ali omotico.

H336	Jezik	3.8 – Specifična strupenost za ciljne organe – enkratna izpostavljenost, kategorija nevarnosti 3, omamljenost
	FI	Saattaa aiheuttaa uneliaisuutta ja huimausta.
	SV	Kan göra att man blir dåsig eller omtöcknad.
H340	Jezik	3.5 – Mutagenost za zarodne celice, kategorija nevarnosti 1A, 1B
	BG	Може да причини генетични дефекти < да се посочи пътят на експозицията, ако е доказано убедително, че няма друг път на експозиция, който води до същата опасност >.
	ES	Puede provocar defectos genéticos <Indíquese la vía de exposición si se ha demostrado concluyentemente que el peligro no se produce por ninguna otra vía >.
	CS	Může vyvolat genetické poškození <uveďte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.
	DA	Kan forårsage genetiske defekter <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann genetische Defekte verursachen <Expositionsweg angeben, sofern schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Võib põhjustada geneetilisi defekte <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Μπορεί να προκαλέσει γενετικά ελαττώματα <αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης >.
	EN	May cause genetic defects <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Peut induire des anomalies génétiques <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	D'fhéadfadh sé a bheith ina chúis le héalanga géiniteacha <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Può provocare alterazioni genetiche <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Var izraisīt ģenētiskus bojājumus <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada bīstamību>.
	LT	Gali sukelti genetinius defektus <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Genetikai károsodást okozhat < meg kell adni az expozíciós útvonalat, ha meggyőződen bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt >.
	MT	Jista' jikkawża difetti ġenetiċi <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konklużiv li l-ebda mod ta' espożizzjoni ieħor ma' jikkawża l-periklu>.
	NL	Kan genetische schade veroorzaken <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Może powodować wady genetyczne <podać drogę narażenia, jeżeli definitywnie udowodniono, że inna droga narażenia nie powoduje zagrożenia>.
	PT	Pode provocar anomalias genéticas <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Poate provoca anomalii genetice <indicați calea de expunere, dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Môže spôsobiť genetické poškodenie <uveďte spôsob expozície, ak sa presvedčivo preukáže, že iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Lahko povzroči genetske okvare <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Saattaa aiheuttaa perimävaurioita <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Kan orsaka genetiska defekter <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra exponeringsvägar>.

H341	Jezik	3.5 – Mutagenost za zarodne celice, kategorija nevarnosti 2
	BG	Предполага се, че причинява генетични дефекти < да се посочи пътят на експозицията, ако е доказано убедително, че няма друг път на експозиция, който води до същата опасност >.
	ES	Se sospecha que provoca defectos genéticos <Indíquese la vía de exposición si se ha demostrado concluyentemente que el peligro no se produce por ninguna otra vía>.
	CS	Podezření na genetické poškození <uvedte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.
	DA	Mistænkt for at forårsage genetiske defekter <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann vermutlich genetische Defekte verursachen <Expositionsweg angeben, sofern schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Arvatavasti põhjustab geneetilisi defekte <märkida kokkupuuteviis, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Υποπτο για πρόκληση γενετικών ελαττωμάτων <αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης>.
	EN	Suspected of causing genetic defects <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Susceptible d'induire des anomalies génétiques <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	Ceaptar go bhféadfadh sé a bheith ina chúis le héalanga géiniteacha <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Sospettato di provocare alterazioni genetiche <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Ir aizdomas, ka var izraisīt ģenētiskus bojājumus <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada bīstamību>.
	LT	Įtariama, kad gali sukelti genetinius defektus <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Feltehetően genetikai károsodást okoz <meg kell adni az expozíciós útvonalat, ha meggyőződen bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt >.
	MT	Suspettat li jikkawża difetti ġenetiċi <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konklużiv li l-ebda mod ta' espożizzjoni iehor ma jikkawża l-periklu>.
	NL	Verdacht van het veroorzaken van genetische schade <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Podjeżewa się, że powoduje wady genetyczne <podać drogę narażenia, jeżeli definitywnie udowodniono, że inna droga narażenia nie powoduje zagrożenia>.
	PT	Suspeito de provocar anomalias genéticas <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Susceptibil de a provoca anomalii genetice < indicați calea de expunere, dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Podozrenie, že spôsobuje genetické poškodenie <uvedte spôsob expozície, ak sa presvedčivo preukáže, že iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Sum povzročitve genetskih okvar <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Epäillään aiheuttavan perimävaurioita <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Misstänks kunna orsaka genetiska defekter <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra exponeringsvägar>.
H350	Jezik	3.6 – Rakotvornost, kategorija nevarnosti 1A, 1B
	BG	Може да причини рак < да се посочи пътят на експозицията, ако е доказано убедително, че няма друг път на експозиция, който води до същата опасност >.
	ES	Puede provocar cáncer <indíquese la vía de exposición si se ha demostrado concluyentemente que el peligro no se produce por ninguna otra vía>.

H350	Jezik	3.6 – Rakotvornost, kategorija nevarnosti 1A, 1B
	CS	Může vyvolat rakovinu <uvedte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.
	DA	Kan fremkalde kræft <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann Krebs erzeugen <Expositionsweg angeben, sofern schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Võib põhjustada vähktõbe <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Μπορεί να προκαλέσει καρκίνο <αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης>.
	EN	May cause cancer <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Peut provoquer le cancer <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	D'fhéadfadh sé a bheith ina chúis le hailse <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Può provocare il cancro<indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Var izraisīt vēzi <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada bīstamību>.
	LT	Gali sukelti vėžį <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Rákot okozhat <meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt >.
	MT	Jista' jikkawża l-kanċer <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konklużiv li l-ebda mod ta' espożizzjoni iehor ma jikkawża l-periklu>.
	NL	Kan kanker veroorzaken <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>
	PL	Może powodować raka <podać drogę narażenia, jeżeli definitywnie udowodniono, że inna droga narażenia nie powoduje zagrożenia>.
	PT	Pode provocar cancro <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Poate provoca cancer <indicați calea de expunere, dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Môže spôsobiť rakovinu <uvedte spôsob expozície, ak sa presvedčivo preukáže, že iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Lahko povzroči raka <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Saattaa aiheuttaa syöpää <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Kan orsaka cancer <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra exponeringsvägar>.
H351	Jezik	3.6 – Rakotvornost, kategorija nevarnosti 2
	BG	Предполага се, че причинява рак <да се посочи пътът на експозицията, ако е доказано убедително, че няма друг път на експозиция, който води до същата опасност >.
	ES	Se sospecha que provoca cáncer <indíquese la vía de exposición si se se ha demostrado concluyentemente que el peligro no se produce por ninguna otra vía>.
	CS	Podezření na vyvolání rakoviny <uvedte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.

H351	Jezik	3.6 – Rakotvornost, kategorija nevarnosti 2
	DA	Mistænkt for at fremkalde kræft <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann vermutlich Krebs erzeugen <Expositionsweg angeben, sofern schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Arvatavasti põhjustab vähktõbe <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Υποπτο για πρόκληση καρκίνου <αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης>.
	EN	Suspected of causing cancer <state route of exposure if it is conclusively proven that no other routs of exposure cause the hazard>.
	FR	Susceptible de provoquer le cancer <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	Ceaptar go bhféadfadh sé a bheith ina chúis le hailse <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Sospettato di provocare il cancro <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Ir aizdomas, ka var izraisīt vēzi <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada bīstamību>.
	LT	Įtariama, kad sukeltų vėžį <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Feltehetően rákot okoz <meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt>.
	MT	Suspettat li jikkawża l-kanċer <ara l-mod ta' espożizzjoni jekk ikun pruvat b'mod konkluziv li l-ebda mod ta' espożizzjoni iehor ma jikkawża l-periklu>.
	NL	Verdacht van het veroorzaken van kanker <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Podejrzenia się, że powoduje raka <podać drogę narażenia, jeżeli definitywnie udowodniono, że inna droga narażenia nie powoduje zagrożenia>.
	PT	Suspeito de provocar cancro <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Susceptibil de a provoca cancer <indicați calea de expunere, dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Podozrenie, že spôsobuje rakovinu <uveďte spôsob expozície, ak sa presvedčivo preukáže, že iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Sum povzročitve raka <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Epäillään aiheuttavan syöpää <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Misstänks kunna orsaka cancer <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra exponeringsvägar>.
H360	Jezik	3.7 – Strupenost za razmnoževanje, kategorija nevarnosti 1A, 1B
	BG	Може да увреди оплодителната способност или плода <да се посочи конкретното въздействие, ако е известно> <да се посочи пътят на експозицията, ако е доказано убедително, че няма друг път на експозиция, който води до същата опасност>.
	ES	Puede perjudicar la fertilidad o dañar al feto <indíquese el efecto específico si se conoce> <indíquese la vía de exposición si se ha demostrado concluyentemente que el peligro no se produce por ninguna otra vía>.
	CS	Může poškodit reprodukční schopnost nebo plod v těle matky <uveďte specifický účinek, je-li znám> <uveďte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.

H360	Jezik	3.7 – Strupenost za razmnoževanje, kategorija nevarnosti 1A, 1B
	DA	Kan skade forplantningsevnen eller det ufødte barn <angiv specifik effekt, hvis kendt> <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann die Fruchtbarkeit beeinträchtigen oder das Kind im Mutterleib schädigen <konkrete Wirkung angeben, sofern bekannt> <Expositionsweg angeben, sofern schlüssig belegt ist, dass die Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Võib kahjustada viljakust või loodet <märkida spetsiifiline toime, kui see on teada> <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Μπορεί να βλάψει τη γονιμότητα ή το έμβρυο <αναφέρεται η ειδική επίπτωση εάν είναι γνωστή> <αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης>.
	EN	May damage fertility or the unborn child <state specific effect if known> <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Peut nuire à la fertilité ou au fœtus <indiquer l'effet spécifique s'il est connu> <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	D'fhéadfadh sé damáiste a dhéanamh do thorthúlacht nó don leanbh sa bhroinn <tabhair an tsainéifeacht más eol> <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Può nuocere alla fertilità o al feto <indicare l'effetto specifico, se noto><indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Var kaitēt auglībai vai nedzimušajam bērnam <norādīt īpašo ietekmi, ja tā ir zināma> <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada bīstamību>.
	LT	Gali pakenkti vaisingumui arba negimusiui vaikui <nurodyti konkretų poveikį, jeigu žinomas> <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Károsíthatja a termékenységet vagy a születendő gyermeket <ha ismert, meg kell adni a konkrét hatást> < meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt>.
	MT	Jista' jagħmel hsara lill-fertilità jew lit-tarbija li għadha fil-ġuf <semmi l-effett speċifiku jekk ikun magħruf> <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konklużiv li l-ebda mod ta' espożizzjoni ieħor ma jikkawża l-periklu>.
	NL	Kan de vruchtbaarheid of het ongeboren kind schaden <specifiek effect vermelden indien bekend> <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Może działać szkodliwie na płodność lub na dziecko w łonie matki <podać szczególny skutek, jeżeli jest znany> <podać drogę narażenia, jeżeli definitywnie udowodniono, że inne drogi narażenia nie stwarzają zagrożenia>.
	PT	Pode afectar a fertilidade ou o nascituro <indicar o efeito específico se este for conhecido> <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Poate dauna fertilității sau fătului <indicați efectul specific, dacă este cunoscut><indicați calea de expunere, dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Môže spôsobiť poškodenie plodnosti alebo nenarodeného dieťaťa <uveďte konkrétny účinok, ak je známy> <uveďte spôsob expozície, ak sa presvedčivo preukáže, že iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Lahko škoduje plodnosti ali nerojenemu otroku <navesti posebni učinek, če je znan> <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Saattaa heikentää hedelmällisyyttä tai vaurioittaa sikiötä <mainitaan tiedetty spesifinen vaikutus> <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Kan skada fertiliteten eller det ofödda barnet <ange specifik effekt om denna är känd> <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra exponeringsvägar>.

H361	Jezik	3.7 – Strupenost za razmnoževanje, kategorija nevarnosti 2
	BG	Предполага се, че уврежда оплодителната способност или плода <да се посочи конкретното въздействие, ако е известно> <да се посочи пътят на експозицията, ако е доказано убедително, че няма друг път на експозиция, който води до същата опасност>.
	ES	Se sospecha que perjudica la fertilidad o daña al feto <indíquese el efecto específico si se conoce> <indíquese la vía de exposición si se ha demostrado concluyentemente que el peligro no se produce por ninguna otra vía>.
	CS	Podezření na poškození reprodukční schopnosti nebo plodu v těle matky <uvedte specifický účinek, je-li znám> <uvedte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.
	DA	Mistænkt for at skade forplantningsevnen eller det ufødte barn <angiv specifik effekt, hvis kendt> <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann vermutlich die Fruchtbarkeit beeinträchtigen oder das Kind im Mutterleib schädigen <konkrete Wirkung angebe, n sofern bekannt> <Expositionswege angeben, sofern schlüssig belegt ist, dass die Gefahr bei keinem anderen Expositionsweg besteht>
	ET	Arvatavasti kahjustab viljakust või loodet <märkida spetsiifiline toime, kui see on teada> <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Υποπτο για πρόκληση βλάβης στη γονιμότητα ή στο έμβρυο <αναφέρεται η ειδική επίπτωση εάν είναι γνωστή> <αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης>.
	EN	Suspected of damaging fertility or the unborn child <state specific effect if known> <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Susceptible de nuire à la fertilité ou au fœtus <indiquer l'effet s'il est connu> <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	Ceaptar go bhféadfadh sé damáiste a dhéanamh do thorthúlacht nó don leanbh sa bhroinn <tabhair an tsainéifeacht más eol> <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an ngnais>.
	IT	Sospettato di nuocere alla fertilità o al feto <indicare l'effetto specifico, se noto> <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Ir aizdomas, ka var kaitēt auglībai vai nedzimušajam bērnam <norādīt īpašo ietekmi, ja tā ir zināma> <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada bīstamību>.
	LT	Įtariama, kad kenkia vaisingumui arba negimusiam vaikui <nurodyti konkretų poveikį, jeigu žinomas> <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Feltehetően károsítja a termékenységet vagy a születendő gyermeket <ha ismert, meg kell adni a konkrét hatást> < meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt>.
	MT	Suspettat li jagħmel hsara lill-fertilità jew lit-tarbija li għadha fil-guf <semmi l-effett specifiku jekk ikun magħruf> <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konklużiv li l-ebda mod ta' espożizzjoni ieħor ma jikkawża l-periklu>.
	NL	Kan mogelijk de vruchtbaarheid of het ongeboren kind schaden <specifiek effect vermelden indien bekend> <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Podejrzenia, że działa szkodliwie na płodność lub na dziecko w łonie matki <podać szczególny skutek, jeżeli jest znany> <podać drogę narażenia, jeżeli definitywnie udowodniono, że inne drogi narażenia nie stwarzają zagrożenia>.
	PT	Suspeito de afectar a fertilidade ou o nascituro <indicar o efeito específico se este for conhecido> <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Susceptibil de a dauna fertilității sau fătului <indicați efectul specific, dacă este cunoscut> <indicați calea de expunere, dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Podozrenie, že spôsobuje poškodenie plodnosti alebo nenarodeného dieťaťa <uvedte konkrétny účinok, ak je známy> <uvedte spôsob expozície, ak sa presvedčivo preukáže, že iné spôsoby expozície nevyvolávajú nebezpečenstvo>.

H361	Jezik	3.7 – Strupenost za razmnoževanje, kategorija nevarnosti 2
	SL	Sum škodljivosti za plodnost ali nerojenega otroka <navesti posebni učinek, če je znan> <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Epäillään heikentävän hedelmällisyyttä tai vaurioittavan sikiötä <mainitaan tiedetty spesifinen vaikutus> <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Misstänks kunna skada fertiliteten eller det ofödda barnet <ange specifik effekt om denna är känd> <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra exponeringsvägar>.

H362	Jezik	3.7 – Strupenost za razmnoževanje, dodatna kategorija, učinki na dojenje ali prek dojenja
	BG	Може да бъде вреден за кърмачета.
	ES	Puede perjudicar a los niños alimentados con leche materna.
	CS	Může poškodit kojence prostřednictvím mateřského mléka.
	DA	Kan skade børn, der ammes.
	DE	Kann Säuglinge über die Muttermilch schädigen.
	ET	Võib kahjustada rinnaga toidetavat last.
	EL	Μπορεί να βλάψει τα βρέφη που τρέφονται με μητρικό γάλα.
	EN	May cause harm to breast-fed children.
	FR	Peut être nocif pour les bébés nourris au lait maternel.
	GA	D'fhéadfadh sé díobháil a dhéanamh do leanaí diúil.
	IT	Può essere nocivo per i lattanti allattati al seno.
	LV	Var radīt kaitējumu ar krūti barotam bērnam.
	LT	Gali pakenkti žindomam vaikui.
	HU	A szoptatott gyermeket károsíthatja.
	MT	Jista' jagħmel hsara lit-tfal imreddgħa.
	NL	Kan schadelijk zijn via borstvoeding.
	PL	Może działać szkodliwie na dzieci karmione piersią.
	PT	Pode ser nocivo para as crianças alimentadas com leite materno.
	RO	Poate dăuna copiilor alăptați la sân.
	SK	Môže spôsobiť poškodenie u dojčených detí.
	SL	Lahko škoduje dojenim otrokom.
	FI	Saattaa aiheuttaa haittaa rintaruokinnassa oleville lapsille.
	SV	Kan skada spädbarn som ammas.

H370	Jezik	3.8 – Specifična strupenost za ciljne organe – enkratna izpostavljenost, kategorija nevarnosti 1
	BG	Причинява увреждане на органите < или да се посочат всички засегнати органи, ако са известни> < да се посочи пътят на експозицията, ако е доказано убедително, че няма друг път на експозиция, който води до същата опасност >.
	ES	Provoca daños en los órganos <o indíquense todos los órganos afectados, si se conocen> <indíquese la vía de exposición si se ha demostrado concluyentemente que el peligro no se produce por ninguna otra vía>.
	CS	Způsobuje poškození orgánů <nebo uvést všechny postižené orgány, jsou-li známy> <uveďte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.

H370	Jezik	3.8 – Specifična strupenost za ciljne organe – enkratna izpostavljenost, kategorija nevarnosti 1
	DA	Forårsager organskader <eller angiv alle berørte organer, hvis de kendes> <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Schädigt die Organe <oder alle betroffenen Organe nennen, sofern bekannt> <Expositionsweg angeben, sofern schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Kahjustab elundeid <või märkida kõik mõjutatud elundid, kui need on teada> <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisi ei ole ohtlikud>.
	EL	Προκαλεί βλάβες στα όργανα <ή αναφέρονται όλα τα όργανα που βλάπτονται, εάν είναι γνωστά> < αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης >.
	EN	Causes damage to organs <or state all organs affected, if known> <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Risque avéré d'effets graves pour les organes <ou indiquer tous les organes affectés, s'ils sont connus> <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	Déanann sé damáiste d'orgáin <nó tabhair na horgáin go léir a bhualtear, más eol> <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Provoca danni agli organi <o indicare tutti gli organi interessati, se noti> <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Rada orgānu bojājumus <vai norādīt visus skartos orgānus, ja tie ir zināmi> <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada bīstamību>.
	LT	Kenkia organams <arba nurodyti visus veikiamus organus, jeigu žinomi> <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Károsítja a szerveket < vagy meg kell adni az összes érintett szervet, ha ismertek > < meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt >.
	MT	Jagħmel hsara lill-organi <jew semmi l-organi kollha affettwati, jekk ikunu magħrufa> <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konkluziv li l-ebda mod ta' espożizzjoni ieħor ma jikkawża l-periklu>.
	NL	Veroorzaakt schade aan organen <of alle betrokken organen vermelden indien bekend> <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Powoduje uszkodzenie narządów <podać szczególny skutek, jeśli jest znany> <podać drogę narażenia, jeżeli udowodniono, że inne drogi narażenia nie stwarzają zagrożeń>.
	PT	Afecta os órgãos <ou indicar todos os órgãos afectados, se forem conhecidos> <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Provoacă leziuni ale organelor <sau indicați toate organele afectate, dacă sunt cunoscute> <indicați calea de expunere, dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Spôsobuje poškodenie orgánov <alebo uvedte všetky zasiahnuté orgány, ak sú známe> <uvedte spôsob expozície, ak sa presvedčivo preukáže, že iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Škoduje organom <ali navesti vse organe, na katere vpliva, če je znano> <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Vahingoittaa elimiä <tai mainitaan kaikki tiedetyt kohde-elimet> <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Orsakar organskador <eller ange vilka organ som påverkas om detta är känt> <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra exponeringsvägar>.
H371	Jezik	3.8 – Specifična strupenost za ciljne organe – enkratna izpostavljenost, kategorija nevarnosti 2
	BG	Може да причини увреждане на органите < или да се посочат всички засегнати органи, ако са известни> < да се посочи пътят на експозицията, ако е доказано убедително, че нята друг път на експозиция, който води до същата опасност >.

H371	Jezik	3.8 – Specifična strupenost za ciljne organe – enkratna izpostavljenost, kategorija nevarnosti 2
	ES	Puede provocar daños en los órganos <o indiquense todos los órganos afectados, si se conocen> <indíquese la vía de exposición si se ha demostrado concluyentemente que el peligro no se produce por ninguna otra vía>.
	CS	Může způsobit poškození orgánů <nebo uvést všechny postižené orgány, jsou-li známy> <uvedte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.
	DA	Kan forårsage organskader <eller angiv alle berørte organer, hvis de kendes> <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann die Organe schädigen <oder alle betroffenen Organe nennen, sofern bekannt> <Expositionsweg angeben, sofern schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Võib kahjustada elundeid <või märkida kõik mõjutatud elundid, kui need on teada> <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Μπορεί να προκαλέσει βλάβες στα όργανα <ή αναφέρονται όλα τα όργανα που βλάπτονται, εάν είναι γνωστά> <αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης>.
	EN	May cause damage to organs <or state all organs affected, if known> <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Risque présumé d'effets graves pour les organes <ou indiquer tous les organes affectés, s'ils sont connus> <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	D'fhéadfadh damáiste a dhéanamh d'orgáin <nó tabhair na horgáin go léir a bhualítear, más eol> <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Può provocare danni agli organi <o indicare tutti gli organi interessati, se noti> <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Var izraisīt orgānu bojājumus <vai norādīt visus skartos orgānus, ja tie ir zināmi> <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada bīstamību>.
	LT	Gali pakenkti organams <arba nurodyti visus veikiamus organus, jeigu žinomi> <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Károsíthatja a szerveket < vagy meg kell adni az összes érintett szervet, ha ismertek > < meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt >.
	MT	Jista' jikkawża hsara lill-organi <jew semmi l-organi kollha affettwati, jekk ikunu magħrufa> <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konklużiv li l-ebda mod ta' espożizzjoni iehor ma jikkawża l-periklu>.
	NL	Kan schade aan organen <of alle betrokken organen vermelden indien bekend> veroorzaken <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Może powodować uszkodzenie narządów <podać wszystkie znane narządy, których to dotyczy> <podać drogę narażenia, jeżeli udowodniono, że inne drogi narażenia nie stwarzają zagrożeń>.
	PT	Pode afectar os órgãos <ou indicar todos os órgãos afectados, se forem conhecidos> <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Poate provoca leziuni ale organelor <sau indicați toate organele afectate, dacă sunt cunoscute> <indicați calea de expunere, dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Môže spôsobiť poškodenie orgánov <alebo uvedte všetky zasiahnuté orgány, ak sú známe> <uvedte spôsob expozície, ak sa presvedčivo preukáže, že iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Lahko škoduje organom <ali navesti vse organe, na katere vpliva, če je znano> <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Saattaa vahingoittaa elimiä <tai mainitaan kaikki tiedetyt kohde-elimet> <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.

H371	Jezik	3.8 – Specifična strupenost za ciljne organe – enkratna izpostavljenost, kategorija nevarnosti 2
	SV	Kan orsaka organskador <eller ange vilka organ som påverkas om detta är känt> <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra exponeringsvägar>.
H372	Jezik	3.9 – Specifična strupenost za ciljne organe – enkratna izpostavljenost, kategorija nevarnosti 1
	BG	Причинява увреждане на органите < или да се посочат всички засегнати органи, ако са известни > посредством продължителна или повтаряща се експозиция < да се посочи пътят на експозицията, ако е доказано убедително, че няма друг път на експозиция, който води до същата опасност >.
	ES	Provoca daños en los órganos <indíquense todos los órganos afectados, si se conocen> tras exposiciones prolongadas o repetidas <indíquese la vía de exposición si se ha demostrado concluyentemente que el peligro no se produce por ninguna otra vía>.
	CS	Způsobuje poškození orgánů <nebo uvést všechny postižené orgány, jsou-li známy> při prodloužené nebo opakované expozici <uveďte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.
	DA	Forårsager organskader <eller angiv alle berørte organer, hvis de kendes> ved længerevarende eller gentagen eksponering <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Schädigt die Organe <alle betroffenen Organe nennen> bei längerer oder wiederholter Exposition <Expositionsweg angeben, wenn schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Kahjustab elundeid <või märkida kõik mõjutatud elundid, kui need on teada> pikaajalisel või korduval kokkupuutel <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Προκαλεί βλάβες στα όργανα <ή αναφέρονται όλα τα όργανα που βλάπτονται, εάν είναι γνωστά> ύστερα από παρατεταμένη ή επανειλημμένη έκθεση < αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης >.
	EN	Causes damage to organs <or state all organs affected, if known> through prolonged or repeated exposure <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Risque avéré d'effets graves pour les organes <indiquer tous les organes affectés, s'ils sont connus> à la suite d'expositions répétées ou d'une exposition prolongée <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	Déanann damáiste d'orgáin <nó tabhair na horgáin go léir a bhualtear, más eol> trí nochtadh fada nó ilnochtadh <tabhair an bealach nochtá má tá sé cruthaithe go cinntitheach nach bealach nochtá ar bith eile is cúis leis an nguais>.
	IT	Provoca danni agli organi <o indicare tutti gli organi interessati, se noti> in caso di esposizione prolungata o ripetuta <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Izraisa orgānu bojājumus <vai norādīt visus skartos orgānus, ja tie ir zināmi> ilgstošas vai atkārtotas iedarbības rezultātā <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada bīstamību>.
	LT	Kenkia organams <arba nurodyti visus veikiamus organus, jeigu žinoma>, jeigu medžiaga veikia ilgai arba kartotinai <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Ismétlődő vagy hosszabb expozíció esetén < meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt > károsítja a szerveket < vagy meg kell adni az összes érintett szervet, ha ismertek >.
	MT	Jikkawża hsara lill-organi <jew semmi l-organi kollha affettwati, jekk ikunu magħrufa> minhabba espożizzjoni fit-tul jew ripetuta <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konklużiv li l-ebda mod ta' espożizzjoni iehor ma jikkawża l-periklu>.
	NL	Veroorzaakt schade aan organen <of alle betrokken organen vermelden indien bekend> bij langdurige of herhaalde blootstelling <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Powoduje uszkodzenie narządów <podać wszystkie znane narządy, których to dotyczy> > poprzez długotrwałe lub powtarzane narażenie <podać drogę narażenia, jeżeli udowodniono, że inne drogi narażenia nie stwarzają zagrożenia>.

H372	Jezik	3.9 – Specifična strupenost za ciljne organe – enkratna izpostavljenost, kategorija nevarnosti 1
	PT	Afecta os órgãos <ou indicar todos os órgãos afectados, se forem conhecidos> após exposição prolongada ou repetida <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Provoacă leziuni ale organelor <sau indicați toate organele afectate, dacă sunt cunoscute> în caz de expunere prelungită sau repetată <indicați calea de expunere, dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Spôsobuje poškodenie orgánov <alebo uveďte všetky zasiahnuté orgány, ak sú známe> pri dlhšej alebo opakovanej expozícii <uveďte spôsob expozície, ak sa presvedčivo preukáže, že iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Škoduje organom <ali navesti vse organe, na katere vpliva, če je znano> pri dolgotrajni ali ponavljajoči se izpostavljenosti <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Vahingoittaa elimiä <tai mainitaan kaikki tiedetyt kohde-elimet> pitkäaikaisessa tai toistuvassa altistumisessa <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Orsakar organskador <eller ange vilka organ som påverkas om detta är känt> genom lång eller upprepad exponering <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra exponeringsvägar>.
H373	Jezik	3.9 – Specifična strupenost za ciljne organe – enkratna izpostavljenost, kategorija nevarnosti 2
	BG	Може да причини увреждане на органите <или да се посочат всички засегнати органи, ако са известни> при продължителна или повтаряща се експозиция <да се посочи пътят на експозицията, ако е доказано убедително, че няма друг път на експозиция, който води до същата опасност>.
	ES	Puede provocar daños en los órganos <indíquense todos los órganos afectados, si se conocen> tras exposiciones prolongadas o repetidas <indíquese la vía de exposición si se ha demostrado concluyentemente que el peligro no se produce por ninguna otra vía>.
	CS	Může způsobit poškození orgánů <nebo uvést všechny postižené orgány, jsou-li známy> při prodloužené nebo opakované expozici <uveďte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.
	DA	Kan forårsage organskader <eller angiv alle berørte organer, hvis de kendes> ved længerevarende eller gentagen eksponering <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann die Organe schädigen <alle betroffenen Organe nennen, sofern bekannt> bei längerer oder wiederholter Exposition <Expositionsweg angeben, wenn schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Võib kahjustada elundeid <või märkida kõik mõjutatud elundid, kui need on teada> pikaajalisel või korduval kokkupuutel <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Μπορεί να προκαλέσει βλάβες στα όργανα <ή αναφέρονται όλα τα όργανα που βλάπτονται, εάν είναι γνωστά> ύστερα από παρατεταμένη ή επανειλημμένη έκθεση <αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης>.
	EN	May cause damage to organs <or state all organs affected, if known> through prolonged or repeated exposure <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Risque présumé d'effets graves pour les organes <ou indiquer tous les organes affectés, s'ils sont connus> à la suite d'expositions répétées ou d'une exposition prolongée <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	D'fhéadfadh sé damáiste a dhéanamh d'orgáin <nó tabhair na horgáin go léir a bhuailear, más eol> trí nochtadh fada nó ilnochtadh <tabhair an bealach nochta má tá sé cruthaithe go cinnititheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Può provocare danni agli organi <o indicare tutti gli organi interessati, se noti> in caso di esposizione prolungata o ripetuta <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Var izraisīt orgānu bojājumus <vai norādīt visus skartos orgānus, ja tie ir zināmi> ilgstošas vai atkārtotas iedarbības rezultātā <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada bīstamību>.

H373	Jezik	3.9 – Specifična strupenost za ciljne organe – enkratna izpostavljenost, kategorija nevarnosti 2
	LT	Gali pakenkti organams <arba nurodyti visus veikiamus organus, jeigu žinomi>, jeigu medžiaga veikia ilgai arba kartotinai <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Ismétlődő vagy hosszabb expozíció esetén < meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt > károsíthatja a szerveket > vagy meg kell adni az összes érintett szervet, ha ismertek >.
	MT	Jista' jikkawża hsara lill-organi <jew semmi l-organi kollha affettwati, jekk ikunu magħrufa> minhabba espożizzjoni fit-tul jew ripetuta <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konklużiv li l-ebda mod ta' espożizzjoni iehor ma jikkawża l-periklu>.
	NL	Kan schade aan organen <of alle betrokken organen vermelden indien bekend> veroorzaken bij langdurige of herhaalde blootstelling <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Może powodować uszkodzenie narządów <podać wszystkie znane narządy, których to dotyczy> poprzez długotrwałe lub narażenie powtarzane <podać drogę narażenia, jeśli udowodniono, że inne drogi narażenia nie stwarzają zagrożenia>.
	PT	Pode afectar os órgãos <ou indicar todos os órgãos afectados, se forem conhecidos> após exposição prolongada ou repetida <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Poate provoca leziuni ale organelor <sau indicați toate organele afectate, dacă sunt cunoscute> în caz de expunere prelungită sau repetată <indicați calea de expunere, dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Môže spôsobiť poškodenie orgánov <alebo uveďte všetky zasiahnuté orgány, ak sú známe> pri dlhšej alebo opakovanej expozícii <uveďte spôsob expozície, ak sa presvedčivo preukáže, že iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Lahko škoduje organom <ali navesti vse organe, na katere vpliva, če je znano> pri dolgotrajni ali ponavljajoči se izpostavljenosti <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Saattaa vahingoittaa elimiä <tai mainitaan kaikki tiedetyt kohde-elimet> pitkäaikaisessa tai toistuvassa altistumisessa <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>
	SV	Kan orsaka organskador <eller ange vilka organ som påverkas om detta är känt> genom lång eller upprepad exponering <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra exponeringsvägar>.

Tabela 1.3

Stavki o nevarnosti za okolje

H400	Jezik	4.1 – Nevarno za vodno okolje – akutna nevarnost, kategorija 1
	BG	Силно токсичен за водните организми.
	ES	Muy tóxico para los organismos acuáticos.
	CS	Vysoce toxický pro vodní organismy.
	DA	Meget giftig for vandlevende organismer.
	DE	Sehr giftig für Wasserorganismen.
	ET	Väga mürgine veeorganismidele.
	EL	Πολύ τοξικό για τους υδρόβιους οργανισμούς.
	EN	Very toxic to aquatic life.
	FR	Très toxique pour les organismes aquatiques.
	GA	An-tocsaineach don saol uisceach.
	IT	Molto tossico per gli organismi acquatici.
	LV	Ļoti toksisks ūdens organismiem.

H400	Jezik	4.1 – Nevarno za vodno okolje – akutna nevarnost, kategorija 1
	LT	Labai toksiška vandens organizmams.
	HU	Nagyon mérgező a vízi élővilágra.
	MT	Tossiku hafna għall-organizmi akwatiċi.
	NL	Zeer giftig voor in het water levende organismen.
	PL	Działa bardzo toksycznie na organizmy wodne.
	PT	Muito tóxico para os organismos aquáticos.
	RO	Foarte toxic pentru mediul acvatic.
	SK	Veľmi toxický pre vodné organizmy.
	SL	Zelo strupeno za vodne organizme.
	FI	Erittäin myrkyllistä vesieliöille.
	SV	Mycket giftigt för vattenlevande organismer.
H410	Jezik	4.1 – Nevarno za vodno okolje – kronična nevarnost, kategorija 1
	BG	Силно токсичен за водните организми, с дълготраен ефект.
	ES	Muy tóxico para los organismos acuáticos, con efectos nocivos duraderos.
	CS	Vysoce toxický pro vodní organismy, s dlouhodobými účinky.
	DA	Meget giftig med langvarige virkninger for vandlevende organismer.
	DE	Sehr giftig für Wasserorganismen mit langfristiger Wirkung.
	ET	Väga mürgine veeorganismidele, pikaajaline toime.
	EL	Πολύ τοξικό για τους υδρόβιους οργανισμούς, με μακροχρόνιες επιπτώσεις.
	EN	Very toxic to aquatic life with long lasting effects.
	FR	Très toxique pour les organismes aquatiques, entraîne des effets néfastes à long terme.
	GA	An-tocsaineach don saol uisceach, le héifeachtaí fadtréimhseacha.
	IT	Molto tossico per gli organismi acquatici con effetti di lunga durata.
	LV	Ļoti toksisks ūdens organismiem ar ilgstošām sekām.
	LT	Labai toksiška vandens organizmams, sukelia ilgalaikius pakitimus.
	HU	Nagyon mérgező a vízi élővilágra, hosszan tartó károsodást okoz.
	MT	Tossiku hafna għall-organizmi akwatiċi b'mod li jhalli effetti dejjiema.
	NL	Zeer giftig voor in het water levende organismen, met langdurige gevolgen.
	PL	Działa bardzo toksycznie na organizmy wodne, powodując długotrwałe skutki.
	PT	Muito tóxico para os organismos aquáticos com efeitos duradouros.
	RO	Foarte toxic pentru mediul acvatic cu efecte pe termen lung.
	SK	Veľmi toxický pre vodné organizmy, s dlhodobými účinkami.
	SL	Zelo strupeno za vodne organizme, z dolgotrajnimi učinki.
	FI	Erittäin myrkyllistä vesieliöille, pitkäaikaisia haittavaikutuksia.
	SV	Mycket giftigt för vattenlevande organismer med långtidseffekter.

H411	Jezik	4.1 – Nevarno za vodno okolje – kronična nevarnost, kategorija 2
	BG	Токсичен за водните организми, с дълготраен ефект.
	ES	Tóxico para los organismos acuáticos, con efectos nocivos duraderos.
	CS	Toxický pro vodní organismy, s dlouhodobými účinky.
	DA	Giftig for vandlevende organismer, med langvarige virkninger.
	DE	Giftig für Wasserorganismen, mit langfristiger Wirkung.
	ET	Mürgine veeorganismidele, pikaajaline toime.
	EL	Τοξικό για τους υδρόβιους οργανισμούς, με μακροχρόνιες επιπτώσεις.
	EN	Toxic to aquatic life with long lasting effects.
	FR	Toxique pour les organismes aquatiques, entraîne des effets néfastes à long terme.
	GA	Tocsaineach don saol uisceach, le héifeachtaí fadtréimhseacha.
	IT	Tossico per gli organismi acquatici con effetti di lunga durata.
	LV	Toksisks ūdens organismiem ar ilgstošām sekām.
	LT	Toksiška vandens organizmams, sukelia ilgalaikius pakitimus.
	HU	Mérgező a vízi élővilágra, hosszan tartó károsodást okoz.
	MT	Tossiku għall-organizmi akwatici b'mod li jhalli effetti dejjiema.
	NL	Giftig voor in het water levende organismen, met langdurige gevolgen.
	PL	Działa toksycznie na organizmy wodne, powodując długotrwałe skutki.
	PT	Tóxico para os organismos aquáticos com efeitos duradouros.
	RO	Toxic pentru mediul acvatic cu efecte pe termen lung.
	SK	Toxický pre vodné organizmy, s dlhodobými účinkami.
	SL	Strupeno za vodne organizme, z dolgotrajnimi učinki.
	FI	Myrkyllistä vesieliöille, pitkäaikaisia haittavaikutuksia.
	SV	Giftigt för vattenlevande organismer med långtidseffekter.
H412	Jezik	4.1 – Nevarno za vodno okolje – kronična nevarnost, kategorija 3
	BG	Вреден за водните организми, с дълготраен ефект.
	ES	Nocivo para los organismos acuáticos, con efectos nocivos duraderos.
	CS	Škodlivý pro vodní organismy, s dlouhodobými účinky.
	DA	Skadelig for vandlevende organismer, med langvarige virkninger.
	DE	Schädlich für Wasserorganismen, mit langfristiger Wirkung.
	ET	Ohtlik veeorganismidele, pikaajaline toime.
	EL	Επιβλαβές για τους υδρόβιους οργανισμούς, με μακροχρόνιες επιπτώσεις.
	EN	Harmful to aquatic life with long lasting effects.
	FR	Nocif pour les organismes aquatiques, entraîne des effets néfastes à long terme.
	GA	Dióbhálach don saol uisceach, le héifeachtaí fadtréimhseacha.
	IT	Nocivo per gli organismi acquatici con effetti di lunga durata.
	LV	Kaitīgs ūdens organismiem ar ilgstošām sekām.
	LT	Kenksminga vandens organizmams, sukelia ilgalaikius pakitimus.

H412	Jezik	4.1 – Nevarno za vodno okolje – kronična nevarnost, kategorija 3
	HU	Ártalmas a vízi élővilágra, hosszan tartó károsodást okoz.
	MT	Jagħmel hsara lill-organizmi akwatiċi b'mod li jhalli effetti dejjiema.
	NL	Schadelijk voor in het water levende organismen, met langdurige gevolgen.
	PL	Działa szkodliwie na organizmy wodne, powodując długotrwałe skutki.
	PT	Nocivo para os organismos aquáticos com efeitos duradouros.
	RO	Nociv pentru mediul acvatic cu efecte pe termen lung.
	SK	Škodlivý pre vodné organizmy, s dlhodobými účinkami.
	SL	Škodljivo za vodne organizme, z dolgotrajnimi učinki.
	FI	Haitallista vesieliölle, pitkäaikaisia haittavaikutuksia.
	SV	Skadliga långtidseffekter för vattenlevande organismer.

H413	Jezik	4.1 – Nevarno za vodno okolje – kronična nevarnost, kategorija 4
	BG	Може да причини дълготраен вреден ефект за водните организми.
	ES	Puede ser nocivo para los organismos acuáticos, con efectos nocivos duraderos.
	CS	Může vyvolat dlouhodobé škodlivé účinky pro vodní organismy.
	DA	Kan forårsage langvarige skadelige virkninger for vandlevende organismer.
	DE	Kann für Wasserorganismen schädlich sein, mit langfristiger Wirkung.
	ET	Võib avaldada veeorganismidele pikaajalist kahjulikku toimet.
	EL	Μπορεί να προκαλέσει μακροχρόνιες επιπτώσεις στους υδρόβιους οργανισμούς.
	EN	May cause long lasting harmful effects to aquatic life.
	FR	Peut être nocif à long terme pour les organismes aquatiques.
	GA	D'fhéadfadh sé a bheith ina chúis le héifeachtaí fadtréimhseacha díobhálacha ar an saol uisceach.
	IT	Può essere nocivo per gli organismi acquatici con effetti di lunga durata.
	LV	Var radīt ilgstošas kaitīgas sekas ūdens organismiem.
	LT	Gali sukelti ilgalaikį kenksmingą poveikį vandens organizmams.
	HU	Hosszan tartó ártalmas hatást gyakorolhat a vízi élővilágra.
	MT	Jista' jikkawża effetti ta' hsara dejjiema lill-organizmi akwatiċi.
	NL	Kan langdurige schadelijke gevolgen voor in het water levende organismen hebben.
	PL	Może powodować długotrwałe szkodliwe skutki dla organizmów wodnych.
	PT	Pode provocar efeitos nocivos duradouros nos organismos aquáticos.
	RO	Poate provoca efecte nocive pe termen lung asupra mediului acvatic.
	SK	Môže mať dlhodobé škodlivé účinky na vodné organizmy.
	SL	Lahko ima dolgotrajne škodljive učinke na vodne organizme.
	FI	Voi aiheuttaa pitkäaikaisia haittavaikutuksia vesieliölle.
	SV	Kan ge skadliga långtidseffekter på vattenlevande organismer.

2. Del 2: dodatne informacije o nevarnosti

Tabela 2.1

Fizikalne lastnosti

EUH 001	Jezik	
	BG	Експлозивен в сухо състояние.
	ES	Explosivo en estado seco.
	CS	Výbušný v suchém stavu.
	DA	Eksplisiv i tør tilstand.
	DE	In trockenem Zustand explosionsgefährlich.
	ET	Plahvatusohtlik kuivana.
	EL	Εκρηκτικό σε ξηρή κατάσταση.
	EN	Explosive when dry.
	FR	Explosif à l'état sec.
	GA	Pléascach agus é tirim.
	IT	Esplosivo allo stato secco.
	LV	Sprādzienbīstams sausā veidā.
	LT	Sausos būsenos gali sprogti.
	HU	Száraz állapotban robbanásveszélyes.
	MT	Jisplodi meta jinxef.
	NL	In droge toestand ontplofbaar.
	PL	Produkt wybuchowy w stanie suchym.
	PT	Explosivo no estado seco.
	RO	Exploziv în stare uscată.
	SK	V suchom stave výbušný.
	SL	Eksplzivno v suhem stanju.
	FI	Räjätävää kuivana.
	SV	Explosivt i torrt tillstånd.
EUH 006	Jezik	
	BG	Експлозивен при или без контакт с въздуха.
	ES	Explosivo en contacto o sin contacto con el aire.
	CS	Výbušný za přístupu i bez přístupu vzduchu.
	DA	Eksplisiv ved og uden kontakt med luft.
	DE	Mit und ohne Luft explosionsfähig.
	ET	Plahvatusohtlik õhuga kokkupuutel või kokkupuuteta.
	EL	Εκρηκτικό σε επαφή ή χωρίς επαφή με τον αέρα.
	EN	Explosive with or without contact with air.
	FR	Danger d'explosion en contact ou sans contact avec l'air.

EUH 006	Jezik	
	GA	Pléascach i dteagmháil le haer nó gan é.
	IT	Esplosivo a contatto o senza contatto con l'aria.
	LV	Sprādzienbīstams gaisa un bezgaisa vidē.
	LT	Gali sprogti ore arba beorėje erdvėje.
	HU	Levegővel érintkezve vagy anélkül is robbanásveszélyes.
	MT	Jista' jispłodi b'kuntatt jew bla kuntatt ma' l-ajra.
	NL	Ontplofbaar met en zonder lucht.
	PL	Produkt wybuchowy z dostępem lub bez dostępu powietrza.
	PT	Perigo de explosão com ou sem contacto com o ar.
	RO	Exploziv în contact sau fără contactul cu aerul.
	SK	Výbušné pri kontakte alebo bez kontaktu so vzduchom.
	SL	Eksplozivno v stiku z zrakom ali brez stika z zrakom.
	FI	Räjähävä sellaisenaan tai ilman kanssa.
	SV	Explosivt vid eller utan kontakt med luft.

EUH 014	Jezik	
	BG	Реагира бурно с вода.
	ES	Reacciona violentamente con el agua.
	CS	Prudce reaguje s vodou.
	DA	Reagerer voldsomt med vand.
	DE	Reagiert heftig mit Wasser.
	ET	Reageerib ägedalt veega.
	EL	Αντιδρά βίαια με νερό.
	EN	Reacts violently with water.
	FR	Réagit violemment au contact de l'eau.
	GA	Imoibríonn go foirtíl le huisce.
	IT	Reagisce violentemente con l'acqua.
	LV	Aktīvi reaģē ar ūdeni.
	LT	Smarkiai reaguoja su vandeniu.
	HU	Vízzel hevesen reagál.
	MT	Jirreagixxi bil-qawwa meta jmiss l-ilma.
	NL	Reageert heftig met water.
	PL	Reaguje gwałtownie z wodą.
	PT	Reage violentamente em contacto com a água.
	RO	Reacționează violent în contact cu apa.
	SK	Prudko reaguje s vodou.
	SL	Burno reagira z vodo.

EUH 014	Jezik	
	FI	Reagoi voimakkaasti veden kanssa.
	SV	Reagerar häftigt med vatten.
EUH 018	Jezik	
	BG	При употреба може да се образува запалима/експлозивна паровъздушна смес.
	ES	Al usarlo pueden formarse mezclas aire-vapor explosivas o inflamables.
	CS	Při používání může vytvářet hořlavé nebo výbušné směsi par se vzduchem.
	DA	Ved brug kan brandbarlige dampe/eksplosive damp-luftblandinger dannes.
	DE	Kann bei Verwendung explosionsfähige/entzündbare Dampf/Luft-Gemische bilden.
	ET	Kasutamisel võib moodustuda tule-/plahvatusohtlik auru-õhu segu.
	EL	Κατά τη χρήση μπορεί να σχηματίσει εύφλεκτα/εκρηκτικά μείγματα ατμού-αέρος.
	EN	In use may form flammable/explosive vapour-air mixture.
	FR	Lors de l'utilisation, formation possible de mélange vapeur-air inflammable/explosif.
	GA	Agus é á úsáid d'fhéadfaí meascán inadhainte/pléascach gaile-aeir a chruthú.
	IT	Durante l'uso può formarsi una miscela vapore-aria esplosiva/inflammabile.
	LV	Izmantojot var veidot uzliesmojošu vai sprādzienbīstamu tvaiku un gaisa maisījumu.
	LT	Naudojama gali sudaryti degius (sprogus) garų-oro mišinius.
	HU	A használat során tűzveszélyes/robbanásveszélyes gőz/levegő elegy keletkezhet.
	MT	Meta jintuża jista' jifforma tahlitiet esplussivi jew li jaqbdu jekk jithallat ma' l-arja.
	NL	Kan bij gebruik een ontvlambaar/ontploffbaar damp-luchtmengsel vormen.
	PL	Podczas stosowania mogą powstawać łatwopalne lub wybuchowe mieszaniny par z powietrzem.
	PT	Pode formar mistura vapor-ar explosiva/inflamável durante a utilização.
	RO	În timpul utilizării poate forma un amestec vapori-aer, inflamabil/exploziv.
	SK	Pri použití môže vytvárať horľavú/výbušnú zmes pár so vzduchom.
	SL	Pri uporabi lahko tvori vnetljivo/eksplzivno zmes hlapi-zrak.
	FI	Käytössä voi muodostua syttyvä/räjähtävä höyry-ilmaseos.
	SV	Vid användning kan brännbara/explosiva ång-luftblandningar bildas.
EUH 019	Jezik	
	BG	Може да образува експлозивни пероксиди.
	ES	Puede formar peróxidos explosivos.
	CS	Může vytvářet výbušné peroxidy.
	DA	Kan danne eksplosive peroxider.
	DE	Kann explosionsfähige Peroxide bilden.
	ET	Võib moodustada plahvatusohtlikke peroksiide.
	EL	Μπορεί να σχηματίσει εκρηκτικά υπεροξειδία.
	EN	May form explosive peroxides.
	FR	Peut former des peroxydes explosifs.

EUH 019	Jezik	
	GA	D'fhéadfadh sé sárocsaídí pléascacha a chruthú.
	IT	Può formare perossidi esplosivi.
	LV	Var veidot sprādzienbīstamus peroksīdus.
	LT	Gali sudaryti sprogius peroksīdus.
	HU	Robbanásveszélyes peroxidokat képezhet.
	MT	Jista' jiforma perossidi esplussivi.
	NL	Kan ontplofbare peroxiden vormen.
	PL	Może tworzyć wybuchowe nadtlarki.
	PT	Pode formar peróxidos explosivos.
	RO	Poate forma peroxizi explozivi.
	SK	Môže vytvárať výbušné peroxidy.
	SL	Lahko tvori eksplozivne peroksidge.
	FI	Saattaa muodostaa räjähtäviä peroksidgeja.
	SV	Kan bilda explosiva peroxider.

EUH 044	Jezik	
	BG	Риск от експлозия при нагряване в затворено пространство.
	ES	Riesgo de explosión al calentarlo en ambiente confinado.
	CS	Nebezpečí výbuchu při zahřátí v uzavřeném obalu.
	DA	Eksplodingsfarlig ved opvarmning under indeslutning.
	DE	Explosionsgefahr bei Erhitzen unter Einschluss.
	ET	Plahvatusohtlik kuumutamisel kinnises mahutis.
	EL	Κίνδυνος εκρήξεως εάν θερμανθεί υπό περιορισμό.
	EN	Risk of explosion if heated under confinement.
	FR	Risque d'explosion si chauffé en ambiance confinée.
	GA	Baol pléasctha arna théamh i limistéar iata.
	IT	Rischio di esplosione per riscaldamento in ambiente confinato.
	LV	Sprādziena draudi, karsējot slēgtā vidē.
	LT	Gali sprogti, jei kaitinama sandariai uždaryta.
	HU	Zárt térben hő hatására robbanhat.
	MT	Riskju ta' splużjoni jekk jissahhan fil-magħluq.
	NL	Ontploffingsgevaar bij verwarming in afgesloten toestand.
	PL	Zagrożenie wybuchem po ogrzaniu w zamkniętym pojemniku.
	PT	Risco de explosão se aquecido em ambiente fechado.
	RO	Risc de explozie, dacă este încălzit în spațiu închis.
	SK	Riziko výbuchu pri zahrievaní v uzavretom priestore.
	SL	Nevarnost eksplozije ob segrevanju v zaprtem prostoru.

EUH 044	Jezik	
	FI	Räjähdysvaara kuumenttaessa suljetussa astiassa.
	SV	Explosionsrisk vid uppvärmning i sluten behållare.

Tabela 2.2

Lastnosti, ki vplivajo na zdravje

EUH 029	Jezik	
	BG	При контакт с вода се отделя токсичен газ.
	ES	En contacto con agua libera gases tóxicos.
	CS	Uvolňuje toxický plyn při styku s vodou.
	DA	Udvikler giftig gas ved kontakt med vand.
	DE	Entwickelt bei Berührung mit Wasser giftige Gase.
	ET	Kokkupuutel veega eraldub mürgine gaas.
	EL	Σε επαφή με το νερό ελευθερώνονται τοξικά αέρια.
	EN	Contact with water liberates toxic gas.
	FR	Au contact de l'eau, dégage des gaz toxiques.
	GA	I dteagmháil le huisce scaoiltear gás tocsaineach.
	IT	A contatto con l'acqua libera un gas tossico.
	LV	Saskaroties ar ūdeni, izdala toksiskas gāzes.
	LT	Kontaktuodama su vandeniu išskiria toksiškas dujas.
	HU	Vízzel érintkezve mérgező gázok képződnek.
	MT	Jitfa' gass tossiku meta jmiss l-ilma.
	NL	Vormt giftig gas in contact met water.
	PL	W kontakcie z wodą uwalnia toksyczne gazy.
	PT	Em contacto com a água liberta gases tóxicos.
	RO	În contact cu apa, degajă un gaz toxic.
	SK	Pri kontakte s vodou uvolňuje toxický plyn.
	SL	V stiku z vodo se sprošča strupen plin.
	FI	Kehittää myrkyllistä kaasua veden kanssa.
	SV	Utvecklar giftig gas vid kontakt med vatten.

EUH 031	Jezik	
	BG	При контакт с киселини се отделя токсичен газ.
	ES	En contacto con ácidos libera gases tóxicos.
	CS	Uvolňuje toxický plyn při styku s kyselinami.
	DA	Udvikler giftig gas ved kontakt med syre.
	DE	Entwickelt bei Berührung mit Säure giftige Gase.
	ET	Kokkupuutel hapetega eraldub mürgine gaas.

EUH 031	Jezik	
	EL	Σε επαφή με οξέα ελευθερώνονται τοξικά αέρια.
	EN	Contact with acids liberates toxic gas.
	FR	Au contact d'un acide, dégage un gaz toxique.
	GA	I dteagmháil le haigéid scaoiltear gás tocsaineach.
	IT	A contatto con acidi libera gas tossici.
	LV	Saskaroties ar skābēm, izdala toksiskas gāzes.
	LT	Kontaktuodama su rūgštimis išskiria toksiškas dujas.
	HU	Savval érintkezve mérgező gázok képződnek.
	MT	Jitfa' gass tossiku meta jmiss l-acidi.
	NL	Vormt giftig gas in contact met zuren.
	PL	W kontakcie z kwasami uwalnia toksyczne gazy.
	PT	Em contacto com ácidos liberta gases tóxicos.
	RO	În contact cu acizi, degajă un gaz toxic.
	SK	Pri kontakte s kyselinami uvoľňuje toxický plyn.
	SL	V stiku s kislinami se sprošča strupen plin.
	FI	Kehittää myrkyllistä kaasua hapon kanssa.
	SV	Utvecklar giftig gas vid kontakt med syra.

EUH 032	Jezik	
	BG	При контакт с киселини се отделя силно токсичен газ.
	ES	En contacto con ácidos libera gases muy tóxicos.
	CS	Uvolňuje vysoce toxický plyn při styku s kyselinami.
	DA	Udvikler meget giftig gas ved kontakt med syre.
	DE	Entwickelt bei Berührung mit Säure sehr giftige Gase.
	ET	Kokkupuutel hapetega eraldub väga mürgine gaas.
	EL	Σε επαφή με οξέα ελευθερώνονται πολύ τοξικά αέρια.
	EN	Contact with acids liberates very toxic gas.
	FR	Au contact d'un acide, dégage un gaz très toxique.
	GA	I dteagmháil le haigéid scaoiltear gás an-tocsaineach.
	IT	A contatto con acidi libera gas molto tossici.
	LV	Saskaroties ar skābēm, izdala ļoti toksiskas gāzes.
	LT	Kontaktuodama su rūgštimis išskiria labai toksiškas dujas.
	HU	Savval érintkezve nagyon mérgező gázok képződnek.
	MT	Jitfa' gass tossiku hafna meta jmiss l-acidi.
	NL	Vormt zeer giftig gas in contact met zuren.
	PL	W kontakcie z kwasami uwalnia bardzo toksyczne gazy.
	PT	Em contacto com ácidos liberta gases muito tóxicos.
	RO	În contact cu acizi, degajă un gaz foarte toxic.

EUH 032	Jezik	
	SK	Pri kontakte s kyselinami uvoľňuje veľmi toxický plyn.
	SL	V stiku s kislinami se sprošča zelo strupen plin.
	FI	Kehittää erittäin myrkyllistä kaasua hapon kanssa.
	SV	Utvecklar mycket giftig gas vid kontakt med syra.

EUH 066	Jezik	
	BG	Повтарящата се експозиция може да предизвика изсушаване или напукване на кожата.
	ES	La exposición repetida puede provocar sequedad o formación de grietas en la piel.
	CS	Opakovaná expozice může způsobit vysušení nebo popraskání kůže.
	DA	Gentagen kontakt kan give tør eller revnet hud.
	DE	Wiederholter Kontakt kann zu spröder oder rissiger Haut führen.
	ET	Korduv kokkupuude võib põhjustada naha kuivust või lõhenemist.
	EL	Παρατεταμένη έκθεση μπορεί να προκαλέσει ξηρότητα δέρματος ή σκάσιμο.
	EN	Repeated exposure may cause skin dryness or cracking.
	FR	L'exposition répétée peut provoquer dessèchement ou gerçures de la peau.
	GA	D'fhéadfadh tirimeacht chraicinn nó scoilteadh craicinn a bheith mar thoradh ar ilnochtadh.
	IT	L'esposizione ripetuta può provocare secchezza o screpolature della pelle.
	LV	Atkārtota iedarbība var radīt sausu ādu vai izraisīt tās sprēgāšanu.
	LT	Pakartotinis poveikis gali sukelti odos džiuvimą arba skilinėjimą.
	HU	Ismétlődő expozíció a bőr kiszáradását vagy megrepedezését okozhatja.
	MT	Espożizzjoni ripetuta tista' tikkaġuna nxif jew qsim tal-ġilda.
	NL	Herhaalde blootstelling kan een droge of een gebarsten huid veroorzaken.
	PL	Powtarzające się narażenie może powodować wysuszenie lub pękanie skóry.
	PT	Pode provocar pele seca ou gretada, por exposição repetida.
	RO	Expunerea repetată poate provoca uscarea sau crăparea pielii.
	SK	Opakovaná expozícia môže spôsobiť vysušenie alebo popraskanie pokožky.
	SL	Ponavljajoča izpostavljenost lahko povzroči nastanek suhe ali razpokane kože.
	FI	Toistuva altistus voi aiheuttaa ihon kuivumista tai halkeilua.
	SV	Upprepad kontakt kan ge torr hud eller hudsprickor.

EUH 070	Jezik	
	BG	Токсично при контакт с очите.
	ES	Tóxico en contacto con los ojos.
	CS	Toxický při styku s očima.
	DA	Giftig ved kontakt med øjnene.
	DE	Giftig bei Berührung mit den Augen.
	ET	Silma sattumisel mürgine.
	EL	Τοξικό σε επαφή με τα μάτια.

EUH 070	Jezik	
	EN	Toxic by eye contact.
	FR	Toxique par contact oculaire.
	GA	Tocsaineach trí theagmháil leis an tsúil.
	IT	Tossico per contatto oculare.
	LV	Toksisks saskarē ar acīm.
	LT	Toksiška patekus į akis.
	HU	Szembe kerülve mérgező.
	MT	Tossiku meta jmiss ma' l-ghajnejn.
	NL	Giftig bij oogcontact.
	PL	Działa toksycznie w kontakcie z oczami.
	PT	Tóxico por contacto com os olhos.
	RO	Toxic în caz de contact cu ochii.
	SK	Toxické pri kontakte s očami.
	SL	Strupeno ob stiku z očmi.
	FI	Myrkyllistä joutuessaan silmään.
	SV	Giftigt vid kontakt med ögonen.

EUH 071	Jezik	
	BG	Корозивен за дихателните пътища.
	ES	Corrosivo para las vías respiratorias.
	CS	Způsobuje poleptání dýchacích cest.
	DA	Ætsende for luftvejene.
	DE	Wirkt ätzend auf die Atemwege.
	ET	Söövitav hingamisteedele.
	EL	Διαβρωτικό της αναπνευστικής οδού.
	EN	Corrosive to the respiratory tract.
	FR	Corrosif pour les voies respiratoires.
	GA	Creimneach don chonair riospráide.
	IT	Corrosivo per le vie respiratorie.
	LV	Kodīgs elpceļiem.
	LT	Ėsdina kvėpavimo takus.
	HU	Maró hatású a légutakra.
	MT	Korruziv għas-sistema respiratorja.
	NL	Bijtend voor de luchtwegen.
	PL	Działa żrąco na drogi oddechowe.
	PT	Corrosivo para as vias respiratórias.
	RO	Corosiv pentru căile respiratorii.
	SK	Žieravé pre dýchacie cesty.

EUH 071	Jezik	
	SL	Jedko za dihalne poti.
	FI	Hengityselimiä syövyttävää.
	SV	Frätande på luftvägarna.

Tabela 2.3

Lastnosti v zvezi z okoljem

EUH 059	Jezik	Dodatni razred nevarnosti EU
	BG	Опасно за озоновия слой.
	ES	Peligroso para la capa de ozono.
	CS	Nebezpečný pro ozonovou vrstvu.
	DA	Farlig for ozonlaget.
	DE	Die Ozonschicht schädigend.
	ET	Ohtlik osoonikihile.
	EL	Επικίνδυνο για τη στιβάδα του όζοντος.
	EN	Hazardous to the ozone layer.
	FR	Dangereux pour la couche d'ozone.
	GA	Guaiseach don chiseal ózón.
	IT	Pericoloso per lo strato di ozono.
	LV	Bīstams ozona slānim.
	LT	Pavojinga ozono sluoksniui.
	HU	Veszélyes az ózónrétegre.
	MT	Perikoluż għas-saff ta' l-ożonu.
	NL	Gevaarlijk voor de ozonlaag.
	PL	Stwarza zagrożenie dla warstwy ozonowej.
	PT	Perigoso para a camada de ozono.
	RO	Periculos pentru stratul de ozon.
	SK	Nebezpečný pre ozónovú vrstvu.
	SL	Nevarno za ozonski plašč.
	FI	Vaarallista otsonikerrokselle.
	SV	Farligt för ozonskiktet.

3. Del 3: dodatni elementi etikete/informacije o nekaterih snoveh ali zmeseh

EUH 201/ 201A	Jezik	
201 201A	BG	Съдържа олово. Да не се използва върху повърхност, която евентуално може да се дъвче или смуче от деца. Внимание! Съдържа олово.

EUH 201/ 201A	Jezik	
201 201A	ES	Contiene plomo. No utilizar en objetos que los niños puedan masticar o chupar. ¡Atención! Contiene plomo.
201 201A	CS	Obsahuje olovo. Nemá se používat na povrchy, které mohou okusovat nebo olizovat děti. Pozor! Obsahuje olovo.
201 201A	DA	Indeholder bly. Må ikke anvendes på genstande, som børn vil kunne tygge eller sutte på. Advarsel! Indeholder bly.
201 201A	DE	Enthält Blei. Nicht für den Anstrich von Gegenständen verwenden, die von Kindern gekaut oder gelutscht werden könnten. Achtung! Enthält Blei.
201 201A	ET	Sisaldab pliid. Mitte kasutada pindadel, mida lapsed võivad närida või imeda. Ettevaatust! Sisaldab pliid.
201 201A	EL	Περιέχει μόλυβδο. Να μη χρησιμοποιείται σε επιφάνειες που είναι πιθανόν να μασήσουν ή να πιπίλίσουν τα παιδιά. Προσοχή! Περιέχει μόλυβδο.
201 201A	EN	Contains lead. Should not be used on surfaces liable to be chewed or sucked by children. Warning! Contains lead.
201 201A	FR	Contient du plomb. Ne pas utiliser sur les objets susceptibles d'être mâchés ou sucés par des enfants. Attention! Contient du plomb.
201 201A	GA	Luaidhe ann. Níor chóir a úsáid ar dhromchlaí a d'fhéadfadh a bheith á gcogaint nó á sú ag leanaí. Rabhadh! Luaidhe ann.
201 201A	IT	Contiene piombo. Non utilizzare su oggetti che possono essere masticati o succhiati dai bambini. Attenzione! Contiene piombo.
201 201A	LV	Satur svinu. Nedrīkst lietot uz virsmām, kuras var nonākt bērnam mutē. Brīdinājums! Satur svinu.
201 201A	LT	Sudėtyje yra švino. Nenaudoti paviršiams, kurie gali būti vaikų kramtomi arba čiulpiami. Atsargiai! Sudėtyje yra švino.
201 201A	HU	Ólmot tartalmaz. Tilos olyan felületeken használni, amelyeket gyermekek szájukba vehetnek. Figyelem! Ólmot tartalmaz.
201 201A	MT	Fih iċ-ċomb. M'għandux jintuża' fuq uċuħ li x'aktarx jomogħduhom jew jerdgħuħom it-tfal. Twissija! Fih iċ-ċomb.
201 201A	NL	Bevat lood. Mag niet worden gebruikt voor voorwerpen waarin kinderen kunnen bijten of waaraan kinderen kunnen zuigen. Let op! Bevat lood.
201 201A	PL	Zawiera ołów. Nie należy stosować na powierzchniach, które mogą być gryzione lub ssane przez dzieci. Uwaga! Zawiera ołów.
201 201A	PT	Contém chumbo. Não utilizar em superfícies que possam ser mordidas ou chupadas por crianças. Atenção! Contém chumbo.
201 201A	RO	Conține plumb. A nu se utiliza pe obiecte care pot fi mestecate sau supte de copii. Atenție! Conține plumb.
201 201A	SK	Obsahuje olovo. Nepoužívajte na povrchy, ktoré by mohli žuť alebo oblizovať deti. Pozor! Obsahuje olovo.
201 201A	SL	Vsebuje svinec. Ne sme se nanašati na površine, ki bi jih lahko žvečili ali sesali otroci. Pozor! Vsebuje svinec.

EUH 201/ 201A	Jezik	
201 201A	FI	Sisältää lyijyä. Ei saa käyttää pintoihin, joita lapset voivat pureskella tai imeä. Varoitus! Sisältää lyijyä.
201 201A	SV	Innehåller bly. Bör inte användas på ytor där barn kan komma åt att tugga eller suga. Varning! Innehåller bly.
EUH 202	Jezik	
	BG	Цианокрилат. Опасно. Залепва кожата и очите за секунди. Да се съхранява извън обсега на деца.
	ES	Cianoacrilato. Peligro. Se adhiere a la piel y a los ojos en pocos segundos. Mantener fuera del alcance de los niños.
	CS	Kyanoakrylát. Nebezpečí. Okamžitě slepuje kůži a oči. Uchovávejte mimo dosah dětí.
	DA	Cyanoacrylat. Farligt. Klæber til huden og øjnene på få sekunder. Opbevares utilgængeligt for børn.
	DE	Cyanacrylat. Gefahr. Klebt innerhalb von Sekunden Haut und Augenlider zusammen. Darf nicht in die Hände von Kindern gelangen.
	ET	Tsüanoakrülaat. Ohtlik. Liimib naha ja silmad hetkega. Hoida lastele kättesaamatus kohas.
	EL	Κυανοακρυλική ένωση. Κίνδυνος. Κολλάει στην επιδερμίδα και στα μάτια μέσα σε λίγα δευτερόλεπτα. Να φυλάσσεται μακριά από παιδιά.
	EN	Cyanoacrylate. Danger. Bonds skin and eyes in seconds. Keep out of the reach of children.
	FR	Cyanoacrylate. Danger. Colle à la peau et aux yeux en quelques secondes. À conserver hors de portée des enfants.
	GA	Cianaicrioláit. Contúirt. Nascann craiceann agus súile laistigh de shoicindí. Coimeád as aimsiú leanaí.
	IT	Cianoacrilato. Pericolo. Incolla la pelle e gli occhi in pochi secondi. Tenere fuori dalla portata dei bambini.
	LV	Ciānakrilāts. Bīstami. Iedarbība uz acīm un ādu tūlītēja. Sargāt no bērniem.
	LT	Cianakrilatas. Pavojinga. Staigiai suklijuoja odą ir akis. Laikyti vaikams neprieinamoje vietoje.
	HU	Cianoakrilát. Veszély! Néhány másodperc alatt a bőrre és a szembe ragad. Gyermekektől elzárva tartandó.
	MT	Cyanoacrylate. Periklu. Iwahhal il-ġilda u l-ghajnejn fi ftit sekondi. Żomm 'il bogħod minn fejn jistgħu jilhqūh it-tfal.
	NL	Cyanoacrylaat. Gevaarlijk. Kleeft binnen enkele seconden aan huid en oogleden. Buiten het bereik van kinderen houden.
	PL	Cyjanoakrylany. Niebezpieczeństwo. Skleja skórę i powieki w ciągu kilku sekund. Chronić przed dziećmi.
	PT	Cianoacrilato. Perigo. Cola à pele e aos olhos em poucos segundos. Manter fora do alcance das crianças.
	RO	Cianoacrilat. Pericol. Se lipește de piele și ochi în câteva secunde. A nu se lăsa la îndemâna copiilor.
	SK	Kyanoakrylát. Nebezpečnostvo. V priebehu niekoľkých sekúnd zlepi pokožku a oči. Uchovávať mimo dosahu detí.
	SL	Cianoakrilat. Nevarno. Kožo in oči zlepi v nekaj sekundah. Hraniti zunaj dosega otrok.
	FI	Syanoakrylaattia. Vaara. Liimaa ihon ja silmät hetkessä. Säilytettävä lasten ulottumattomissa.
	SV	Cyanoakrylat. Fara. Fäster snabbt på hud och ögon. Förvaras oåtkomligt för barn.

EUH 203	Jezik	
	BG	Съдържа хром (VI). Може да причини алергична реакция.
	ES	Contiene cromo (VI). Puede provocar una reacción alérgica.
	CS	Obsahuje chrom (VI). Může vyvolat alergickou reakci.
	DA	Indeholder krom (VI). Kan udløse allergisk reaktion.
	DE	Enthält Chrom (VI). Kann allergische Reaktionen hervorrufen.
	ET	Sisaldab kroomi (VI). Võib esile kutsuda allergilise reaktsiooni.
	EL	Περιέχει χρώμιο (VI). Μπορεί να προκαλέσει αλλεργική αντίδραση.
	EN	Contains chromium (VI). May produce an allergic reaction.
	FR	Contient du chrome (VI). Peut produire une réaction allergique.
	GA	Cróimiam (VI) ann. D'fhéadfadh sé a bheith ina chúis le frithghníomh ailléirgeach.
	IT	Contiene cromo (VI). Può provocare una reazione allergica.
	LV	Satur hromu (VI). Var izraisīt alerģisku reakciju.
	LT	Sudėtyje yra chromo (VI). Gali sukelti alerginę reakciją.
	HU	Krómot (VI) tartalmaz. Allergiás reakciót válthat ki.
	MT	Fih il-kromju (VI). Jista' johloq reazzjoni allergika.
	NL	Bevat zeswaardig chroom. Kan een allergische reactie veroorzaken.
	PL	Zawiera chrom (VI). Może powodować wystąpienie reakcji alergicznej.
	PT	Contém crómio (VI). Pode provocar uma reacção alérgica.
	RO	Conține crom (VI). Poate provoca o reacție alergică.
	SK	Obsahuje chróm (VI). Môže vyvolať alergickú reakciu.
	SL	Vsebuje krom (VI). Lahko povzroči alergijski odziv.
	FI	Sisältää kromi(VI)-yhdisteitä. Voi aiheuttaa allergisen reaktion.
	SV	Innehåller krom (VI). Kan orsaka en allergisk reaktion.

EUH 204	Jezik	
	BG	Съдържа изоцианати. Може да причини алергична реакция.
	ES	Contiene isocianatos. Puede provocar una reacción alérgica.
	CS	Obsahuje isokyanáty. Může vyvolat alergickou reakci.
	DA	Indeholder isocyanater. Kan udløse allergisk reaktion.
	DE	Enthält Isocyanate. Kann allergische Reaktionen hervorrufen.
	ET	Sisaldab isotsüanaate. Võib esile kutsuda allergilise reaktsiooni.
	EL	Περιέχει ισοκυανικές ενώσεις. Μπορεί να προκαλέσει αλλεργική αντίδραση.
	EN	Contains isocyanates. May produce an allergic reaction.
	FR	Contient des isocyanates. Peut produire une réaction allergique.
	GA	Isicianaítí ann. D'fhéadfadh sé a bheith ina chúis le frithghníomh ailléirgeach.
	IT	Contiene isocianati. Può provocare una reazione allergica.
	LV	Satur izocianātus. Var izraisīt alerģisku reakciju.
	LT	Sudėtyje yra izocianatų. Gali sukelti alerginę reakciją.

EUH 204	Jezik	
	HU	Izocianátokat tartalmaz. Allergiás reakciót válthat ki.
	MT	Fih l-isocyanates. Jista' jagħmel reazzjoni allergika.
	NL	Bevat isocyanaten. Kan een allergische reactie veroorzaken.
	PL	Zawiera izocyjaniany. Może powodować wystąpienie reakcji alergicznej.
	PT	Contém isocianatos. Pode provocar uma reacção alérgica.
	RO	Conține izocianati. Poate provoca o reacție alergică.
	SK	Obsahuje izokyanáty. Môže vyvolať alergickú reakciu.
	SL	Vsebuje izocianate. Lahko povzroči alergijski odziv.
	FI	Sisältää isosyanaatteja. Voi aiheuttaa allergisen reaktion.
	SV	Innehåller isocyanater. Kan orsaka en allergisk reaktion.
EUH 205	Jezik	
	BG	Съдържа епоксидни съставки. Може да причини алергична реакция.
	ES	Contiene componentes epoxídicos. Puede provocar una reacción alérgica.
	CS	Obsahuje epoxidové složky. Může vyvolat alergickou reakci.
	DA	Indeholder epoxyforbindelser. Kan udløse allergisk reaktion.
	DE	Enthält epoxidhaltige Verbindungen. Kann allergische Reaktionen hervorrufen.
	ET	Sisaldab epoksükomponente. Võib esile kutsuda allergilise reaktsiooni.
	EL	Περιέχει εποξειδικές ενώσεις. Μπορεί να προκαλέσει αλλεργική αντίδραση.
	EN	Contains epoxy constituents. May produce an allergic reaction.
	FR	Contient des composés époxydiques. Peut produire une réaction allergique.
	GA	Comhábhair eapocsacha ann. D'fhéadfadh sé a bheith ina chúis le frithghníomh ailléirgeach.
	IT	Contiene componenti epossidici. Può provocare una reazione allergica.
	LV	Satur epoksīda sastāvdaļas. Var izraisīt alerģisku reakciju.
	LT	Sudėtyje yra epoksidinių komponentų. Gali sukelti alerginę reakciją.
	HU	Epoxid tartalmú vegyületeket tartalmaz. Allergiás reakciót válthat ki.
	MT	Fih kostitwenti ta' l-eposside. Jista' jagħmel reazzjoni allergika.
	NL	Bevat epoxyverbindingen. Kan een allergische reactie veroorzaken.
	PL	Zawiera składniki epoksydowe. Może powodować wystąpienie reakcji alergicznej.
	PT	Contém componentes epoxídicos. Pode provocar uma reacção alérgica.
	RO	Conține componenteți epoxidici. Poate provoca o reacție alergică.
	SK	Obsahuje epoxidové zložky. Môže vyvolať alergickú reakciu.
	SL	Vsebuje epoksidne sestavine. Lahko povzroči alergijski odziv.
	FI	Sisältää epoksihartseja. Voi aiheuttaa allergisen reaktion.
	SV	Innehåller epoxiförening. Kan orsaka en allergisk reaktion.
EUH 206	Jezik	
	BG	Внимание! Да не се използва заедно с други продукти. Може да отдели опасни газове (хлор).

EUH 206	Jezik	
	ES	¡Atención! No utilizar junto con otros productos. Puede desprender gases peligrosos (cloro).
	CS	Pozor! Nepoužívejte společně s jinými výrobky. Může uvolňovat nebezpečné plyny (chlor).
	DA	Advarsel! Må ikke anvendes i forbindelse med andre produkter. Farlige luftarter (chlor) kan frigøres.
	DE	Achtung! Nicht zusammen mit anderen Produkten verwenden, da gefährliche Gase (Chlor) freigesetzt werden können.
	ET	Ettevaatust! Mitte kasutada koos teiste toodetega. Segust võib eralduda ohtlikke gaase (kloori).
	EL	Προσοχή! Να μην χρησιμοποιείται σε συνδυασμό με άλλα προϊόντα. Μπορεί να ελευθερωθούν επικίνδυνα αέρια (χλώριο).
	EN	Warning! Do not use together with other products. May release dangerous gases (chlorine).
	FR	Attention! Ne pas utiliser en combinaison avec d'autres produits. Peut libérer des gaz dangereux (chlore).
	GA	Rabhadh! Ná húsáid in éineacht le táirgí eile. D'fhéadfadh sé go scaoilfí gáis chontúirteacha (clóirín).
	IT	Attenzione! Non utilizzare in combinazione con altri prodotti. Possono liberarsi gas pericolosi (cloro).
	LV	Brīdinājums! Nelietot kopā ar citiem produktiem. Var izdalīt bīstamas gāzes (hloru).
	LT	Atsargiai! Nenaudoti kartu su kitais produktais. Gali išskirti pavojingas dujas (chlorą).
	HU	Figyelem! Tilos más termékekkel együtt használni. Veszélyes gázok (klór) szabadulhatnak fel.
	MT	Twissija! Tużahx flimkien ma' prodotti oħra. Jista' jerhi gassijiet perikolużi (kloru).
	NL	Let op! Niet in combinatie met andere producten gebruiken. Er kunnen gevaarlijke gassen (chloor) vrijkomen.
	PL	Uwaga! Nie stosować razem z innymi produktami. Może wydzielać niebezpieczne gazy (chlor).
	PT	Atenção! Não utilizar juntamente com outros produtos. Podem libertar-se gases perigosos (cloro).
	RO	Atenție! A nu se folosi împreună cu alte produse. Poate elibera gaze periculoase (clor).
	SK	Pozor! Nepoužívajte spolu s inými výrobkami. Môžu uvoľňovať nebezpečné plyny (chlór).
	SL	Pozor! Ne uporabljajte skupaj z drugimi izdelki. Lahko se sproščajo nevarni plini (klor).
	FI	Varoitus! Älä käytä yhdessä muiden tuotteiden kanssa. Tuotteesta voi vapautua vaarallista kaasua (klooria).
	SV	Varning! Får ej användas tillsammans med andra produkter. Kan avge farliga gaser (klor).

EUH 207	Jezik	
	BG	Внимание! Съдържа кадмий. При употреба се образуват опасни пари. Вижте информацията, предоставена от производителя. Спазвайте инструкциите за безопасност.
	ES	¡Atención! Contiene cadmio. Durante su utilización se desprenden vapores peligrosos. Ver la información facilitada por el fabricante. Seguir las instrucciones de seguridad.
	CS	Pozor! Obsahuje kadmium. Při používání vznikají nebezpečné výpary. Viz informace dodané výrobcem. Dodržujte bezpečnostní pokyny.
	DA	Advarsel! Indeholder cadmium. Der udvikles farlige dampe under anvendelsen. Se producentens oplysninger. Overhold sikkerhedsforskrifterne.
	DE	Achtung! Enthält Cadmium. Bei der Verwendung entstehen gefährliche Dämpfe. Hinweise des Herstellers beachten. Sicherheitsanweisungen einhalten.

EUH 207	Jezik	
	ET	Ettevaatust! Sisaldab kaadmiumi. Kasutamisel moodustuvad ohtlikud aurud. Vt tootja esitatud teavet. Järgida ohutuseeskirju.
	EL	Προσοχή! Περιέχει κάδμιο. Κατά τη χρήση αναπτύσσονται επικίνδυνες αναθυμιάσεις. Βλέπετε πληροφορίες του κατασκευαστή. Τηρείτε τις οδηγίες ασφαλείας.
	EN	Warning! Contains cadmium. Dangerous fumes are formed during use. See information supplied by the manufacturer. Comply with the safety instructions.
	FR	Attention! Contient du cadmium. Des fumées dangereuses se développent pendant l'utilisation. Voir les informations fournies par le fabricant. Respectez les consignes de sécurité.
	GA	Rabhadh! Caidmiam ann. Cruthaítear múch chontúirteach le linn a úsáide. Féach an fhaisnéis atá curtha ar fáil ag an monaróir. Cloígh leis na treoracha sábháilteachta.
	IT	Attenzione! Contiene cadmio. Durante l'uso si sviluppano fumi pericolosi. Leggere le informazioni fornite dal fabbricante. Rispettare le disposizioni di sicurezza.
	LV	Brīdinājums! Satur kadmiju. Lietojot veidojas bīstami izgarojumi. Sk. ražotāja sniegto informāciju. Ievērot drošības instrukcijas.
	LT	Atsargiai! Sudėtyje yra kadmio. Naudojant susidaro pavojingi garai. Žiūrėti gamintojo pateiktą informaciją. Vykdyti saugos instrukcijas.
	HU	Figyelem! Kadmiumot tartalmaz! A használat során veszélyes füstök képződnek. Lásd a gyártó által közölt információt. Be kell tartani a biztonsági előírásokat.
	MT	Twissija! Fih il-kadmju. Waqt li jintuża jiffurmaw dhahen perikolużi. Ara l-informazzjoni mogħtija mill-fabbrikant. Hares l-istruzzjonijiet dwar is-sigurtà.
	NL	Let op! Bevat cadmium. Bij het gebruik ontwikkelen zich gevaarlijke dampen. Zie de aanwijzingen van de fabrikant. Neem de veiligheidsvoorschriften in acht.
	PL	Uwaga! Zawiera kadm. Podczas stosowania wydziela niebezpieczne pary. Zapoznaj się z informacją dostarczoną przez producenta. Przestrzegaj instrukcji bezpiecznego stosowania.
	PT	Atenção! Contém cádmio. Libertam-se fumos perigosos durante a utilização. Ver as informações fornecidas pelo fabricante. Respeitar as instruções de segurança.
	RO	Atenție! Conține cadmiu. În timpul utilizării se degajă un fum periculos. A se vedea informațiile furnizate de producător. A se respecta instrucțiunile privind siguranța.
	SK	Pozor! Obsahuje kadmium. Pri používaní sa tvorí nebezpečný dym. Pozri informácie od výrobcu. Dodržiavajte bezpečnostné pokyny.
	SL	Pozor! Vsebuje kadmij. Med uporabo nastajajo nevarni dimi. Preberite informacije proizvajalca. Upoštevajte navodila za varno uporabo.
	FI	Varoitusta! Sisältää kadmiumia. Käytettäessä muodostuu vaarallisia huuruja. Noudata valmistajan antamia ohjeita. Noudata turvallisuusohjeita.
	SV	Varning! Innehåller kadmium. Farliga ångor bildas vid användning. Se information från tillverkaren. Följ skyddsanvisningarna.
EUH 208	Jezik	
	BG	Съдържа <наименование на сенсibiliзиращото вещество>. Може да предизвика алергична реакция.
	ES	Contiene <nombre de la sustancia sensibilizante>. Puede provocar una reacción alérgica.
	CS	Obsahuje <název senzibilizující látky>. Může vyvolat alergickou reakci.
	DA	Indeholder <navn på det sensibiliserende stof>. Kan udløse allergisk reaktion.
	DE	Enthält <Name des sensibilisierenden Stoffes>. Kann allergische Reaktionen hervorrufen.
	ET	Sisaldab <sensibiliseeriva aine nimetus>. Võib esile kutsuda allergilise reaktsiooni.
	EL	Περιέχει <όνομα της ευαισθητοποιητικής ουσίας>. Μπορεί να προκαλέσει αλλεργική αντίδραση.
	EN	Contains <name of sensitising substance>. May produce an allergic reaction.
	FR	Contient <nom de la substance sensibilisante>. Peut produire une réaction allergique.

EUH 208	Jezik	
	GA	<Ainm na substainte íograithe> ann. D'fhéadfadh sé a bheith ina chúis le frithghníomh ailléirgeach.
	IT	Contiene <denominazione della sostanza sensibilizzante>. Può provocare una reazione allergica.
	LV	Satur <sensibilizējošās vielas nosaukums>. Var izraisīt alerģisku reakciju.
	LT	Sudėtyje yra <jautrinančios medžiagos pavadinimas>. Gali sukelti alerginę reakciją.
	HU	<Allergén anyag neve>-t tartalmaz. Allergiás reakciót válthat ki.
	MT	Fih <l-isem tas-sustanza sensibbli>. Jista' jagħmel reazzjoni allergika.
	NL	Bevat <naam van de sensibiliserende stof>. Kan een allergische reactie veroorzaken.
	PL	Zawiera <nazwa substancji uczulającej>. Może powodować wystąpienie reakcji alergicznej.
	PT	Contém <nome da substância sensibilizante em questão>. Pode provocar uma reacção alérgica.
	RO	Conține <denumirea substanței sensibilizante>. Poate provoca o reacție alergică.
	SK	Obsahuje <názov senzibilizujúcej látky>. Môže vyvolať alergickú reakciu.
	SL	Vsebuje <ime snovi, ki povzroča preobčutljivost>. Lahko povzroči alergijski odziv.
	FI	Sisältää <herkistävän aineen nimi>. Voi aiheuttaa allergisen reaktion.
	SV	Innehåller <namnet på det sensibiliserande ämnet>. Kan orsaka en allergisk reaktion.
EUH 209/ 209A	Jezik	
209 209A	BG	При употреба може да стане силно запалимо. При употреба може да стане запалимо.
209 209A	ES	Puede inflamarse fácilmente al usarlo Puede inflamarse al usarlo.
209 209A	CS	Při používání se může stát vysoce hořlavým. Při používání se může stát hořlavým.
209 209A	DA	Kan blive meget brandfarlig ved brug. Kan blive brandfarlig ved brug.
209 209A	DE	Kann bei Verwendung leicht entzündbar werden. Kann bei Verwendung entzündbar werden.
209 209A	ET	Kasutamisel võib muutuda väga tuleohtlikuks. Kasutamisel võib muutuda tuleohtlikuks.
209 209A	EL	Μπορεί να γίνει πολύ εύφλεκτο κατά τη χρήση. Μπορεί να γίνει εύφλεκτο κατά τη χρήση.
209 209A	EN	Can become highly flammable in use. Can become flammable in use.
209 209A	FR	Peut devenir facilement inflammable en cours d'utilisation. Peut devenir inflammable en cours d'utilisation.
209 209A	GA	D'fhéadfadh sé éirí an-inadhaite agus é á úsáid. D'fhéadfadh sé éirí inadhaite agus é á úsáid.
209 209A	IT	Può diventare facilmente infiammabile durante l'uso. Può diventare infiammabile durante l'uso.
209 209A	LV	Lietojoj var viegli uzliesmot. Kļūt uzliesmojšs.

EUH 209/ 209A	Jezik	
209 209A	LT	Naudojama gali tapti labai degi. Naudojama gali tapti degi.
209 209A	HU	A használat során fokozottan tűzveszélyessé válhat. A használat során tűzveszélyessé válhat.
209 209A	MT	Jista' jiehu n-nar faċilment meta jintuża. Jista' jiehu n-nar meta jintuża.
209 209A	NL	Kan bij gebruik licht ontvlambaar worden. Kan bij gebruik ontvlambaar worden.
209 209A	PL	Podczas stosowania może przekształcić się w substancję wysoce łatwopalną. Podczas stosowania może przekształcić się w substancję łatwopalną.
209 209A	PT	Pode tornar-se facilmente inflamável durante o uso. Pode tornar-se inflamável durante o uso.
209 209A	RO	Poate deveni foarte inflamabil în timpul utilizării. Poate deveni inflamabil în timpul utilizării.
209 209A	SK	Pri používaní sa môže stať veľmi horľavou. Pri používaní sa môže stať horľavou.
209 209A	SL	Med uporabo utegne postati lahko vnetljivo. Med uporabo utegne postati vnetljivo.
209 209A	FI	Voi muuttua helposti syttyväksi käytössä. Voi muuttua syttyväksi käytössä.
209 209A	SV	Kan bli mycket brandfarligt vid användning. Kan bli brandfarligt vid användning.
EUH 210	Jezik	
	BG	Информационен лист за безопасност ще бъде представен при поискване.
	ES	Puede solicitarse la ficha de datos de seguridad.
	CS	Na vyžádání je k dispozici bezpečnostní list.
	DA	Sikkerhedsdatablad kan på anmodning rekvireres.
	DE	Sicherheitsdatenblatt auf Anfrage erhältlich.
	ET	Ohutuskaart nõudmisel kättesaadav.
	EL	Δελτίο δεδομένων ασφαλείας παρέχεται εφόσον ζητηθεί.
	EN	Safety data sheet available on request.
	FR	Fiche de données de sécurité disponible sur demande.
	GA	Bileog sonraí sábháilteachta ar fáil arna iarraidh sin.
	IT	Scheda dati di sicurezza disponibile su richiesta.
	LV	Drošības datu lapa ir pieejama pēc pieprasījuma.
	LT	Saugos duomenų lapą galima gauti paprašius.
	HU	Kérésre biztonsági adatlap kapható.
	MT	Il-karta tad-data dwar is-sikurezza hija disponibbli meta tintalab.
	NL	Veiligheidsinformatieblad op verzoek verkrijgbaar.
	PL	Karta charakterystyki dostępna na żądanie.
	PT	Ficha de segurança fornecida a pedido.

EUH 210	Jezik	
	RO	Fișa cu date de securitate disponibilă la cerere.
	SK	Na požiadanie možno poskytnúť kartu bezpečnostných údajov.
	SL	Varnosti list na voljo na zahtevo.
	FI	Käyttöturvallisuustiedote toimitetaan pyynnöstä.
	SV	Säkerhetsdatablad finns att rekquirera.
EUH 401	Jezik	
	BG	За да се избегнат рискове за човешкото здраве и околната среда, спазвайте инструкциите за употреба.
	ES	A fin de evitar riesgos para las personas y el medio ambiente, siga las instrucciones de uso.
	CS	Dodržujte pokyny pro používání, abyste se vyvarovali rizik pro lidské zdraví a životní prostředí.
	DA	Brugsanvisningen skal følges for ikke at bringe menneskers sundhed og miljøet i fare.
	DE	Zur Vermeidung von Risiken für Mensch und Umwelt die Gebrauchsanleitung einhalten.
	ET	Inimeste tervise ja keskkonna ohustamise vältimiseks järgida kasutusjuhendit.
	EL	Για να αποφύγετε τους κινδύνους για την ανθρώπινη υγεία και το περιβάλλον, ακολουθήστε τις οδηγίες χρήσης.
	EN	To avoid risks to human health and the environment, comply with the instructions for use.
	FR	Respectez les instructions d'utilisation pour éviter les risques pour la santé humaine et l'environnement.
	GA	Chun priacail do shláinte an duine agus don chomhshaol a sheachaint, cloígh leis na treoracha maidir le húsáid.
	IT	Per evitare rischi per la salute umana e per l'ambiente, seguire le istruzioni per l'uso.
	LT	Siekiant išvengti žmonių sveikatai ir aplinkai keliamos rizikos, būtina vykdyti naudojimo instrukcijos nurodymus.
	LV	Lai izvairītos no riska cilvēku veselībai un videi, ievērojiet lietošanas pamācību.
	HU	Az emberi egészségs és a környezet veszélyeztetésének elkerülése érdekében be kell tartani a használati utasítás előírásait.
	MT	Biex jiġu evitati r-riskji għal saħħet il-bniedem u għall-ambjent, haies l-istruzzjonijiet dwar l-użu.
	NL	Volg de gebruiksaanwijzing om gevaar voor de menselijke gezondheid en het milieu te voorkomen.
	PL	W celu uniknięcia zagrożenia dla zdrowia ludzi i środowiska, należy postępować zgodnie z instrukcją użycia.
	PT	Para evitar riscos para a saúde humana e para o ambiente, respeitar as instruções de utilização.
	RO	Pentru a evita riscurile pentru sănătatea umană și mediu, a se respecta instrucțiunile de utilizare.
	SK	Dodržiavajte návod na používanie, aby ste zabránili vzniku rizík pre zdravie ľudí a životné prostredie.
	SL	Da bi se izognili tveganjem za ljudi in okolje, ravnajte v skladu z navodili za uporabo.
	FI	Noudata käyttöohjeita ihmisen terveydelle ja ympäristölle aiheutuvien vaarojen välttämiseksi.
	SV	För att undvika risker för människors hälsa och för miljön, följ bruksanvisningen.

PRILOGA IV

SEZNAM PREVIDNOSTNIH STAVKOV

Pri izbiri previdnostnih stavkov v skladu s členoma 22 in 28(3) lahko dobavitelji kombinirajo previdnostne stavke iz spodnjega seznama, ob upoštevanju jasnosti in razumljivosti varnostnega nasveta.

1. Del 1: kriteriji za izbiro previdnostnih stavkov

Tabela 6.1

Previdnostni stavki – splošno

Etiketa (1)	Splošni previdnostni stavki (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P101	Če je potreben zdravniški nasvet, mora biti na voljo posoda ali etiketa proizvoda.	če je ustrezno		Potrošniški proizvodi
P102	Hraniti zunaj dosega otrok.	če je ustrezno		Potrošniški proizvodi
P103	Pred uporabo preberite etiketo.	če je ustrezno		Potrošniški proizvodi

Tabela 6.2

Previdnostni stavki – preprečevanje

Etiketa (1)	Previdnostni stavki – preprečevanje (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P201	Pred uporabo pridobiti posebna navodila.	Eksplozivi (oddelek 2.1)	Nestabilni eksploziv	
		Mutagenost za zarodne celice (oddelek 3.5)	1A, 1B, 2	
		Rakotvornost (oddelek 3.6)	1A, 1B, 2	
		Strupenost za razmnoževanje (oddelek 3.7)	1A, 1B, 2	
		Strupenost za razmnoževanje – učinki na dojenje ali prek dojenja (oddelek 3.7)	Dodatna kategorija	
P202	Ne uporabljajte, dokler se ne seznanite z vsemi varnostnimi ukrepi.	Eksplozivi (oddelek 2.1)	Nestabilni eksploziv	
		Mutagenost za zarodne celice (oddelek 3.5)	1A, 1B, 2	
		Rakotvornost (oddelek 3.6)	1A, 1B, 2	
		Strupenost za razmnoževanje (oddelek 3.7)	1A, 1B, 2	

Etiketa (1)	Previdnostni stavki – preprečevanje (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P210	Hraniti ločeno od vročine/ isker/odprtega ognja/vročih površin. – Kajenje prepove- dano.	Eksplzivni (oddelek 2.1)	Podrazredi 1.1, 1.2, 1.3, 1.4, 1.5	Ustrezni(-e) vir(-e) vžiga določi proizvajalec/ dobavitelj.
		Vnetljivi plini (oddelek 2.2)	1, 2	
		Vnetljivi aerosoli (oddelek 2.3)	1, 2	
		Vnetljive tekočine (oddelek 2.6)	1, 2, 3	
		Vnetljive trdne snovi (oddelek 2.7)	1, 2	
		Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B, C, D, E, F	
		Piroforne tekočine (oddelek 2.9)	1	
		Piroforne trdne snovi (odde- lek 2.10)	1	
		Organski peroksidi (oddelek 2.15)	Vrste A, B, C, D, E, F	
		Oksidativne tekočine (odde- lek 2.13)	1, 2, 3	— Navede se: zaščititi pred vročino.
		Oksidativne trdne snovi (odde- lek 2.14)	1, 2, 3	
P211	Ne pršiti proti odprtemu ognju ali drugemu viru vžiga.	Vnetljivi aerosoli (oddelek 2.3)	1, 2	
P220	Hraniti ločeno od oblačil/ .../vnetljivih materialov.	Oksidativni plini (oddelek 2.4)	1	... Nezdružljive snovi določi proizvajalec/ dobavitelj.
		Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B, C, D, E, F	
		Oksidativne tekočine (odde- lek 2.13)	1	... Nezdružljive snovi določi proizvajalec/ dobavitelj. — Navede se: hraniti ločeno od oblačil in drugih nezdruž- ljivih snovi
			2, 3	

Etiketa (1)	Previdnostni stavki – preprečevanje (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
		Oksidativne trdne snovi (oddelek 2.14)	1	... Nezdržljive snovi določi proizvajalec/dobavitelj. — Navede se: hraniti ločeno od oblačil in drugih nezdržljivih snovi
		Organski peroksidi (oddelek 2.15)	2, 3	... Nezdržljive snovi določi proizvajalec/dobavitelj.
			Vrste A, B, C, D, E, F	
P221	Preprečiti mešanje z vnetljivimi snovmi/...	Oksidativne tekočine (oddelek 2.13)	1, 2, 3	... Nezdržljive snovi določi proizvajalec/dobavitelj.
		Oksidativne trdne snovi (oddelek 2.14)	1, 2, 3	
P222	Preprečiti stik z zrakom.	Piroforne tekočine (oddelek 2.9)	1	
		Piroforne trdne snovi (oddelek 2.10)	1	
P223	Hraniti ločeno od možnega stika z vodo zaradi burne reakcije in možnega bliskovitega požara.	Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline (oddelek 2.12)	1, 2	
P230	Hraniti prepojeno s/z ...	Eksplozivi (oddelek 2.1)	Podrazredi 1.1, 1.2, 1.3, 1.5	... Primerno snov določi proizvajalec/dobavitelj. — kadar izsušitev povečuje nevarnost eksplozije, razen če je potrebna v proizvodnem ali delovnem postopku (npr. nitroceluloza)
P231	Hraniti v ustreznem inertnem plinu.	Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline (oddelek 2.12)	1, 2, 3	
P232	Zaščititi pred vlago.	Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline (oddelek 2.12)	1, 2, 3	
P233	Hraniti v tesno zaprti posodi.	Vnetljive tekočine (oddelek 2.6)	1, 2, 3	— če je proizvod hlapen in povzroča nevarno ozračje
		Akutna strupenost – pri vdihavanju (oddelek 3.1)	1, 2, 3	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; draženje dihalnih poti (oddelek 3.8)	3	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; omamljenost (oddelek 3.8)	3	
P234	Hraniti samo v originalni posodi.	Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B, C, D, E, F	
		Organski peroksidi (oddelek 2.15)	Vrste A, B, C, D, E, F	
		Jedko za kovine (oddelek 2.16)	1	

Etiketa (1)	Previdnostni stavki – preprečevanje (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P235	Hraniti na hladnem.	Vnetljive tekočine (oddelek 2.6)	1, 2, 3	
		Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B, C, D, E, F	
		Samosegrevajoče snovi in zmesi (oddelek 2.11)	1, 2	
		Organski peroksidi (oddelek 2.15)	Vrste A, B, C, D, E, F	
P240	Ozemljiti posodo in opremo za sprejem tekočine.	Eksplozivni (oddelek 2.1)	Podrazredi 1.1, 1.2, 1.3, 1.4, 1.5	— če je eksploziv elektrostatično občutljiv
		Vnetljive tekočine (oddelek 2.6)	1, 2, 3	— če je elektrostatično občutljiv material namenjen ponovnemu nato-varjanju — če je proizvod hla-pen in povzroča nevarno ozračje
		Vnetljive trdne snovi (oddelek 2.7)	1, 2	— če je elektrostatično občutljiv material namenjen ponovnemu nato-varjanju
P241	Uporabiti električno/pre-zračevalno opremo, opremo za razsvetljavo/..., odporno proti eksplozijam.	Vnetljive tekočine (oddelek 2.6)	1, 2, 3	... Drugo opremo določi proizvajalec/dobavitelj.
		Vnetljive trdne snovi (oddelek 2.7)	1, 2	... Drugo opremo določi proizvajalec/dobavitelj. — če lahko nastane oblak prahu.
P242	Uporabiti le orodje, ki ne povzroča isker.	Vnetljive tekočine (oddelek 2.6)	1, 2, 3	
P243	Preprečiti statično naelek-trenje.	Vnetljive tekočine (oddelek 2.6)	1, 2, 3	
P244	Preprečiti stik reducirnih ventilov z mastjo in oljem.	Oksidativni plini (oddelek 2.4)	1	
P250	Ne izpostavljati drgnjenju/udarcem/.../trenju.	Eksplozivni (oddelek 2.1)	Podrazredi 1.1, 1.2, 1.3, 1.4, 1.5	... Grobo ravnanje opredeli proizvajalec/dobavitelj.
P251	Posoda je pod tlakom: ne preluknjajte ali sežigajte je niti, ko je prazna.	Vnetljivi aerosoli (oddelek 2.3)	1, 2	
P260	Ne vdihavati prahu/dima/plina/meglence/hlapov/raz-pršila.	Akutna strupenost – pri vdihava-nju (oddelek 3.1)	1, 2	Ustrezne pogoje določi proizvajalec/dobavitelj.
		Specifična strupenost za cilje organe – enkratna izpostavljenost (oddelek 3.8)	1, 2	
		Specifična strupenost za cilje organe – ponavljajoča izpostavlje-nost (oddelek 3.9)	1, 2	

Etiketa (1)	Previdnostni stavki – preprečevanje (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	— Navede se: ne vdihavati prahu ali meglic. — če se lahko med uporabo pojavijo vdihljivi delci prahu ali meglic.
		Strupenost za razmnoževanje – učinki na dojenje ali prek dojenja (oddelek 3.7)	Dodatna kategorija	
P261	Ne vdihavati prahu/dima/plina/meglice/hlapov/razpršila.	Akutna strupenost – pri vdihavanju (oddelek 3.1)	3, 4	Ustrezne pogoje določi proizvajalec/dobavitelj.
		Preobčutljivost dihal (oddelek 3.4)	1	
		Preobčutljivost kože (oddelek 3.4)	1	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; draženje dihalnih poti (oddelek 3.8)	3	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; omamljenost (oddelek 3.8)	3	
P262	Preprečiti stik z očmi, kožo ali oblačili.	Akutna strupenost – dermalna (oddelek 3.1)	1, 2	
P263	Preprečiti stik med nosečnostjo/dojenjem.	Strupenost za razmnoževanje – učinki na dojenje ali prek dojenja (oddelek 3.7)	Dodatna kategorija	
P264	Po uporabi temeljito umiti ...	Akutna strupenost – oralna (oddelek 3.1)	1, 2, 3, 4	... Dele telesa, ki jih je treba po uporabi umiti, določi proizvajalec/dobavitelj, ali pristojni organ.
		Akutna strupenost – dermalna (oddelek 3.1)	1, 2	
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
		Draženje kože (oddelek 3.2)	2	
		Draženje oči (oddelek 3.3)	2	
		Strupenost za razmnoževanje – učinki na dojenje ali prek dojenja (oddelek 3.7)	Dodatna kategorija	
		Specifična strupenost za cilje organe – enkratna izpostavljenost (oddelek 3.8)	1, 2	
		Specifična strupenost za cilje organe – ponavljajoča izpostavljenost (oddelek 3.9)	1	
P270	Ne jesti, piti ali kaditi med uporabo tega izdelka.	Akutna strupenost – oralna (oddelek 3.1)	1, 2, 3, 4	
		Akutna strupenost – dermalna (oddelek 3.1)	1, 2	
		Strupenost za razmnoževanje – učinki na dojenje ali prek dojenja (oddelek 3.7)	Dodatna kategorija	
		Specifična strupenost za cilje organe – enkratna izpostavljenost (oddelek 3.8)	1, 2	
		Specifična strupenost za cilje organe – ponavljajoča izpostavljenost (oddelek 3.9)	1	

Etiketa (1)	Previdnostni stavki – preprečevanje (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P271	Uporabljati le zunaj ali v dobro prezračenem prostoru.	Akutna strupenost – pri vdihava- nju (oddelek 3.1)	1, 2, 3, 4	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; draženje dihalnih poti (odde- lek 3.8)	3	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; narcosis (oddelek 3.8)	3	
P272	Kontaminirana delovna oblačila niso dovoljena zunaj delovnega mesta.	Preobčutljivost kože (oddelek 3.4)	1	
P273	Preprečiti sproščanje v oko- lje.	Nevarno za vodno okolje – akutna nevarnost za vodno okolje (odde- lek 4.1)	1	— če to ni predvidena uporaba.
		Nevarno za vodno okolje – kro- nična nevarnost za vodno okolje (oddelek 4.1)	1, 2, 3, 4	
		Nevarno za ozonski plašč (odde- lek 5.1)	1	
P280	Nositi zaščitne rokavice/ zaščitno obleko/zaščito za oči/zaščito za obraz.	Eksplozivi (oddelek 2.1)	Podrazredi 1.1, 1.2, 1.3, 1.4, 1.5	Vrsto opreme določi proizvajalec/dobavitelj. — Navede se: obvezna zaščita obraz.
		Vnetljive tekočine (oddelek 2.6)	1, 2, 3	Vrsto opreme določi proizvajalec/dobavitelj. — Navede se: obvezne zaščitne rokavice in zaščita za oči/obraz
		Vnetljive trdne snovi (oddelek 2.7)	1, 2	
		Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B, C, D, E, F	
		Piroforne tekočine (oddelek 2.9)	1	
		Piroforne trdne snovi (odde- lek 2.10)	1	
		Samosegrevajoče se snovi in zmesi (oddelek 2.11)	1, 2	
		Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline (odde- lek 2.12)	1, 2, 3	
		Oksidativne tekočine (odde- lek 2.13)	1, 2, 3	
		Oksidativne trdne snovi (odde- lek 2.14)	1, 2, 3	
		Organski peroksidi (oddelek 2.15)	Vrste A, B, C, D, E, F	
		Akutna strupenost – dermalna (oddelek 3.1)	1, 2, 3, 4	Vrsto opreme določi proizvajalec/dobavitelj. — Navede se: obvezne zaščitne rokavice/zaščitna obleka
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	Vrsto opreme določi proizvajalec/dobavitelj. — Navede se: obvezne zaščitne rokavice/zaščitna obleka in zaščita oči/obraz

Etiketa (1)	Previdnostni stavki – preprečevanje (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
		Draženje kože (oddelek 3.2)	2	Vrsto opreme določi proizvajalec/dobavitelj. — Navede se: obvezne zaščitne rokavice
		Preobčutljivost kože (oddelek 3.4)	1	
		Hude poškodbe oči/draženje oči (oddelek 3.3)	1	Vrsto opreme določi proizvajalec/dobavitelj. — Navede se: obvezna zaščita oči/obraza.
		Draženje oči (oddelek 3.3)	2	
P281	Uporabiti predpisano osebno zaščitno opremo.	Eksplzivni (oddelek 2.1)	Nestabilni eksploziv	
		Mutagenost za zarodne celice (oddelek 3.5)	1A, 1B, 2	
		Rakotvornost (oddelek 3.6)	1A, 1B, 2	
		Strupenost za razmnoževanje (oddelek 3.7)	1A, 1B, 2	
P282	Nositi hladne izolirne rokavice/zaščito za obraz/zaščito za oči.	Plini pod tlakom (oddelek 2.5)	Ohlajen utekočinjeni plin	
P283	Nositi negorljiva oblačila in oblačila, odporna proti ognju.	Oksidativne tekočine (oddelek 2.13)	1	
		Oksidativne trdne snovi (oddelek 2.14)	1	
P284	Nositi opremo za zaščito dihal.	Akutna strupenost – pri vdihavanju (oddelek 3.1)	1, 2	Opremo določi proizvajalec/dobavitelj.
P285	Ob nezadostnem prezračevanju nositi opremo za zaščito dihal.	Preobčutljivost dihal (oddelek 3.4)	1	Opremo določi proizvajalec/dobavitelj.
P231 + P232	Hraniti v ustreznem inertnem plinu. Zaščititi pred vlago.	Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline (oddelek 2.12)	1, 2, 3	
P235 + P410	Hraniti na hladnem. Zaščititi pred sončno svetlobo.	Samosegrevajoče se snovi in zmesi (oddelek 2.11)	1, 2	

Tabela 6.3

Previdnostni stavki – odziv

Etiketa (1)	Previdnostni stavek – odziv (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P301	PRI ZAUŽITJU:	Akutna strupenost – oralna (oddelek 3.1)	1, 2, 3, 4	
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
		Nevarnost pri vdihavanju (oddelek 3.10)	1	
P302	PRI STIKU S KOŽO:	Piroforne tekočine (oddelek 2.9)	1	
		Akutna strupenost – dermalna (oddelek 3.1)	1, 2, 3, 4	

Etiketa (1)	Previdnostni stavek – odziv (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
		Draženje kože (oddelek 3.2)	2	
		Preobčutljivost kože (oddelek 3.4)	1	
P303	PRI STIKU S KOŽO (ali lasmi):	Vnetljive tekočine (oddelek 2.6)	1, 2, 3	
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
P304	PRI VDIHAVANJU:	Akutna strupenost – pri vdihavanju (oddelek 3.1)	1, 2, 3, 4	
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
		Preobčutljivost dihal (oddelek 3.4)	1	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; draženje dihalnih poti (oddelek 3.8)	3	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; omamljenost (oddelek 3.8)	3	
P305	PRI STIKU Z OČMI:	Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
		Hude poškodbe oči/draženje oči (oddelek 3.3)	1	
		Draženje oči (oddelek 3.3)	2	
P306	PRI STIKU Z OBLAČILI:	Oksidativne tekočine (oddelek 2.13)	1	
		Oksidativne trdne snovi (oddelek 2.14)	1	
P307	Pri izpostavljenosti:	Specifična strupenost za cilje organe – enkratna izpostavljenost (oddelek 3.8)	1	
P308	Pri izpostavljenosti ali sumu izpostavljenosti:	Mutagenost za zarodne celice (oddelek 3.5)	1A, 1B, 2	
		Rakotvornost (oddelek 3.6)	1A, 1B, 2	
		Strupenost za razmnoževanje (oddelek 3.7)	1A, 1B, 2	
		Strupenost za razmnoževanje – učinki na dojenje ali prek dojenja (oddelek 3.7)	Dodatna kategorija	
P309	Pri izpostavljenosti ali slabem počutju:	Specifična strupenost za cilje organe – enkratna izpostavljenost (oddelek 3.8)	2	
P310	Takoj pokličite CENTER ZA ZASTRUPITVE ali zdravnika.	Akutna strupenost – oralna (oddelek 3.1)	1, 2, 3	
		Akutna strupenost – dermalna (oddelek 3.1)	1, 2	
		Akutna strupenost – pri vdihavanju (oddelek 3.1)	1, 2	
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
		Hude poškodbe oči/draženje oči (oddelek 3.3)	1	
		Nevarnost pri vdihavanju (oddelek 3.10)	1	

Etiketa (1)	Previdnostni stavek – odziv (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P311	Pokličite CENTER ZA ZASTRUPITVE ali zdravnika.	Akutna strupenost – pri vdihavanju (oddelek 3.1)	3	
		Preobčutljivost dihal (oddelek 3.4)	1	
		Specifična strupenost za cilje organe – enkratna izpostavljenost (oddelek 3.8)	1, 2	
P312	Ob slabem počutju pokličite CENTER ZA ZASTRUPITVE ali zdravnika.	Akutna strupenost – oralna (oddelek 3.1)	4	
		Akutna strupenost – dermalna (oddelek 3.1)	3, 4	
		Akutna strupenost – pri vdihavanju (oddelek 3.1)	4	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; draženje dihalnih poti (oddelek 3.8)	3	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; omamljenost (oddelek 3.8)	3	
P313	Poiščite zdravniško pomoč/oskrbo.	Draženje kože (oddelek 3.2)	2, 3	
		Draženje oči (oddelek 3.3)	2	
		Preobčutljivost kože (oddelek 3.4)	1	
		Mutagenost za zarodne celice (oddelek 3.5)	1A, 1B, 2	
		Rakotvornost (oddelek 3.6)	1A, 1B, 2	
		Strupenost za razmnoževanje (oddelek 3.7)	1A, 1B, 2	
		Strupenost za razmnoževanje – učinki na dojenje ali prek dojenja (oddelek 3.7)	Dodatna kategorija	
P314	Ob slabem počutju poiščite zdravniško pomoč/oskrbo.	Specifična strupenost za cilje organe – ponavljajoča izpostavljenost (oddelek 3.9)	1, 2	
P315	Takoj poiščite zdravniško pomoč/oskrbo.	Plini pod tlakom (oddelek 2.5)	Ohlajen utekočinjeni plin	
P320	Posebno zdravljenje je nujno (glejte ... na tej etiketi).	Akutna strupenost – pri vdihavanju (oddelek 3.1)	1, 2	... Napotilo na dodatna navodila za prvo pomoč. — če je potreben takojšen odmerk protistrupa
P321	Posebno zdravljenje (glejte ... na tej etiketi).	Akutna strupenost – oralna (oddelek 3.1)	1, 2, 3	... Napotilo na dodatna navodila za prvo pomoč. — če je potreben takojšen odmerk protistrupa

Etiketa (1)	Previdnostni stavek – odziv (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
		Akutna strupenost – pri vdihavanju (oddelek 3.1)	3	... Napotilo na dodatna navodila za prvo pomoč. — če so potrebni takojšnji posebni ukrepi.
		Specifična strupenost za cilje organe – enkratna izpostavljenost (oddelek 3.8)	1	... Napotilo na dodatna navodila za prvo pomoč. — če so potrebni takojšnji ukrepi
		Preobčutljivost kože (oddelek 3.4)	1	... Napotilo na dodatna navodila za prvo pomoč. — če je ustrezno, lahko proizvajalec/dobavitelj določi sredstvo za čiščenje
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
		Draženje kože (oddelek 3.2)	2	
P322	Posebni ukrepi (glejte ... na tej etiketi).	Akutna strupenost – dermalna (oddelek 3.1)	1, 2	... Napotilo na dodatna navodila za prvo pomoč. — če se priporočajo takojšnji ukrepi, kot je posebno sredstvo za čiščenje
		Akutna strupenost – dermalna (oddelek 3.1)	3, 4	... Napotilo na dodatna navodila za prvo pomoč. — če se priporočajo ukrepi, kot je posebno sredstvo za čiščenje.
P330	Izprati usta.	Akutna strupenost – oralna (oddelek 3.1)	1, 2, 3, 4	
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
P331	NE izzvati bruhanja.	Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
		Nevarnost pri vdihavanju (oddelek 3.10)	1	
P332	Če nastopi draženje kože:	Draženje kože (oddelek 3.2)	2, 3	
P333	Če nastopi draženje kože ali se pojavi izpuščaj:	Preobčutljivost kože (oddelek 3.4)	1	
P334	Potopiti v hladno vodo/zaviti v mokre povoje.	Piroforne tekočine (oddelek 2.9)	1	
		Piroforne trdne snovi (oddelek 2.10)	1	
		Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline (oddelek 2.12)	1, 2	
P335	S krtačo odstraniti razsute delce s kože.	Piroforne trdne snovi (oddelek 2.10)	1	
		Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline (oddelek 2.12)	1, 2	

Etiketa (1)	Previdnostni stavek – odziv (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P336	Zamrznjene dele oddaliti z mlačno vodo. Ne drgniti prizadetega mesta.	Plini pod tlakom (oddelek 2.5)	Ohlajen utekočinjeni plin	
P337	Če draženje oči ne preneha:	Draženje oči (oddelek 3.3)	2	
P338	Odstranite kontaktne leče, če jih imate in če to lahko stori brez težav. Nadaljujte z izpiranjem.	Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
		Hude poškodbe oči/draženje oči (oddelek 3.3)	1	
		Draženje oči (oddelek 3.3)	2	
P340	Prenesti žrtev na svež zrak in jo pustiti počivati v položaju, ki olajša dihanje.	Akutna strupenost – pri vdihavanju (oddelek 3.1)	1, 2, 3, 4	
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; draženje dihalnih poti (oddelek 3.8)	3	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; omamljenost (oddelek 3.8)	3	
P341	Pri oteženem dihanju prenesti žrtev na svež zrak in jo pustiti počivati v položaju, ki olajša dihanje.	Preobčutljivost dihal (oddelek 3.4)	1	
P342	Pri respiratornih simptomih:	Preobčutljivost dihal (oddelek 3.4)	1	
P350	Nežno umiti z veliko mila in vode.	Akutna strupenost – dermalna (oddelek 3.1)	1, 2	
P351	Previdno izpirati z vodo nekaj minut.	Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
		Hude poškodbe oči/draženje oči (oddelek 3.3)	1	
		Draženje oči (oddelek 3.3)	2	
P352	Umiti z veliko mila in vode.	Akutna strupenost – dermalna (oddelek 3.1)	3, 4	
		Draženje kože (oddelek 3.2)	2	
		Preobčutljivost kože (oddelek 3.4)	1	
P353	Izprati kožo z vodo/prho.	Vnetljive tekočine (oddelek 2.6)	1, 2, 3	
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
P360	Tako izprati kontaminirana oblačila in kožo z veliko vode pred odstranitvijo oblačil.	Oksidativne tekočine (oddelek 2.13)	1	
		Oksidativne trdne snovi (oddelek 2.14)	1	
P361	Tako odstraniti/sleči vsa kontaminirana oblačila.	Vnetljive tekočine (oddelek 2.6)	1, 2, 3	
		Akutna strupenost – dermalna (oddelek 3.1)	1, 2, 3	
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	

Etiketa (1)	Previdnostni stavek – odziv (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P362	Sleči kontaminirana oblačila in jih oprati pred ponovno uporabo.	Draženje kože (oddelek 3.2)	2	
P363	Kontaminirana oblačila oprati pred ponovno uporabo.	Akutna strupenost – dermalna (oddelek 3.1)	1, 2, 3, 4	
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
		Preobčutljivost kože (oddelek 3.4)	1	
P370	Ob požaru:	Eksplozivni (oddelek 2.1)	Podrazredi 1.1, 1.2, 1.3, 1.4, 1.5	
		Oksidativni plini (oddelek 2.4)	1	
		Vnetljive tekočine (oddelek 2.6)	1, 2, 3	
		Vnetljive trdne snovi (oddelek 2.7)	1, 2	
		Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B, C, D, E, F	
		Piroforne tekočine (oddelek 2.9)	1	
		Piroforne trdne snovi (oddelek 2.10)	1	
		Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline (oddelek 2.12)	1, 2, 3	
		Oksidativne tekočine (oddelek 2.13)	1, 2, 3	
		Oksidativne trdne snovi (oddelek 2.14)	1, 2, 3	
P371	Ob velikem požaru in velikih količinah:	Oksidativne tekočine (oddelek 2.13)	1	
		Oksidativne trdne snovi (oddelek 2.14)	1	
P372	Nevarnost eksplozije ob požaru.	Eksplozivni (oddelek 2.1)	Nestabilni eksplozivni in podrazredi 1.1, 1.2, 1.3, 1.4, 1.5	— razen če je eksploziv STRELIVO 1.4S IN NJEGOVE SESTAVNE DELE
P373	NE gasiti, ko ogenj doseže eksploziv.	Eksplozivni (oddelek 2.1)	Nestabilni eksplozivni in podrazredi 1.1, 1.2, 1.3, 1.4, 1.5	
P374	Gasiti z običajno previdnostjo in s primerne razdalje.	Eksplozivni (oddelek 2.1)	Podrazred 1.4	— če je eksploziv STRELIVO 1.4S IN NJEGOVI SESTAVNI DELI

Etiketa (1)	Previdnostni stavek – odziv (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P375	Gasiti z večje razdalje zaradi nevarnosti eksplozije.	Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B	
		Oksidativne tekočine (oddelek 2.13)	1	
		Oksidativne trdne snovi (oddelek 2.14)	1	
P376	Zaustaviti puščanje, če je varno.	Oksidativni plini (oddelek 2.4)	1	
P377	Požar zaradi uhajanja plina: Ne gasiti, če puščanja ni mogoče varno zaustaviti.	Vnetljivi plini (oddelek 2.2)	1, 2	
P378	Za gašenje uporabiti ...	Vnetljive tekočine (oddelek 2.6)	1, 2, 3	... Primerno sredstvo določi proizvajalec/dobavitelj. — kadar voda povečuje tveganje.
		Vnetljive trdne snovi (oddelek 2.7)	1, 2	
		Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B, C, D, E, F	
		Piroforne tekočine (oddelek 2.9)	1	
		Piroforne trdne snovi (oddelek 2.10)	1	
		Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline (oddelek 2.12)	1, 2, 3	
		Oksidativne tekočine (oddelek 2.13)	1, 2, 3	
		Oksidativne trdne snovi (oddelek 2.14)	1, 2, 3	
P380	Izprazniti območje.	Eksplzivni (oddelek 2.1)	Nestabilni eksplozivi	
		Eksplzivni (oddelek 2.1)	Podrazredi 1.1, 1.2, 1.3, 1.4, 1.5	
		Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B	
		Oksidativne tekočine (oddelek 2.13)	1	
		Oksidativne trdne snovi (oddelek 2.14)	1	
P381	Odstraniti vse vire vžiga, če je varno.	Vnetljivi plini (oddelek 2.2)	1, 2	
P390	Odpraviti razlitje, da se prepreči materialna škoda.	Jedko za kovine (oddelek 2.16)	1	
P391	Prestreči razlito tekočino.	Nevarno za vodno okolje – akutna nevarnost za vodno okolje (oddelek 4.1)	1	
		Nevarno za vodno okolje – kronična nevarnost za vodno okolje (oddelek 4.1)	1, 2	

Etiketa (1)	Previdnostni stavek – odziv (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P301 + P310	PRI ZAUŽITJU: Takoj pokličite CENTER ZA ZASTRUPITVE ali zdravnika.	Akutna strupenost – oralna (oddelek 3.1)	1, 2, 3	
		Nevarnost pri vdihavanju (oddelek 3.10)	1	
P301 + P312	PRI ZAUŽITJU: Ob slabem počutju pokličite CENTER ZA ZASTRUPITVE ali zdravnika.	Akutna strupenost – oralna (oddelek 3.1)	4	
P301 + P330 + P331	PRI ZAUŽITJU: Izprati usta. NE izzvati bruhanja.	Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
P302 + P334	PRI STIKU S KOŽO: Poto-piti v hladno vodo/zaviti v mokre povoje.	Piroforne tekočine (oddelek 2.9)	1	
P302 + P350	PRI STIKU S KOŽO: Nežno umiti z veliko mila in vode.	Akutna strupenost – dermalna (oddelek 3.1)	1, 2	
P302 + P352	PRI STIKU S KOŽO: Umiti z veliko mila in vode.	Akutna strupenost – dermalna (oddelek 3.1)	3, 4	
		Draženje kože (oddelek 3.2)	2	
		Preobčutljivost kože (oddelek 3.4)	1	
P303 + P361 + P353	PRI STIKU S KOŽO (ali lasmi): Takoj odstraniti/sleči vsa kontaminirana oblačila. Izprati kožo z vodo/prho.	Vnetljive tekočine (oddelek 2.6)	1, 2, 3	
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
P304 + P340	PRI VDIHAVANJU: Prenesti žrtev na svež zrak in jo pustiti počivati v položaju, ki olajša dihanje.	Akutna strupenost – pri vdihavanju (oddelek 3.1)	1, 2, 3, 4	
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; draženje dihalnih poti (oddelek 3.8)	3	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; omamljenost (oddelek 3.8)	3	
P304 + P341	PRI VDIHAVANJU: Pri oteženem dihanju prenesti žrtev na svež zrak in jo pustiti počivati v položaju, ki olajša dihanje.	Preobčutljivost dihal (oddelek 3.4)	1	
P305 + P351 + P338	PRI STIKU Z OČMI: Previdno izpirati z vodo nekaj minut. Odstranite kontaktne leče, če jih imate in če to lahko stori brez težav. Nadaljujte z izpiranjem.	Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
		Hude poškodbe oči/draženje oči (oddelek 3.3)	1	
		Draženje oči (oddelek 3.3)	2	
P306 + P360	PRI STIKU Z OBLAČILI: Takoj izprati kontaminirana oblačila in kožo z veliko vode pred odstranitvijo oblačil.	Oksidativne tekočine (oddelek 2.13)	1	
		Oksidativne trdne snovi (oddelek 2.14)	1	
P307 + P311	Pri izpostavljenosti: Pokličite CENTER ZA ZASTRUPITVE ali zdravnika.	Specifična strupenost za cilje organe – enkratna izpostavljenost (oddelek 3.8)	1	

Etiketa (1)	Previdnostni stavek – odziv (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P308 + P313	Pri izpostavljenosti ali sumu izpostavljenosti: Poiščite zdravniško pomoč/oskrbo.	Mutagenost za zarodne celice (oddelek 3.5)	1A, 1B, 2	
		Rakotvornost (oddelek 3.6)	1A, 1B, 2	
		Strupenost za razmnoževanje (oddelek 3.7)	1A, 1B, 2	
		Strupenost za razmnoževanje – učinki na dojenje ali prek dojenja (oddelek 3.7)	Dodatna kategorija	
P309 + P311	Pri izpostavljenosti ali slabem počutju: Pokličite CENTER ZA ZASTRUPITVE ali zdravnika.	Specifična strupenost za cilje organe – enkratna izpostavljenost (oddelek 3.8)	2	
P332 + P313	Če nastopi draženje kože: Poiščite zdravniško pomoč/oskrbo.	Draženje kože (oddelek 3.2)	2	
P333 + P313	Če nastopi draženje kože ali se pojavi izpuščaj: Poiščite zdravniško pomoč/oskrbo.	Preobčutljivost kože (oddelek 3.4)	1	
P335 + P334	S krtačo odstraniti razsute delce s kože. Potopiti v hladno vodo/zaviti v mokre povoje.	Piroforne trdne snovi (oddelek 2.10)	1	
		Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline (oddelek 2.12)	1, 2	
P337 + P313	Če draženje oči ne preneha: Poiščite zdravniško pomoč/oskrbo.	Draženje oči (oddelek 3.3)	2	
P342 + P311	Pri respiratornih simptomih: Pokličite CENTER ZA ZASTRUPITVE ali zdravnika.	Preobčutljivost dihal (oddelek 3.4)	1	
P370 + P376	Ob požaru: Zaustaviti puščanje, če je varno.	Oksidativni plini (oddelek 2.4)	1	
P370 + P378	Ob požaru: Za gašenje uporabiti ...	Vnetljive tekočine (oddelek 2.6)	1, 2, 3	... Primerno sredstvo določi proizvajalec/dobavitelj. — kadar voda povečuje tveganje.
		Vnetljive trdne snovi (oddelek 2.7)	1, 2	
		Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B, C, D, E, F	
		Piroforne tekočine (oddelek 2.9)	1	
		Piroforne trdne snovi (oddelek 2.10)	1	
		Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline (oddelek 2.12)	1, 2, 3	
		Oksidativne tekočine (oddelek 2.13)	1, 2, 3	
		Oksidativne trdne snovi (oddelek 2.14)	1, 2, 3	
P370 + P380	Ob požaru: Izprazniti območje.	Eksplzivni (oddelek 2.1)	Podrazredi 1.1, 1.2, 1.3, 1.4, 1.5	
P370 + P380 + P375	Ob požaru: Izprazniti območje. Gasiti z večje razdalje zaradi nevarnosti eksplozije.	Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B	

Etiketa (1)	Previdnostni stavek – odziv (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P371 + P380 + P375	Ob velikem požaru in velikih količinah: Izprazniti območje. Gasiti z večje razdalje zaradi nevarnosti eksplozije.	Oksidativne tekočine (oddelek 2.13)	1	
		Oksidativne trdne snovi (oddelek 2.14)	1	

Tabela 6.4

Previdnostni stavki – shranjevanje

Etiketa (1)	Previdnostni stavki – shranjevanje (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P401	Hraniti ...	Eksplozivni (oddelek 2.1)	Nestabilni eksplozivni in podrazredi 1.1, 1.2, 1.3, 1.4, 1.5	... v skladu z lokalnimi/regionalnimi/nacionalnimi/mednarodnimi predpisi (se določi).
P402	Hraniti na suhem.	Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline (oddelek 2.12)	1, 2, 3	
P403	Hraniti na dobro prezračenem mestu.	Vnetljivi plini (oddelek 2.2)	1, 2	— če je proizvod hlapen in povzroča nevarno ozračje
		Oksidativni plini (oddelek 2.4)	1	
		Plini pod tlakom (oddelek 2.5)	Stisnjeni plin	
			Utekočinjeni plin	
			Ohlajen utekočinjeni plin	
			Raztopljeni plin	
		Vnetljive tekočine (oddelek 2.6)	1, 2, 3	
		Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B, C, D, E, F	
		Akutna strupenost – pri vdihavanju (oddelek 3.1)	1, 2, 3	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; draženje dihalnih poti (oddelek 3.8)	3	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; omamljenost (oddelek 3.8)	3	
P404	Hraniti v zaprti posodi.	Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline (oddelek 2.12)	1, 2, 3	
P405	Hraniti zaklenjeno.	Akutna strupenost – oralna (oddelek 3.1)	1, 2, 3	
		Akutna strupenost – dermalna (oddelek 3.1)	1, 2, 3	
		Akutna strupenost – pri vdihavanju (oddelek 3.1)	1, 2, 3	
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
		Mutagenost za zarodne celice (oddelek 3.5)	1A, 1B, 2	

Etiketa (1)	Previdnostni stavki – shranjevanje (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
		Rakotvornost (oddelek 3.6)	1A, 1B, 2	
		Strupenost za razmnoževanje (oddelek 3.7)	1A, 1B, 2	
		Specifična strupenost za cilje organe – enkratna izpostavljenost (oddelek 3.8)	1, 2	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; draženje dihalnih poti (odde- lek 3.8)	3	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; omamljenost (oddelek 3.8)	3	
		Nevarnost pri vdihavanju (odde- lek 3.10)	1	
P406	Hraniti v posodi, odporni proti koroziji/... z odporno notranjo oblogo.	Jedko za kovine (oddelek 2.16)	1	... Druge združljive snovi določi proizvajalec/ dobavitelj.
P407	Ohraniti zračno rezo med skladi/paletami.	Samosegrevajoče snovi in zmesi (oddelek 2.11)	1, 2	
P410	Zaščititi pred sončno svet- lobo.	Vnetljivi aerosoli (oddelek 2.3)	1, 2	
		Plini pod tlakom (oddelek 2.5)	Stisnjeni plin	
			Utekočinjeni plin	
			Raztopljeni plin	
		Samosegrevajoče se snovi in zmesi (oddelek 2.11)	1, 2	
		Organski peroksidi (oddelek 2.15)	Vrste A, B, C, D, E, F	
P411	Hraniti pri temperaturi do ... °C/... °F.	Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B, C, D, E, F	... Temperaturo določi proizvajalec/dobavitelj.
		Organski peroksidi (oddelek 2.15)	Vrste A, B, C, D, E, F	
P412	Ne izpostavljati temperatu- ram nad 50 °C/122 °F.	Vnetljivi aerosoli (oddelek 2.3)	1, 2	
P413	Razsute količine, večje od ... kg/... lbs, hraniti pri temperaturi do ... °C/... °F.	Samosegrevajoče se snovi in zmesi (oddelek 2.11)	1, 2	... Maso in tempera- turo določi proizvajalec/ dobavitelj.
P420	Hraniti ločeno od drugih materialov.	Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B, C, D, E, F	
		Samosegrevajoče se snovi in zmesi (oddelek 2.11)	1, 2	
		Organski peroksidi (oddelek 2.15)	Vrste A, B, C, D, E, F	
P422	Vsebinsko hraniti v ...	Piroforne tekočine (oddelek 2.9)	1	... Ustrezno tekočino ali inertni plin določi proizvajalec/dobavitelj.
		Piroforne trdne snovi (odde- lek 2.10)	1	

Etiketa (1)	Previdnostni stavki – shranjevanje (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P402 + P404	Hraniti na suhem. Hraniti v zaprti posodi.	Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline (odde- lek 2.12)	1, 2, 3	
P403 + P233	Hraniti na dobro prezračevanem mestu. Hraniti v tesno zaprti posodi.	Akutna strupenost – pri vdihavanju (oddelek 3.1)	1, 2, 3	— če je proizvod hla- pen in povzroča nevarno ozračje
		Specifična strupenost za cilje organe – enkratna izpostavljenost; draženje dihalnih poti (odde- lek 3.8)	3	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; omamljenost (oddelek 3.8)	3	
P403 + P235	Hraniti na dobro prezračevanem mestu. Hraniti na hladnem.	Vnetljive tekočine (oddelek 2.6)	1, 2, 3	
		Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B, C, D, E, F	
P410 + P403	Zaščititi pred sončno svet- lobo. Hraniti na dobro pre- zračevanem mestu.	Plini pod tlakom (oddelek 2.5)	Stisnjeni plin	
			Utekočinjeni plin	
			Raztopljeni plin	
P410 + P412	Zaščititi pred sončno svet- lobo. Ne izpostavljati tem- peraturam nad 50 °C/ 122 °F.	Vnetljivi aerosoli (oddelek 2.3)	1, 2	
P411 + P235	Hraniti pri temperaturi do ... °C/... °F. Hraniti na hladnem.	Organski peroksidi (oddelek 2.15)	Vrste A, B, C, D, E, F	... Temperaturo določi proizvajalec/dobavitelj.

Tabela 6.5

Previdnostni stavki – odstranjevanje

Etiketa (1)	Previdnostni stavki – odstranjevanje (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
P501	Odstraniti vsebino/posodo ...	Eksplzivni (oddelek 2.1)	Nestabilni eks- plzivni in pod- razredi 1.1, 1.2, 1.3, 1.4, 1.5	... v skladu z lokal- nimi/regionalnimi/ nacionalnimi/medna- rodnimi predpisi (se določi).
		Vnetljive tekočine (oddelek 2.6)	1, 2, 3	
		Samoreaktivne snovi in zmesi (oddelek 2.8)	Vrste A, B, C, D, E, F	
		Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline (odde- lek 2.12)	1, 2, 3	
		Oksidativne tekočine (odde- lek 2.13)	1, 2, 3	
		Oksidativne trdne snovi (odde- lek 2.14)	1, 2, 3	
		Organski peroksidi (oddelek 2.15)	Vrste A, B, C, D, E, F	
		Akutna strupenost – oralna (oddelek 3.1)	1, 2, 3, 4	

Etiketa (1)	Previdnostni stavki – odstranjevanje (2)	Razred nevarnosti (3)	Kategorija nevarnosti (4)	Pogoji uporabe (5)
		Akutna strupenost – dermalna (oddelek 3.1)	1, 2, 3, 4	
		Akutna strupenost – pri vdihavanju (oddelek 3.1)	1, 2	
		Jedkost za kožo (oddelek 3.2)	1A, 1B, 1C	
		Preobčutljivost dihal (oddelek 3.4)	1	
		Preobčutljivost kože (oddelek 3.4)	1	
		Mutagenost za zarodne celice (oddelek 3.5)	1A, 1B, 2	
		Rakotvornost (oddelek 3.6)	1A, 1B, 2	
		Strupenost za razmnoževanje (oddelek 3.7)	1A, 1B, 2	
		Specifična strupenost za cilje organe – enkratna izpostavljenost (oddelek 3.8)	1, 2	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; draženje dihalnih poti (oddelek 3.8)	3	
		Specifična strupenost za cilje organe – enkratna izpostavljenost; omamljenost (oddelek 3.8)	3	
		Specifična strupenost za cilje organe – ponavljajoča izpostavljenost (oddelek 3.9)	1, 2	
		Nevarnost pri vdihavanju (oddelek 3.10)	1	
		Nevarno za vodno okolje – akutna nevarnost za vodno okolje (oddelek 4.1)	1	
		Nevarno za vodno okolje – kronična nevarnost za vodno okolje (oddelek 4.1)	1, 2, 3, 4	
		Nevarno za ozonski plašč (oddelek 5.1)	1	

2. Del 2: previdnostni stavki

Previdnostni stavki se vzamejo iz tega dela Priloge IV in izberejo v skladu z delom 1.

Tabela 1.1

Previdnostni stavki – splošno

P101	Jezik	
	BG	При необходимост от медицинска помощ, носете опаковката или етикета на продукта.
	ES	Si se necesita consejo médico, tener a mano el envase o la etiqueta.
	CS	Je-li nutná lékařská pomoc, mějte po ruce obal nebo štítek výrobku.
	DA	Hvis der er brug for lægehjælp, medbring da beholderen eller etiketten.
	DE	Ist ärztlicher Rat erforderlich, Verpackung oder Kennzeichnungsetikett bereithalten.

P101	Jezik	
	ET	Arsti poole pöördudes võtta kaasa toote pakend või etikett.
	EL	Εάν ζητήσετε ιατρική συμβουλή, να έχετε μαζί σας τον περιέκτη του προϊόντος ή την ετικέτα.
	EN	If medical advice is needed, have product container or label at hand.
	FR	En cas de consultation d'un médecin, garder à disposition le récipient ou l'étiquette.
	GA	Más gá comhairle liachta, bíodh coimeádán nó lipéad an táirge ina aice láimhe.
	IT	In caso di consultazione di un medico, tenere a disposizione il contenitore o l'etichetta del prodotto.
	LV	Medicīniska padoma nepieciešamības gadījumā attiecīgā informācija ir norādīta uz iepakojuma vai etiķetes.
	LT	Jei reikalinga gydytojo konsultacija, su savimi turėkite produkto talpyklą ar jo etiketę.
	HU	Orvosi tanácsadás esetén tartsa kéznél a termék edényét vagy címkéjét.
	MT	Jekk ikun meħtieġ parir mediku, ara li jkollok il-kontenitur jew it-tikketta tal-prodott fil-qrib.
	NL	Bij het inwinnen van medisch advies, de verpakking of het etiket ter beschikking houden.
	PL	W razie konieczności zasięgnięcia porady lekarza należy pokazać pojemnik lub etykietę.
	PT	Se for necessário consultar um médico, mostre-lhe a embalagem ou o rótulo.
	RO	Dacă este necesară consultarea medicului, Țineți la îndemână recipientul sau eticheta produsului.
	SK	Ak je potrebná lekárska pomoc, majte k dispozícii obal alebo etiketu výrobku.
	SL	Če je potreben zdravniški nasvet, mora biti na voljo posoda ali etiketa proizvoda.
	FI	Jos tarvitaan lääkinnällistä apua, näytä pakkaus tai varoitusetiketti.
	SV	Ha förpackningen eller etiketten till hands om du måste söka läkarvård.

P102	Jezik	
	BG	Да се съхранява извън обсега на деца.
	ES	Mantener fuera del alcance de los niños.
	CS	Uchovávejte mimo dosah dětí.
	DA	Opbevarer utilgængeligt for børn.
	DE	Darf nicht in die Hände von Kindern gelangen.
	ET	Hoida lastele kättesaamatus kohas.
	EL	Μακριά από παιδιά.
	EN	Keep out of reach of children.
	FR	Tenir hors de portée des enfants.
	GA	Coimeád as aimsiú leanaí.
	IT	Tenere fuori dalla portata dei bambini.
	LV	Sargāt no bērniem.
	LT	Laikyti vaikams neprieinamoje vietoje.
	HU	Gyermekektől elzárva tartandó.
	MT	Żommu 'l bogħod minn fejn jistghu jilhqun it-tfal.
	NL	Buiten het bereik van kinderen houden.

P102	Jezik	
	PL	Chronić przed dziećmi.
	PT	Manter fora do alcance das crianças.
	RO	A nu se lăsa la îndemâna copiilor.
	SK	Uchovávať mimo dosahu detí.
	SL	Hraniti zunaj dosega otrok.
	FI	Säilytä lasten ulottumattomissa.
	SV	Förvaras oåtkomligt för barn.

P103	Jezik	
	BG	Преди употреба прочетете етикета.
	ES	Leer la etiqueta antes del uso.
	CS	Před použitím si přečtěte údaje na štítku.
	DA	Læs etiketten før brug.
	DE	Vor Gebrauch Kennzeichnungsetikett lesen.
	ET	Enne kasutamist tutvuda etiketil oleva infoga.
	EL	Διαβάστε την ετικέτα πριν από τη χρήση.
	EN	Read label before use.
	FR	Lire l'étiquette avant utilisation.
	GA	Léigh an lipéad roimh úsáid.
	IT	Leggere l'etichetta prima dell'uso.
	LV	Pirms izmantošanas izlasīt etiķeti.
	LT	Prieš naudojimą perskaityti etiketę.
	HU	Használat előtt olvassa el a címken közölt információkat.
	MT	Aqra t-tikketta qabel l-użu.
	NL	Alvorens te gebruiken, het etiket lezen.
	PL	Przed użyciem przeczytać etykietę.
	PT	Ler o rótulo antes da utilização.
	RO	Citiți eticheta înainte de a utiliza.
	SK	Pred použitím si prečítajte etiketu.
	SL	Pred uporabo preberite etiketo.
	FI	Lue merkinnät ennen käyttöä.
	SV	Läs etiketten före användning.

Tabela 1.2

Previdnostni stavki – preprečevanje

P201	Jezik	
	BG	Преди употреба се снабдете със специални инструкции.
	ES	Pedir instrucciones especiales antes del uso.

P201	Jezik	
	CS	Před použitím si obstarejte speciální instrukce.
	DA	Indhent særlige anvisninger før brug.
	DE	Vor Gebrauch besondere Anweisungen einholen.
	ET	Enne kasutamist tutvuda erijuhistega.
	EL	Εφοδιαστείτε με τις ειδικές οδηγίες πριν από τη χρήση.
	EN	Obtain special instructions before use.
	FR	Se procurer les instructions avant utilisation.
	GA	Faigh treoracha speisialta roimh úsáid.
	IT	Procurarsi istruzioni specifiche prima dell'uso.
	LV	Pirms lietošanas saņemt speciālu instrukciju.
	LT	Prieš naudojimą gauti specialias instrukcijas.
	HU	Használat előtt ismerje meg az anyagra vonatkozó különleges utasításokat.
	MT	Ikseb struzzjonijiet speċjali qabel l-użu.
	NL	Alvorens te gebruiken de speciale aanwijzingen raadplegen.
	PL	Przed użyciem zapoznać się ze specjalnymi środkami ostrożności.
	PT	Pedir instruções específicas antes da utilização.
	RO	Procurați instrucțiuni speciale înainte de a utiliza.
	SK	Pred použitím sa oboznámte s osobitnými pokynmi.
	SL	Pred uporabo pridobiti posebna navodila.
	FI	Lue erityisohjeet ennen käyttöä.
	SV	Inhämta särskilda instruktioner före användning.

P202	Jezik	
	BG	Не използвайте преди да сте прочели и разбрали всички предпазни мерки за безопасност.
	ES	No manipular la sustancia antes de haber leído y comprendido todas las instrucciones de seguridad.
	CS	Nepoužívejte, dokud jste si nepřečetli všechny bezpečnostní pokyny a neporozuměli jim.
	DA	Anvend ikke produktet, før alle advarsler er læst og forstået.
	DE	Vor Gebrauch alle Sicherheitshinweise lesen und verstehen.
	ET	Mitte käidelda enne ohutusnõuetega tutvumist ja nendest arusaamist.
	EL	Μην το χρησιμοποιήσετε πριν διαβάσετε και κατανοήσετε τις οδηγίες προφύλαξης.
	EN	Do not handle until all safety precautions have been read and understood.
	FR	Ne pas manipuler avant d'avoir lu et compris toutes les précautions de sécurité.
	GA	Ná láimhsigh go dtí go léifear agus go dtuigfear gach ráiteas réamhchúraim sábháilteachta.
	IT	Non manipolare prima di avere letto e compreso tutte le avvertenze.
	LV	Neizmantot pirms nav izlasīti un saprasti visi apzīmējumi.
	LT	Nenaudoti, jeigu neperskaityti ar nesuprasti visi saugos įspėjimai.
	HU	Ne használja addig, amíg az összes biztonsági óvintézkedést el nem olvasta és meg nem értette.

P202	Jezik	
	MT	Tmissux qabel ma tkun qrajt u fhimt l-istruzzjonijiet kollha ta' prekawzjoni.
	NL	Pas gebruiken nadat u alle veiligheidsvoorschriften gelezen en begrepen heeft
	PL	Nie używać przed zapoznaniem się i zrozumieniem wszystkich środków bezpieczeństwa.
	PT	Não manuseie o produto antes de ter lido e percebido todas as precauções de segurança.
	RO	A nu se manipula decât după ce au fost citite și înțelese toate măsurile de securitate.
	SK	Nepoužívať, kým si neprečítate a nepochopíte všetky bezpečnostné opatrenia.
	SL	Ne uporabljajte, dokler se ne seznanite z vsemi varnostnimi ukrepi.
	FI	Lue varoitukset huolellisesti ennen käsittelyä.
	SV	Använd inte produkten innan du har läst och förstått säkerhetsanvisningarna
P210	Jezik	
	BG	Да се пази от топлина/искри/открит пламък/нагорешени повърхности. – Тютюнопушенето е забранено.
	ES	Mantener alejado de fuentes de calor, chispas, llama abierta o superficies calientes. – No fumar.
	CS	Chraňte před teplem/jiskrami/otevřeným plamenem/horkými povrchy. – Zákaz kouření.
	DA	Holdes væk fra varme/gnister/åben ild/varme overflader. Rygning forbudt.
	DE	Von Hitze/Funken/offener Flamme/heißen Oberflächen fernhalten. Nicht rauchen.
	ET	Hoida eemal soojusallikast/sädemetest/leekidest/kuumadest pindadest. – Mitte suitsetada.
	EL	Μακριά από θερμότητα/σπινθήρες/γυμνές φλόγες/θερμές επιφάνειες. – Μην καπνίζετε.
	EN	Keep away from heat/sparks/open flames/hot surfaces. – No smoking.
	FR	Tenir à l'écart de la chaleur/des étincelles/des flammes nues/des surfaces chaudes. – Ne pas fumer.
	GA	Coimeád ó theas/splancacha/lasair gan chosaint/dromchlaí te. – Ná caitear tobac.
	IT	Tenere lontano da fonti di calore/scintille/fiamme libere/superfici riscaldate. – Non fumare.
	LV	Nelietot vietās, kur ir sastopams karstums/dzirksteles/atklāta uguns/.../karstas virsmas. Nesmēķēt.
	LT	Laikyti atokiau nuo šilumos šaltinių/žiežirbų/atviros liepsnos/karštų paviršių. – Nerūkyti.
	HU	Hőtől/szikrától/nyílt lángtól/.../forró felületektől távol tartandó. Tilos a dohányzás.
	MT	Żomm 'il bogħod mis-shana/xrar tan-nar/fjammiet mikxufa/uċuħ jaħarqu. – Tpejjipx.
	NL	Verwijderd houden van warmte/vonken/open vuur/hete oppervlakken. – Niet roken.
	PL	Przechowywać z dala od źródeł ciepła/iskrzenia/otwartego ognia/gorących powierzchni. Palenie wzbronione.
	PT	Manter afastado do calor/faísca/chama aberta/superfícies quentes. – Não fumar.
	RO	A se păstra departe de surse de căldură/scântei/flăcări deschise/suprafețe incinse. – Fumatul interzis.
	SK	Uchovávať mimo dosahu tepla/iskier/otvoreného ohňa/horúcich povrchov. Nefajčite.
	SL	Hraniti ločeno od vročine/isker/odprtega ognja/vročih površin. – Kajenje prepovedano.
	FI	Suojaa lämmöltä/kipinöiltä/avotulelta/kuumilta pinnoilta. – Tupakointi kielletty.
	SV	Får inte utsättas för värme/gnistor/öppen låga/heta ytor. – Rökning förbjuden.

P211	Jezik	
	BG	Да не се пръска към открит пламък или друг източник на запалване.
	ES	No pulverizar sobre una llama abierta u otra fuente de ignición.
	CS	Nestříkejte do otevřeného ohně nebo jiných zdrojů zapálení.
	DA	Spray ikke mod åben ild eller andre antændelseskilder.
	DE	Nicht gegen offene Flamme oder andere Zündquelle sprühen.
	ET	Mitte pihustada leekidesse või muusse süüteallikasse.
	EL	Μην ψεκάζετε κοντά σε γυμνή φλόγα ή άλλη πηγή ανάφλεξης.
	EN	Do not spray on an open flame or other ignition source.
	FR	Ne pas vaporiser sur une flamme nue ou sur toute autre source d'ignition.
	GA	Ná spraeáil ar lasair gan chosaint ná ar fhoirse eile adhainte.
	IT	Non vaporizzare su una fiamma libera o altra fonte di accensione.
	LV	Neizsmidzināt uz atklātas uguns vai citiem aizdegšanās avotiem.
	LT	Nepurkšti į atvirą liepsną arba kitus degimo šaltinius.
	HU	Tilos nyílt lángra vagy más gyújtóforrásra permetezni.
	MT	Tisprejjax fuq fjamma mikxufa jew sors iehor li jaqbad.
	NL	Niet in een open vuur of op andere ontstekingsbronnen spuiten.
	PL	Nie rozpylać nad otwartym ogniem lub innym źródłem zapłonu.
	PT	Não pulverizar sobre chama aberta ou outra fonte de ignição.
	RO	Nu pulverizați deasupra unei flăcări deschise sau unei alte surse de aprindere.
	SK	Nestriekajte na otvorený oheň ani iný zdroj zapálenia.
	SL	Ne pršiti proti odprtemu ognju ali drugemu viru vžiga.
	FI	Ei saa suihkuttaa avotuleen tai muuhun sytytyslähteeseen.
	SV	Spreja inte över öppen låga eller andra antändningskällor.

P220	Language	
	BG	Да се държи/съхранява далеч от облекло/.../горими материали
	ES	Mantener o almacenar alejado de la ropa/.../materiales combustibles.
	CS	Uchovávejte/skladujte odděleně od oděvů/.../hořlavých materiálů.
	DA	Må ikke anvendes/opbevares i nærheden af tøj/.../brændbare materialer.
	DE	Von Kleidung/.../brennbaren Materialien fernhalten/entfernt aufbewahren.
	ET	Hoida eemal rõivastest/.../süttivast materjalist.
	EL	Διατηρείται/Φυλάσσεται μακριά από ενδύματα/.../καύσιμα υλικά.
	EN	Keep/Store away from clothing/.../combustible materials.
	FR	Tenir/stocker à l'écart des vêtements/.../matières combustibles
	GA	Coimeád/Stóráil glan ar éadaí/.../ábhair indóite.
	IT	Tenere/conservare lontano da indumenti/...../materiali combustibili.
	LV	Turēt/uzglabāt vietās, kur nav piekļuves drēbēm/.../uzliesmojošiem materiāliem.
	LT	Laikyti/sandėliuoti atokiau nuo drabužių/.../degių medžiagų.

P220	Language	
	HU	Ruhától/.../éghető anyagtól távol tartandó/tárolandó.
	MT	Żomm/Ahžen 'il bogħod mill-hwejjeġ/.../materjali li jaqbdu.
	NL	Van kleding/.../brandbare stoffen verwijderd houden/bewaren.
	PL	Trzymać/przechowywać z dala od odzieży/.../materiałów zapalnych.
	PT	Manter/guardar afastado de roupa/.../matérias combustíveis.
	RO	A se păstra/depozita departe de îmbrăcăminte/.../materiale combustibile.
	SK	Uchovávať/skladujte mimo odevov/.../horľavých materiálov.
	SL	Hraniti ločeno od oblačil/.../vnetljivih materialov.
	FI	Pidä/Varastoi erillään vaatetuksesta/.../syttyvistä materiaaleista.
	SV	Hålls/förvarad åtskilt från kläder/.../brännbara material.
P221	Jezik	
	BG	Вземете всички предпазни мерки за избягване на смесването с горими материали...
	ES	Tomar todas las precauciones necesarias para no mezclar con materias combustibles...
	CS	Proveďte preventivní opatření proti smíchání s hořlavými materiály...
	DA	Undgå at blande med brændbare materialer...
	DE	Mischen mit brennbaren Stoffen/... unbedingt verhindern.
	ET	Rakendada ettevaatusabinõusid, et vältida segunemist põlevainetega...
	EL	Λάβετε κάθε προφύλαξη ώστε να μην αναμειχθεί με καύσιμα...
	EN	Take any precaution to avoid mixing with combustibles...
	FR	Prendre toutes précautions pour éviter de mélanger avec des matières combustibles...
	GA	Déan gach réamhchúram chun meascadh le hábhair indóite a sheachaint...
	IT	Prendere ogni precauzione per evitare di miscelare con sostanze combustibili....
	LV	Nekādā gadījumā nemaisīt ar viegli uzliesmojošām vielām...
	LT	Imtis visų atsargumo priemonių, kad nebūtų sumaišyta su degiomis medžiagomis...
	HU	Minden óvintézkedést meg kell tenni, hogy ne keveredjen éghető anyagokkal.
	MT	Hu kull prekawzjoni biex tevita li jithallat mal-kombustibbli...
	NL	Vermenging met brandbare stoffen... absoluut vermijden.
	PL	Zastosować wszelkie środki ostrożności w celu uniknięcia mieszania z innymi materiałami zapalnymi ...
	PT	Tomar todas as precauções para não misturar com combustíveis...
	RO	Luăți toate măsurile de precauție pentru a evita amestecul cu combustibili...
	SK	Prijmite opatrenia na zabránenie zmiešania s horľavými materiálmi...
	SL	Preprečiti mešanje z vnetljivimi snovmi ...
	FI	Varo sekoittamasta syttyvien materiaalien... kanssa.
	SV	Undvik att blanda med med brännbara ämnen...

P222	Language	
	BG	Не допускайте контакт с въздух.
	ES	No dejar que entre en contacto con el aire.
	CS	Zabraňte styku se vzduchem.
	DA	Undgå kontakt med luft.
	DE	Kontakt mit Luft nicht zulassen.
	ET	Hoida õhuga kokkupuute eest.
	EL	Να μην έρθει σε επαφή με τον αέρα.
	EN	Do not allow contact with air.
	FR	Ne pas laisser au contact de l'air.
	GA	Ná ceadaiḡh teagmháil le haer.
	IT	Evitare il contatto con l'aria.
	LV	Nepieļaut kontaktu ar gaisu.
	LT	Saugoti nuo kontakto su oru.
	HU	Nem érintkezhet levegővel.
	MT	Thallix li jkun hemm kuntatt ma' l-arja.
	NL	Contact met de lucht vermijden.
	PL	Nie dopuszczać do kontaktu z powietrzem.
	PT	Não deixar entrar em contacto com o ar.
	RO	A nu se lăsa în contact cu aerul.
	SK	Zabráňte kontaktu so vzduchom.
	SL	Preprečiti stik z zrakom.
	FI	Ei saa joutua kosketuksiin ilman kanssa.
	SV	Undvik kontakt med luft.

P223	Jezik	
	BG	Да се избягва всякакъв възможен контакт с вода поради бурна реакция и възможно внезапно запалване.
	ES	Mantener alejado de cualquier posible contacto con el agua, pues reacciona violentamente y puede provocar una llamarada.
	CS	Chraňte před možným stykem s vodou kvůli prudké reakci a možnému náhlému vzplanutí.
	DA	Undgå enhver kontakt med vand, da dette kan fremkalde voldsom reaktion og risiko for eksplosionsagtig brand.
	DE	Kontakt mit Wasser wegen heftiger Reaktion und möglichem Aufflammen unbedingt verhindern.
	ET	Hoida igasuguse kokkupuute eest veega, vastasel juhul reageerib ägedalt ja võib põhjustada hetkpõlemise.
	EL	Αποφύγετε κάθε πιθανή επαφή με το νερό, διότι αντιδρά βίαια και μπορεί να προκληθεί ανάφλεξη.
	EN	Keep away from any possible contact with water, because of violent reaction and possible flash fire.
	FR	Éviter tout contact avec l'eau, à cause du risque de réaction violente et d'inflammation spontanée.

P223	Jezik	
	GA	Ná ceadaigh teagmháil de shaghas ar bith le huisce, mar gheall ar imoibriú foirtíl agus splancthine a d'fhéadfadh a bheith ann.
	IT	Evitare qualsiasi contatto con l'acqua: pericolo di reazione violenta e di infiammazione spontanea.
	LV	Nepieļaut kontaktu ar ūdeni īpaši stipras reakcijas un iespējamās eksplozijas dēļ.
	LT	Saugoti nuo bet kokio galimo kontakto su vandeniu, nes smarkiai reaguoja ir gali susidaryti ugnies pliūpsnis.
	HU	Vízzel semmilyen formában nem érintkezhet, ellenkező esetben heves reakció és belobbanás fordulhat elő.
	MT	Żomm 'il bogħod minn kull kuntatt possibbli ma' l-ilma, minhabba li jirreaġixxi bil-qawwa u jista' jkun hemm fjamma nar.
	NL	Contact met water vermijden in verband met een heftige reactie en een mogelijke wolkbrand.
	PL	Chronić przed wszelkim kontaktem z wodą z powodu gwałtownej reakcji i możliwości wystąpienia błyskawicznego pożaru.
	PT	Não deixar entrar em contacto com a água: risco de reacção violenta e possibilidade de formação de chama súbita.
	RO	A se evita orice contact cu apa, din cauza reacției violente și a riscului de aprindere spontană.
	SK	Zabráňte akémukoľvek kontaktu s vodou, aby nedošlo k prudkej reakcii a prípadnému zapáleniu.
	SL	Hraniti ločeno od možnega stika z vodo zaradi burne reakcije in možnega bliskovitega požara.
	FI	Ei saa joutua kosketuksiin veden kanssa voimakkaan reaktion ja mahdollisen leimahduksen takia.
	SV	Undvik all kontakt med vatten eftersom det kan framkalla en våldsam reaktion och explosionsartad brand.

P230	Jezik	
	BG	Да се държи навлажнен с...
	ES	Mantener humedecido con...
	CS	Uchovávejte ve zvlhčeném stavu ...
	DA	Holdes befugt med...
	DE	Feucht halten mit ...
	ET	Niisutada ...-ga.
	EL	Να διατηρείται υγρό με ...
	EN	Keep wetted with...
	FR	Maintenir humidifié avec...
	GA	Coimeád fliuchta le...
	IT	Mantenere umido con....
	LV	Vienmēr samitrināt ar ...
	LT	Laikyti sudrėkintą (kuo)
	HU	...-val/-vel nedvesítve tartandó.
	MT	Żommu mxarrab bi ...
	NL	Vochtig houden met...

P230	Jezik	
	PL	Przechowywać produkt zwilżony....
	PT	Manter húmido com...
	RO	A se păstra umezit cu...
	SK	Uchovávať zvlhčené ...
	SL	Hraniti prepojeno z ...
	FI	Säilytä kostutettuna ...
	SV	Ska hållas fuktigt med...

P231	Language	
	BG	Да се използва под инертен газ.
	ES	Manipular en gas inerte.
	CS	Manipulace pod inertním plynem.
	DA	Håndteres under inaktiv gas.
	DE	Unter inertem Gas handhaben.
	ET	Käidelda inertgaasis.
	EL	Χειρισμός σε αδρανή ατμόσφαιρα.
	EN	Handle under inert gas.
	FR	Manipuler sous gaz inerte.
	GA	Láimhsigh faoi thriathghás.
	IT	Manipolare in atmosfera di gas inerte.
	LV	Rīkoties tikai inertas gāzes apstākļos.
	LT	Tvarkyti inertinėse dujose.
	HU	Inert gázban használandó.
	MT	Immaniġġja taht gass inerti.
	NL	Onder inert gas werken.
	PL	Używać w atmosferze obojętnego gazu.
	PT	Manusear em atmosfera de gás inerte.
	RO	A se manipula sub un gaz inert.
	SK	Manipulujte v prostredí s inertným plynom.
	SL	Hraniti v ustreznem inertnem plinu.
	FI	Käsittele inertissä kaasussa.
	SV	Hanteras under inert gas.

P232	Jezik	
	BG	Да се пази от влага.
	ES	Proteger de la humedad.
	CS	Chraňte před vlhkem.
	DA	Beskyttes mod fugt.

P232	Jezik	
	DE	Vor Feuchtigkeit schützen.
	ET	Hoida niiskuse eest.
	EL	Προσπετέψτε από την υγρασία.
	EN	Protect from moisture.
	FR	Protéger de l'humidité.
	GA	Cosain ar thaise.
	IT	Proteggere dall'umidità.
	LV	Aizsargāt no mitruma.
	LT	Saugoti nuo drėgmės.
	HU	Nedvességtől védendő.
	MT	Ipproteġi mill-umdità.
	NL	Tegen vocht beschermen.
	PL	Chronić przed wilgocią.
	PT	Manter ao abrigo da humidade.
	RO	A se proteja de umiditate.
	SK	Chránite pred vlhkosťou.
	SL	Zaščititi pred vlago.
	FI	Suojaa kosteudelta.
	SV	Skyddas från fukt.

P233	Language	
	BG	Съдът да се съхранява плътно затворен.
	ES	Mantener el recipiente herméticamente cerrado.
	CS	Uchovávejte obal těsně uzavřený.
	DA	Hold beholderen tæt lukket.
	DE	Behälter dicht verschlossen halten.
	ET	Hoida pakend tihedalt suletuna.
	EL	Να διατηρείται ο περιέκτης ερμητικά κλειστός.
	EN	Keep container tightly closed.
	FR	Maintenir le récipient fermé de manière étanche.
	GA	Coimeád an coimeádán dúnta go docht.
	IT	Tenere il recipiente ben chiuso.
	LV	Tvertni stingri noslēgt.
	LT	Talpyklą laikyti sandariai uždarytą.
	HU	Az edény szorosan lezárva tartandó.
	MT	Żomm il-kontenitur magħluq sew.
	NL	In goed gesloten verpakking bewaren.
	PL	Przechowywać pojemnik szczelnie zamknięty.

P233	Language	
	PT	Manter o recipiente bem fechado.
	RO	Păstrați recipientul închis etanș.
	SK	Nádobu uchovávať tesne uzavretú.
	SL	Hraniti v tesno zaprti posodi.
	FI	Säilytä tiiviisti suljettuna.
	SV	Behållaren ska vara väl tillsluten.

P234	Jezik	
	BG	Да се съхранява само в оригиналната опаковка.
	ES	Conservar únicamente en el recipiente original.
	CS	Uchovávejte pouze v původním obalu.
	DA	Opbevares kun i den originale beholder.
	DE	Nur im Originalbehälter aufbewahren.
	ET	Hoida üksnes originaalpakendis.
	EL	Να διατηρείται μόνο στον αρχικό περιέκτη.
	EN	Keep only in original container.
	FR	Conserver uniquement dans le récipient d'origine.
	GA	Coimeád sa choimeádán bunaidh amháin.
	IT	Conservare soltanto nel contenitore originale.
	LV	Turēt tikai oriģinālā iepakojumā.
	LT	Laikyti tik originalioje talpykloje.
	HU	Az eredeti edényben tartandó.
	MT	Żomm biss fil-kontenitur oriġinali.
	NL	Uitsluitend in de oorspronkelijke verpakking bewaren.
	PL	Przechowywać wyłącznie w oryginalnym pojemniku.
	PT	Conservar unicamente no recipiente de origem.
	RO	Păstrați numai în recipientul original.
	SK	Uchovávať iba v pôvodnej nádobe.
	SL	Hraniti samo v originalni posodi.
	FI	Säilytä alkuperäispakkauksessa.
	SV	Förvaras endast i originalbehållaren.

P235	Language	
	BG	Да се държи на хладно.
	ES	Mantener en lugar fresco.
	CS	Uchovávejte v chladu.
	DA	Opbevares køligt.
	DE	Kühl halten.

P235	Language	
	ET	Hoida jahedas.
	EL	Να διατηρείται δροσερό.
	EN	Keep cool.
	FR	Tenir au frais.
	GA	Coimeád fionnuar é
	IT	Conservare in luogo fresco.
	LV	Turēt vēsumā.
	LT	Laikyti vėsioje vietoje.
	HU	Hűvös helyen tartandó.
	MT	Żomm frisk.
	NL	Koel bewaren.
	PL	Przechowywać w chłodnym miejscu.
	PT	Conservar em ambiente fresco.
	RO	A se păstra la rece.
	SK	Uchovávať v chlade.
	SL	Hraniti na hladnem.
	FI	Säilytä viileässä.
	SV	Förvaras svalt.
P240	Jezik	
	BG	Заземяване/еквипотенциална връзка на съда и приемателното устройство.
	ES	Conectar a tierra/enlace equipotencial del recipiente y del equipo de recepción.
	CS	Uzemněte obal a odběrové zařízení.
	DA	Beholder og modtageudstyr jordforbindes/potentialudlignes.
	DE	Behälter und zu befüllende Anlage erden.
	ET	Mahuti ja vastuvõtuseade maandada/ühendada.
	EL	Γείωση/ισοδυναμική σύνδεση του περιέκτη και του εξοπλισμού δέκτη.
	EN	Ground/bond container and receiving equipment.
	FR	Mise à la terre/liaison équipotentielle du récipient et du matériel de réception.
	GA	Nasc an coimeádán agus an trealamh glactha leis an talamh.
	IT	Mettere a terra/massa il contenitore e il dispositivo ricevente.
	LV	Tvertnes un iekārtas saņemšanai ievietot zemē/sasaistīt
	LT	Įžeminti/įtvirtinti talpyklą ir priėmimo įrangą.
	HU	A tárolóedényt és a fogadóedényt le kell földelni/át kell kötni.
	MT	Poġġi ma' l-art/wahhal il-kontenitur u t-tagħmir li jirċievi.
	NL	Opslag- en opvangreservoir aarden.
	PL	Uziemić/połączyć pojemnik i sprzęt odbiorczy.
	PT	Ligação à terra/equipotencial do recipiente e do equipamento receptor.

P240	Jezik	
	RO	Legătură la pământ/conexiune echipotențială cu recipientul și cu echipamentul de recepție.
	SK	Uzemnite/upevnite nádoby a plniace zariadenie.
	SL	Ozemljiti posodo in opremo za sprejem tekočine.
	FI	Säiliö ja vastaanottavat laitteet on maadoitettava/yhdistettävä.
	SV	Jorda/potentialförbind behållare och mottagarutrustning.

P241	Jezik	
	BG	Използвайте електрическо/проветриващо/осветително/.../оборудване, обезопасено срещу експлозия
	ES	Utilizar un material eléctrico, de ventilación o de iluminación/.../antideflagrante.
	CS	Používejte elektrické/ventilační/osvětlovací/.../zařízení do výbušného prostředí.
	DA	Anvend eksplosionssikkert elektrisk/ventilations-/lys-/.../udstyr.
	DE	Explosionssgeschützte elektrische Betriebsmittel/Lüftungsanlagen/Beleuchtung/... verwenden.
	ET	Kasutada plahvatuskindlaid elektri-/ventilatsiooni-/valgustus-/.../seadmeid.
	EL	Να χρησιμοποιείται αντικρηκτικός ηλεκτρολογικός/εξαερισμού/φωτιστικός/.../εξοπλισμός.
	EN	Use explosion-proof electrical/ventilating/lighting/.../equipment.
	FR	Utiliser du matériel électrique/de ventilation/d'éclairage/.../antidéflagrant.
	GA	Bain úsáid as trealamh pléascdhíonach leictreach/aerála/soilsiúcháin/...
	IT	Utilizzare impianti elettrici/di ventilazione/d'illuminazione/.../a prova di esplosione.
	LV	Izmantot sprādziendrošas elektriskas/ar ventilāciju/izgaismotas/.../iekārtas
	LT	Naudoti sprogimui atsparią elektros/ventiliacijos/apšvietimo/.../įrangą.
	HU	Robbanásbiztos elektromos/szellőztető/világító/.../berendezés használandó.
	MT	Uża' tagħmir elettriku/ta' ventilazzjoni/ta' dawl/.../li jiflah għal splużjoni.
	NL	Explosieveilige elektrische/ventilatie-/verlichtings-/...apparatuur gebruiken.
	PL	Używać elektrycznego/wentylującego/oświetleniowego/.../. przeciwwybuchowego sprzętu.
	PT	Utilizar equipamento eléctrico/de ventilação/de iluminação/.../à prova de explosão.
	RO	Utilizați echipamente electrice/de ventilare/de iluminat/.../antideflagrante.
	SK	Používajte elektrické/ventilačné/osvetľovacie/.../zariadenie do výbušného prostredia.
	SL	Uporabiti električno/prezračevalno opremo, opremo za razsvetljavo/.../, odporno proti eksplozijam.
	FI	Käytä räjähdysturvallisia sähkö/ilmanvaihto/valaisin/.../laitteita.
	SV	Använd explosionssäker elektrisk/ventilations-/belysnings-/.../utrustning.

P242	Jezik	
	BG	Използвайте само инструменти, които не предизвикват искри.
	ES	Utilizar únicamente herramientas que no produzcan chispas.
	CS	Používejte pouze nářadí z nejiskřícího kovu.
	DA	Anvend kun værktøj, som ikke frembringer gnister.
	DE	Nur funkenfreies Werkzeug verwenden.

P242	Jezik	
	ET	Mitte kasutada seadmeid, mis võivad tekitada sädemeid.
	EL	Να χρησιμοποιούνται μόνο εργαλεία που δεν παράγουν σπινθήρες.
	EN	Use only non-sparking tools.
	FR	Ne pas utiliser d'outils produisant des étincelles.
	GA	Bain úsáid as uirlisí neamhspréachta amháin.
	IT	Utilizzare solo utensili antiscintillamento.
	LV	Izmantot instrumentus, kas nerada dzirksteles.
	LT	Naudoti tik kibirkščių nekeliančius įrankius.
	HU	Szikramentes eszközök használandók.
	MT	Uża' biss għodda li ma jtajrux żnied.
	NL	Uitsluitend vonkvrij gereedschap gebruiken.
	PL	Używać wyłącznie nieiskrzących narzędzi.
	PT	Utilizar apenas ferramentas antichispa.
	RO	Nu utilizați unelte care produc scântei.
	SK	Používať iba neiskriace prístroje.
	SL	Uporabiti le orodje, ki ne povzroča isker.
	FI	Käytä ainoastaan kipinöimättömiä työkaluja.
	SV	Använd endast verktyg som inte ger upphov till gnistor.

P243	Jezik	
	BG	Вземете предпазни мерки срещу освобождаване на статично електричество.
	ES	Tomar medidas de precaución contra descargas electrostáticas.
	CS	Proveďte preventivní opatření proti výbojům statické elektřiny.
	DA	Træf foranstaltninger mod statisk elektricitet.
	DE	Maßnahmen gegen elektrostatische Aufladungen treffen.
	ET	Rakendada ettevaatusabinõusid staatilise elektri vastu.
	EL	Λάβετε προστατευτικά μέτρα έναντι ηλεκτροστατικών εκκενώσεων.
	EN	Take precautionary measures against static discharge.
	FR	Prendre des mesures de précaution contre les décharges électrostatiques.
	GA	Déan bearta réamhchúraim in aghaidh díluchtú statach.
	IT	Prendere precauzioni contro le scariche elettrostatiche.
	LV	Nodrošināties pret statiskās enerģijas izlādi.
	LT	Imtis atsargumo priemonių statinei iškrovai išvengti.
	HU	Az elektrosztatikus kisülés megakadályozására óvintézkedéseket kell tenni.
	MT	Hu miżuri ta' prekawzjoni kontra l-hruġ ta' elettriku statiku.
	NL	Voorzorgsmaatregelen treffen tegen ontladingen van statische elektriciteit.
	PL	Przedsięwziąć środki ostrożności zapobiegające statycznemu rozładowaniu.
	PT	Evitar acumulação de cargas electrostáticas.

P243	Jezik	
	RO	Luați măsuri de precauție împotriva descărcărilor electrostatice.
	SK	Urobte preventívne opatrenia proti výbojom statickej elektriny.
	SL	Preprečiti statično naelektrenje.
	FI	Estä staattisen sähköön aiheuttama kipinöinti.
	SV	Vidta åtgärder mot statisk elektricitet.

P244	Jezik	
	BG	Почиствайте редуциращите вентили от смазка и масло
	ES	Mantener las válvulas de reducción limpias de grasa y aceite.
	CS	Udržujte redukční ventily bez maziva a oleje.
	DA	Reduktionsventilerne holdes fri for fedt og olie.
	DE	Druckminderer frei von Fett und Öl halten.
	ET	Hoida reduktsiooniklapid rasvast ja õlist puhtad.
	EL	Να διατηρούνται καθαρές από γράσα και λάδια οι βαλβίδες μείωσης.
	EN	Keep reduction valves free from grease and oil.
	FR	S'assurer de l'absence de graisse ou d'huile sur les soupapes de réduction.
	GA	Coimeád comhláí brúlaghdaithe saor ó ghréisc agus ó ola.
	IT	Mantenere le valvole di riduzione libere da grasso e olio.
	LV	Turēt reducēšanās vārstus tīrus no taukiem un eļļas.
	LT	Saugoti, kad ant redukcinių vožtuvų nepatektų riebalų ir tepalų.
	HU	A nyomáscsökkentő szelepeket zsírtól és olajtól mentesen kell tartani.
	MT	Żomm il-valvs ta' tnaqqis hielsa mill-griz u ż-żejt.
	NL	Reduceerventielen vrij van olie en vet houden.
	PL	Chronicz zawory redukcyjne przed tłuszczem i olejem.
	PT	Manter as válvulas de redução isentas de óleo e massa lubrificantes.
	RO	Protejați supapele reductoare de grăsimi și ulei.
	SK	Redukčné ventily udržiavajte bez mazadiel a oleja.
	SL	Preprečiti stik reducirnih ventilov z mastjo in oljem.
	FI	Pidä paineenalennusventtiilit vapaana rasvasta ja öljystä.
	SV	Reducerventilerna ska hållas fria från fett och olja.

P250	Jezik	
	BG	Да не се подлага на стържене/удар/.../триене
	ES	Evitar la abrasión/el choque/.../la fricción.
	CS	Nevystavujte obrušování/narázům/.../tření.
	DA	Må ikke udsættes for slibning/stød/.../gnidning.
	DE	Nicht schleifen/stoßen/.../reiben.
	ET	Hoida kriimustamise/põrutuse/.../hõõrdumise eest.

P250	Jezik	
	EL	Να αποφεύγεται άλεση/κρούση/.../τριβή.
	EN	Do not subject to grinding/shock/.../friction.
	FR	Éviter les abrasions/les chocs/.../les frottements.
	GA	Ná nocht do mheilt/do thurraing/.../do fhrithchuimilt.
	IT	Evitare le abrasioni/gli urti/.../gli attriti.
	LV	Nepakļaut drupināšanai/triecienam/.../berzei
	LT	Nešlifuoti/netrankyti/.../netrinti.
	HU	Tilos csiszolásnak/ütésnek/.../súrlódásnak kitenni.
	MT	Tissottoponihomx għal brix/xokk/.../frizzjoni.
	NL	Malen/schokken/.../wrijving vermijden.
	PL	Nie poddawać szlifowaniu/wstrząsom/.../tarcia.
	PT	Não submeter a trituração/choque/.../fricção.
	RO	A nu supune la abraziuni/şocuri/.../frecare.
	SK	Nevystavujte brúseniu/nárazu/.../treniu.
	SL	Ne izpostavljati drgnjenju/udarcem/.../trenju.
	FI	Suojele rasitukselta/iskuilta/.../hankaukselta.
	SV	Får inte utsättas för gnidning/stötar/.../friktion.

P251	Jezik	
	BG	Съд под налягане: да не се пробива и изгаря дори след употреба.
	ES	Recipiente a presión: no perforar ni quemar, aun después del uso.
	CS	Tlakový obal: nepropichujte nebo nespalujte ani po použití.
	DA	Beholder under tryk: Må ikke punkteres eller brændes, heller ikke efter brug.
	DE	Behälter steht unter Druck: Nicht durchstechen oder verbrennen, auch nicht nach der Verwendung.
	ET	Mahuti on rõhu all: mitte purustada ega põletada isegi pärast kasutamist.
	EL	Περιέκτης υπό πίεση. Να μην τρυπηθεί ή καεί ακόμη και μετά τη χρήση.
	EN	Pressurized container: Do not pierce or burn, even after use.
	FR	Récipient sous pression: ne pas perforer, ni brûler, même après usage.
	GA	Coimeádán brúcháirthe: Ná toll agus ná dóigh, fiú tar éis úsáide.
	IT	Recipiente sotto pressione: non perforare né bruciare, neppure dopo l'uso.
	LV	Tvertne zem spiediena: nedurt vai nededzināt, arī pēc izlietošanas.
	LT	Slėginis indas. Nepradurti ir nedeginti net panaudoto.
	HU	Nyomás alatt edény: ne lyukassza ki vagy égesse el, még használat után sem.
	MT	Kontenitur taht pressjoni: Ittaqqbux jew taħarqux, anki wara li tużah.
	NL	Houder onder druk: ook na gebruik niet doorboren of verbranden.
	PL	Pojemnik pod ciśnieniem. Nie przekłuwać ani nie spalać, nawet po zużyciu.
	PT	Recipiente sob pressão. Não furar nem queimar, mesmo após utilização.

P251	Jezik	
	RO	Recipient sub presiune. Nu perforați sau ardeți, chiar și după utilizare.
	SK	Nádoba je pod tlakom: neprepichujte alebo nespáľujte ju, a to ani po spotrebovaní obsahu.
	SL	Posoda je pod tlakom: ne preluknjajte ali sežigajte je niti, ko je prazna.
	FI	Painesäiliö: Ei saa puhkaista tai polttaa edes tyhjänä.
	SV	Tryckbehållare: Får inte punkteras eller brännas, gäller även tömd behållare.

P260	Jezik	
	BG	Не вдишвайте прах/пушек/газ/дим/изпарения/аерозоли
	ES	No respirar el polvo/el humo/el gas/la niebla/los vapores/el aerosol.
	CS	Nevdechujte prach/dým/plyn/mlhu/páry/aerosoly.
	DA	Indånd ikke pulver/røg/gas/tåge/damp/spray.
	DE	Staub/Rauch/Gas/Nebel/Dampf/Aerosol nicht einatmen.
	ET	Tolmu/suitsu/gaasi/udu/auru/pihustatud ainet mitte sisse hingata.
	EL	Μην αναπνέετε σκόνη/αναθυμιάσεις/αέρια/σταγονίδια/ατμούς/εκνεφώματα
	EN	Do not breathe dust/fume/gas/mist/vapours/spray.
	FR	Ne pas respirer les poussières/fumées/gaz/brouillards/vapeurs/aérosols.
	GA	Ná hanálaigh deannach/múch/gás/ceo/gala/sprae.
	IT	Non respirare la polvere/i fumi/i gas/la nebbia/i vapori/gli aerosol.
	LV	Neieelpot puteklus/tvaikus/gāzi/dūmus/izgarojumus/smidzinājumu.
	LT	Neįkvėpti dulkių/dūmų/dujų/rūko/garų/aerolio.
	HU	A por/füst/gáz/köd/gőzök/permet belélegzése tilos.
	MT	Tiblax bin-nifs trabijiet/dhahen/gass/raxx/fwar/sprej.
	NL	Stof/rook/gas/nevel/damp/spuitnevel niet inademen.
	PL	Nie wdychać pyłu/dymu/gazu/mgły/par/rozpylonej cieczy.
	PT	Não respirar as poeiras/fumos/gases/névoas/vapores/aerossóis.
	RO	Nu inspirați praful/fumul/gazul/ceata/vaporii/spray-ul.
	SK	Nevdychujte prach/dym/plyn/hmlu/pary/aerosóly.
	SL	Ne vdihavati prahu/dima/plina/meglje/hlapov/razpršila.
	FI	Älä hengitä pölyä/savua/kaasua/sumua/höyryä/suihketta.
	SV	Inandas inte damm/rök/gaser/dimma/ångor/sprej.

P261	Jezik	
	BG	Избягвайте вдишване на прах/пушек/газ/дим/изпарения/аерозоли
	ES	Evitar respirar el polvo/el humo/el gas/la niebla/los vapores/el aerosol.
	CS	Zamezte vdechování prachu/dýmu/plynu/mlhy/par/aerosolů.
	DA	Undgå indånding af pulver/røg/gas/tåge/damp/spray.
	DE	Einatmen von Staub/Rauch/Gas/Nebel/Dampf/Aerosol vermeiden.
	ET	Vältida tolmu/suitsu/gaasi/udu/auru/pihustatud aine sissehingamist.

P261	Jezik	
	EL	Αποφεύγετε να αναπνέετε σκόνη/αυαθυμιάσεις/αέρια/σταγονίδια/ατμούς/εκνεφώματα.
	EN	Avoid breathing dust/fume/gas/mist/vapours/spray.
	FR	Éviter de respirer les poussières/fumées/gaz/brouillards/vapeurs/aérosols.
	GA	Seachain deannach/múch/gás/ceo/gala/sprae a anáil.
	IT	Evitare di respirare la polvere/i fumi/i gas/la nebbia/i vapori/gli aerosol.
	LV	Izvairīties ieelpot putekļus/tvaikus/gāzi/dūmus/izgarojumus/smidzinājumu.
	LT	Stengtis neįkvėpti dulkių/dūmų/dujų/rūko/garų/aerозolio.
	HU	Kerülje a por/füst/gáz/köd/gőzök/permet belélegzését.
	MT	Evita li tibla' bin-nifs trabijiet/dhaħen/gass/raxx/fwar/sprej.
	NL	Inademing van stof/rook/gas/nevel/damp/spuitnevel vermijden.
	PL	Unikać wdychania pyłu/dymu/gazu/mgły/par/rozpylonej cieczy.
	PT	Evitar respirar as poeiras/fumos/gases/névoas/vapores/aerossóis.
	RO	Evitați să inspirați praful/fumul/gazul/ceafa/vaporii/spray-ul.
	SK	Zabraňte vdychovaniu prachu/dymu/plynu/hmly/pár/aerosólov.
	SL	Ne vdihavati prahu/dima/plina/meglīce/hlapov/razpršila.
	FI	Vältä pölyn/savun/kaasun/sumun/höyryn/suihkeen hengittämistä.
	SV	Undvik att inandas damm/rök/gaser/dimma/ångor/sprej.

P262	Jezik	
	BG	Да се избягва контакт с очите, кожата или облеклото.
	ES	Evitar el contacto con los ojos, la piel o la ropa.
	CS	Zabraňte styku s očima, kůží nebo oděvem.
	DA	Må ikke komme i kontakt med øjne, hud eller tøj.
	DE	Nicht in die Augen, auf die Haut oder auf die Kleidung gelangen lassen.
	ET	Vältida silma, nahale või rõivastele sattumist.
	EL	Να μην έρθει σε επαφή με τα μάτια, με το δέρμα ή με τα ρούχα.
	EN	Do not get in eyes, on skin, or on clothing.
	FR	Éviter tout contact avec les yeux, la peau ou les vêtements.
	GA	Ná lig sna súile, ar an gcraiceann, ná ar éadaí.
	IT	Evitare il contatto con gli occhi, la pelle o gli indumenti.
	LV	Nepieļaut nokļūšanu acīs, uz ādas vai uz drēbēm.
	LT	Saugotis, kad nepatektų į akis, ant odos ar drabužių.
	HU	Szembe, bőrre vagy ruhára nem kerülhet.
	MT	Iddahħalx fl-ghajnejn, fuq il-gilda, jew fuq il-hwejjegħ.
	NL	Contact met de ogen, de huid of de kleding vermijden.
	PL	Nie wprowadzać do oczu, na skórę lub na odzież.
	PT	Não pode entrar em contacto com os olhos, a pele ou a roupa.
	RO	Evitați orice contact cu ochii, pielea sau îmbrăcămintea.

P262	Jezik	
	SK	Zabráňte kontaktu s očami, pokožkou alebo odevom.
	SL	Preprečiti stik z očmi, kožo ali oblačili.
	FI	Varo kemikaalin joutumista silmiin, iholle tai vaatteisiin.
	SV	Får inte komma i kontakt med ögonen, huden eller kläderna.

P263	Jezik	
	BG	Да се избягва контакт по време на бременност/при кърмене.
	ES	Evitar el contacto durante el embarazo/la lactancia.
	CS	Zabraňte styku během těhotenství/kojení.
	DA	Undgå kontakt under graviditet/amning.
	DE	Kontakt während der Schwangerschaft/und der Stillzeit vermeiden.
	ET	Vältida kokkupuudet raseduse/imetamise ajal.
	EL	Αποφεύγετε την επαφή στη διάρκεια της εγκυμοσύνης/γαλουχίας.
	EN	Avoid contact during pregnancy/while nursing.
	FR	Éviter tout contact avec la substance au cours de la grossesse/pendant l'allaitement.
	GA	Seachain teagmháil le linn toirchis/agus an chíoch á tabhairt.
	IT	Evitare il contatto durante la gravidanza/l'allattamento.
	LV	Izvairīties no saskares grūtniecības laikā/barojot bērnu ar krūti.
	LT	Vengti kontakto nėštumo metu/maitinant krūtimi.
	HU	A terhesség/szoptatás alatt kerülni kell az anyaggal való érintkezést.
	MT	Evita l-kuntatt waqt it-tqala/waqt it-treddigh.
	NL	Bij zwangerschap of borstvoeding aanraking vermijden.
	PL	Unikać kontaktu w czasie ciąży/karmienia piersią.
	PT	Evitar o contacto durante a gravidez/o aleitamento.
	RO	Evitați contactul în timpul sarcinii/alăptării.
	SK	Zabráňte kontaktu počas tehotenstva a dojčenia.
	SL	Preprečiti stik med nosečnostjo/dojenjem.
	FI	Vältä kosketusta raskauden tai imetyksen aikana.
	SV	Undvik kontakt under graviditet eller amning.

P264	Jezik	
	BG	Да се измие... старателно след употреба.
	ES	Lavar se ... concienzudamente tras la manipulación.
	CS	Po manipulaci důkladně omyjte
	DA	Vask ... grundigt efter brug.
	DE	Nach Gebrauch ... gründlich waschen.
	ET	Pärast käitlemist pesta hoolega
	EL	Πλύνετε ... σχολαστικά μετά το χειρισμό.

P264	Jezik	
	EN	Wash ... thoroughly after handling.
	FR	Se laver ... soigneusement après manipulation.
	GA	Nigh ... go lánchúramach tar éis láimhsithe.
	IT	Lavare accuratamente ... dopo l'uso.
	LV	Pēc izmantošanas ... kārtīgi nomazgāt.
	LT	Po naudojimo kruopščiai nuplauti ...
	HU	A használatot követően a(z) ... -t alaposan meg kell mosni.
	MT	Aħsel ... sew wara li timmaniġġjah.
	NL	Na het werken met dit product ... grondig wassen.
	PL	Dokładnie umyć ... po użyciu.
	PT	Lavar ... cuidadosamente após manuseamento.
	RO	Spălați-vă ... bine după utilizare.
	SK	Po manipulácii starostlivo umyte...
	SL	Po uporabi temeljito umiti ...
	FI	Pese ... huoleellisesti käsittelyn jälkeen.
	SV	Tvätta ... grundligt efter användning.

P270	Jezik	
	BG	Да не се яде, пие или пуши при употреба на продукта.
	ES	No comer, beber ni fumar durante su utilización.
	CS	Při používání tohoto výrobku nejezte, nepijte ani nekuřte.
	DA	Der må ikke spises, drikkes eller ryges under brugen af dette produkt.
	DE	Bei Gebrauch nicht essen, trinken oder rauchen.
	ET	Toote käitlemise ajal mitte süüa, juua ega suitsetada.
	EL	Μην τρώτε, πίνετε ή καπνίζετε, όταν χρησιμοποιείτε αυτό το προϊόν.
	EN	Do no eat, drink or smoke when using this product.
	FR	Ne pas manger, boire ou fumer en manipulant ce produit.
	GA	Ná hith, ná hól agus ná caitear tobac agus an táirge seo á úsáid.
	IT	Non mangiare, né bere, né fumare durante l'uso.
	LV	Neēst, nedzert un nesmēķēt produkta izmantošanas laikā.
	LT	Naudojant šį produktą, nevalgyti, negerti ir nerūkyti.
	HU	A termék használata közben tilos enni, inni vagy dohányozni.
	MT	Tikolx, tixrobx u tpejjipx waqt li tuża' dan il-prodott.
	NL	Niet eten, drinken of roken tijdens het gebruik van dit product.
	PL	Nie jeść, nie pić i nie palić podczas używania produktu.
	PT	Não comer, beber ou fumar durante a utilização deste produto.
	RO	A nu mânca, bea sau fuma în timpul utilizării produsului.
	SK	Pri používaní výrobku nejedzte, nepite ani nefajčite.

P270	Jezik	
	SL	Ne jesti, piti ali kaditi med uporabo tega izdelka.
	FI	Syöminen, juominen ja tupakointi kielletty kemikaalia käytettäessä.
	SV	Ät inte, drick inte och rök inte när du använder produkten.

P271	Jezik	
	BG	Да се използва само на открито или на добре проветривомясто.
	ES	Utilizar únicamente en exteriores o en un lugar bien ventilado.
	CS	Používejte pouze venku nebo v dobře větraných prostorách.
	DA	Brug kun udendørs eller i et rum med god udluftning.
	DE	Nur im Freien oder in gut belüfteten Räumen verwenden.
	ET	Käidelda üksnes välitingimustes või hästi ventileeritavas kohas.
	EL	Να χρησιμοποιείται μόνο σε ανοικτό ή καλά αεριζόμενο χώρο.
	EN	Use only outdoors or in a well-ventilated area.
	FR	Utiliser seulement en plein air ou dans un endroit bien ventilé.
	GA	Úsáid amuigh faoin aer nó i limistéar dea-aerálaithe amháin.
	IT	Utilizzare soltanto all'aperto o in luogo ben ventilato.
	LV	Izmantot tikai ārā vai labi vēdināmās telpās.
	LT	Naudoti tik lauke arba gerai vėdinamoje patalpoje.
	HU	Kizárólag szabadban vagy jól szellőző helyiségben használható.
	MT	Uża biss barra jew fpost ventilat sew.
	NL	Alleen buiten of in een goed geventileerde ruimte gebruiken.
	PL	Stosować wyłącznie na zewnątrz lub w dobrze wentylowanym pomieszczeniu
	PT	Utilizar apenas ao ar livre ou em locais bem ventilados.
	RO	A se utiliza numai în aer liber sau în spații bine ventilate.
	SK	Používajte iba na voľnom priestranstve alebo v dobre vetranom priestore.
	SL	Uporabljeni le zunaj ali v dobro prezračevanem prostoru.
	FI	Käytä ainoastaan ulkona tai tiloissa, joissa on hyvä ilmanvaihto.
	SV	Används endast utomhus eller i väl ventilerade utrymmen.

P272	Jezik	
	BG	Да не се изнася замърсено работно облекло извън работното помещение.
	ES	Las prendas de trabajo contaminadas no podrán sacarse del lugar de trabajo.
	CS	Kontaminovaný pracovní oděv neodnášejte z pracoviště.
	DA	Tilsmudset arbejdstøj bør ikke fjernes fra arbejdspladsen.
	DE	Kontaminierte Arbeitskleidung nicht außerhalb des Arbeitsplatzes tragen.
	ET	Saastunud töörõivaid töökohast mitte välja viia.
	EL	Τα μολυσμένα ενδύματα εργασίας δεν πρέπει να βγαίνουν από το χώρο εργασίας.
	EN	Contaminated work clothing should not be allowed out of the workplace.

P272	Jezik	
	FR	Les vêtements de travail contaminés ne devraient pas sortir du lieu de travail.
	GA	Níor chóir éadaí éillithe oibre a ligean amach as an láthair oibre.
	IT	Gli indumenti da lavoro contaminati non devono essere portati fuori dal luogo di lavoro.
	LV	Piesārņoto darba apģērbu neiznest ārpus darba telpām.
	LT	Užterštų darbo drabužių negalima išnešti iš darbo vietos.
	HU	Szennyezett munkaruhát tilos kivinni a munkahely területéről.
	MT	Ilbies tax-xoghol kontaminat m'ghandux jithalla johroġ mill-post tax-xoghol.
	NL	Verontreinigde werkkleding mag de werkruimte niet verlaten.
	PL	Zanieczyszczonej odzieży ochronnej nie wnosić poza miejsce pracy.
	PT	A roupa de trabalho contaminada não pode sair do local de trabalho.
	RO	Nu scoateți îmbrăcămintea de lucru contaminată în afara locului de muncă.
	SK	Je zakázané vyniesť kontaminovaný pracovný odev z pracoviska.
	SL	Kontaminirana delovna oblačila niso dovoljena zunaj delovnega mesta.
	FI	Saastuneita työvaatteita ei saa viedä työpaikalta.
	SV	Nedstänkta arbetskläder får inte avlägsnas från arbetsplatsen.

P273	Jezik	
	BG	Да се избягва изпускане в околната среда.
	ES	Evitar su liberación al medio ambiente.
	CS	Zabraňte uvolnění do životního prostředí.
	DA	Undgå udledning til miljøet.
	DE	Freisetzung in die Umwelt vermeiden.
	ET	Vältida sattumist keskkonda.
	EL	Να αποφεύγεται η ελευθέρωση στο περιβάλλον.
	EN	Avoid release to the environment.
	FR	Éviter le rejet dans l'environnement.
	GA	Ná scaoiltear amach sa chomhshaol.
	IT	Non disperdere nell'ambiente.
	LV	Izvairīties no izplatīšanas apkārtējā vidē.
	LT	Saugoti, kad nepatektų į aplinką.
	HU	Kerülni kell az anyagnak a környezetbe való kijutását.
	MT	Evita r-rilaxx fl-ambjent.
	NL	Voorkom lozing in het milieu.
	PL	Unikać uwolnienia do środowiska.
	PT	Evitar a libertação para o ambiente.
	RO	Evitați dispersarea în mediu.
	SK	Zabraňte uvoľneniu do životného prostredia.
	SL	Preprečiti sproščanje v okolje.

P273	Jezik	
	FI	Vältettävä päästämistä ympäristöön.
	SV	Undvik utsläpp till miljön.

P280	Jezik	
	BG	Използвайте предпазни ръкавици/предпазно облекло/предпазни очила/предпазна маска за лице.
	ES	Llevar guantes/prendas/gafas/máscara de protección.
	CS	Používejte ochranné rukavice/ochranný oděv/ochranné brýle/obličejový štít.
	DA	Bær beskyttelseshandsker/beskyttelsestøj/øjenskyttelse/ansigtsbeskyttelse
	DE	Schutzhandschuhe/Schutzkleidung/Augenschutz/Gesichtsschutz tragen.
	ET	Kanda kaitsekindaid/kaitserõivastust/kaitseprille/kaitsemaski.
	EL	Να φοράτε προστατευτικά γάντια/προστατευτικά ενδύματα/μέσα ατομικής προστασίας για τα μάτια/πρόσωπο.
	EN	Wear protective gloves/protective clothing/eye protection/face protection.
	FR	Porter des gants de protection/des vêtements de protection/un équipement de protection des yeux/du visage.
	GA	Caith lámhainní cosanta/éadaí cosanta/cosaint súile/cosaint aghaidhe.
	IT	Indossare guanti/indumenti protettivi/Proteggere gli occhi/il viso.
	LV	Izmantot aizsargcimdus/aizsargdrēbes/acu aizsargus/sejas aizsargus.
	LT	Mūvėti apsaugines pirštines/dėvėti apsauginius drabužius/naudoti akių (veido) apsaugos priemonės.
	HU	Védőkesztyű/védőruha/szemvédő/arcvédő használatra kötelező.
	MT	Ilbes ingwanti protettivi/ilbies protettiv/protezzjoni għall-ghajnejn/protezzjoni għall-wiċċ.
	NL	Beschermende handschoenen/beschermende kleding/oogbescherming/gelaatsbescherming dragen.
	PL	Stosować rękawice ochronne/odzież ochronną/ochronę oczu/ochronę twarzy.
	PT	Usar luvas de protecção/vestuário de protecção/protecção ocular/protecção facial.
	RO	Purtați mănuși de protecție/îmbrăcămintele de protecție/echipament de protecție a ochilor/echipament de protecție a feței.
	SK	Noste ochranné rukavice/ochranný odev/ochranné okuliare/ochranu tváre.
	SL	Nositi zaščitne rokavice/zaščitno obleko/zaščito za oči/zaščito za obraz.
	FI	Käytä suojakäsineitä/suojavaatetusta/silmiensuojainta/kasvonsuojainta.
	SV	Använd skyddshandskar/skyddskläder/ögonskydd/ansiktsskydd.

P281	Jezik	
	BG	Използвайте предписаните лични предпазни средства.
	ES	Utilizar el equipo de protección individual obligatorio.
	CS	Používejte požadované osobní ochranné prostředky.
	DA	Anvend de påkrævede personlige værnemidler.
	DE	Vorgeschriebene persönliche Schutzausrüstung verwenden.
	ET	Kasutada vajalikke isikukaitsevahendeid.

P281	Jezik	
	EL	Χρησιμοποιείτε μέσα ατομικής προστασίας όταν απαιτείται.
	EN	Use personal protective equipment as required.
	FR	Utiliser l'équipement de protection individuel requis.
	GA	Bain úsáid as an trealamh cosanta pearsanta faoi mar a éilítear.
	IT	Utilizzare il dispositivo di protezione individuale richiesto.
	LV	Izmantot personisko aizsargaprīkojumu atbilstoši prasībām.
	LT	Naudoti reikalaujamas asmenines apsaugos priemonės.
	HU	Az előírt egyéni védőfelszerelés használatára kötelező.
	MT	Uża' t-tagħmir personali protettiv kif meħtieġ.
	NL	De nodige persoonlijke beschermingsuitrusting gebruiken.
	PL	Stosować wymagane środki ochrony indywidualnej.
	PT	Usar o equipamento de protecção individual exigido.
	RO	Utilizați echipamentul de protecție individuală conform cerințelor.
	SK	Používať predpísané osobné ochranné prostriedky.
	SL	Uporabiti predpisano osebno zaščitno opremo.
	FI	Käytä vaadittuja henkilönsuojaimia.
	SV	Använd föreskriven personlig skyddsutrustning.
P282	Jezik	
	BG	Носете предпазващи от студ ръкавици/маска за лице/защитни очила.
	ES	Llevar guantes que aislen del frío/gafas/máscara.
	CS	Používejte ochranné rukavice proti chladu/obličejový štít/ochranné brýle.
	DA	Bær kuldeisolerende handsker/ansigtsskærm/øjenbeskyttelse.
	DE	Schutzhandschuhe/Gesichtsschild/Augenschutz mit Kälteisolierung tragen.
	ET	Kanda külmakaitsekindaid/kaitsemaski/kaitseprille.
	EL	Φοράτε μονωτικά γάντια προστασίας από το ψύχος/προστατευτική μάσκα/προστατευτικά γυαλιά.
	EN	Wear cold insulating gloves/face shield/eye protection.
	FR	Porter des gants isolants contre le froid/un équipement de protection du visage/des yeux.
	GA	Caith lámhainní inslithe fuachta/aghaidhsciath/cosaint súile.
	IT	Utilizzare guanti termici/schermo facciale/Proteggere gli occhi.
	LV	Izmantot aizsargcimdus/sejas aizsargus/acu aizsargus ar aukstuma izolāciju.
	LT	Mūvėti nuo šalčio izoliuojančias pirštines/naudoti veido skydelį/akių apsaugos priemonės.
	HU	Hidegszigetelő kesztyű/arcvédő/szemvédő használatára kötelező.
	MT	Ilbies ingwanti kiesha li ma jinfedx minnhom/ilqugh għall-wiċċ/protezzjoni għall-ghajnejn.
	NL	Koude-isolerende handschoenen/gelaatsbescherming/oogbescherming dragen.
	PL	Nosić rękawice izolujące od zimna/maski na twarz/ochronę oczu.
	PT	Usar luvas de protecção contra o frio/escudo facial/protecção ocular.

P282	Jezik	
	RO	Purtați mănuși izolante împotriva frigului/echipament de protecție a feței/ochilor.
	SK	Používajte termostabilné rukavice/ochranný štít/ochranné okuliare.
	SL	Nositi hladne izolirne rokavice/zaščito za obraz/zaščito za oči.
	FI	Käytä kylmäeristäviä suojakäsineitä/kasvonsuojainta/silmiensuojainta.
	SV	Använd köldisolerande handskar/visir/ögonskydd.

P283	Jezik	
	BG	Носете огнеупорно/огнезащитно облекло.
	ES	Llevar prendas ignífugas/resistentes al fuego/resistentes a las llamas.
	CS	Používejte ohnivzdorný/nehořlavý oděv.
	DA	Bær brandbestandig/brandhæmmende beklædning.
	DE	Schwer entflammbare/flammhemmende Kleidung tragen.
	ET	Kanda tule-/leegikindlat/tule levikut aeglustavat rõivastust.
	EL	Φοράτε αντιπυρικά/αλεξίφλογα πυράντοχα/βραδυφλεγή ενδύματα.
	EN	Wear fire/flare resistant/retardant clothing.
	FR	Porter des vêtements résistant au feu/aux flammes/ignifuges.
	GA	Caith éadaí dódhíonacha/lasairdhíonacha nó dómhoillitheacha/lasairmhoillitheacha.
	IT	Indossare indumenti completamente ignifughi o in tessuti ritardanti di fiamma.
	LV	Izmantot aizsargapģērbu pret uguni/liesmām.
	LT	Dėvėti ugniai/liepsnai atsparius/antipireninius drabužius.
	HU	Tűz-/lángálló/-késleltető ruházat viselése kötelező.
	MT	Ilbies hwejjeġ rezistenti għan-nar/fjammi.
	NL	Vuur/vlambestendige/brandwerende kleding dragen.
	PL	Nosić odzież ognioodporną/plotmieniodporną/opóźniającą zapalenie.
	PT	Usar vestuário ignífugo/retardador de fogo/chamas.
	RO	Purtați îmbrăcăminte rezistentă la foc/flacăra/ignifugă.
	SK	Noste ohňovzdorný odev/odev so zníženou horľavosťou.
	SL	Nositi negorljiva oblačila in oblačila, odporna proti ognju.
	FI	Käytä palosuojattua/paloturvallista vaateusta.
	SV	Använd brand-/flamsäkra eller brand-/flamhämmande kläder.

P284	Jezik	
	BG	Носете респираторни предпазни средства.
	ES	Llevar equipo de protección respiratoria.
	CS	Používejte vybavení pro ochranu dýchacích cest.
	DA	Anvend åndedrætsværn.
	DE	Atemschutz tragen.
	ET	Kanda hingamisteede kaitsevahendeid.

P284	Jezik	
	EL	Φοράτε μέσα ατομικής προστασίας της αναπνοής.
	EN	Wear respiratory protection.
	FR	Porter un équipement de protection respiratoire.
	GA	Caith cosaint riospráide.
	IT	Utilizzare un apparecchio respiratorio.
	LV	Izmantot gāzmasku.
	LT	Naudoti kvėpavimo takų apsaugos priemonės.
	HU	Légzésvédelem használata kötelező.
	MT	Ilbes protezzjoni respiratorja.
	NL	Adembescherming dragen.
	PL	Stosować indywidualne środki ochrony dróg oddechowych.
	PT	Usar protecção respiratória.
	RO	Purtați echipament de protecție respiratorie.
	SK	Používajte ochranu dýchacích ciest.
	SL	Nositi opremo za zaščito dihal.
	FI	Käytä hengityksensuojainta.
	SV	Använd andningsskydd.
P285	Jezik	
	BG	В случай на лоша вентилация носете респираторни предпазни средства.
	ES	En caso de ventilación insuficiente, llevar equipo de protección respiratoria.
	CS	V případě nedostatečného větrání použijte vybavení pro ochranu dýchacích cest.
	DA	Ved utilstrækkelig udluftning anvendes åndedrætsværn.
	DE	Bei unzureichender Belüftung Atemschutz tragen.
	ET	Ebapiisava ventilatsiooni korral kanda hingamisteede kaitsevahendeid.
	EL	Σε περίπτωση ανεπαρκούς αερισμού, να φοράτε μέσα ατομικής προστασίας της αναπνοής.
	EN	In case of inadequate ventilation wear respiratory protection.
	FR	Lorsque la ventilation du local est insuffisante, porter un équipement de protection respiratoire.
	GA	I gcás aerála uireasaigh caith cosaint riospráide.
	IT	In caso di ventilazione insufficiente utilizzare un apparecchio respiratorio.
	LV	Neatbilstošas ventilācijas gadījumā izmantot gāzmasku.
	LT	Esant nepakankamam vėdinimui, naudoti kvėpavimo takų apsaugos priemonės.
	HU	Nem megfelelő szellőzés esetén légzésvédelem kötelező.
	MT	F'każ ta' ventilazzjoni inadegwata ilbes protezzjoni respiratorja.
	NL	Bij ontoereikende ventilatie een geschikte adembescherming dragen.
	PL	W przypadku niedostatecznej wentylacji stosować indywidualne środki ochrony dróg oddechowych.
	PT	Em caso de ventilação inadequada, usar protecção respiratória.

P285	Jezik	
	RO	În cazul în care ventilarea este insuficientă, purtați echipament de protecție respiratorie.
	SK	V prípade nedostatočného vetrania, používajte ochranu dýchacích ciest.
	SL	Ob nezadostnem prezračevanju nositi opremo za zaščito dihal.
	FI	Käytä hengityksensuojainta, jos ilmanvaihto on riittämätön.
	SV	Använd andningsskydd vid otillräcklig ventilation.

P231 + P232	Jezik	
	BG	Да се използва под инертен газ. Да се пази от влага.
	ES	Manipular en gas inerte. Proteger de la humedad.
	CS	Manipulace pod inertním plynem. Chraňte před vlhkem.
	DA	Anvendes under inaktiv gas. Beskyttes mod fugt.
	DE	Unter inertem Gas handhaben. Vor Feuchtigkeit schützen.
	ET	Käidelda inertgaasis. Hoida niiskuse eest.
	EL	Χειρισμός σε αδρανή ατμόσφαιρα. Προστατέψτε από την υγρασία.
	EN	Handle under inert gas. Protect from moisture.
	FR	Manipuler sous gaz inerte. Protéger de l'humidité.
	GA	Láimhsigh faoi thriathghás. Cosain ó thaise.
	IT	Manipolare in atmosfera di gas inerte. Tenere al riparo dall'umidità.
	LV	Izmantot tikai inertas gāzes apstākļos. Aizsargāt no mitruma.
	LT	Tvarkyti inertinėse dujose. Saugoti nuo drėgmės.
	HU	Inert gázban használandó. Nedvességtől védendő.
	MT	Uża' taht gass inerti. Ipproteġi mill-umdità.
	NL	Onder inert gas werken. Tegen vocht beschermen.
	PL	Używać w atmosferze obojętnego gazu Chronić przed wilgocią.
	PT	Manusear em atmosfera de gás inerte. Manter ao abrigo da humidade.
	RO	A se manipula sub un gaz inert. A se proteja de umiditate.
	SK	Manipulujte v prostredí s inertným plynom. Chráňte pred vlhkosťou.
	SL	Hraniti v ustreznem inertnem plinu. Zaščititi pred vlago.
	FI	Käsittele inertissä kaasussa. Suojaa kosteudelta.
	SV	Hanteras under inert gas. Skyddas från fukt.

P235 + P410	Jezik	
	BG	Да се държи на хладно. Да се пази от пряка слънчева светлина.
	ES	Conservar en un lugar fresco. Proteger de la luz del sol.
	CS	Uchovávejte v chladu. Chraňte před slunečním zářením.
	DA	Opbevares køligt. Beskyttes mod sollys.
	DE	Kühl halten. Vor Sonnenbestrahlung schützen.

P235 + P410	Jezik	
	ET	Hoida jahedas. Hoida päikesevalguse eest.
	EL	Να διατηρείται δροσερό. Να προστατεύεται από τις ηλιακές ακτίνες.
	EN	Keep cool. Protect from sunlight.
	FR	Tenir au frais. Protéger du rayonnement solaire.
	GA	Coimeád fionnuar. Cosain ó sholas na gréine.
	IT	Tenere in luogo fresco. Proteggere dai raggi solari.
	LV	Turēt vēsumā. Aizsargāt no saules gaismas.
	LT	Laikyti vėsioje vietoje. Saugoti nuo saulės šviesos.
	HU	Hűvös helyen tartandó. Napfénytől védendő.
	MT	Żomm frisk. Ipproteġi mir-raġġi tax-xemx.
	NL	Koel bewaren. Tegen zonlicht beschermen.
	PL	Przechowywać w chłodnym miejscu. Chronić przed światłem słonecznym.
	PT	Conservar em ambiente fresco. Manter ao abrigo da luz solar.
	RO	A se păstra la rece. A se proteja de lumina solară.
	SK	Uchovávať v chlade. Chrániť pred slnečným žiarením.
	SL	Hraniti na hladnem. Zaščititi pred sončno svetlobo.
	FI	Säilytä viileässä. Suojaa auringonvalolta.
	SV	Förvaras svalt. Skyddas från solljus.

Tabela 1.3

Previdnostni stavki – odziv

P301	Jezik	
	BG	ПРИ ПОГЛЪЩАНЕ:
	ES	EN CASO DE INGESTIÓN:
	CS	PŘI POŽITÍ:
	DA	I TILFÆLDE AF INDTAGELSE:
	DE	BEI VERSCHLUCKEN:
	ET	ALLANEELAMISE KORRAL:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΚΑΤΑΠΟΣΗΣ:
	EN	IF SWALLOWED:
	FR	EN CAS D'INGESTION:
	GA	MÁ SHLOGTAR:
	IT	IN CASO DI INGESTIONE:
	LV	NORĪŠANAS GADĪJUMĀ:
	LT	PRARIJUS:
	HU	LENYELÉS ESETÉN:
	MT	JEKK JINBELA':

P301	Jezik	
	NL	NA INSLIKKEN:
	PL	W PRZYPADKU POŁKNIĘCIA:
	PT	EM CASO DE INGESTÃO:
	RO	ÎN CAZ DE ÎNGHIȚIRE:
	SK	PO POŽITÍ:
	SL	PRI ZAUŽITJU:
	FI	JOS KEMIKAALIA ON NIELTY:
	SV	VID FÖRTÄRING:

P302	Jezik	
	BG	ПРИ КОНТАКТ С КОЖАТА:
	ES	EN CASO DE CONTACTO CON LA PIEL:
	CS	PŘI STYKU S KŮŽÍ:
	DA	VED KONTAKT MED HUDEN:
	DE	BEI BERÜHRUNG MIT DER HAUT:
	ET	NAHALE SATTUMISE KORRAL:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΟ ΔΕΡΜΑ:
	EN	IF ON SKIN:
	FR	EN CAS DE CONTACT AVEC LA PEAU:
	GA	I gCÁS TEAGMHÁLA LEIS AN gCRAICEANN:
	IT	IN CASO DI CONTATTO CON LA PELLE:
	LV	SASKARĒ AR ĀDU:
	LT	PATEKUS ANT ODO:
	HU	HA BŐRRE KERÜL:
	MT	FKAŻ TA' KUNTATT MAL-ĠILDA:
	NL	BIJ CONTACT MET DE HUID:
	PL	W PRZYPADKU KONTAKTU ZE SKÓRĄ:
	PT	SE ENTRAR EM CONTACTO COM A PELE:
	RO	ÎN CAZ DE CONTACT CU PIELEA:
	SK	PRI KONTAKTE S POKOŽKOU:
	SL	PRI STIKU S KOŽO:
	FI	JOS KEMIKAALIA JOUTUU IHOILLE:
	SV	VID HUDKONTAKT:

P303	Jezik	
	BG	ПРИ КОНТАКТ С КОЖАТА (или косата):
	ES	EN CASO DE CONTACTO CON LA PIEL (o el pelo):
	CS	PŘI STYKU S KŮŽÍ (nebo s vlasy):

P303	Jezik	
	DA	VED KONTAKT MED HUDEN (eller håret):
	DE	BEI BERÜHRUNG MIT DER HAUT (oder dem Haar):
	ET	NAHALE (või juustele) SATTUMISE KORRAL:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΟ ΔΕΡΜΑ (ή με τα μαλλιά):
	EN	IF ON SKIN (or hair):
	FR	EN CAS DE CONTACT AVEC LA PEAU (ou les cheveux):
	GA	I gCÁS TEAGMHÁLA LEIS AN gCRAICEANN (nó le gruaig):
	IT	IN CASO DI CONTATTO CON LA PELLE (o con i capelli):
	LV	SASKARĒ AR ĀDU (vai matiem):
	LT	PATEKUS ANT ODOŠ (arba plaukų):
	HU	HA BŐRRE (vagy hajra) KERÜL:
	MT	F'KAŻ TA' KUNTATT MAL-ĠILDA (jew ix-xagħar):
	NL	BIJ CONTACT MET DE HUID (of het haar):
	PL	W PRZYPADKU KONTAKTU ZE SKÓRĄ (lub z włosami):
	PT	SE ENTRAR EM CONTACTO COM A PELE (ou o cabelo):
	RO	ÎN CAZ DE CONTACT CU PIELEA (sau părul):
	SK	PRI KONTAKTE S POKOŽKOU (alebo vlasmi):
	SL	PRI STIKU S KOŽO (ali lasmi):
	FI	JOS KEMIKAALIA JOUTUU IHOLLE (tai hiuksiin):
	SV	VID HUDKONTAKT (även håret):
P304	Jezik	
	BG	ПРИ ВДИШВАНЕ:
	ES	EN CASO DE INHALACIÓN:
	CS	PŘI VDECHNUTÍ:
	DA	VED INDÅNDING:
	DE	BEI EINATMEN:
	ET	SISSEHINGAMISE KORRAL:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΙΣΠΝΟΗΣ:
	EN	IF INHALED:
	FR	EN CAS D'INHALATION:
	GA	MÁ IONANÁLAÍTEAR:
	IT	IN CASO DI INALAZIONE:
	LV	IEELPOJOT:
	LT	ĮKVĖPUS:
	HU	BELÉLEGZÉS ESETÉN:
	MT	JEKK JINGĠBED MAN-NIFS:
	NL	NA INADEMING:

P304	Jezik	
	PL	W PRZYPADKU DOSTANIA SIĘ DO DRÓG ODDECHOWYCH:
	PT	EM CASO DE INALAÇÃO:
	RO	ÎN CAZ DE INHALARE:
	SK	PO VDÝCHNUTÍ:
	SL	PRI VDIHAVANJU:
	FI	JOS KEMIKAALIA ON HENGITETTY:
	SV	VID INANDNING:

P305	Jezik	
	BG	ПРИ КОНТАКТ С ОЧИТЕ:
	ES	EN CASO DE CONTACTO CON LOS OJOS:
	CS	PŘI ZASAŽENÍ OČÍ:
	DA	VED KONTAKT MED ØJNE:
	DE	BEI KONTAKT MIT DEN AUGEN:
	ET	SILMA SATTUMISE KORRAL:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΑ ΜΑΤΙΑ:
	EN	IF IN EYES:
	FR	EN CAS DE CONTACT AVEC LES YEUX:
	GA	I gCÁS TEAGMHÁLA LEIS NA SÚILE:
	IT	IN CASO DI CONTATTO CON GLI OCCHI:
	LV	IEKĻŪSTOT ACĪS:
	LT	PATEKUS Į AKIS:
	HU	SZEMBE KERÜLÉS ESETÉN:
	MT	JEKK JIDHOL FL-GHAJNEJN:
	NL	BIJ CONTACT MET DE OGEN:
	PL	W PRZYPADKU DOSTANIA SIĘ DO OCZU:
	PT	SE ENTRAR EM CONTACTO COM OS OLHOS:
	RO	ÎN CAZ DE CONTACT CU OCHII:
	SK	PO ZASIAHNUTÍ OČÍ:
	SL	PRI STIKU Z OČMI:
	FI	JOS KEMIKAALIA JOUTUU SILMIIN:
	SV	VID KONTAKT MED ÖGONEN:

P306	Jezik	
	BG	ПРИ ПОПАДАНЕ ВЪРХУ ОБЛЕКЛОТО:
	ES	EN CASO DE CONTACTO CON LA ROPA:
	CS	PŘI STYKU S ODĚVEM:
	DA	VED KONTAKT MED TØJET:

P306	Jezik	
	DE	BEI KONTAMINierter KLEIDUNG:
	ET	RÕIVASTELE SATTUMISE KORRAL:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΑ ΡΟΥΧΑ:
	EN	IF ON CLOTHING:
	FR	EN CAS DE CONTACT AVEC LES VÊTEMENTS:
	GA	I gCÁS TEAGMHÁLA LE hÉADAÍ:
	IT	IN CASO DI CONTATTO CON GLI INDUMENTI:
	LV	SASKARĒ AR APĢĒRBU:
	LT	PATEKUS ANT DRABUŽIŲ:
	HU	HA RUHÁRA KERÜL:
	MT	F'KAŻ TA' KUNTATT MA' L-ILBIES:
	NL	NA MORSEN OP KLEDING:
	PL	W PRZYPADKU KONTAKTU Z ODDZIEŻĄ:
	PT	SE ENTRAR EM CONTACTO COM A ROUPA:
	RO	ÎN CAZ DE CONTACT CU ÎMBRĂCĂMINTEA:
	SK	PRI KONTAKTE S ODEVOM:
	SL	PRI STIKU Z OBLAČILI:
	FI	JOS KEMIKAALIA JOUTUU VAATTEISIIN:
	SV	VID KONTAKT MED KLÄDERNA:

P307	Jezik	
	BG	ПРИ експозиция:
	ES	EN CASO DE exposición:
	CS	PŘI expozici:
	DA	VED eksponering:
	DE	BEI Exposition:
	ET	Kokkupuute korral:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ έκθεσης:
	EN	IF exposed:
	FR	EN CAS d'exposition:
	GA	I gCÁS nochta:
	IT	IN CASO di esposizione:
	LV	JA saskaras:
	LT	Esant sąlyčiui:
	HU	Expozíció esetén:
	MT	JEKK espost:
	NL	NA blootstelling:
	PL	W PRZYPADKU narażenia:

P307	Jezik	
	PT	EM CASO DE exposição:
	RO	ÎN CAZ DE expunere:
	SK	PO expozíci:
	SL	PRI izpostavljenosti:
	FI	Altistumisen tapahduttua:
	SV	Om du exponerats:

P308	Jezik	
	BG	ПРИ явна или предполагаема експозиция:
	ES	EN CASO DE exposición manifiesta o presunta:
	CS	PŘI expozici nebo podezření na ni:
	DA	VED eksponering eller mistanke om eksponering:
	DE	BEI Exposition oder falls betroffen
	ET	Kokkupuute või kokkupuutekahtluse korral:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ έκθεσης ή πιθανής έκθεσης:
	EN	IF exposed or concerned:
	FR	EN CAS d'exposition prouvée ou suspectée:
	GA	I gCÁS nochta nó má mheastar a bheith nochtaithe:
	IT	IN CASO di esposizione o di possibile esposizione:
	LV	Ja saskaras vai saistīts ar:
	LT	Esant sąlyčiui arba jeigu numanomas sąlytis:
	HU	Expozíció vagy annak gyanúja esetén:
	MT	JEKK espost jew konċernat:
	NL	NA (mogelijke) blootstelling:
	PL	W PRZYPADKU narażenia lub styczności:
	PT	EM CASO DE exposição ou suspeita de exposição:
	RO	ÎN CAZ DE expunere sau de posibilă expunere:
	SK	Po expozícii alebo podozrení z nej:
	SL	PRI izpostavljenosti ali sumu izpostavljenosti:
	FI	Altistumisen tapahduttua tai jos epäillään altistumista:
	SV	Vid exponering eller misstanke om exponering:

P309	Jezik	
	BG	ПРИ експозиция или при неразположение:
	ES	EN CASO DE exposición o malestar:
	CS	PŘI expozici nebo necítíte-li se dobře:
	DA	VED eksponering eller ubehag:
	DE	BEI Exposition oder Unwohlsein:

P309	Jezik	
	ET	Kokkupuute või halva enesetunde korral:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ έκθεσης ή αδιαθεσίας:
	EN	If exposed or if you feel unwell:
	FR	EN CAS d'exposition ou d'un malaise:
	GA	I gCÁS nochta nó má bhraitear tinn:
	IT	IN CASO di esposizione o di malessere:
	LV	JA saskaras vai ja jums ir slikta pašsajūta:
	LT	Esant sąlyčiui arba blogai pasijutus:
	HU	Expozíció vagy rosszullét esetén:
	MT	JEKK espost jew thossok ma tiflahx:
	NL	NA blootstelling of bij onwel voelen:
	PL	W PRZYPADKU narażenia lub złego samopoczucia:
	PT	EM CASO DE exposição ou de indisposição:
	RO	ÎN CAZ DE expunere sau dacă nu vă simțiți bine:
	SK	Po expozícii alebo pri zdravotných problémoch.
	SL	PRI izpostavljenosti ali slabem počutju:
	FI	Altistumisen tapahduttua tai jos ilmenee pahoinvointia:
	SV	Vid exponering eller obehag:

P310	Jezik	
	BG	Незабавно се обадете в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар.
	ES	Llamar inmediatamente a un CENTRO DE INFORMACION TOXICOLOGICA o a un médico.
	CS	Okamžitě volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	Ring omgående til en GIFTINFORMATION eller en læge.
	DE	Sofort GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	Võtta viivitamata ühendust MÜRGISTUSTEABEKESKUSE või arstiga.
	EL	Καλέστε αμέσως το ΚΕΝΤΡΟ ΔΗΛΗΘΗΡΙΑΣΕΩΝ ή ένα γιατρό.
	EN	Immediately call a POISON CENTER or doctor/physician.
	FR	Appeler immédiatement un CENTRE ANTIPOISON ou un médecin.
	GA	Cuir glao láithreach ar IONAD NIMHE nó ar dhochtúir/lia.
	IT	Contattare immediatamente un CENTRO ANTIVELENI o un medico.
	LV	Nekavējoties sazinieties ar SAINDĒŠANĀS CENTRU vai ārstu.
	LT	Nedelsiant skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	Azonnal forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	Ikkuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib.
	NL	Onmiddellijk een ANTIGIFCENTRUM of een arts raadplegen.
	PL	Natychmiast skontaktować się z OŚRODKIEM ZATRUĆ lub lekarzem.

P310	Jezik	
	PT	Contacte imediatamente um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.
	RO	Sunați imediat la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic.
	SK	Okamžite volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	Takoj pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	Ota välittömästi yhteys MYRKYTYSTIETOKESKUKSEEN tai lääkäriin.
	SV	Kontakta genast GIFTINFORMATIONSCENTRAL eller läkare.

P311	Jezik	
	BG	Обадете се в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар.
	ES	Llamar a un CENTRO DE INFORMACION TOXICOLOGICA o a un médico.
	CS	Volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	Ring til en GIFTINFORMATION eller en læge.
	DE	GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	Võtta ühendust MÜRGISTUSTEABEKESKUSE või arstiga.
	EL	Καλέστε το ΚΕΝΤΡΟ ΔΗΛΗΘΗΡΙΑΣΕΩΝ ή ένα γιατρό.
	EN	Call a POISON CENTER or doctor/physician.
	FR	Appeler un CENTRE ANTIPOISON ou un médecin.
	GA	Cuir glao ar IONAD NIMHE nó ar dhochtúir/lia.
	IT	Contattare un CENTRO ANTIVELENI o un medico.
	LV	Sazinieties ar SAINDĒŠANĀS CENTRU vai ārstu.
	LT	Skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	Forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	Ikkuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib.
	NL	Een ANTIGIFCENTRUM of een arts raadplegen.
	PL	Skontaktować się z OŚRODKIEM ZATRUĆ lub lekarzem.
	PT	Contacte um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.
	RO	Sunați la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic.
	SK	Volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	Pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	Ota yhteys MYRKYTYSTIETOKESKUKSEEN tai lääkäriin.
	SV	Kontakta GIFTINFORMATIONSCENTRAL eller läkare.

P312	Jezik	
	BG	При неразположение се обадете в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар.
	ES	Llamar a un CENTRO DE INFORMACION TOXICOLOGICA o a un médico en caso de malestar.
	CS	Necítíte-li se dobře, volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	I tilfælde af ubehag ring til en GIFTINFORMATION eller en læge.

P312	Jezik	
	DE	Bei Unwohlsein GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	Halva enesetunde korral võtta ühendust MÜRGISTUSTEABEKESKUSE või arstiga.
	EL	Καλέστε το ΚΕΝΤΡΟ ΔΗΛΗΤΗΡΙΑΣΕΩΝ ή ένα γιατρό εάν αισθανθείτε αδιαθεσία.
	EN	Call a POISON CENTER or doctor/physician if you feel unwell.
	FR	Appeler un CENTRE ANTIPOISON ou un médecin en cas de malaise.
	GA	Cuir glao ar IONAD NIMHE nó ar dhochtúir/lia má bhraitheann tú tinn.
	IT	In caso di malessere, contattare un CENTRO ANTIVELENI o un medico.
	LV	Sazinieties ar SAINDĒŠANĀS CENTRU vai ārstu, ja jums ir slikta pašsajūta.
	LT	Pasijutus blogai, skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	Rosszullét esetén forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	Ikkuuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib jekk thossok ma tiflahx.
	NL	Bij onwel voelen een ANTIGIFCENTRUM of een arts raadplegen.
	PL	W przypadku złego samopoczucia skontaktować się z OŚRODKIEM ZATRUĆ lub z lekarzem.
	PT	Caso sinta indisposição, contacte um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.
	RO	Sunați la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic, dacă nu vă simțiți bine.
	SK	Pri zdravotných problémoch, volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	Ob slabem počutju pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	Ota yhteyks MYRKYTYSTIETOKESKUKSEEN tai lääkäriin, jos ilmenee pahoinvointia.
	SV	Vid obehag, kontakta GIFTINFORMATIONSCENTRAL eller läkare.
P313	Jezik	
	BG	Потърсете медицински съвет/помощ.
	ES	Consultar a un médico.
	CS	Vyhledejte lékařskou pomoc/ošetření.
	DA	Søg lægehjælp.
	DE	Ärztlichen Rat einholen/ärztliche Hilfe hinzuziehen.
	ET	Pöörduda arsti poole.
	EL	Συμβουλευθείτε/Επισκεφθείτε γιατρό.
	EN	Get medical advice/attention.
	FR	Consulter un médecin.
	GA	Faigh comhairle/cúram liachta.
	IT	Consultare un medico.
	LV	Lūdziet palīdzību mediķiem.
	LT	Kreiptis į gydytoją.
	HU	Orvosi ellátást kell kérni.
	MT	Ikkonsulta tabib.

P313	Jezik	
	NL	Een arts raadplegen.
	PL	Zasięgnąć porady/zgłosić się pod opiekę lekarza.
	PT	Consulte um médico.
	RO	Consultați medicul.
	SK	Vyhľadajte lekársku pomoc/starostlivosť.
	SL	Poiščite zdravniško pomoč/oskrbo.
	FI	Hakeudu lääkäriin.
	SV	Sök läkarhjälp.

P314	Jezik	
	BG	При неразположение потърсете медицински съвет/помощ.
	ES	Consultar a un médico en caso de malestar.
	CS	Necítíte-li se dobře, vyhledejte lékařskou pomoc/ošetření.
	DA	Søg lægehjælp ved ubehag.
	DE	Bei Unwohlsein ärztlichen Rat einholen/ärztliche Hilfe hinzuziehen.
	ET	Halva enesetunde korral pöörduda arsti poole.
	EL	Συμβουλευθείτε/Επισκεφθείτε γιατρό εάν αισθανθείτε αδιαθεσία.
	EN	Get medical advice/attention if you feel unwell.
	FR	Consulter un médecin en cas de malaise.
	GA	Faigh comhairle/cúram liachta má bhraitheann tú tinn.
	IT	In caso di malessere, consultare un medico.
	LV	Lūdziet palīdzību mediķiem, ja jums ir slikta pašsajūta.
	LT	Pasijutus blogai, kreiptis į gydytoją.
	HU	Roszállást esetén orvosi ellátást kell kérni.
	MT	Ikkonsulta tabib jekk thossok ma tiflaħx.
	NL	Bij onwel voelen een arts raadplegen.
	PL	W przypadku złego samopoczucia zasięgnąć porady/zgłosić się pod opiekę lekarza.
	PT	Em caso de indisposição, consulte um médico.
	RO	Consultați medicul, dacă nu vă simțiți bine.
	SK	Ak pociťujete zdravotné problémy, vyhľadajte lekársku pomoc/starostlivosť.
	SL	Ob slabem počutju poiščite zdravniško pomoč/oskrbo.
	FI	Hakeudu lääkäriin, jos ilmenee pahoinvointia.
	SV	Sök läkarhjälp vid obehag

P315	Jezik	
	BG	Незабавно потърсете медицински съвет/помощ.
	ES	Consultar a un médico inmediatamente.
	CS	Okamžitě vyhledejte lékařskou pomoc/ošetření.

P315	Jezik	
	DA	Søg omgående lægehjælp.
	DE	Sofort ärztlichen Rat einholen/ärztliche Hilfe hinzuziehen.
	ET	Pöörduda viivitamata arsti poole.
	EL	Συμβουλευθείτε/Επισκεφθείτε αμέσως γιατρό.
	EN	Get immediate medical advice/attention.
	FR	Consulter immédiatement un médecin.
	GA	Faigh comhairle/cúram liachta láithreach.
	IT	Consultare immediatamente un medico.
	LV	Nekavējoties lūdziet palīdzību mediķiem.
	LT	Nedelsiant kreiptis į gydytoją.
	HU	Azonnal orvosi ellátást kell kérni.
	MT	Ikkonsulta tabib minnufih.
	NL	Onmiddellijk een arts raadplegen.
	PL	Natychmiast zasięgnąć porady/zgłosić się pod opiekę lekarza.
	PT	Consulte imediatamente um médico.
	RO	Consultați imediat medicul.
	SK	Okamžite vyhľadajte lekársku pomoc/starostlivosť.
	SL	Takoj poiščite zdravniško pomoč/oskrbo.
	FI	Hakeudu välittömästi lääkäriin.
	SV	Sök omedelbart läkarhjälp.
P320	Jezik	
	BG	Спешна нужда от специализирано лечение (вж. ... на този етикет).
	ES	Se necesita urgentemente un tratamiento específico (ver ... en esta etiqueta).
	CS	Je nutné odborné ošetření (viz ... na tomto štítku).
	DA	Særlig behandling straks påkrævet (se ... på denne etiket).
	DE	Besondere Behandlung dringend erforderlich (siehe ... auf diesem Kennzeichnungsetikett).
	ET	Nõuab viivitamatut eriravi (vt ... käesoleval etiketil).
	EL	Χρειάζεται επείγοντως ειδική αγωγή (βλέπε ... στην ετικέτα).
	EN	Specific treatment is urgent (see ... on this label).
	FR	Un traitement spécifique est urgent (voir ... sur cette étiquette).
	GA	Tá sé práinneach go bhfaightear cóir leighis ar leith (féach ... ar an lipéad seo).
	IT	Trattamento specifico urgente (vedere..... su questa etichetta).
	LV	Steidzami nepieciešama īpaša medicīniskā palīdzība (skat. ... uz šīs etiķetes).
	LT	Būtinias skubus specialus gydymas (žr. ... šioje etiketėje).
	HU	Sürgős szakellátás szükséges (lásd ... a címkén).
	MT	Trattament speċifiku hu urġenti (ara ... fuq din it-tikketta).
	NL	Specifieke behandeling dringend vereist (zie ... op dit etiket).

P320	Jezik	
	PL	Pilnie zastosować określone leczenie (patrz ... na etykiecie).
	PT	É urgente um tratamento específico (ver ... no presente rótulo).
	RO	Un tratament specific este urgent (a se vedea ... de pe această etichetă).
	SK	Odborné ošetrenie je naliehavé (pozri ... na etikete).
	SL	Posebno zdravljenje je nujno (glejte ... na tej etiketi).
	FI	Erityishoitoa tarvitaan välittömästi (katso ... pakkauksen merkinnoissä).
	SV	Särskild behandling krävs omedelbart (se ... på etiketten).

P321	Jezik	
	BG	Специализирано лечение (вж... на този етикет).
	ES	Se necesita un tratamiento específico (ver ... en esta etiqueta).
	CS	Odborné ošetření (viz ... na tomto štítku).
	DA	Særlig behandling (se ... på denne etiket).
	DE	Besondere Behandlung (siehe ... auf diesem Kennzeichnungsetikett).
	ET	Nõuab eriravi (vt ... käesoleval etiketil).
	EL	Χρειάζεται ειδική αγωγή (βλέπε ... στην ετικέτα).
	EN	Specific treatment (see ... on this label).
	FR	Traitement spécifique (voir ... sur cette étiquette).
	GA	Cóir liachta ar leith (féach ... ar an lipéad seo).
	IT	Trattamento specifico (vedere su questa etichetta).
	LV	Īpaša medicīniskā palīdzība (skat. ... uz šīs etiķetes).
	LT	Specialus gydymas (žr. ... šioje etiketėje).
	HU	Szakellátás (lásd ... a címkén).
	MT	Trattament speċifiku (ara ... fuq din it-tikketta).
	NL	Specifieke behandeling vereist (zie ... op dit etiket).
	PL	Zastosować określone leczenie (patrz ... na etykiecie).
	PT	Tratamento específico (ver ... no presente rótulo).
	RO	Tratament specific (a se vedea ... de pe această etichetă).
	SK	Odborné ošetrenie (pozri ... na etikete).
	SL	Posebno zdravljenje (glejte ... na tej etiketi).
	FI	Erityishoitoa tarvitaan (katso ... pakkauksen merkinnoissä).
	SV	Särskild behandling (se ... på etiketten).

P322	Jezik	
	BG	Специални мерки (вж... на този етикет).
	ES	Se necesitan medidas específicas (ver ... en esta etiqueta).
	CS	Specifické opatření (viz ... na tomto štítku).
	DA	Særlige foranstaltninger (se ... på denne etiket).

P322	Jezik	
	DE	Gezielte Maßnahmen (siehe ... auf dieser Kennzeichnungsetikett).
	ET	Nõuab erimeetmeid (vt ... käesoleval etiketil).
	EL	Χρειάζονται ειδικά μέτρα (βλέπε ... στην ετικέτα).
	EN	Specific measures (see ... on this label).
	FR	Mesures spécifiques (voir ... sur cette étiquette).
	GA	Bearta ar leith (féach ... ar an lipéad seo).
	IT	Misure specifiche (vedere ... su questa etichetta).
	LV	Īpaši pasākumi (skat. ... uz šīs etiķetes).
	LT	Specialios priemonės (žr. ... šioje etiketėje).
	HU	Különleges intézkedések (lásd ... a címkén).
	MT	Miżuri speċifiċi (ara ... fuq din it-tikketta).
	NL	Specifieke maatregelen (zie ... op dit etiket).
	PL	Środki szczególne (patrz ... na etykiecie).
	PT	Medidas específicas (ver ... no presente rótulo).
	RO	Măsuri specifice (a se vedea ... de pe această etichetă).
	SK	Osobitné opatrenia (pozri ... na etikete).
	SL	Posebni ukrepi (glejte ... na tej etiketi).
	FI	Eriytistoimenpiteitä tarvitaan (katso ... pakkauksen merkinnöissä).
	SV	Särskilda åtgärder (se ... på etiketten).

P330	Jezik	
	BG	Изплакнете устата.
	ES	Enjuagarse la boca.
	CS	Vypláchněte ústa.
	DA	Skyl munden.
	DE	Mund ausspülen.
	ET	Loputada suud.
	EL	Ξεπλύνετε το στόμα.
	EN	Rinse mouth.
	FR	Rincer la bouche.
	GA	Sruthlaítear an béal.
	IT	Sciacquare la bocca.
	LV	Izskalot muti.
	LT	Išskalauti burną.
	HU	A száját ki kell öblíteni.
	MT	Lahlah halqek.
	NL	De mond spoelen.
	PL	Wyplukać usta.

P330	Jezik	
	PT	Enxaguar a boca.
	RO	Clătiți gura.
	SK	Vypláchnite ústa.
	SL	Izprati usta.
	FI	Huuhdo suu.
	SV	Skölj munnen.

P331	Jezik	
	BG	НЕ предизвиквайте повръщане.
	ES	NO provocar el vómito.
	CS	NEVYVOLÁVEJTE zvracení.
	DA	Fremkald IKKE opkastning.
	DE	KEIN Erbrechen herbeiführen.
	ET	MITTE kutsuda esile oksendamist.
	EL	ΜΗΝ προκαλέσετε εμετό.
	EN	Do NOT induce vomiting.
	FR	NE PAS faire vomir.
	GA	NÁ spreagtar urlacan.
	IT	NON provocare il vomito.
	LV	NEIZRAISĪT vemšanu.
	LT	NESKATINTI vėmimo.
	HU	TILOS hánytatni.
	MT	TIPPROVOKAX ir-remettar.
	NL	GEEN braken opwekken.
	PL	NIE wywoływać wymiotów.
	PT	NÃO provocar o vómito.
	RO	NU provocați voma.
	SK	Nevyvolávajte zvracanie.
	SL	NE izzvati bruhanja.
	FI	El saa oksennutta.
	SV	Framkalla INTE kräkning.

P332	Jezik	
	BG	При поява на кожно дразнене:
	ES	En caso de irritación cutánea:
	CS	Při podráždění kůže:
	DA	Ved hudirritation:
	DE	Bei Hautreizung:

P332	Jezik	
	ET	Nahaärrituse korral:
	EL	Εάν παρατηρηθεί ερεθισμός του δέρματος:
	EN	If skin irritation occurs:
	FR	En cas d'irritation cutanée:
	GA	I gcás greannú craicinn:
	IT	In caso di irritazione della pelle:
	LV	Ja rodas ādas iekaisums:
	LT	Jeigu sudirginama oda:
	HU	Bőrirritáció esetén:
	MT	Jekk ikun hemm irritazzjoni tal-ġilda:
	NL	Bij huidirritatie:
	PL	W przypadku wystąpienia podrażnienia skóry:
	PT	Em caso de irritação cutânea:
	RO	În caz de iritare a pielii:
	SK	Ak sa prejaví podráždenie pokožky:
	SL	Če nastopi draženje kože:
	FI	Jos ilmenee ihoärsytystä:
	SV	Vid hudirritation:
P333	Jezik	
	BG	При поява на кожно дразнене или обрив на кожата:
	ES	En caso de irritación o erupción cutánea:
	CS	Při podráždění kůže nebo vyrážce:
	DA	Ved hudirritation eller udslet:
	DE	Bei Hautreizung oder -ausschlag:
	ET	Nahaärrituse või _obe korral:
	EL	Εάν παρατηρηθεί ερεθισμός του δέρματος ή εμφανιστεί εξάνθημα:
	EN	If skin irritation or rash occurs:
	FR	En cas d'irritation ou d'éruption cutanée:
	GA	I gcás greannú nó grís craicinn:
	IT	In caso di irritazione o eruzione della pelle:
	LV	Ja rodas ādas iekaisums vai izsitumi:
	LT	Jeigu sudirginama oda arba ją išberia.
	HU	Bőrirritáció vagy kiütések megjelenése esetén:
	MT	Jekk ikun hemm irritazzjoni jew raxx tal-ġilda:
	NL	Bij huidirritatie of uitslag:
	PL	W przypadku wystąpienia podrażnienia skóry lub wysypki:
	PT	Em caso de irritação ou erupção cutânea:

P333	Jezik	
	RO	În caz de iritare a pielii sau de erupție cutanată:
	SK	Ak sa prejaví podráždenie pokožky alebo sa vytvorí vyrážky:
	SL	Če nastopi draženje kože ali se pojavi izpuščaj:
	FI	Jos ilmenee ihoärsytystä tai ihottumaa:
	SV	Vid hudirritation eller utslag:

P334	Jezik	
	BG	Потопете в хладка вода/сложете мокри компреси.
	ES	Sumergir en agua fresca/aplicar compresas húmedas.
	CS	Ponořte do studené vody/zabalte do vlhkého obvazu.
	DA	Skyl under koldt vand/anvend våde omslag.
	DE	In kaltes Wasser tauchen/nassen Verband anlegen.
	ET	Hoida jahedas vees/panna peale niiske kompress.
	EL	Βυθίστε σε δροσερό νερό/τυλίξτε με βρεγμένους επιδέσμους.
	EN	Immerse in cool water/wrap in wet bandages.
	FR	Rincer à l'eau fraîche/poser une compresse humide.
	GA	Tum in uisce fionnuar/cuir bréid fliuch air.
	IT	Immergere in acqua fredda/avvolgere con un bendaggio umido.
	LV	Iegremdēt vēsā ūdenī/ietīt mitros apsējos.
	LT	Įmerkti į vėsą vandenį/apvynioti šlapiais tvarsčiais.
	HU	Hideg vízzel/nedves kötéssel kell hűteni.
	MT	Dahhal fl-ilma kiesah/kebbeb f'faxex imxarrbin.
	NL	In koud water onderdompelen/nat verband aanbrengen.
	PL	Zanurzyć w zimnej wodzie/owinąć mokrym bandażem.
	PT	Mergulhar em água fria/aplicar compressas húmidas.
	RO	Introduceți în apă rece/acoperiți cu o compresă umedă.
	SK	Ponorte do studenej vody/obviažte mokrými obväzmi.
	SL	Potopiti v hladno vodo/zaviti v mokre povoje.
	FI	Upota kylmään veteen/kääri märkiin siteisiin.
	SV	Skölj under kallt vatten/använd våta omslag.

P335	Jezik	
	BG	Отстранете от кожата посипаните частици.
	ES	Sacudir las partículas que se hayan depositado en la piel.
	CS	Volné částice odstraňte z kůže.
	DA	Børst løse partikler bort fra huden.
	DE	Lose Partikel von der Haut abbürsten.
	ET	Pühkida lahtised osakesed nahalt maha.

P335	Jezik	
	EL	Αφαιρέστε προσεκτικά τα σωματίδια που έχουν μείνει στο δέρμα.
	EN	Brush off loose particles from skin.
	FR	Enlever avec précaution les particules déposées sur la peau.
	GA	Glan cáithníní scaoilte den chraiceann.
	IT	Rimuovere le particelle depositate sulla pelle.
	LV	Noberzt no ādas nepiestiprinātās daļiņas.
	LT	Nepirilpusias daleles nuvalyti nuo odos.
	HU	A bőrré lazán tapadó szemcséket óvatosan le kell kefélni.
	MT	Farfar il-frak mhux imwählha minn fuq il-ġilda.
	NL	Losse deeltjes van de huid afvegen.
	PL	Nie związaną pozostałość strzepnąć ze skóry.
	PT	Sacudir da pele as partículas soltas.
	RO	Îndepărtați particulele depuse pe piele.
	SK	Z pokožky oprášte sypké čiasťočky.
	SL	S krtačo odstraniti razsute delce s kože.
	FI	Poista irtohiukkaset iholta.
	SV	Borsta bort lösa partiklar från huden.
P336	Jezik	
	BG	Размразете замръзналите части в хладка вода. Не разтривайте засегнатото място.
	ES	Descongelar las partes heladas con agua tibia. No frotar la zona afectada.
	CS	Omrzlá místa ošetřete vlažnou vodou. Postižené místo netřete.
	DA	Forsigtig opvarmning af frostskaadede legemsdele i lunkent vand. Gnid ikke det angrebne område.
	DE	Vereiste Bereiche mit lauwarmem Wasser auftauen. Betroffenen Bereich nicht reiben.
	ET	Sulatada külmunud piirkonnad leige veega. Kannatada saanud piirkonda mitte hõõruda.
	EL	Ξεπαγώστε τα παγωμένα μέρη με χλιαρό νερό. Μην τρίβετε την περιοχή που πάγωσε.
	EN	Thaw frosted parts with lukewarm water. Do not rub affected area.
	FR	Dégeler les parties gelées avec de l'eau tiède. Ne pas frotter les zones touchées.
	GA	Leáigh codanna sioctha le huisce alabhog. Ná cuimil an réimse lena mbaineann.
	IT	Sgelare le parti congelate usando acqua tiepida. Non sfregare la parte interessata.
	LV	Atkausēt sasalušās daļas ar remdenu ūdeni. Skarto zonu neberzt.
	LT	Prišalusias daleles atitirpinti drungnu vandeniu. Netrinti paveiktos zonos.
	HU	A fagyott részeket langyos vízzel fel kell melegíteni. Tilos az érintett terület dörzsölése.
	MT	Holl il-partijiet kiesha bl-ilma fietel. Toghroxx il-parti affettwata.
	NL	Bevroren lichaamsdelen met lauw water ontdooien. Niet wrijven op de betrokken plaatsen.
	PL	Rozmrozić oszronione obszary letnią wodą. Nie trzeć oszronionego obszaru.
	PT	Derreter as zonas congeladas com água morna. Não friccionar a zona afectada.

P336	Jezik	
	RO	Dezghețați părțile degerate cu apă caldă. Nu frecați zona afectată.
	SK	Zmrznuté časti ošetrte vlažnou vodou. Postihnuté miesto netrite.
	SL	Zamrznjene dele odtaliti z mlačno vodo. Ne drgniti prizadetega mesta.
	FI	Sulata jäätyneet alueet haalealla vedellä. Vahingoittunutta aluetta ei saa hangata.
	SV	Värm det köldskadade området med ljummet vatten. Gnid inte det skadade området.

P337	Jezik	
	BG	При продължително дразнене на очите:
	ES	Si persiste la irritación ocular:
	CS	Přetrvává-li podráždění očí:
	DA	Ved vedvarende øjenirritation:
	DE	Bei anhaltender Augenreizung:
	ET	Kui silmade ärritus ei möödu:
	EL	Εάν δεν υποχωρεί ο οφθαλμικός ερεθισμός:
	EN	If eye irritation persists:
	FR	Si l'irritation oculaire persiste:
	GA	Má mhaireann an greannú súile:
	IT	Se l'irritazione degli occhi persiste:
	LV	Ja acu iekaisums nepāriet:
	LT	Jei akių dirginimas nepraeina:
	HU	Ha a szemirritáció nem múlik el:
	MT	Jekk l-irritazzjoni ta' l-ghajnejn tibqa':
	NL	Bij aanhoudende oogirritatie:
	PL	W przypadku utrzymywania się działania drażniącego na oczy:
	PT	Caso a irritação ocular persista:
	RO	Dacă iritarea ochilor persistă:
	SK	Ak podráždenie očí pretrváva:
	SL	Če draženje oči ne preneha:
	FI	Jos silmä-ärsytys jatkuu:
	SV	Vid bestående ögonirritation:

P338	Jezik	
	BG	Свалете контактните лещи, ако има такива и доколкото това е възможно. Продължете с изплакването.
	ES	Quitar las lentes de contacto, si lleva y resulta fácil. Seguir aclarando.
	CS	Vyjměte kontaktní čočky, jsou-li nasazeny a pokud je lze vyjmout snadno. Pokračujte ve vyplachování.
	DA	Fjern eventuelle kontaktlinser, hvis dette kan gøres let. Fortsæt skylning.
	DE	Eventuell Vorhandene Kontaktlinsen nach Möglichkeit entfernen. Weiter ausspülen.

P338	Jezik	
	ET	Eemaldada kontaktläätsed, kui neid kasutatakse ja kui neid on kerge eemaldada. Loputada veel kord.
	EL	Εάν υπάρχουν φακοί επαφής, αφαιρέστε τους, εφόσον είναι εύκολο. Συνεχίστε να ξεπλένετε.
	EN	Remove contact lenses, if present and easy to do. Continue rinsing.
	FR	Enlever les lentilles de contact si la victime en porte et si elles peuvent être facilement enlevées. Continuer à rincer.
	GA	Tóg amach na tadhall-lionsaí, más ann dóibh agus más furasta é sin a dhéanamh. Lean den sruthlú.
	IT	Togliere le eventuali lenti a contatto se è agevole farlo. Continuare a sciacquare.
	LV	Izņemiet kontaktlēcas, ja tās ir ievietotas un to ir viegli izdarīt. Turpiniet skalot.
	LT	Išimti kontaktinius lęšius, jeigu jie yra ir jeigu lengvai galima tai padaryti. Toliau plauti akis.
	HU	Adott esetben kontaktlencsék eltávolítása, ha könnyen megoldható. Az öblítés folytatása.
	MT	Nehhi l-lentijiet tal-kuntatt, jekk ikun hemm u jkunu faċli biex tnehhihom. Kompli lahlah.
	NL	Contactlenzen verwijderen, indien mogelijk. Blijven spoelen.
	PL	Wyjąć soczewki kontaktowe, jeżeli są i można je łatwo usunąć. Nadal płukać.
	PT	Se usar lentes de contacto, retire-as, se tal lhe for possível. Continue a enxaguar.
	RO	Scoateți lentilele de contact, dacă este cazul și dacă acest lucru se poate face cu ușurință. Continuați să clătiți.
	SK	Ak používate kontaktné šošovky a ak je to možné, odstráňte ich. Pokračujte vo vyplachovaní.
	SL	Odstranite kontaktne leče, če jih imate in če to lahko storite brez težav. Nadaljujte z izpiranjem.
	FI	Poista piilolinssit, jos sen voi tehdä helposti. Jatka huuhtomista.
	SV	Ta ur eventuella kontaktlinser om det går lätt. Försätt att skölja.

P340	Jezik	
	BG	Изведете пострадалия на чист въздух и го поставете в позиция, улесняваща дишането.
	ES	Transportar a la víctima al exterior y mantenerla en reposo en una posición confortable para respirar.
	CS	Přeneste postiženého na čerstvý vzduch a ponechte jej v klidu v poloze usnadňující dýchání.
	DA	Flyt personen til et sted med frisk luft og sørg for, at vedkommende hviler i en stilling, som letter vejrtrækningen.
	DE	Die betroffene Person an die frische Luft bringen und in einer Position ruhigstellen, die das Atmen erleichtert.
	ET	Toimetada kannatanu värske õhu kätte ja asetada mugavasse puhkeasendisse, mis võimaldab kergesti hingata.
	EL	Μεταφέρετε τον παθόντα στον καθαρό αέρα και αφήστε τον να ξεκουραστεί σε στάση που διευκολύνει την αναπνοή.
	EN	Remove victim to fresh air and keep at rest in a position comfortable for breathing.
	FR	Transporter la victime à l'extérieur et la maintenir au repos dans une position où elle peut confortablement respirer.
	GA	Tabhair amach faoin aer an duine agus coimeád socair é, i riocht ina bhféadfaidh sé anáil a tharraingt go réidh.
	IT	Trasportare l'infortunato all'aria aperta e mantenerlo a riposo in posizione che favorisca la respirazione.

P340	Jezik	
	LV	Izvest cietušo svaigā gaisā un turēt miera stāvoklī, lai būtu ērti elpot.
	LT	Išnešti nukentėjusį į gryną orą; jam būtina ramybė ir padėtis, leidžianti laisvai kvėpuoti.
	HU	Az érintett személyt friss levegőre kell vinni és olyan nyugalmi testhelyzetbe kell helyezni, hogy könnyen tudjon lélegezni.
	MT	Esponi lill-vittma għall-arja friska u zommha mistrieħa f'pożizzjoni komda biex tkun tista' tieħu n-nifs.
	NL	Het slachtoffer in de frisse lucht brengen en laten rusten in een houding die het ademen vergemakkelijkt.
	PL	Wyprowadzić lub wynieść poszkodowanego na świeże powietrze i zapewnić warunki do odpoczynku w pozycji umożliwiającej swobodne oddychanie.
	PT	Retirar a vítima para uma zona ao ar livre e mantê-la em repouso numa posição que não dificulte a respiração.
	RO	Transportați victima la aer liber și mențineți-o în stare de repaus într-o poziție confortabilă pentru respirație.
	SK	Presuňte postihnutého na čerstvý vzduch a nechajte ho oddychovať v polohe, ktorá mu umožní pohodlné dýchanie.
	SL	Prenesti žrtev na svež zrak in jo pustiti počivati v položaju, ki olajša dihanje.
	FI	Siirrä henkilö raittiiseen ilmaan ja pidä lepoasennossa, jossa on helppo hengittää.
	SV	Flytta personen till frisk luft och se till att han eller hon vilar i en ställning som underlättar andningen
P341	Jezik	
	BG	При затруднено дишане изведете пострадалия на чист въздух и го поставете в позиция, улесняваща дишането.
	ES	Si respira con dificultad, transportar a la víctima al exterior y mantenerla en reposo en una posición confortable para respirar.
	CS	Při obtížném dýchání přeneste postiženého na čerstvý vzduch a ponechte jej v klidu v poloze usnadňující dýchání.
	DA	Ved vejrtrækningsbesvær: Flyt personen til et sted med frisk luft og sørg for, at vedkommende hviler i en stilling, som letter vejrtrækningen.
	DE	Bei Atembeschwerden an die frische Luft bringen und in einer Position ruhigstellen, die das Atmen erleichtert.
	ET	Hingamisraskuste korral toimetada kannatanu värske õhu kätte ja asetada mugavasse puhkeasendisse, mis võimaldab kergesti hingata.
	EL	Εάν ο παθών έχει δυσπνοία, μεταφέρετέ τον στον καθαρό αέρα και αφήστε τον να ξεκουραστεί σε στάση που διευκολύνει την αναπνοή.
	EN	If breathing is difficult, remove victim to fresh air and keep at rest in a position comfortable for breathing.
	FR	S'il y a difficulté à respirer, transporter la victime à l'extérieur et la maintenir au repos dans une position où elle peut confortablement respirer.
	GA	Más deacair don duine análú, tabhair amach faoin aer é agus coimeád socair é, i riocht ina bhféadfaidh sé anáil a tharraingt go réidh.
	IT	Se la respirazione è difficile, trasportare l'infortunato all'aria aperta e mantenerlo a riposo in posizione che favorisca la respirazione.
	LV	Ja elpošana ir apgrūtināta, izvest cietušo svaigā gaisā un turēt miera stāvoklī, lai būtu ērti elpot.
	LT	Jeigu nukentėjusiajam sunku kvėpuoti, išnešti jį į gryną orą; jam būtina ramybė ir padėtis, leidžianti laisvai kvėpuoti.
	HU	Légzési nehézségek esetén az érintett személyt friss levegőre kell vinni és olyan nyugalmi testhelyzetbe kell helyezni, hogy könnyen tudjon lélegezni.

P341	Jezik	
	MT	Jekk in-nifs ikun diffiċli, esponi lill-vittma għall-arja friska u zommha mistrieħa f'pożizzjoni komda biex tkun tista' tiegħu n-nifs.
	NL	Bij ademhalingsmoeilijkheden het slachtoffer in de frisse lucht brengen en laten rusten in een houding die het ademen vergemakkelijkt.
	PL	W przypadku trudności z oddychaniem, wyprowadzić lub wynieść poszkodowanego na świeże powietrze i zapewnić warunki do odpoczynku w pozycji umożliwiającej swobodne oddychanie.
	PT	Em caso de dificuldade respiratória, retirar a vítima para uma zona ao ar livre e mantê-la em repouso numa posição que não dificulte a respiração.
	RO	Dacă respirația este dificilă, transportați victima la aer liber și mențineți-o în stare de repaus într-o poziție confortabilă pentru respirație.
	SK	Ak nastanú ťažkosti s dýchaním, presuňte postihnutého na čerstvý vzduch a nechajte ho oddychovať v polohe, ktorá mu umožní pohodlné dýchanie.
	SL	Pri oteženem dihanju prenesti žrtev na svež zrak in jo pustiti počivati v položaju, ki olajša dihanje.
	FI	Jos hengitysvaikeuksia, siirrä henkilö raittiiseen ilmaan ja pidä lepoasennossa, jossa on helppo hengittää.
	SV	Vid andningsbesvär, flytta personen till frisk luft och se till att han eller hon vilar i en ställning som underlättar andningen.
P342	Jezik	
	BG	При симптоми на затруднено дишане:
	ES	En caso de síntomas respiratorios:
	CS	Při dýchacích potížích:
	DA	Ved luftvejssymptomer:
	DE	Bei Symptomen der Atemwege:
	ET	Hingamisteede probleemide ilmnemise korral:
	EL	Εάν παρουσιάζονται αναπνευστικά συμπτώματα:
	EN	If experiencing respiratory symptoms:
	FR	En cas de symptômes respiratoires:
	GA	I gcás siomptóm riospráide:
	IT	In caso di sintomi respiratori:
	LV	Ja rodas elpošanas traucējumu simptomi:
	LT	Jeigu pasireiškia respiraciniai simptomai:
	HU	Légzési problémák esetén:
	MT	Jekk tkun qed tbat i minn sintomi respiratorji:
	NL	Bij ademhalings symptomen:
	PL	W przypadku wystąpienia objawów ze strony układu oddechowego:
	PT	Em caso de sintomas respiratórios:
	RO	În caz de simptome respiratorii:
	SK	Pri sťaženom dýchaní:
	SL	Pri respiratornih simptomih:

P342	Jezik	
	FI	Jos ilmenee hengitysoireita:
	SV	Vid besvär i luftvägarna:
P350	Jezik	
	BG	Измийте внимателно и обилно със сапун и вода.
	ES	Lavar suavemente con agua y jabón abundantes.
	CS	Jemně omyjte velkým množstvím vody a mýdla.
	DA	Vask forsigtigt med rigeligt sæbe og vand.
	DE	Behutsam mit viel Wasser und Seife waschen.
	ET	Pesta õrnalt rohke vee ja seebiga.
	EL	Πλύνετε απαλά με άφθονο νερό και σαπούνι.
	EN	Gently wash with plenty of soap and water.
	FR	Laver avec précaution et abondamment à l'eau et au savon.
	GA	Nigh go bog le neart gallúnaí agus uisce.
	IT	Lavare delicatamente e abbondantemente con acqua e sapone.
	LV	Maigi izskalot ar lielu daudzumu ziepēm un ūdeni.
	LT	Atsargiai nuplauti dideliu kiekiu muilo ir vandens.
	HU	Óvatos lemosás bő szappanos vízzel.
	MT	Ahsel bil-mod b'hafna sapun u ilma.
	NL	Voorzichtig wassen met veel water en zeep.
	PL	Delikatnie umyć dużą ilością wody z mydłem.
	PT	Lavar suavemente com sabonete e água abundantes.
	RO	Spălați ușor cu multă apă și săpun.
	SK	Opatrne umyte veľkým množstvom vody a mydla.
	SL	Nežno umiti z veliko mila in vode.
	FI	Pese varovasti runsaalla vedellä ja saippualla.
	SV	Tvätta försiktigt med mycket tvål och vatten.
P351	Jezik	
	BG	Промивайте внимателно с вода в продължение на няколко минути.
	ES	Aclarar cuidadosamente con agua durante varios minutos.
	CS	Několik minut opatrně oplachujte vodou.
	DA	Skyl forsigtigt med vand i flere minutter.
	DE	Einige Minuten lang behutsam mit Wasser ausspülen.
	ET	Loputada mitme minuti jooksul ettevaatlikult veega.
	EL	Ξεπλύνετε προσεκτικά με νερό για αρκετά λεπτά.
	EN	Rinse cautiously with water for several minutes.
	FR	Rincer avec précaution à l'eau pendant plusieurs minutes.

P351	Jezik	
	GA	Sruthlaítear go faichilleach le huisce ar feadh roinnt nóiméad.
	IT	Sciacquare accuratamente per parecchi minuti.
	LV	Uzmanīgi skalot ar ūdeni vairākas minūtes.
	LT	Atsargiai plauti vandeniui kelias minutes.
	HU	Óvatos öblítés vízzel több percen keresztül.
	MT	Lahlah b'attenzjoni bl-ilma għal diversi minuti.
	NL	Voorzichtig afspoelen met water gedurende een aantal minuten.
	PL	Ostrożnie płukać wodą przez kilka minut.
	PT	Enxaguar cuidadosamente com água durante vários minutos.
	RO	Clătiți cu atenție cu apă, timp de mai multe minute.
	SK	Opatrne niekoľko minút oplachujte vodou.
	SL	Previdno izpirati z vodo nekaj minut.
	FI	Huuhdo huolellisesti vedellä usean minuutin ajan.
	SV	Skölj försiktigt med vatten i flera minuter.

P352	Jezik	
	BG	Измийте обилно със сапун и вода.
	ES	Lavar con agua y jabón abundantes.
	CS	Omyjte velkým množstvím vody a mýdla.
	DA	Vask med rigeligt sæbe og vand.
	DE	Mit viel Wasser und Seife waschen.
	ET	Pesta rohke vee ja seebiga.
	EL	Πλύνετε με άφθονο σαπούνι και νερό.
	EN	Wash with plenty of soap and water.
	FR	Laver abondamment à l'eau et au savon.
	GA	Nigh le neart gallúnaí agus uisce.
	IT	Lavare abbondantemente con acqua e sapone.
	LV	Mazgāt ar lielu daudzumu ziepēm un ūdeni.
	LT	Plauti dideliu kiekiu muilo ir vandens.
	HU	Lemosás bő szappanos vízzel.
	MT	Aħsel b'hafna sapun u ilma.
	NL	Met veel water en zeep wassen.
	PL	Umyć dużą ilością wody z mydłem.
	PT	Lavar com sabonete e água abundantes.
	RO	Spălați cu multă apă și săpun.
	SK	Umyte veľkým množstvom vody a mydla.
	SL	Umiti z veliko mila in vode.

P352	Jezik	
	FI	Pese runsaalla vedellä ja saippualla.
	SV	Tvätta med mycket tvål och vatten.
P353	Jezik	
	BG	Облейте кожата с вода/вземете душ.
	ES	Aclararse la piel con agua/ducharse.
	CS	Opláchněte kůži vodou/osprchujte.
	DA	Skyl/brus huden med vand.
	DE	Haut mit Wasser abwaschen/duschen.
	ET	Loputada nahka veega/loputada duši all.
	EL	Ξεπλύνετε την επιδερμίδα με νερό/στο ντους.
	EN	Rinse skin with water/shower.
	FR	Rincer la peau à l'eau/se doucher.
	GA	Sruthlaítear an craiceann le huisce/glac cithfholcadh.
	IT	Sciacquare la pelle/fare una doccia.
	LV	Noskalot ādu ar ūdeni/dušā.
	LT	Odą nuplauti vandeniu/čiurkšle.
	HU	A bőrt le kell öblíteni vízzel/zuhanyozás.
	MT	Lahlah il-ġilda bl-ilma/bix-xawer.
	NL	Huid met water afspoelen/afdouchen.
	PL	Splukać skórę pod strumieniem wody/prysznicem.
	PT	Enxaguar a pele com água/tomar um duche.
	RO	Clătiți pielea cu apă/faceți duș.
	SK	Pokožku opláchnite vodou/sprchou.
	SL	Kožo izprati z vodo/prho.
	FI	Huuhdo/suihkuta iho vedellä.
	SV	Skölj huden med vatten/duscha.
P360	Jezik	
	BG	Незабавно облейте замърсеното облекло и кожата обилно с вода, преди да свалите дрехите.
	ES	Aclarar inmediatamente con agua abundante las prendas y la piel contaminadas antes de quitarse la ropa.
	CS	Kontaminovaný oděv a kůži okamžitě omyjte velkým množstvím vody a potom oděv odložte.
	DA	Skyl omgående tilsmudset tøj og hud med rigeligt vand, før tøjet fjernes.
	DE	Kontaminierte Kleidung und Haut sofort mit viel Wasser abwaschen und danach Kleidung ausziehen.
	ET	Saastunud rõivad ja nahk loputada viivitamata rohke veega ning alles seejärel rõivad eemaldada.
	EL	Ξεπλύνετε αμέσως τα μολυσμένα ρούχα και την επιδερμίδα με άφθονο νερό πριν αφαιρέσετε τα ρούχα.

P360	Jezik	
	EN	Rinse immediately contaminated clothing and skin with plenty of water before removing clothes.
	FR	Rincer immédiatement et abondamment avec de l'eau les vêtements contaminés et la peau avant de les enlever.
	GA	Sruthlaítear éadaí éillithe agus an craiceann láithreach le neart uisce sula mbaineann an duine na héadaí de.
	IT	Sciacquare immediatamente e abbondantemente gli indumenti contaminati e la pelle prima di togliersi gli indumenti.
	LV	Nekavējoties noskalot piesārņoto apģērbu un skarto ādu ar lielu daudzumu ūdens pirms apģērba novilkšanas.
	LT	Prieš nuvelkant užterštus drabužius, nedelsiant juos ir odą nuplauti dideliu kiekiu vandens.
	HU	A ruhák levetése előtt a szennyezett ruházatot és a bőrt bő vízzel azonnal le kell öblíteni.
	MT	Lahlah mall-ewwel l-ilbies ikkontaminat u l-ġilda b'hafna ilma qabel ma tneħhi l-ilbies.
	NL	Verontreinigde kleding en huid onmiddellijk met veel water afspoelen en pas daarna kleding uittrekken.
	PL	Natychmiast spłukać zanieczyszczoną odzież i skórę dużą ilością wody przed zdjęciem odzieży.
	PT	Enxaguar imediatamente com muita água a roupa e a pele contaminadas antes de se despir.
	RO	Clătiți imediat îmbrăcămintea contaminată și pielea cu multă apă, înainte de scoaterea îmbrăcămintei.
	SK	Kontaminovaný odev a pokožku ihneď opláchnite veľkým množstvom vody a potom odev odstráňte.
	SL	Takoj izprati kontaminirana oblačila in kožo z veliko vode pred odstranitvijo oblačil.
	FI	Huuhto saastunut vaatetus ja iho välittömästi runsaalla vedellä ennen vaatetuksen riisumista.
	SV	Skölj genast nedstänkta kläder och hud med mycket vatten innan du tar av dig kläderna.

P361	Jezik	
	BG	Незабавно свалете цялото замърсено облекло.
	ES	Quitarse inmediatamente las prendas contaminadas.
	CS	Veškeré kontaminované části oděvu okamžitě svlékněte.
	DA	Tilsmudset tøj tages straks af/fjernes.
	DE	Alle kontaminierten Kleidungsstücke sofort ausziehen.
	ET	Kõik saastunud rõivad viivitamata seljast võtta.
	EL	Αφαιρέστε/Βγάλτε αμέσως όλα τα μολυσμένα ρούχα.
	EN	Remove/Take off immediately all contaminated clothing.
	FR	Enlever immédiatement les vêtements contaminés.
	GA	Bain díot láithreach na héadaí éillithe go léir.
	IT	Togliere di dosso immediatamente tutti gli indumenti contaminati.
	LV	Noņemt/Novilkt nekavējoties visu piesārņoto apģērbu.
	LT	Nedelsiant nuvilkti/pašalinti visus užterštus drabužius.
	HU	Az összes szennyezett ruhadarabot azonnal el kell távolítani/le kell vetni.
	MT	Nehħi/Inħa' mall-ewwel l-ilbies ikkontaminat.

P361	Jezik	
	NL	Verontreinigde kleding onmiddellijk uittrekken.
	PL	Natychmiast usunąć/zdjąć całą zanieczyszczoną odzież.
	PT	Despir/retirar imediatamente toda a roupa contaminada.
	RO	Scoateți imediat toată îmbrăcămintea contaminată.
	SK	Ihned' odstráňte/vyzlečte všetky kontaminované časti odevu.
	SL	Takoj odstraniti/sleči vsa kontaminirana oblačila.
	FI	Riisu saastunut vaatetus välittömästi.
	SV	Ta omedelbart av alla nedstänkta kläder.

P362	Jezik	
	BG	Свалете замърсеното облекло и го изперете преди повторна употреба.
	ES	Quitarse las prendas contaminadas y lavarlas antes de volver a usarlas.
	CS	Kontaminovaný oděv svlékněte a před opětovným použitím ho vyperte.
	DA	Forurenet tøj tages af og vaskes, før det bruges igen.
	DE	Kontaminierte Kleidung ausziehen und vor erneutem Tragen waschen.
	ET	Võtta saastunud rõivad seljast ja pesta neid enne järgmist kasutamist.
	EL	Βγάλτε τα μολυσμένα ρούχα και πλύνετε τα πριν τα ξαναχρησιμοποιήσετε.
	EN	Take off contaminated clothing and wash before reuse.
	FR	Enlever les vêtements contaminés et les laver avant réutilisation
	GA	Bain díot láithreach na héadaí éillithe go léir agus nigh iad sula ndéanfar iad a athúsáid.
	IT	Togliersi di dosso gli indumenti contaminati e lavarli prima di indossarli nuovamente.
	LV	Novilkt piesārņoto apģērbu un pirms atkārtotas lietošanas izmazgāt.
	LT	Nusivilkti užterštus drabužius ir išskalbti prieš vėl juos apsivelkant.
	HU	A szennyezett ruhát le kell vetni és az újbóli használat előtt ki kell mosni.
	MT	Inża' l-hwejjeg kontaminati u aħsilhom qabel ma terġa' tużahom.
	NL	Verontreinigde kleding uittrekken en wassen alvorens deze opnieuw te gebruiken.
	PL	Zanieczyszczoną odzież zdjąć i wyprać przed ponownym użyciem.
	PT	Retirar a roupa contaminada e lavá-la antes de a voltar a usar.
	RO	Scoateți îmbrăcămintea contaminată și spălați-o înainte de reutilizare.
	SK	Kontaminovaný odev vyzlečte a pred ďalším použitím vyperte.
	SL	Sleči kontaminirana oblačila in jih oprati pred ponovno uporabo.
	FI	Riisu ja pese saastunut vaatetus ennen uudelleenkäyttöä.
	SV	Nedstänkta kläder tas av och tvättas innan de används igen.

P363	Jezik	
	BG	Изперете замърсеното облекло преди повторна употреба.
	ES	Lavar las prendas contaminadas antes de volver a usarlas.
	CS	Kontaminovaný oděv před opětovným použitím vyperte.

P363	Jezik	
	DA	Tilsmudset tøj skal vaskes, før det kan anvendes igen.
	DE	Kontaminierte Kleidung vor erneutem Tragen waschen.
	ET	Saastunud rõivad enne järgmist kasutamist pesta.
	EL	Πλύνετε τα μολυσμένα ενδύματα πριν τα ξαναχρησιμοποιήσετε.
	EN	Wash contaminated clothing before reuse.
	FR	Laver les vêtements contaminés avant réutilisation.
	GA	Nigh éadaí éillithe sula ndéanfar iad a athúsáid.
	IT	Lavare gli indumenti contaminati prima di indossarli nuovamente.
	LV	Pirms atkārtotas lietošanas piesārņoto apģērbus izmazgāt.
	LT	Užterštus drabužius išskalbti prieš vėl juos apsivelkant.
	HU	A szennyezett ruhát újbóli használat előtt ki kell mosni.
	MT	Aħsel il-hwejjeġ kontaminati qabel terġa' tużahom.
	NL	Verontreinigde kleding wassen alvorens deze opnieuw te gebruiken.
	PL	Wyprać zanieczyszczoną odzież przed ponownym użyciem.
	PT	Lavar a roupa contaminada antes de a voltar a usar.
	RO	Spălați îmbrăcămintea contaminată, înainte de reutilizare.
	SK	Kontaminovaný odev pred ďalším použitím vyperte.
	SL	Kontaminirana oblačila oprati pred ponovno uporabo.
	FI	Pese saastunut vaatetus ennen uudelleenkäyttöä.
	SV	Nedstänkta kläder ska tvättas innan de används igen.

P370	Jezik	
	BG	При пожар:
	ES	En caso de incendio:
	CS	V případě požáru:
	DA	Ved brand:
	DE	Bei Brand:
	ET	Tulekahju korral:
	EL	Σε περίπτωση πυρκαγιάς:
	EN	In case of fire:
	FR	En cas d'incendie:
	GA	I gcás dóiteáin:
	IT	In caso di incendio:
	LV	Ugunsgrēka gadījumā:
	LT	Gaisro atveju:
	HU	Tűz esetén:
	MT	F'każ ta' nar:
	NL	In geval van brand:

P370	Jezik	
	PL	W przypadku pożaru:
	PT	Em caso de incêndio:
	RO	În caz de incendiu:
	SK	V prípade požiaru:
	SL	Ob požaru:
	FI	Tulipalon sattuessä:
	SV	Vid brand:

P371	Jezik	
	BG	При голям пожар и значителни количества:
	ES	En caso de incendio importante y en grandes cantidades:
	CS	V případě velkého požáru a velkého množství:
	DA	Ved større brand og store mængder:
	DE	Bei Großbrand und großen Mengen:
	ET	Suure tulekahju korral ning kui on tegemist suurte kogustega:
	EL	Σε περίπτωση σοβαρής πυρκαγιάς και εάν πρόκειται για μεγάλες ποσότητες:
	EN	In case of major fire and large quantities:
	FR	En cas d'incendie important et s'il s'agit de grandes quantités:
	GA	I gcás mórdhóiteáin agus má tá cainníochtaí móra i gceist:
	IT	In caso di incendio grave e di quantità rilevanti:
	LV	Ugunsgrēka un lielu apjomu gadījumā:
	LT	Didelio gaisro ir didelių kiekių atveju:
	HU	Nagyobb tűz és nagy mennyiség esetén:
	MT	F'każ ta' nar kbir u kwantitajiet kbar:
	NL	In geval van grote brand en grote hoeveelheden:
	PL	W przypadku poważnego pożaru i dużych ilości:
	PT	Em caso de incêndio importante e de grandes quantidades:
	RO	În caz de incendiu de proporții și de cantități mari de produs:
	SK	V prípade veľkého požiaru a veľkého množstva:
	SL	Ob velikem požaru in velikih količinah:
	FI	Jos tulipalo ja ainemäärät ovat suuret:
	SV	Vid större brand och stora mängder:

P372	Jezik	
	BG	Опасност от експлозия при пожар.
	ES	Riesgo de explosión en caso de incendio.
	CS	Nebezpečí výbuchu v případě požáru.
	DA	Eksplodingsfare ved brand.

P372	Jezik	
	DE	Explosionsgefahr bei Brand.
	ET	Tulekahju korral plahvatusoht.
	EL	Κίνδυνος έκρηξης σε περίπτωση πυρκαγιάς.
	EN	Explosion risk in case of fire.
	FR	Risque d'explosion en cas d'incendie.
	GA	Baol pléasctha i gcás dóiteáin.
	IT	Rischio di esplosione in caso di incendio.
	LV	Eksplzijas risks ugunsgrēka gadījumā:
	LT	Sprogimo pavojus gaisro atveju.
	HU	Tűz esetén robbanásveszély.
	MT	Riskju ta' splużjoni f'każ ta' nar.
	NL	Ontploffingsgevaar in geval van brand.
	PL	Ryzyko wybuchu w razie pożaru.
	PT	Risco de explosão em caso de incêndio.
	RO	Risc de explozie în caz de incendiu.
	SK	V prípade požiaru hrozí riziko výbuchu.
	SL	Nevarnost eksplozije ob požaru.
	FI	Tulipalon sattuessaa räjähdysvaara.
	SV	Explosionsrisk vid brand.
P373	Jezik	
	BG	НЕ се опитвайте да гасите пожара, ако огънят наближи експлозиви.
	ES	NO luchar contra el incendio cuando el fuego llega a los explosivos.
	CS	Požár NEHASTE, dostane-li se k výbušninám.
	DA	BEKÆMP IKKE branden, hvis denne når eksplosiverne.
	DE	KEINE Brandbekämpfung, wenn das Feuer explosive Stoffe/Gemische/Erzeugnisse erreicht.
	ET	Kui tuli jõuab lõhkeaineteni, MITTE teha kustutustöid.
	EL	ΜΗΝ προσπαθείτε να σβήσετε την πυρκαγιά, όταν η φωτιά πλησιάζει σε εκρηκτικά.
	EN	DO NOT fight fire when fire reaches explosives.
	FR	NE PAS combattre l'incendie lorsque le feu atteint les explosifs.
	GA	NÁ DÉÁN an dóiteán a chomhrac má shroicheann sé pléascáin.
	IT	NON utilizzare mezzi estinguenti se l'incendio raggiunge materiali esplosivi.
	LV	NECENSTIES dzēst ugunsgrēku, ja uguns piekļūst sprādzienbīstamām vielām.
	LT	NEGESINTI gaisro, jeigu ugnis pasiekia sprogmenis.
	HU	TILOS a tűz oltása, ha az robbanóanyagra áttérjedt.
	MT	TIPPRUVAX TITFI n-nar meta n-nar jilhaq l-isplussivi.
	NL	NIET blussen wanneer het vuur de ontplofbare stoffen bereikt.
	PL	NIE gasić pożaru, jeżeli ogień dosięgnie materiały wybuchowe

P373	Jezik	
	PT	Se o fogo atingir os explosivos, NÃO tentar combatê-lo.
	RO	NU încercați să stingeți incendiul atunci când focul a ajuns la explozivi.
	SK	Požiar NEHASTE, ak sa oheň priblížil k výbušninám.
	SL	NE gasiti, ko ogenj doseže eksploziv.
	FI	Tulta EI SAA yrittää sammuttaa sen saavutettua räjäheteet.
	SV	Försök INTE bekämpa branden när den når explosiva varor.

P374	Jezik	
	BG	Гасете пожара с обичайните предпазни мерки от разумно разстояние.
	ES	Luchar contra el incendio desde una distancia razonable, tomando las precauciones habituales.
	CS	Haste z přiměřené vzdálenosti a dodržujte běžná opatření.
	DA	Træf normale foranstaltninger mod brand og bekæmp den på en fornuftig afstand.
	DE	Brandbekämpfung mit üblichen Vorsichtsmaßnahmen aus angemessener Entfernung.
	ET	Kustutustõid teha tavaliste ettevaatusabinõudega ja mõistlikust kaugusest.
	EL	Προσπαθήστε να σβήσετε την πυρκαγιά λαμβάνοντας τις κατάλληλες προφυλάξεις και από εύλογη απόσταση.
	EN	Fight fire with normal precautions from a reasonable distance.
	FR	Combattre l'incendie à distance en prenant les précautions normales.
	GA	Déan na gnáth-réamhchúraimí chun an dóiteán a chomhrac gan a bheith níos gaire dó ná mar atá réasúnta.
	IT	Utilizzare i mezzi estinguenti con le precauzioni abituali a distanza ragionevole.
	LV	Dzēst ugunsgrēku, ņemot vērā parastos drošības nosacījumus un no saprātīga attāluma.
	LT	Gaisrą gesinti laikantis įprastinio atsargumo pakankamu atstumo.
	HU	Tűzoltás megfelelő távolságból a szokásos óvintézkedések betartásával.
	MT	Itfi n-nar bil-prekawzjonijiet normali minn distanza raġonevoli.
	NL	Met normale voorzorgen vanaf een redelijke afstand blussen.
	PL	Gasić pożar z rozsądnej odległości z zachowaniem zwykłych środków ostrożności.
	PT	Combater o incêndio tomando as precauções normais e a partir de uma distância razoável.
	RO	Stingeți incendiul de la o distanță rezonabilă, luând măsurile normale de precauție.
	SK	Požiar haste z primeranej vzdialenosti pri dodržiavaní bežných bezpečnostných opatrení.
	SL	Gasiti z običajno previdnostjo in s primerne razdalje.
	FI	Sammuta palo kohtuullisen välimatkan päästä tavanomaisin varotoimin.
	SV	Bekämpa branden på vanligt sätt på behörigt avstånd.

P375	Jezik	
	BG	Гасете пожара от разстояние поради опасност от експлозия.
	ES	Luchar contra el incendio a distancia, dado el riesgo de explosión.
	CS	Kvůli nebezpečí výbuchu haste z dostatečné vzdálenosti.
	DA	Bekæmp branden på afstand på grund af eksplosionsfare.

P375	Jezik	
	DE	Wegen Explosionsgefahr Brand aus der Entfernung bekämpfen.
	ET	Plahvatusohu tõttu teha kustutustööd eemalt.
	EL	Προσπαθήστε να σβήσετε την πυρκαγιά από απόσταση, επειδή υπάρχει κίνδυνος έκρηξης.
	EN	Fight fire remotely due to the risk of explosion.
	FR	Combattre l'incendie à distance à cause du risque d'explosion.
	GA	Téigh i gcianghleic leis an dóiteán mar gheall ar an mbaol pléasctha.
	IT	Rischio di esplosione. Utilizzare i mezzi estinguenti a grande distanza.
	LV	Dzēst ugunsgrēku no attāluma eksplozijas riska dēļ.
	LT	Gaisrą gesinti iš toli dėl sprogimo pavojaus.
	HU	A tűz oltását robbanásveszély miatt távolból kell végezni.
	MT	Itfi n-nar mill-bogħod minhabba r-riskju ta' splużjoni.
	NL	Op afstand blussen omwille van ontploffingsgevaar.
	PL	Z powodu ryzyka wybuchu gasić pożar z odległości.
	PT	Combater o incêndio à distância, devido ao risco de explosão.
	RO	Stingeți incendiul de la distanță din cauza pericolului de explozie.
	SK	Z dôvodu nebezpečenstva výbuchu požiar haste z diaľky.
	SL	Gasiti z večje razdalje zaradi nevarnosti eksplozije.
	FI	Sammuta palo etäältä räjähdysvaaran takia.
	SV	Bekämpa branden på avstånd på grund av explosionsrisken.
P376	Jezik	
	BG	Спрете теча, ако е безопасно.
	ES	Detener la fuga, si no hay peligro en hacerlo.
	CS	Zastavte únik, můžete-li tak učinit bez rizika.
	DA	Standt lækagen, hvis dette er sikkert.
	DE	Undichtigkeit beseitigen, wenn gefahrlos möglich.
	ET	Leke peatada, kui seda on võimalik teha ohutult.
	EL	Σταματήστε τη διαρροή, εφόσον δεν υπάρχει κίνδυνος.
	EN	Stop leak if safe to do so.
	FR	Obturer la fuite si cela peut se faire sans danger.
	GA	Cuir stop leis an sceitheadh má tá sé sábháilte é sin a dhéanamh.
	IT	Bloccare la perdita se non c'è pericolo.
	LV	Apstādināt noplūdi, ja to var izdarīt drošā veidā.
	LT	Sustabdyti nuotėkį, jeigu galima saugiai tai padaryti.
	HU	Meg kell szüntetni a szivárgást, ha ez biztonságosan megtehető.
	MT	Waqqaf it-tnixxija jekk ma jkunx hemm periklu.
	NL	Het lek dichten als dat veilig gedaan kan worden.
	PL	Jeżeli jest to bezpieczne zahamować wyciek.

P376	Jezik	
	PT	Deter a fuga se tal puder ser feito em segurança.
	RO	Oprîți scurgerea, dacă acest lucru se poate face în siguranță.
	SK	Zastavte únik, ak je to bezpečné.
	SL	Zaustaviti puščanje, če je varno.
	FI	Sulje vuoto, jos sen voi tehdä turvallisesti.
	SV	Stoppa läckan om det kan göras på ett säkert sätt.

P377	Jezik	
	BG	Пожар от изтекъл газ: Не гасете освен при възможност за безопасно отстраняване на теча.
	ES	Fuga de gas en llamas: No apagar, salvo si la fuga puede detenerse sin peligro.
	CS	Požár unikajícího plynu: Nehaste, nelze-li únik bezpečně zastavit.
	DA	Brand fra udsivende gas: Sluk ikke, medmindre det er sikkert at stoppe lækagen.
	DE	Brand von ausströmendem Gas: Nicht löschen, bis Undichtigkeit gefahrlos beseitigt werden kann.
	ET	Lekkiva gaasi põlemise korral mitte kustutada, välja arvatud juhul, kui leket on võimalik ohutult peatada.
	EL	Διαρροή φλεγόμενου αερίου: Μην την σβήσετε, εκτός εάν μπορείτε να σταματήσετε τη διαρροή χωρίς κίνδυνο.
	EN	Leaking gas fire: Do not extinguish, unless leak can be stopped safely.
	FR	Fuite de gaz enflammé: Ne pas éteindre si la fuite ne peut pas être arrêtée sans danger.
	GA	Tine gháis ag sceitheadh: Ná múch, mura i ndán agus gur féidir stop a chur leis an sceitheadh go sábháilte.
	IT	In caso d'incendio dovuto a perdita di gas, non estinguere a meno che non sia possibile bloccare la perdita senza pericolo.
	LV	Degšanas gāzes noplūde: Nedzēst, ja vien noplūdi var apstādināt drošā veidā.
	LT	Dujų nuotėkio sukeltas gaisras: Negesinti, nebent nuotėkį būtų galima saugiai sustabdyti.
	HU	Égő szivárgó gáz: Csak akkor szabad a tüzet oltani, ha a szivárgás biztonságosan megszüntethető.
	MT	Tnixxija ta' gass tan-nar: Tippruvax titfiha, sakemm it-tnixxija ma tkunx tista' titwaqqaf bla periklu.
	NL	Brand door lekkend gas: niet blussen, tenzij het lek veilig gedicht kan worden.
	PL	W przypadku płonienia wyciekającego gazu: Nie gasić, jeżeli nie można bezpiecznie zahamować wycieku.
	PT	Incêndio por fuga de gás: não apagar, a menos que se possa deter a fuga em segurança.
	RO	Incendiu cauzat de o scurgere de gaz: nu încercați să stingeți, decât dacă scurgerea poate fi oprită în siguranță.
	SK	Požiar unikajúceho plynu: Nehaste, pokiaľ únik nemožno bezpečne zastaviť.

P377	Jezik	
	SL	Požar zaradi uhajanja plina: Ne gasiti, če puščanja ni mogoče varno zaustaviti.
	FI	Vuotavasta kaasusta johtuva palo: Ei saa sammuttaa, jollei vuotoa voida pysäyttää turvallisesti.
	SV	Läckande gas som brinner: Försök inte släcka branden om inte läckan kan stoppas på ett säkert sätt.

P378	Jezik	
	BG	Използвайте ... за гасене.
	ES	Utilizar ... para apagarlo.
	CS	K hašení použijte
	DA	Anvend ... til brandslukning.
	DE	... zum Löschen verwenden.
	ET	Kustutamiseks kasutada
	EL	Χρησιμοποιήστε ... για την κατάσβεση.
	EN	Use ... for extinction.
	FR	Utiliser ... pour l'extinction.
	GA	Úsáid ... le haghaidh múchta.
	IT	Estinguere con...
	LV	Nodzēšanai izmantot...
	LT	Gesinimui naudoti ...
	HU	Az oltáshoz ... használandó.
	MT	Uża' ... biex titfi.
	NL	Blussen met ...
	PL	Użyć ... do gaszenia.
	PT	Para a extinção utilizar ...
	RO	Utilizați... pentru stingere.
	SK	Na hasenie použite
	SL	Za gašenje uporabiti ...
	FI	Käytä palon sammuttamiseen ...
	SV	Släck branden med

P380	Jezik	
	BG	Евакуирайте зоната.
	ES	Evacuar la zona.
	CS	Vykliďte _roctor.
	DA	Evakuer området.
	DE	Umgebung räumen.
	ET	Ala evakueerida.

P380	Jezik	
	EL	Εκκενώστε την περιοχή.
	EN	Evacuate area.
	FR	Évacuer la zone.
	GA	Aslonnaigh gach duine as an limistéar.
	IT	Evacuare la zona.
	LV	Evakuēt zonu.
	LT	Evakuoti zoną.
	HU	A területet ki kell üríteni.
	MT	Evakwa ż-zona.
	NL	Evacueren.
	PL	Ewakuować teren.
	PT	Evacuar a zona.
	RO	Evacuați zona.
	SK	Priestory evakuujte.
	SL	Izprazniti območje.
	FI	Evakuoi alue.
	SV	Utrym området.

P381	Jezik	
	BG	Премахнете всички източници на запалване, ако е безопасно.
	ES	Eliminar todas las fuentes de ignición si no hay peligro en hacerlo.
	CS	Odstraňte všechny zdroje zapálení, můžete-li tak učinit bez rizika.
	DA	Fjern alle antændelseskilder, hvis dette kan gøres sikkert.
	DE	Alle Zündquellen entfernen, wenn gefahrlos möglich.
	ET	Eemaldada kõik süüteallikad, kui seda on võimalik teha ohutult.
	EL	Απομακρύνετε τις πηγές ανάφλεξης, εάν αυτό μπορεί να γίνει χωρίς κίνδυνο.
	EN	Eliminate all ignition sources if safe to do so.
	FR	Éliminer toutes les sources d'ignition si cela est faisable sans danger.
	GA	Díothaigh gach foinse adhainte, má tá sé sábháilte é sin a dhéanamh.
	IT	Eliminare ogni fonte di accensione se non c'è pericolo.
	LV	Novērst visus uzliesmošanas avotus, ja to var izdarīt droši.
	LT	Pašalinti visus uždegimo šaltinius, jeigu galima saugiai tai padaryti.
	HU	Meg kell szüntetni az összes gyújtóforrást, ha ez biztonságosan megtehető.
	MT	Elimina s-sorsi kollha li jgabbdu sakemm ma jkunx perikoluż li taghmel dan.
	NL	Alle ontstekingsbronnen wegnemen als dat veilig gedaan kan worden.
	PL	Wyeliminować wszystkie źródła zapłonu, jeżeli jest to bezpieczne.
	PT	Eliminar todas as fontes de ignição se tal puder ser feito em segurança.
	RO	Eliminați toate sursele de aprindere, dacă acest lucru se poate face în siguranță.

P381	Jezik	
	SK	Ak je to bezpečné, odstráňte všetky zdroje zapálenia.
	SL	Odstraniti vse vire vžiga, če je varno.
	FI	Poista kaikki sytytysläheteet, jos sen voi tehdä turvallisesti.
	SV	Avlägsna alla antändningskällor om det kan göras på ett säkert sätt.
P390	Jezik	
	BG	Попийте разлятото, за да се предотвратят материални вреди.
	ES	Absorber el vertido para que no dañe otros materiales.
	CS	Uniklý produkt absorbujte, aby se zabránilo materiálním škodám.
	DA	Absorber udslip for at undgå materielskade.
	DE	Verschüttete Mengen aufnehmen, um Materialschäden zu vermeiden.
	ET	Mahavoolanud toode absorbeerida, et see ei kahjustaks teisi materjale.
	EL	Σκουπίστε τη χυμένη ποσότητα για να προλάβετε υλικές ζημιές.
	EN	Absorb spillage to prevent material damage.
	FR	Absorber toute substance répandue pour éviter qu'elle attaque les matériaux environnants.
	GA	Ionúsúigh doirteadh chun damáiste d'ábhar a chosc.
	IT	Assorbire la fuoriuscita per evitare danni materiali.
	LV	Uzsūkt izšļakstījumus, lai novērstu materiālus zaudējumus.
	LT	Absorbuoti išsilejusią medžiagą, siekiant išvengti materialinės žalos.
	HU	A kiömlött anyagot fel kell itatni a körülvevő anyagok károsodásának megelőzése érdekében.
	MT	Assorbi t-tixrid biex tipprevjeni hsara fil-materjal.
	NL	Gelekte/gemorste stof opnemen om materiële schade te vermijden.
	PL	Usunąć wyciek, aby zapobiec szkodom materialnym.
	PT	Absorver o produto derramado a fim de evitar danos materiais.
	RO	Absorbiți scurgerile de produs, pentru a nu afecta materialele din apropiere.
	SK	Absorbujte uniknutý produkt, aby sa zabránilo materiálным škodám.
	SL	Odpraviti razlitje, da se prepreči materialna škoda.
	FI	Imeytä valumat vahinkojen estämiseksi.
	SV	Sug upp spill för att undvika materiella skador.
P391	Jezik	
	BG	Съберете разлятото.
	ES	Recoger el vertido.
	CS	Uniklý produkt seberte.
	DA	Udslip opsamlles.
	DE	Verschüttete Mengen aufnehmen.
	ET	Mahavoolanud toode kokku koguda.
	EL	Μαζέψτε τη χυμένη ποσότητα.

P391	Jezik	
	EN	Collect spillage.
	FR	Recueillir le produit répandu.
	GA	Bailigh doirteadh.
	IT	Raccogliere il materiale fuoriuscito.
	LV	Savākt izšļakstīto šķidrumu.
	LT	Surinkti ištekėjusią medžiagą.
	HU	A kiömlött anyagot össze kell gyűjteni.
	MT	Iġbor it-tixrid.
	NL	Gelekte/gemorste stof opruimen.
	PL	Zebrać wyciek.
	PT	Recolher o produto derramado.
	RO	Colectați scurgerile de produs.
	SK	Zozbierajte uniknutý produkt.
	SL	Prestreči razlito tekočino.
	FI	Valumat on kerättävä.
	SV	Samla upp spill.

P301 + P310	Jezik	
	BG	ПРИ ПОГЛЪЩАНЕ: Незабавно се обадете в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар.
	ES	EN CASO DE INGESTIÓN: Llamar inmediatamente a un CENTRO DE INFORMACIÓN TOXICOLÓGICA o a un médico.
	CS	PŘI POŽITÍ: Okamžitě volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	I TILFÆLDE AF INDTAGELSE: Ring omgående til en GIFTINFORMATION eller en læge.
	DE	BEI VERSCHLUCKEN: Sofort GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	ALLANEELAMISE KORRAL: võtta viivitamata ühendust MÜRGISTUSTEABEKESKUSE või arstiga.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΚΑΤΑΠΟΣΗΣ: Καλέστε αμέσως το ΚΕΝΤΡΟ ΔΗΛΗΤΗΡΙΑΣΕΩΝ ή ένα γιατρό.
	EN	IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.
	FR	EN CAS D'INGESTION: appeler immédiatement un CENTRE ANTIPOISON ou un médecin.
	GA	MÁ SHLOGTAR: Cuir glao láithreach ar IONAD NIMHE nó ar dhochtúir/lia.
	IT	IN CASO DI INGESTIONE: contattare immediatamente un CENTRO ANTIVELENI o un medico
	LV	NORĪŠANAS GADĪJUMĀ: Nekavējoties sazināties ar SAINDĒŠANĀS CENTRU vai ārstu.
	LT	PRARIJUS: Nedelsiant skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	LENYELÉS ESETÉN: azonnal forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	JEKK JINBELA': Ikkuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib.
	NL	NA INSLIKKEN: onmiddellijk een ANTIGIFCENTRUM of een arts raadplegen.
	PL	W PRZYPADKU POŁKNIECIA: Natychmiast skontaktować się z OŚRODKIEM ZATRUĆ lub z lekarzem.

P301 + P310	Jezik	
	PT	EM CASO DE INGESTÃO: contacte imediatamente um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.
	RO	ÎN CAZ DE ÎNGHIȚIRE: sunați imediat la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic.
	SK	PO POŽITÍ: okamžite volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	PRI ZAUŽITJU: takoj pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	JOS KEMIKAALIA ON NIELTY: Ota välittömästi yhteys MYRKYTYSTIETOKESKUKSEEN tai lääkäriin.
	SV	VID FÖRTÄRING: Kontakta genast GIFTINFORMATIONSCENTRAL eller läkare.
P301 + P312	Jezik	
	BG	ПРИ ПОГЛЪЩАНЕ: Незабавно се обадете в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар при неразположение.
	ES	EN CASO DE INGESTIÓN: Llamar a un CENTRO DE INFORMACIÓN TOXICOLÓGICA o a un médico si se encuentra mal.
	CS	PŘI POŽITÍ: Necítíte-li se dobře, volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	I TILFÆLDE AF INDTAGELSE: I tilfælde af ubehag ring til en GIFTINFORMATION eller en læge.
	DE	BEI VERSCHLUCKEN: Bei Unwohlsein GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	ALLANEELAMISE KORRAL: halva enesetunde korral võtta ühendust MÜRGISTUSTEABEKESKUSE või arstiga.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΚΑΤΑΠΟΣΗΣ: Καλέστε αμέσως το ΚΕΝΤΡΟ ΔΗΛΗΤΗΡΙΑΣΕΩΝ ή ένα γιατρό, εάν αισθανθείτε αδιαθεσία.
	EN	IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell.
	FR	EN CAS D'INGESTION: appeler un CENTRE ANTIPOISON ou un médecin en cas de malaise.
	GA	MÁ SHLOGTAR: Cuir glao ar IONAD NIMHE nó ar dhochtúir/lia má bhraitheann tú tinn.
	IT	IN CASO DI INGESTIONE accompagnata da malessere: contattare un CENTRO ANTIVELENI o un medico.
	LV	NORĪŠANAS GADĪJUMĀ: sazināties ar SAINDĒŠANĀS CENTRU vai ārstu, ja jums ir slihta pašsajūta.
	LT	PRARIJUS: Pasijutus blogai, skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	LENYELÉS ESETÉN: rosszullét esetén azonnal forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	JEKK JINBELA: Ikkuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib jekk thossok ma tiflahx.
	NL	NA INSLIKKEN: bij onwel voelen een ANTIGIFCENTRUM of een arts raadplegen.
	PL	W PRZYPADKU POŁKNIECIA: W przypadku złego samopoczucia skontaktować się z OŚRODKIEM ZATRUC lub z lekarzem.
	PT	EM CASO DE INGESTÃO: caso sinta indisposição, contacte um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.
	RO	ÎN CAZ DE ÎNGHIȚIRE: sunați la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic, dacă nu vă simțiți bine.

P301 + P312	Jezik	
	SK	PO POŽITÍ: ak máte zdravotné problémy, okamžite volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	PRI ZAUŽITJU: ob slabem počutju pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	JOS KEMIKAALIA ON NIELTY: Ota yhteys MYRKYTYSTIETOKESKUKSEEN tai lääkäriin, jos ilmenee pahoinvointia.
	SV	VID FÖRTÄRING: Kontakta GIFTINFORMATIONSCENTRAL eller läkare om du mår dåligt.

P301 + P330 + P331	Jezik	
	BG	ПРИ ПОГЛЪЩАНЕ: изплакнете устата. НЕ предизвиквайте повръщане.
	ES	EN CASO DE INGESTIÓN: Enjuagarse la boca. NO provocar el vómito.
	CS	PŘI POŽITÍ: Vypláchněte ústa. NEVYVOLÁVEJTE zvracení.
	DA	I TILFÆLDE AF INDTAGELSE: Skyl munden. Fremkald IKKE opkastning.
	DE	BEI VERSCHLUCKEN: Mund ausspülen. KEIN Erbrechen herbeiführen.
	ET	ALLANEELAMISE KORRAL: loputada suud. MITTE kutsuda esile oksendamist.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΚΑΤΑΠΟΣΗΣ: Ξεπλύνετε το στόμα. ΜΗΝ προκαλέσετε εμετό.
	EN	IF SWALLOWED: rinse mouth. Do NOT induce vomiting.
	FR	EN CAS D'INGESTION: rincer la bouche. NE PAS faire vomir.
	GA	MÁ SHLOGTAR: sruthlaítear an béal. NÁ déan urlacan a spreagadh.
	IT	IN CASO DI INGESTIONE: sciacquare la bocca. NON provocare il vomito.
	LV	NORĪŠANAS GADĪJUMĀ: izskalot muti. NEIZRAISĪT vemšanu.
	LT	PRARIJUS: išskalauti burną. NESKATINTI vėmimo.
	HU	LENYELÉS ESETÉN: a szájat ki kell öblíteni. TILOS hánytatni.
	MT	JEKK JINBELA': lahlah il-halq. TIPPROVOKAX ir-remettar.
	NL	NA INSLIKKEN: de mond spoelen – GEEN braken opwekken.
	PL	W PRZYPADKU POŁKNIECIA: wypłukać usta. NIE wywoływać wymiotów.
	PT	EM CASO DE INGESTÃO: enxaguar a boca. NÃO provocar o vómito.
	RO	ÎN CAZ DE ÎNGHIȚIRE: clătiți gura. NU provocați vomă.
	SK	PO POŽITÍ: vypláchnite ústa. Nevyvolávajte zvracanie.
	SL	PRI ZAUŽITJU: izprati usta. NE izzvati bruhanja.
	FI	JOS KEMIKAALIA ON NIELTY: Huuhdo suu. Ei saa oksennutta.
	SV	VID FÖRTÄRING: Skölj munnen. Framkalla INTE kräkning.

P302 + P334	Jezik	
	BG	ПРИ КОНТАКТ С КОЖАТА: Потопете в студена вода/сложете мокри компреси.
	ES	EN CASO DE CONTACTO CON LA PIEL: Sumergir en agua fresca/aplicar compresas húmedas.
	CS	PŘI STYKU S KŮŽÍ: Ponořte do studené vody/zabalte do vlhkého obvazu.
	DA	VED KONTAKT MED HUDEN: Skyl under koldt vand/ anvend våde omslag.

P302 + P334	Jezik	
	DE	BEI KONTAKT MIT DER HAUT: In kaltes Wasser tauchen/nassen Verband anlegen.
	ET	NAHALE SATTUMISE KORRAL: hoida jahedas vees/panna peale niiske kompress.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΟ ΔΕΡΜΑ: Πλύντε με άφθονο δροσερό νερό/τυλίξτε με βρεγμένους επιδέσμους.
	EN	IF ON SKIN: Immerse in cool water/wrap in wet bandages.
	FR	EN CAS DE CONTACT AVEC LA PEAU: rincer à l'eau fraîche/poser une compresse humide.
	GA	I gCÁS TEAGMHÁLA LEIS AN gCRAICEANN: Tum in uisce fionnuar/cuir bréid fliuch air.
	IT	IN CASO DI CONTATTO CON LA PELLE: immergere in acqua fredda/avvolgere con un bendaggio umido.
	LV	SASKARĒ AR ĀDU: iegremdēt vēsā ūdenī/ietīt mitros apsējos.
	LT	PATEKUS ANT ODOŠ: Įmerkti į vėsą vandenį/apvynioti šlapiais tvarščiais.
	HU	HA BŐRRE KERÜL: Hideg vízzel/nedves kötéssel kell hűteni.
	MT	JEKK FUQ IL-ĠILDA: Dahhal fl-ilma frisk/kebbeb f'faxex imxarrbin.
	NL	BIJ CONTACT MET DE HUID: in koud water onderdompelen/nat verband aanbrengen.
	PL	W PRZYPADKU KONTAKTU ZE SKÓRĄ: Zanurzyć w zimnej wodzie/owinąć mokrym bandażem.
	PT	SE ENTRAR EM CONTACTO COM A PELE: mergulhar em água fria/aplicar compressas húmidas.
	RO	ÎN CAZ DE CONTACT CU PIELEA: introduceți în apă rece/acoperiți cu o compresă umedă.
	SK	PRI KONTAKTE S POKOŽKOU: Ponorte do studenej vody/obviažte mokrými obväzmi.
	SL	PRI STIKU S KOŽO: potopiti v hladno vodo/zaviti v mokre povoje.
	FI	JOS KEMIKAALIA JOUTUU IHOLLE: Upota kylmään veteen/kääri märkiin siteisiin.
	SV	VID HUDKONTAKT: Skölj under kallt vatten/använd våta omslag.
P302 + P350	Jezik	
	BG	ПРИ КОНТАКТ С КОЖАТА: Измийте внимателно и обилно със сапун и вода.
	ES	EN CASO DE CONTACTO CON LA PIEL: Lavar suavemente con agua y jabón abundantes.
	CS	PŘI STYKU S KŮŽÍ: Jemně omyjte velkým množstvím vody a mýdla.
	DA	VED KONTAKT MED HUDEN: Vask forsigtigt med rigeligt sæbe og vand.
	DE	BEI KONTAKT MIT DER HAUT: Behutsam mit viel Wasser und Seife waschen.
	ET	NAHALE SATTUMISE KORRAL: pesta õrnalt rohke vee ja seebiga.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΟ ΔΕΡΜΑ: Πλύντε απαλά με άφθονο νερό και σαπούνι.
	EN	IF ON SKIN: Gently wash with plenty of soap and water.
	FR	EN CAS DE CONTACT AVEC LA PEAU: laver avec précaution et abondamment à l'eau et au savon.
	GA	I gCÁS TEAGMHÁLA LEIS AN gCRAICEANN: Nigh go bog le neart gallúnaí agus uisce.
	IT	IN CASO DI CONTATTO CON LA PELLE: lavare delicatamente e abbondantemente con acqua e sapone.
	LV	SASKARĒ AR ĀDU: maigi nomazgāt ar lielu ziepju un ūdens daudzumu.
	LT	PATEKUS ANT ODOŠ: Atsargiai nuplauti dideliu kiekiu muilo ir vandens.

P302 + P350	Jezik	
	HU	HA BŐRRE KERÜL: Óvatos lemosás bő szappanos vízzel.
	MT	JEKK FUQ IL-ĠILDA: Aħsel bil-mod b'ħafna sapun u ilma.
	NL	BIJ CONTACT MET DE HUID: voorzichtig wassen met veel water en zeep.
	PL	W PRZYPADKU DOSTANIA SIĘ NA SKÓRĘ: Delikatnie umyć dużą ilością wody z mydłem.
	PT	SE ENTRAR EM CONTACTO COM A PELE: lavar suavemente com sabonete e água abundantes.
	RO	ÎN CAZ DE CONTACT CU PIELEA: spălați ușor cu multă apă și săpun.
	SK	PRI KONTAKTE S POKOŽKOU: Opatrne umyte veľkým množstvom vody a mydla.
	SL	PRI STIKU S KOŽO: nežno umiti z veliko mila in vode.
	FI	JOS KEMIKAALIA JOUTUU IHOLLE: Pese varovasti runsaalla vedellä ja saippualla.
	SV	VID HUDKONTAKT: Tvätta försiktigt med mycket tvål och vatten.

P302 + P352	Jezik	
	BG	ПРИ КОНТАКТ С КОЖАТА: Измийте обилно със сапун и вода.
	ES	EN CASO DE CONTACTO CON LA PIEL: Lavar con agua y jabón abundantes.
	CS	PŘI STYKU S KŮŽÍ: Omyjte velkým množstvím vody a mýdla.
	DA	VED KONTAKT MED HUDEN: Vask med rigeligt sæbe og vand.
	DE	BEI KONTAKT MIT DER HAUT: Mit viel Wasser und Seife waschen.
	ET	NAHALE SATTUMISE KORRAL: pesta rohke vee ja seebiga.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΟ ΔΕΡΜΑ: Πλύνετε με άφθονο νερό και σαπούνι.
	EN	IF ON SKIN: Wash with plenty of soap and water.
	FR	EN CAS DE CONTACT AVEC LA PEAU: laver abondamment à l'eau et au savon.
	GA	I gCÁS TEAGMHÁLA LEIS AN gCRAICEANN: Nigh le neart gallúnaí agus uisce.
	IT	IN CASO DI CONTATTO CON LA PELLE: lavare abbondantemente con acqua e sapone.
	LV	SASKARĒ AR ĀDU: nomazgāt ar lielu ziepju un ūdens daudzumu.
	LT	PATEKUS ANT ODOS: Nuplauti dideliu kiekiu muilo ir vandens.
	HU	HA BŐRRE KERÜL: Lemosás bő szappanos vízzel.
	MT	JEKK FUQ IL-ĠILDA: Aħsel b'ħafna sapun u ilma.
	NL	BIJ CONTACT MET DE HUID: met veel water en zeep wassen.
	PL	W PRZYPADKU KONTAKTU ZE SKÓRĄ: Umyć dużą ilością wody z mydłem.
	PT	SE ENTRAR EM CONTACTO COM A PELE: lavar com sabonete e água abundantes.
	RO	ÎN CAZ DE CONTACT CU PIELEA: spălați cu multă apă și săpun.
	SK	PRI KONTAKTE S POKOŽKOU: Umyte veľkým množstvom vody a mydla.
	SL	PRI STIKU S KOŽO: umiti z veliko mila in vode.
	FI	JOS KEMIKAALIA JOUTUU IHOLLE: Pese runsaalla vedellä ja saippualla.
	SV	VID HUDKONTAKT: Tvätta med mycket tvål och vatten.

P303 + P361 + P353	Jezik	
	BG	ПРИ КОНТАКТ С КОЖАТА (или косата): Незабавно свалете цялото замърсено облекло. Облейте кожата с вода/вземете душ
	ES	EN CASO DE CONTACTO CON LA PIEL (o el pelo): Quitarse inmediatamente las prendas contaminadas. Aclararse la piel con agua o ducharse.
	CS	PŘI STYKU S KŮŽÍ (nebo s vlasy): Veškeré kontaminované části oděvu okamžitě svlékněte. Opláchněte kůži vodou/osprchujte.
	DA	VED KONTAKT MED HUDEN (eller håret): Tilmudset tøj tages straks af/fjernes. Skyl/brus huden med vand.
	DE	BEI KONTAKT MIT DER HAUT (oder dem Haar): Alle beschmutzten, getränkten Kleidungsstücke sofort ausziehen. Haut mit Wasser abwaschen/duschen.
	ET	NAHALE (või juustele) SATTUMISE KORRAL: võtta viivitamata kõik saastunud rõivad seljast. Loputada nahka veega/loputada duši all.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΟ ΔΕΡΜΑ (ή με τα μαλλιά): Αφαιρέστε αμέσως όλα τα μολυσμένα ενδύματα. Ξεπλύνετε το δέρμα με νερό/στο ντους.
	EN	IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower.
	FR	EN CAS DE CONTACT AVEC LA PEAU (ou les cheveux): enlever immédiatement les vêtements contaminés. Rincer la peau à l'eau/se doucher.
	GA	I gCÁS TEAGMHÁLA LEIS AN gCRAICEANN(nó le gruaig): Bain díot láithreach na héadaí éilithe go léir. Sruthlaítear an craiceann le huisce/glac cithfholcadh.
	IT	IN CASO DI CONTATTO CON LA PELLE (o con i capelli): togliersi di dosso immediatamente tutti gli indumenti contaminati. Sciacquare la pelle/fare una doccia.
	LV	SASKARĒ AR ĀDU (vai matiem): nogērbt visu piesārņoto apģērbu. Noskalot ādu ar ūdeni/dušā.
	LT	PATEKUS ANT ODOS (arba plauky): Nedelsiant nuvilkti/pašalinti visus užterštus drabužius. Odą nuplauti vandeniu/čiurkšle.
	HU	HA BŐRRE (vagy hajra) KERÜL: Az összes szennyezett ruhadarabot azonnal el kell távolítani/le kell vetni. A bőrt le kell öblíteni vízzel/zuhanyozás.
	MT	JEKK FUQ IL-ĠILDA (jew xaghar): Nehhi/in'za' minnufih l-ilbies kontaminat. Laħlah il-ġilda bl-ilma/bix-xawer.
	NL	BIJ CONTACT MET DE HUID (of het haar): verontreinigde kleding onmiddellijk uittrekken – huid met water afspoelen/afdouchen.
	PL	W PRZYPADKU KONTAKTU ZE SKÓRĄ (lub z włosami): Natychmiast usunąć/zdjąć całą zanieczyszczoną odzież. Spłukać skórę pod strumieniem wody/prysznicem.
	PT	SE ENTRAR EM CONTACTO COM A PELE (ou o cabelo): despir/retirar imediatamente toda a roupa contaminada. Enxaguar a pele com água/tomar um duche.
	RO	ÎN CAZ DE CONTACT CU PIELEA (sau părul): scoateți imediat toată îmbrăcămintea contaminată. Clătiți pielea cu apă/faceți duș.
	SK	PRI KONTAKTE S POKOŽKOU (alebo vlasmi): Odstráňte/vyzlečte všetky kontaminované časti odevu. Pokožku ihneď opláchnite vodou/sprchou.
	SL	PRI STIKU S KOŽO (ali lasmi): takoj odstraniti/sleči vsa kontaminirana oblačila. Izprati kožo z vodo/prho.
	FI	JOS KEMIKAALIA JOUTUU IHOLLE (tai hiuksiin): Riisu saastunut vaatetus välittömästi. Huuhdo/suihkuta iho vedellä.
	SV	VID HUDKONTAKT (även håret): Ta omedelbart av alla nedstänkta kläder. Skölj huden med vatten/duscha.

P304 + P340	Jezik	
	BG	ПРИ ВДИШВАНЕ: Изведете пострадалия на чист въздух и го поставете в позиция, улесняваща дишането.
	ES	EN CASO DE INHALACIÓN: Transportar a la víctima al exterior y mantenerla en reposo en una posición confortable para respirar.
	CS	PŘI VDECHNUTÍ: Přeneste postiženého na čerstvý vzduch a ponechte jej v klidu v poloze usnadňující dýchání.
	DA	VED INDÅNDING: Flyt personen til et sted med frisk luft og sørg for, at vedkommende hviler i en stilling, som letter vejrtrækningen.
	DE	BEI EINATMEN: An die frische Luft bringen und in einer Position ruhigstellen, die das Atmen erleichtert.
	ET	SISSEHINGAMISE KORRAL: toimetada kannatanu värske õhu kätte ja asetada mugavasse puhkeasendisse, mis võimaldab kergesti hingata.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΙΣΠΝΟΗΣ: Μεταφέρετε τον παθόντα στον καθαρό αέρα και αφήστε τον να ξεκουραστεί σε στάση που διευκολύνει την αναπνοή.
	EN	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
	FR	EN CAS D'INHALATION: transporter la victime à l'extérieur et la maintenir au repos dans une position où elle peut confortablement respirer.
	GA	MÁ IONÁLAÍTEAR, tabhair amach faoin aer an duine agus coimeád socair é, i riocht ina bhféadfaidh sé anáil a tharraingt go réidh.
	IT	IN CASO DI INALAZIONE: trasportare l'infortunato all'aria aperta e mantenerlo a riposo in posizione che favorisca la respirazione.
	LV	IEELPOŠANAS GADĪJUMĀ: izvest cietušo svaigā gaisā un turēt miera stāvoklī, lai būtu ērti elpot.
	LT	ĮKVĖPUS: Išnešti nukentėjusį į gryną orą; jam būtina ramybė ir padėtis, leidžianti laisvai kvėpuoti.
	HU	BELÉLEGZÉS ESETÉN: Az érintett személyt friss levegőre kell vinni és olyan nyugalmi testhelyzetbe kell helyezni, hogy könnyen tudjon lélegezni.
	MT	JEKK JITTIEHED FIN-NIFS: Esponi lill-vittma għall-arja friska u żommha mistrieħa f'pożizzjoni komda biex tkun tista' tieħu n-nifs.
	NL	NA INADEMING: het slachtoffer in de frisse lucht brengen en laten rusten in een houding die het ademen vergemakkelijkt.
	PL	W PRZYPADKU DOSTANIA SIĘ DO DRÓG ODDECHOWYCH: wyprowadzić lub wynieść poszkodowanego na świeże powietrze i zapewnić warunki do odpoczynku w pozycji umożliwiającej swobodne oddychanie.
	PT	EM CASO DE INALAÇÃO: retirar a vítima para uma zona ao ar livre e mantê-la em repouso numa posição que não dificulte a respiração.
	RO	ÎN CAZ DE INHALARE: transportați victima la aer liber și mențineți-o în stare de repaus, într-o poziție confortabilă pentru respirație.
	SK	PO VDÝCHNUTÍ: Presuňte postihnutého na čerstvý vzduch a nechajte ho oddychovať v polohe, ktorá mu umožní pohodlné dýchanie.
	SL	PRI VDIHAVANJU: prenesti žrtev na svež zrak in jo pustiti počivati v položaju, ki olajša dihanje.
	FI	JOS KEMIKAALIA ON HENGITETTY: Siirrä henkilö raittiiseen ilmaan ja pidä lepoasennossa, jossa on helppo hengittää.
	SV	VID INANDNING: Flytta personen till frisk luft och se till att han eller hon vilar i en ställning som underlättar andningen.

P304 + P341	Jezik	
	BG	ПРИ ВДИШВАНЕ: При затруднено дишане изведете пострадалия на чист въздух и го поставете в позиция, улесняваща дишането.
	ES	EN CASO DE INHALACIÓN: Si respira con dificultad, transportar a la víctima al exterior y mantenerla en reposo en una posición confortable para respirar.
	CS	PŘI VDECHNUTÍ: Při obtížném dýchání přeneste postiženého na čerstvý vzduch a ponechte jej v klidu v poloze usnadňující dýchání.
	DA	VED INDÅNDING: Ved vejrtrækningsbesvær: Flyt personen til et sted med frisk luft og sørg for, at vedkommende hviler i en stilling, som letter vejrtrækningen.
	DE	BEI EINATMEN: Bei Atembeschwerden an die frische Luft bringen und in einer Position ruhigstellen, die das Atmen erleichtert.
	ET	SISSEHINGAMISE KORRAL: hingamisraskuste korral toimetada kannatanu värske õhu kätte ja asetada mugavasse puhkeasendisse, mis võimaldab kergesti hingata.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΙΣΠΝΟΗΣ: Εάν ο παθών έχει δύσπνοια, μεταφέρετέ τον στον καθαρό αέρα και αφήστε τον να ξεκουραστεί σε στάση που διευκολύνει την αναπνοή.
	EN	IF INHALED: If breathing is difficult, remove victim to fresh air and keep at rest in a position comfortable for breathing.
	FR	EN CAS D'INHALATION: s'il y a difficulté à respirer, transporter la victime à l'extérieur et la maintenir au repos dans une position où elle peut confortablement respirer.
	GA	MÁ THÉANN AN TÁIRGE SEO LE HANÁIL DUINE, tabhair amach faoin aer an duine agus coimeád socair é, i riocht ina bhféadfaidh sé anáil a tharraingt go réidh.
	IT	IN CASO DI INALAZIONE: se la respirazione è difficile, trasportare l'infortunato all'aria aperta e mantenerlo a riposo in posizione che favorisca la respirazione.
	LV	IEELPOŠANAS GADĪJUMĀ: ja elpošana ir apgrūtināta, izvest cietušo svaigā gaisā un turēt miera stāvoklī, lai būtu ērti elpot.
	LT	ĮKVĖPUS: Jeigu nukentėjusiajam sunku kvėpuoti, išnešti jį į gryną orą; jam būtina ramybė ir padėtis, leidžianti laisvai kvėpuoti.
	HU	BELÉLEGZÉS ESETÉN: Légzési nehézségek esetén az érintett személyt friss levegőre kell vinni és olyan nyugalmi testhelyzetbe kell helyezni, hogy könnyen tudjon lélegezni.
	MT	JEKK JITTIEHED FIN-NIFS: Jekk in-nifs ikun diffiċli, esponi lill-vittma għall-arja friska u żommha mistrieħa f'pożizzjoni komda biex tkun tista' tieħu n-nifs.
	NL	NA INADEMING: bij ademhalingsmoeilijkheden het slachtoffer in de frisse lucht brengen en laten rusten in een houding die het ademen vergemakkelijkt.
	PL	W PRZYPADKU DOSTANIA SIĘ DO DRÓG ODDECHOWYCH: W przypadku trudności z oddychaniem, wyprowadzić lub wynieść poszkodowanego na świeże powietrze i zapewnić warunki do odpoczynku w pozycji umożliwiającej swobodne oddychanie.
	PT	EM CASO DE INALAÇÃO: em caso de dificuldade respiratória, retirar a vítima para uma zona ao ar livre e mantê-la em repouso numa posição que não dificulte a respiração.
	RO	ÎN CAZ DE INHALARE: dacă respirația este dificilă, transportați victima la aer liber și mențineți-o în stare de repaus, într-o poziție confortabilă pentru respirație.
	SK	PO VDÝCHNUTÍ: Ak nastanú ťažkosti s dýchaním, presuňte postihnutého na čerstvý vzduch a nechajte ho oddychovať v polohe, ktorá mu umožní pohodlné dýchanie.
	SL	PRI VDIHAVANJU: prenesti žrtev pri oteženem dihanju na svež zrak in jo pustiti počivati v položaju, ki olajša dihanje.
	FI	JOS KEMIKAALIA ON HENGITETTY: Jos hengitysvaikeuksia, siirrä henkilö raittiiseen ilmaan ja pidä lepoasennossa, jossa on helppo hengittää.
	SV	VID INANDNING: Vid andningsbesvär, flytta personen till frisk luft och se till att han eller hon vilar i en ställning som underlättar andningen.

P305 + P351 + P338	Jezik	
	BG	ПРИ КОНТАКТ С ОЧИТЕ: Промивайте внимателно с вода в продължение на няколко минути. Свалете контактните лещи, ако има такива и доколкото това е възможно. Продължавайте да промивате.
	ES	EN CASO DE CONTACTO CON LOS OJOS: Aclarar cuidadosamente con agua durante varios minutos. Quitar las lentes de contacto, si lleva y resulta fácil. Seguir aclarando.
	CS	PŘI ZASAŽENÍ OČÍ: Několik minut opatrně vyplachujte vodou. Vyjměte kontaktní čočky, jsou-li nasazeny a pokud je lze vyjmout snadno. Pokračujte ve vyplachování.
	DA	VED KONTAKT MED ØJNENE: Skyl forsigtigt med vand i flere minutter. Fjern eventuelle kontaktlinser, hvis dette kan gøres let. Fortsæt skylning.
	DE	BEI KONTAKT MIT DEN AUGEN: Einige Minuten lang behutsam mit Wasser spülen. Vorhandene Kontaktlinsen nach Möglichkeit entfernen. Weiter spülen.
	ET	SILMA SATTUMISE KORRAL: loputada mitme minuti jooksul ettevaatlikult veega. Eemaldada kontaktläätsed, kui neid kasutatakse ja kui neid on kerge eemaldada. Loputada veel kord.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΑ ΜΑΤΙΑ: Ξεπλύνετε προσεκτικά με νερό για αρκετά λεπτά. Εάν υπάρχουν φακοί επαφής, αφαιρέστε τους, εφόσον είναι εύκολο. Συνεχίστε να ξεπλένετε.
	EN	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
	FR	EN CAS DE CONTACT AVEC LES YEUX: rincer avec précaution à l'eau pendant plusieurs minutes. Enlever les lentilles de contact si la victime en porte et si elles peuvent être facilement enlevées. Continuer à rincer.
	GA	I gCÁS TEAGMHÁLA LEIS NA SÚILE: Sruthlaigh go cúramach le huisce ar feadh roinnt nóiméad. Tóg amach na tadhall-lionsaí, más ann dóibh agus más furasta. Lean den sruthlú.
	IT	IN CASO DI CONTATTO CON GLI OCCHI: sciacquare accuratamente per parecchi minuti. Togliere le eventuali lenti a contatto se è agevole farlo. Continuare a sciacquare.
	LV	SASKARĒ AR ACĪM: uzmanīgi izskalot ar ūdeni vairākas minūtes. Izņemt kontaktlēcas, ja tās ir ievietotas un ja to ir viegli izdarīt. Turpināt skalot.
	LT	PATEKUS Į AKIS: Kelias minutes atsargiai plauti vandeniu. Išimti kontaktinius lęšius, jeigu jie yra ir jeigu lengvai galima tai padaryti. Toliau plauti akis.
	HU	SZEMBE KERÜLÉS esetén: Több percig tartó óvatos öblítés vízzel. Adott esetben a kontaktlencsék eltávolítása, ha könnyen megoldható. Az öblítés folytatása.
	MT	JEKK JIDHOL FL-GHAJNEJN: Lahlah b'attenzjoni bl-ilma għal diversi minuti. Nehhi l-lentijiet tal-kuntatt, jekk ikun hemm u jkunu faċli biex tnehhihom. Komplil lahlah.
	NL	BIJ CONTACT MET DE OGEN: voorzichtig afspoelen met water gedurende een aantal minuten; contactlenzen verwijderen, indien mogelijk; blijven spoelen.
	PL	W PRZYPADKU DOSTANIA SIĘ DO OCZU: Ostrożnie płukać wodą przez kilka minut. Wyjąć soczewki kontaktowe, jeżeli są i można je łatwo usunąć. Nadal płukać.
	PT	SE ENTRAR EM CONTACTO COM OS OLHOS: enxaguar cuidadosamente com água durante vários minutos. Se usar lentes de contacto, retire-as, se tal lhe for possível. Continuar a enxaguar.
	RO	ÎN CAZ DE CONTACT CU OCHII: clătiți cu atenție cu apă timp de mai multe minute. Scoateți lentilele de contact, dacă este cazul și dacă acest lucru se poate face cu ușurință. Continuați să clătiți.
	SK	PO ZASIAHNUTÍ OČÍ: Niekoľko minút ich opatrne vyplachujte vodou. Ak používate kontaktné šošovky a ak je to možné, odstráňte ich. Pokračujte vo vyplachovaní.
	SL	PRI STIKU Z OČMI: previdno izpirajte z vodo nekaj minut. Odstranite kontaktne leče, če jih imate in če to lahko storite brez težav. Nadaljujte z izpiranjem.
	FI	JOS KEMIKAALIA JOUTUU SILMIIN: Huuhdo huolellisesti vedellä usean minuutin ajan. Poista piilolinssit, _edical voi tehdä helposti. Jatka huuhtomista.
	SV	VID KONTAKT MED ÖGONEN: Skölj försiktigt med vatten i flera minuter. Ta ur eventuella kontaktlinser om det går lätt. Fortsätt att skölja.

P306 + P360	Jezik	
	BG	ПРИ ПОПАДАНЕ ВЪРХУ ОБЛЕКЛОТО: незабавно облейте замърсеното облекло и кожата обилно с вода, преди да свалите дрехите.
	ES	EN CASO DE CONTACTO CON LA ROPA: Aclarar inmediatamente con agua abundante las prendas y la piel contaminadas antes de quitarse la ropa.
	CS	PŘI STYKU S ODĚVEM: Kontaminovaný oděv a kůži okamžitě omyjte velkým množstvím vody a potom oděv odložte.
	DA	VED KONTAKT MED TØJET: Skyl omgående tilsmudset tøj og hud med rigeligt vand, før tøjet fjernes.
	DE	BEI KONTAKT MIT DER KLEIDUNG: Kontaminierte Kleidung und Haut sofort mit viel Wasser abwaschen und danach Kleidung ausziehen.
	ET	RÕIVASTELE SATTUMISE KORRAL: saastunud rõivad ja nahk loputada viivitamata rohke veega ning alles seejärel rõivad eemaldada.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΑ ΡΟΥΧΑ: Ξεπλύντε αμέσως τα μολυσμένα ρούχα και την επιδερμίδα με άφθονο νερό πριν αφαιρέσετε τα ρούχα.
	EN	IF ON CLOTHING: rinse immediately contaminated clothing and skin with plenty of water before removing clothes.
	FR	EN CAS DE CONTACT AVEC LES VÊTEMENTS: rincer immédiatement et abondamment avec de l'eau les vêtements contaminés et la peau avant de les enlever.
	GA	I gCÁS TEAGMHÁLA LE HÉADAÍ: sruthlaítear éadaí éillithe agus an craiceann láithreach le neart uisce sula ndéantar na héadaí a bhaint den duine.
	IT	IN CASO DI CONTATTO CON GLI INDUMENTI: sciacquare immediatamente e abbondantemente gli indumenti contaminati e la pelle prima di togliersi gli indumenti.
	LV	SASKARĒ AR APĢĒRBU: nekavējoties izskalot piesārņoto apģērbu un ādu ar lielu daudzumu ūdeni, pirms apģērba novilkšanas.
	LT	PATEKUS ANT DRABUŽIŲ: Prieš nuvelkant užterštus drabužius, nedelsiant juos ir odą nuplauti dideliu kiekiu vandens.
	HU	HA RUHÁRA KERÜL: A ruhák levetése előtt a szennyezett ruházatot és a bőrt bő vízzel azonnal le kell öblíteni.
	MT	JEKK FUQ L-ILBIES: lahlah mall-ewwel l-ilbies ikkontaminat u l-gilda b'hafna ilma qabel ma tneħhi l-ilbies.
	NL	NA MORSEN OP KLEDING: verontreinigde kleding en huid onmiddellijk met veel water afspoelen en pas daarna kleding uittrekken.
	PL	W PRZYPADKU KONTAKTU Z ODZIEŻĄ: natychmiast spłukać zanieczyszczoną odzież i skórę dużą ilością wody przed zdjęciem odzieży.
	PT	SE ENTRAR EM CONTACTO COM A ROUPA: enxaguar imediatamente com muita água a roupa e a pele contaminadas antes de se despir.
	RO	ÎN CAZ DE CONTACT CU ÎMBRĂCĂMINTEA: clătiți imediat îmbrăcămintea contaminată și pielea cu multă apă, înainte de scoaterea îmbrăcămintei.
	SK	PRI KONTAKTE S ODEVOM: kontaminovaný odev a pokožku opláchnite veľkým množstvom vody a potom odev odstráňte.
	SL	PRI STIKU Z OBLAČILI: takoj izprati kontaminirana oblačila in kožo z veliko vode pred odstranitvijo oblačil.
	FI	JOS KEMIKAALIA JOUTUU VAATTEISIIN: Huuhdo saastunut vaatetus ja iho välittömästi runsaalla vedellä ennen vaatetuksen riisumista.
	SV	VID KONTAKT MED KLÄDERNA: Skölj omedelbart nedstänkta kläder och hud med mycket vatten innan du tar av dig kläderna.

P307 + P311	Jezik	
	BG	ПРИ експозиция: Обавете се в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар.
	ES	EN CASO DE exposición: Llamar a un CENTRO DE INFORMACIÓN TOXICOLÓGICA o a un médico.
	CS	PŘI expozici: Volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	VED eksponering: Ring til en GIFTINFORMATION eller en læge.
	DE	BEI Exposition: GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	Kokkupuute korral: võtta ühendust MÜRGISTUSTEABEKESKUSE või arstiga.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ έκθεσης: Καλέστε το ΚΕΝΤΡΟ ΔΗΛΗΤΗΡΙΑΣΕΩΝ ή ένα γιατρό.
	EN	IF exposed: Call a POISON CENTER or doctor/physician.
	FR	EN CAS d'exposition: appeler un CENTRE ANTIPOISON ou un médecin.
	GA	I gCÁS nochta: Cuir glao ar IONAD NIMHE nó ar dhochtúir/lia.
	IT	IN CASO di esposizione, contattare un CENTRO ANTIVELENI o un medico.
	LV	Ja ir saskarē: Sazināties ar SAINDĒŠANĀS CENTRU vai ārstu.
	LT	Esant sąlyčiui: Skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	Expozíció esetén: forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	Jekk espost: Ikkuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib.
	NL	NA blootstelling: een ANTIGIFCENTRUM of een arts raadplegen.
	PL	W przypadku narażenia: Skontaktować się z OŚRODKIEM ZATRUĆ lub z lekarzem.
	PT	EM CASO DE exposição: contacte um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.
	RO	ÎN CAZ DE expunere: sunați la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic.
	SK	Po expozícii: volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	PRI izpostavljenosti: pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	Altistumisen tapahduttua: Ota yhteys MYRKYTYSTIETOKESKUKSEEN tai lääkäriin.
	SV	Om du exponerats: Kontakta GIFTINFORMATIONSCENTRAL eller läkare.
P308 + P313	Jezik	
	BG	ПРИ явна или предполагаема експозиция: Потърсете медицински съвет/помощ.
	ES	EN CASO DE exposición manifiesta o presunta: Consultar a un médico.
	CS	PŘI expozici nebo podezření na ni: Vyhledejte lékařskou pomoc/ošetření.
	DA	VED eksponering eller mistanke om eksponering: Søg lægehjælp.
	DE	BEI Exposition oder falls betroffen: Ärztlichen Rat einholen/ärztliche Hilfe hinzuziehen.
	ET	Kokkupuute või kokkupuutekahtluse korral: pöörduda arsti poole.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ έκθεσης ή πιθανότητας έκθεσης: Συμβουλευθείτε/Επισκεφθείτε γιατρό.
	EN	IF exposed or concerned: Get medical advice/attention.
	FR	EN CAS d'exposition prouvée ou suspectée: consulter un médecin.
	GA	I gCÁS nochta nó má mheastar a bheith nochtaithe: Faigh comhairle/cúram liachta.

P308 + P313	Jezik	
	IT	IN CASO di esposizione o di possibile esposizione, consultare un medico.
	LV	Ja nokļūst saskarē vai saistīts ar to: lūdziet medicīnu palīdzību.
	LT	Esant sąlyčiui arba jeigu numanomas sąlytis: kreiptis į gydytoją.
	HU	Expozíció vagy annak gyanúja esetén: orvosi ellátást kell kérni.
	MT	Jekk espost jew konċernat: Ikkonsulta tabib.
	NL	NA (mogelijke) blootstelling: een arts raadplegen.
	PL	W przypadku narażenia lub styczości: Zasięgnąć porady/zgłosić się pod opiekę lekarza.
	PT	EM CASO DE exposição ou suspeita de exposição: consulte um médico.
	RO	ÎN CAZ DE expunere sau de posibilă expunere: consultați medicul.
	SK	Po expozícii alebo podozrení z nej: Vyhľadajte lekársku pomoc/starostlivosť.
	SL	PRI izpostavljenosti ali sumu izpostavljenosti: poiščite zdravniško pomoč/oskrbo.
	FI	Altistumisen tapahduttua tai jos epäillään altistumista: Hakeudu lääkäriin.
	SV	Vid exponering eller misstanke om exponering Sök läkarhjälp.
P309 + P311	Jezik	
	BG	ПРИ експозиция или неразположение: Обадете се в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар.
	ES	EN CASO DE exposición o si se encuentra mal: Llamar a un CENTRO DE INFORMACIÓN TOXICOLÓGICA o a un médico.
	CS	PŘI expozici nebo necítíte-li se dobře: Volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	VED eksponering eller ubehag: Ring til en GIFTINFORMATION eller en læge.
	DE	BEI Exposition oder Unwohlsein: GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	Kokkupuute või halva enesetunde korral: võtta ühendust MÜRGISTUSTEABEKESKUSE või arstiga.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ έκθεσης ή αδιαθεσίας: Καλέστε το ΚΕΝΤΡΟ ΔΗΛΗΤΗΡΙΑΣΕΩΝ ή ένα γιατρό.
	EN	IF exposed or if you feel unwell: Call a POISON CENTER or doctor/physician.
	FR	EN CAS d'exposition ou de malaise: appeler un CENTRE ANTIPOISON ou un médecin.
	GA	I gCÀS nochta nó má bhraitear tinn: Cuir glao ar IONAD NIMHE nó ar dhochtúir/lia.
	IT	IN CASO di esposizione o di malessere, contattare un CENTRO ANTIVELENI o un medico.
	LV	Ja nokļūst saskarē vai jums ir slikta pašsajūta: sazinieties ar SAINDĒŠANĀS CENTRU vai ārstu.
	LT	Esant sąlyčiui arba pasijutus blogai: Skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	Expozíció vagy rosszullét esetén: forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	JEKK espost jew thossok ma tiflahx: Ikkuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib.
	NL	NA blootstelling of bij onwel voelen: een ANTIGIFCENTRUM of een arts raadplegen.
	PL	W przypadku narażenia lub złego samopoczucia: Skontaktować się z OŚRODKIEM ZATRUC lub z lekarzem.
	PT	EM CASO DE exposição ou de indisposição: contacte um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.

P309 + P311	Jezik	
	RO	ÎN CAZ DE expunere sau dacă nu vă simțiți bine: sunați la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic.
	SK	Po expozícii alebo pri zdravotných problémoch: volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	PRI izpostavljenosti ali slabem počutju: pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	Altistumisen tapahduttua tai jos ilmenee pahoinvointia: Ota yhteys MYRKYTYSTIETO-SKESKUKSEEN tai lääkäriin.
	SV	Vid exponering eller obehag: Kontakta GIFTINFORMATIONSCENTRAL eller läkare.

P332 + P313	Jezik	
	BG	При поява на кожно дразнене: Потърсете медицински съвет/помощ.
	ES	En caso de irritación cutánea: Consultar a un médico.
	CS	Při podráždění kůže: Vyhledejte lékařskou pomoc/ošetření.
	DA	Ved hudirritation: Søg lægehjælp.
	DE	Bei Hautreizung: Ärztlichen Rat einholen/ärztliche Hilfe hinzuziehen.
	ET	Nahaärrituse korral: pöörduda arsti poole.
	EL	Εάν παρατηρηθεί ερεθισμός του δέρματος: Συμβουλευθείτε/Επισκεφθείτε γιατρό.
	EN	If skin irritation occurs: Get medical advice/attention.
	FR	En cas d'irritation cutanée: consulter un médecin.
	GA	I gcás greannú craicinn: Faigh comhairle/cúram liachta.
	IT	In caso di irritazione della pelle: consultare un medico.
	LV	Ja rodas ādas iekaisums: lūdziet medicīnu palīdzību.
	LT	Jeigu sudirginama oda: kreiptis į gydytoją.
	HU	Bőrirritáció esetén: orvosi ellátást kell kérni.
	MT	Jekk ikun hemm irritazzjoni tal-ġilda: Ikkonsulta tabib.
	NL	Bij huidirritatie: een arts raadplegen.
	PL	W przypadku wystąpienia podrażnienia skóry: Zasięgnąć porady/zgłosić się pod opiekę lekarza.
	PT	Em caso de irritação cutânea: consulte um médico.
	RO	În caz de iritare a pielii: consultați medicul.
	SK	Ak sa objaví podráždenie pokožky, vyhľadajte lekársku pomoc/starostlivosť.
	SL	Če nastopi draženje kože: poiščite zdravniško pomoč/oskrbo.
	FI	Jos ilmenee ihoärsytystä: Hakeudu lääkäriin.
	SV	Vid hudirritation: Sök läkarhjälp.

P333 + P313	Jezik	
	BG	При поява на кожно дразнене или обрив на кожата: Потърсете медицински съвет/помощ.
	ES	En caso de irritación o erupción cutánea: Consultar a un médico.
	CS	Při podráždění kůže nebo vyrážce: Vyhledejte lékařskou pomoc/ošetření.

P333 + P313	Jezik	
	DA	Ved hudirritation eller udslet: Søg lægehjælp.
	DE	Bei Hautreizung oder -ausschlag: Ärztlichen Rat einholen/ärztliche Hilfe hinzuziehen.
	ET	Nahaärrituse või _obe korral: pöörduda arsti poole.
	EL	Εάν παρατηρηθεί ερεθισμός του δέρματος ή εμφανιστεί εξάνθημα: Συμβουλευθείτε/Επισκεφθείτε γιατρό.
	EN	If skin irritation or rash occurs: Get medical advice/attention.
	FR	En cas d'irritation ou d'éruption cutanée: consulter un médecin.
	GA	Má tharlaíonn greannú nó gríos craicinn: Faigh comhairle/cúram liachta.
	IT	In caso di irritazione o eruzione della pelle: consultare un medico.
	LV	Ja rodas ādas iekaisums vai izsitumi: lūdziet medicīnu palīdzību.
	LT	Jeigu sudirginama oda arba ją išberia: kreiptis į gydytoją.
	HU	Bőrirritáció vagy kiütések megjelenése esetén: orvosi ellátást kell kérni.
	MT	Jekk ikun hemm irritazzjoni jew raxx tal-ġilda: Ikkonsulta tabib.
	NL	Bij huidirritatie of uitslag: een arts raadplegen.
	PL	W przypadku wystąpienia podrażnienia skóry lub wysypki: Zasięgnąć porady/zgłosić się pod opiekę lekarza.
	PT	Em caso de irritação ou erupção cutânea: consulte um médico.
	RO	În caz de iritare a pielii sau de erupție cutanată: consultați medicul.
	SK	Ak sa prejaví podráždenie pokožky alebo sa vytvoria vyrážky: vyhľadajte lekársku pomoc/starostlivosť.
	SL	Če nastopi draženje kože ali se pojavijo izpuščaji: poiščite zdravniško pomoč/oskrbo.
	FI	Jos ilmenee ihoärsytystä tai ihottumaa: Hakeudu lääkäriin.
	SV	Vid hudirritation eller utslag: Sök läkarhjälp.

P335 + P334	Jezik	
	BG	Отстранете посипаните частици от кожата. Потопете в хладка вода/сложете мокри компреси.
	ES	Sacudir las partículas que se hayan depositado en la piel. Sumergir en agua fresca/aplicar compresas húmedas.
	CS	Volné částice odstraňte z kůže. Ponořte do studené vody/zabalte do vlhkého obvazu.
	DA	Børst løse partikler bort fra huden. Skyl under koldt vand/ anvend våde omslag.
	DE	Lose Partikel von der Haut abbürsten. In kaltes Wasser tauchen/nassen Verband anlegen.
	ET	Pühkida lahtised osakesed nahalt maha. Hoida jahedas vees / panna peale niiske kompress.
	EL	Αφαιρέστε προσεκτικά τα σωματίδια που έχουν μείνει στο δέρμα. Πλύντε με άφθονο δροσερό νερό/τυλίξτε με βρεγμένους επιδέσμους.
	EN	Brush off loose particles from skin. Immerse in cool water/wrap in wet bandages.
	FR	Enlever avec précaution les particules déposées sur la peau. Rincer à l'eau fraîche/poser une compresse humide.
	GA	Scuab cáithníní scaoilte den chraiceann. Tum in uisce fionnuar/cuir bréid fliuch air.
	IT	Rimuovere le particelle depositate sulla pelle. Immergere in acqua fredda/avvolgere con un bendaggio umido.
	LV	Noberziet brīvās daļiņas no ādas. Iegremdējiet vēsā ūdenī/ietiniet mitros apsējos.

P335 + P334	Jezik	
	LT	Neprilipusias daleles nuvalyti nuo odos. Įmerkti į vėsų vandenį/apvynioti šlapiais tvarščiais.
	HU	A bőrre tapadó szemcséket óvatosan le kell kefélni. Hideg vízzel/nedves kötéssel kell hűteni.
	MT	Farfar il-frak mhux imwahhal minn mal-ġilda. Dahhal fl-ilma frisk/kebbeb f'faxex imxarrbin.
	NL	Losse deeltjes van de huid afvegen. In koud water onderdompelen/nat verband aanbrengen.
	PL	Nie związaną pozostałość strzepnąć ze skóry. Zanurzyć w zimnej wodzie/owinąć mokrym bandażem.
	PT	Sacudir da pele as partículas soltas. Mergulhar em água fria/aplicar compressas húmidas.
	RO	Îndepărtați particulele depuse pe piele. Introduceți în apă rece/acoperiți cu o compresă umedă.
	SK	Z pokožky oprášte sypké čiasťočky. Ponorte do studenej vody/obviažte mokrými obväzmi.
	SL	S krtačo odstraniti razsute delce s kože. Potopiti v hladno vodo/zaviti v mokre povoje.
	FI	Poista irtohiukkaset iholta. Upota kylmään veteen/kääri märkiin siteisiin.
	SV	Borsta bort lösa partiklar från huden. Skölj under kallt vatten/använd våta omslag.
P337 + P313	Jezik	
	BG	При продължително дразнене на очите: Потърсете медицински съвет/помощ.
	ES	Si persiste la irritación ocular: Consultar a un médico.
	CS	Přetrvává-li podráždění očí: Vyhledejte lékařskou pomoc/ošetření.
	DA	Ved vedvarende øjenirritation: Søg lægehjælp.
	DE	Bei anhaltender Augenreizung: Ärztlichen Rat einholen/ärztliche Hilfe hinzuziehen.
	ET	Kui silmade ärritus ei möödu: pöörduda arsti poole.
	EL	Εάν δεν υποχωρεί ο οφθαλμικός ερεθισμός: Συμβουλευθείτε/Επισκεφθείτε γιατρό.
	EN	If eye irritation persists: Get medical advice/attention.
	FR	Si l'irritation oculaire persiste: consulter un médecin.
	GA	Má mhaireann an greannú súile: Faigh comhairle/cúram liachta.
	IT	Se l'irritazione degli occhi persiste, consultare un medico.
	LV	Ja acu iekaisums nepāriet: lūdziet mediķu palīdzību.
	LT	Jei akių dirginimas nepraeina: kreiptis į gydytoją.
	HU	Ha a szemirritáció nem múlik el: orvosi ellátást kell kérni.
	MT	Jekk l-irritazzjoni ta' l-għajnejn tippersisti: Ikkonsulta tabib.
	NL	Bij aanhoudende oogirritatie: een arts raadplegen.
	PL	W przypadku utrzymywania się działania drażniącego na oczy: Zasięgnąć porady/zgłosić się pod opiekę lekarza.
	PT	Caso a irritação ocular persista: consulte um médico.
	RO	Dacă iritarea ochilor persistă: consultați medicul.
	SK	Ak podráždenie očí pretrváva: vyhľadajte lekársku pomoc/starostlivosť.
	SL	Če draženje oči ne preneha: poiščite zdravniško pomoč/oskrbo.

P337 + P313	Jezik	
	FI	Jos silmä-ärsytys jatkuu: Hakeudu lääkäriin.
	SV	Vid bestående ögonirritation: Sök läkarhjälp.
P342 + P311	Jezik	
	BG	При симптоми на затруднено дишане: Обадете се в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар.
	ES	En caso de síntomas respiratorios: Llamar a un CENTRO DE INFORMACIÓN TOXICOLÓGICA o a un médico.
	CS	Při dýchacích potížích: Volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	Ved luftvejssymptomer: Ring til en GIFTINFORMATION eller en læge.
	DE	Bei Symptomen der Atemwege: GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	Hingamisteede probleemide ilmnemise korral: võtta ühendust MÜRGISTUSTEABEKE-SKÜSE või arstiga.
	EL	Εάν παρουσιάζονται αναπνευστικά συμπτώματα: Καλέστε το ΚΕΝΤΡΟ ΔΗΛΗΤΗΡΙΑΣΕΩΝ ή ένα γιατρό.
	EN	If experiencing respiratory symptoms: Call a POISON CENTER or doctor/physician.
	FR	En cas de symptômes respiratoires: appeler un CENTRE ANTIPOISON ou un médecin.
	GA	I gcás siomptóm riospráide: Cuir glao ar IONAD NIMHE nó ar dhochtúir/lia.
	IT	In caso di sintomi respiratori: contattare un CENTRO ANTIVELENI o un medico.
	LV	Ja rodas elpas trūkuma simptomi: sazinieties ar SAINDĒŠANĀS CENTRU vai ārstu.
	LT	Jeigu pasireiškia respiraciniai simptomai: skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	Légzési problémák esetén: forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	Jekk ikollok sintomi respiratorji: Ikkuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib.
	NL	Bij ademhalingssymptomen: een ANTIGIFCENTRUM of een arts raadplegen.
	PL	W przypadku wystąpienia objawów ze strony układu oddechowego: Skontaktować się z OŚRODKIEM ZATRUĆ lub z lekarzem.
	PT	Em caso de sintomas respiratórios: contacte um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.
	RO	În caz de simptome respiratorii: sunați la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic.
	SK	Pri ťažkostiach s dýchaním: volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	Pri respiratornih simptomih: pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	Jos ilmenee hengitysoireita: Ota yhteys MYRKYTYSTIETOKESKUKSEEN tai lääkäriin.
	SV	Vid besvär i luftvägarna: Kontakta GIFTINFORMATIONSCENTRAL eller läkare.
P370 + P376	Jezik	
	BG	При пожар: Спрете теча, ако е безопасно.
	ES	En caso de incendio: Detener la fuga, si no hay peligro en hacerlo.
	CS	V případě požáru: Zastavte únik, můžete-li tak učinit bez rizika.
	DA	Ved brand: Stands lækagen, hvis dette er sikkert.

P370 + P376	Jezik	
	DE	Bei Brand: Undichtigkeit beseitigen, wenn gefahrlos möglich.
	ET	Tulekahju korral: leke peatada, kui seda on võimalik teha ohutult.
	EL	Σε περίπτωση πυρκαγιάς: Σταματήστε τη διαρροή, εφόσον δεν υπάρχει κίνδυνος.
	EN	In case of fire: Stop leak if safe to do so.
	FR	En cas d'incendie: obturer la fuite si cela peut se faire sans danger.
	GA	I gcás dóiteáin: Cuir stop leis an sceitheadh má tá sé sábháilte é sin a dhéanamh.
	IT	In caso di incendio: bloccare la perdita se non c'è pericolo.
	LV	Ugunsgrēka gadījumā: apturiet noplūdi, ja to darīt ir droši.
	LT	Gaisro atveju: sustabdyti nuotėkį, jeigu galima saugiai tai padaryti.
	HU	Tűz esetén: Meg kell szüntetni a szivárgást, ha ez biztonságosan megtehető.
	MT	F'każ ta' nar: Waqqaf it-tnixxija sakemm ma jkunx ta' periklu.
	NL	In geval van brand: het lek dichten als dat veilig gedaan kan worden.
	PL	W przypadku pożaru: Jeżeli jest to bezpieczne zahamować wyciek.
	PT	Em caso de incêndio: deter a fuga se tal puder ser feito em segurança.
	RO	În caz de incendiu: opriți scurgerea, dacă acest lucru se poate face în siguranță.
	SK	V prípade požiaru: ak je to bezpečné, zastavte únik.
	SL	Ob požaru: zaustaviti puščanje, če je varno.
	FI	Tulipalon sattuesssa: Sulje vuoto, jos sen voi tehdä turvallisesti.
	SV	Vid brand: Stoppa läckan om det kan göras på ett säkert sätt.

P370 + P378	Jezik	
	BG	При пожар: Използвайте ... за гасене.
	ES	En caso de incendio: Utilizar ... para apagarlo.
	CS	V případě požáru: K hašení použijte
	DA	Ved brand: Anvend ... til brandslukning.
	DE	Bei Brand: ... zum Löschen verwenden.
	ET	Tulekahju korral: kasutada kustutamiseks
	EL	Σε περίπτωση πυρκαγιάς: Χρησιμοποιήστε ... για την κατάσβεση.
	EN	In case of fire: Use ... for extinction.
	FR	En cas d'incendie: utiliser ... pour l'extinction.
	GA	I gcás dóiteáin: Úsáid ... le haghaidh múchta.
	IT	In caso di incendio: estinguere con....
	LV	Ugunsgrēka gadījumā: dzēšanai izmantojiet ...
	LT	Gaisro atveju: gesinimui naudoti ...
	HU	Tűz esetén: az oltáshoz ...használandó.
	MT	F'każ ta' nar: Uża' ... għat-tifi.
	NL	In geval van brand: blussen met ...

P370 + P378	Jezik	
	PL	W przypadku pożaru: Użyć ... do gaszenia.
	PT	Em caso de incêndio: para a extinção utilizar ...
	RO	În caz de incendiu: utilizați... pentru stingere.
	SK	V prípade požiaru: na hasenie použite
	SL	Ob požaru: za gašenje uporabiti ...
	FI	Tulipalon sattuessa: Käytä palon sammuttamiseen ...
	SV	Vid brand: Släck branden med

P370 + P380	Jezik	
	BG	При пожар: Евакуирайте зоната.
	ES	En caso de incendio: Evacuar la zona.
	CS	V případě požáru: Vykliďte prostor.
	DA	Ved brand: Evakuer området.
	DE	Bei Brand: Umgebung räumen.
	ET	Tulekahju korral: ala evakueerida.
	EL	Σε περίπτωση πυρκαγιάς: Εκκενώστε την περιοχή.
	EN	In case of fire: Evacuate area.
	FR	En cas d'incendie: évacuer la zone.
	GA	I gcás dóiteáin: Aslonnaigh gach duine as an limistéar.
	IT	Evacuare la zona in caso di incendio.
	LV	Ugunsgrēka gadījumā: evakuēt zonu.
	LT	Gaisro atveju: evakuoti zona.
	HU	Tűz esetén: Ki kell üríteni a területet.
	MT	F'każ ta' nar: Evakwa ż-zona.
	NL	In geval van brand: evacueren.
	PL	W przypadku pożaru: Ewakuować teren.
	PT	Em caso de incêndio: evacuar a zona.
	RO	În caz de incendiu: evacuați zona.
	SK	V prípade požiaru: priestory evakuujte.
	SL	Ob požaru: izprazniti območje.
	FI	Tulipalon sattuessa: Evakuoi alue.
	SV	Vid brand: Utrym området.

P370 + P380 + P375	Jezik	
	BG	При пожар: Евакуирайте зоната. Гасете пожара от разстояние поради опасност от експлозия.
	ES	En caso de incendio: Evacuar la zona. Luchar contra el incendio a distancia, dado el riesgo de explosión.

P370 + P380 + P375	Jezik	
	CS	V případě požáru: Vykliďte prostor. Kvůli nebezpečí výbuchu haste z dostatečné vzdálenosti.
	DA	Ved brand: Evakuer området. Bekæmp branden på afstand på grund af eksplosionsfare.
	DE	Bei Brand: Umgebung räumen. Wegen Explosionsgefahr Brand aus der Entfernung bekämpfen.
	ET	Tulekahju korral: ala evakueerida. Plahvatusohu tõttu teha kustutustööd eemalt.
	EL	Σε περίπτωση πυρκαγιάς: Εκκενώστε την περιοχή. Προσπαθήστε να σβήσετε την πυρκαγιά από απόσταση, επειδή υπάρχει κίνδυνος έκρηξης.
	EN	In case of fire: Evacuate area. Fight fire remotely due to the risk of explosion.
	FR	En cas d'incendie: évacuer la zone. Combattre l'incendie à distance à cause du risque d'explosion.
	GA	I gcás dóiteáin: Aslonnaigh gach duine as an limistéar. Téigh i gcianghleic leis an dóiteán mar gheall ar an mbaol pléascha.
	IT	In caso di incendio: evacuare la zona. Rischio di esplosione. Utilizzare i mezzi estinguenti a grande distanza.
	LV	Ugunsgrēka gadījumā: evakuēt zonu. Dzēst uguni no attāluma eksplozijas riska dēļ.
	LT	Gaisro atveju: evakuoti zoną. Gaisrą gesinti iš toli dėl sprogimo pavojaus.
	HU	Tűz esetén: Ki kell üríteni a területet. A tűz oltását robbanásveszély miatt távolból kell végezni.
	MT	F'każ ta' nar: Evakwa ż-zona. Itfi n-nar mill-bogħod minhabba r-riskju ta' splujżoni.
	NL	In geval van brand: evacueren. Op afstand blussen omwille van ontploffingsgevaar.
	PL	W przypadku pożaru: Ewakuować teren. Z powodu ryzyka wybuchu gasić pożar z odległości.
	PT	Em caso de incêndio: evacuar a zona. Combater o incêndio à distância, devido ao risco de explosão.
	RO	În caz de incendiu: evacuați zona. Stingeti incendiul de la distanță din cauza pericolului de explozie.
	SK	V prípade požiaru: priestory evakuujte. Z dôvodu nebezpečenstva výbuchu požiar haste z diaľky.
	SL	Ob požaru: izprazniti območje. Gasiti z večje razdalje zaradi nevarnosti eksplozije.
	FI	Tulipalon sattuesssa: Evakuoï alue. Sammuta palo etäältä räjähdysvaaran takia.
	SV	Vid brand: Utrym området. Bekämpa branden på avstånd på grund av explosionsrisken.

P371 + P380 + P375	Jezik	
	BG	При голям пожар и значителни количества: Евакуирайте зоната. Гасете пожара от разстояние поради опасност от експлозия.
	ES	En caso de incendio importante y en grandes cantidades: Evacuar la zona. Luchar contra el incendio a distancia, dado el riesgo de explosión.
	CS	V případě velkého požáru a velkého množství: Vykliďte prostor. Kvůli nebezpečí výbuchu haste z dostatečné vzdálenosti.
	DA	Ved større brand og store mængder: Evakuer området. Bekæmp branden på afstand på grund af eksplosionsfare.
	DE	Bei Großbrand und großen Mengen: Umgebung räumen. Wegen Explosionsgefahr Brand aus der Entfernung bekämpfen.
	ET	Suure tulekahju korral ning kui on tegemist suurte kogustega: ala evakueerida. Plahvatusohu tõttu teha kustutustööd eemalt.

P371 + P380 + P375	Jezik	
	EL	Σε περίπτωση σοβαρής πυρκαγιάς και εάν πρόκειται για μεγάλες ποσότητες: Εκκενώστε την περιοχή. Προσπαθήστε να σβήσετε την πυρκαγιά από απόσταση, επειδή υπάρχει κίνδυνος έκρηξης.
	EN	In case of major fire and large quantities: Evacuate area. Fight fire remotely due to the risk of explosion.
	FR	En cas d'incendie important et s'il s'agit de grandes quantités: évacuer la zone. Combattre l'incendie à distance à cause du risque d'explosion.
	GA	I gcás mórdhóiteáin agus mórchainníochtaí: Aslonnaigh gach duine as an limistéar. Téigh i gcianghleic leis an dóiteán mar gheall ar an mbaoil pléasctha.
	IT	In caso di incendio grave e di grandi quantità: evacuare la zona. Rischio di esplosione. Utilizzare i mezzi estinguenti a grande distanza.
	LV	Ugunsgrēka vai liela apjoma gadījumā: evakuēt zonu. Dzēst uguni no attāluma eksplozijas riska dēļ.
	LT	Didelio gaisro ir didelių kiekių atveju: evakuoti zoną. Gaisrą gesinti iš toli dėl sprogimo pavojaus.
	HU	Nagyobb tűz és nagy mennyiség esetén: Ki kell üríteni a területet. A tűz oltását robbanásveszély miatt távolból kell végezni.
	MT	F'każ ta' nar kbir u kwantitajiet kbar: Evakwa ż-zona. Itfi n-nar mill-bogħod minhabba r-riskju ta' splużjoni.
	NL	In geval van grote brand en grote hoeveelheden: evacueren. Op afstand blussen omwille van ontploffingsgevaar.
	PL	W przypadku poważnego pożaru i dużych ilości: Ewakuować teren. Z powodu ryzyka wybuchu gasić pożar z odległości.
	PT	Em caso de incêndio importante e de grandes quantidades: evacuar a zona. Combater o incêndio à distância, devido ao risco de explosão.
	RO	În caz de incendiu de proporții și de cantități mari de produs: evacuați zona. Stingeti incendiul de la distanță din cauza pericolului de explozie.
	SK	V prípade veľkého požiaru a značného množstva: priestory evakuujte. Z dôvodu nebezpečenstva výbuchu požiar haste z diaľky.
	SL	Ob velikem požaru in velikih količinah: izprazniti območje. Gasiti z večje razdalje zaradi nevarnosti eksplozije.
	FI	Jos tulipalo ja ainemäärät ovat suuret: Evakuoï alue. Sammuta palo etäältä räjähdysvaaran takia.
	SV	Vid större brand och stora mängder: Utrym området. Bekämpa branden på avstånd på grund av explosionsrisken.

Tabela 1.4

Previdnostni stavki – shranjevanje

P401	Jezik	
	BG	Да се съхранява...
	ES	Almacenar ...
	CS	Skladujte ...
	DA	Opbevarer ...
	DE	... aufbewahren.
	ET	Hoida ...
	EL	Αποθηκεύεται ...

P401	Jezik	
	EN	Store ...
	FR	Stocker ...
	GA	Stóráil ...
	IT	Conservare...
	LV	Glabāt...
	LT	Laikyti...
	HU	Tárolás:
	MT	Ahżen ...
	NL	... bewaren.
	PL	Przechowywać ...
	PT	Armazenar ...
	RO	A se depozita...
	SK	Uchovávaťe ...
	SL	Hraniti ...
	FI	Varastoi ...
	SV	Förvaras ...

P402	Jezik	
	BG	Да се съхранява на сухо място.
	ES	Almacenar en un lugar seco.
	CS	Skladujte na suchém místě.
	DA	Opbevares et tørt sted.
	DE	An einem trockenen Ort aufbewahren.
	ET	Hoida kuivas.
	EL	Αποθηκεύεται σε στεγνό μέρος.
	EN	Store in a dry place.
	FR	Stocker dans un endroit sec.
	GA	Stóráil in áit thirim.
	IT	Conservare in luogo asciutto.
	LV	Glabāt sausā vietā.
	LT	Laikyti sausoje vietoje.
	HU	Száraz helyen tárolandó.
	MT	Ahżen fpost niexef.
	NL	Op een droge plaats bewaren.
	PL	Przechowywać w suchym miejscu.
	PT	Armazenar em local seco.
	RO	A se depozita într-un loc uscat.
	SK	Uchovávaťe na suchom mieste.

P402	Jezik	
	SL	Hraniti na suhem.
	FI	Varastoi kuivassa paikassa.
	SV	Förvaras torrt.

P403	Jezik	
	BG	Да се съхранява на добре проветриво място.
	ES	Almacenar en un lugar bien ventilado.
	CS	Skladujte na dobře větraném místě.
	DA	Opbevares på et godt ventileret sted.
	DE	An einem gut belüfteten Ort aufbewahren.
	ET	Hoida hästi ventileeritavas kohas.
	EL	Αποθηκεύεται σε καλά αεριζόμενο χώρο.
	EN	Store in a well-ventilated place.
	FR	Stocker dans un endroit bien ventilé.
	GA	Stóráil in áit dhea-aeráilte.
	IT	Conservare in luogo ben ventilato.
	LV	Glabāt labi vēdināmā vietā.
	LT	Laikyti gerai vėdinamoje vietoje.
	HU	Jól szellőző helyen tárolandó.
	MT	Ahżen f'post b'ventilazzjoni tajba.
	NL	Op een goed geventileerde plaats bewaren.
	PL	Przechowywać w dobrze wentylowanym miejscu.
	PT	Armazenar em local bem ventilado.
	RO	A se depozita într-un spațiu bine ventilat.
	SK	Uchovávať na dobre vetranom mieste.
	SL	Hraniti na dobro prezračevanem mestu.
	FI	Varastoi paikassa, jossa on hyvä ilmanvaihto.
	SV	Förvaras på väl ventilerad plats.

P404	Jezik	
	BG	Да се съхранява в затворен съд.
	ES	Almacenar en un recipiente cerrado.
	CS	Skladujte v uzavřeném obalu.
	DA	Opbevares i en lukket beholder.
	DE	In einem geschlossenen Behälter aufbewahren.
	ET	Hoida suletud mahutis.
	EL	Φυλάσσεται σε κλειστό περιέκτη.
	EN	Store in a closed container.

P404	Jezik	
	FR	Stocker dans un récipient fermé.
	GA	Stóráil i gcoimeádán iata.
	IT	Conservare in un recipiente chiuso.
	LV	Glabāt slēgtā tvertnē.
	LT	Laikyti uždaroje talpykloje.
	HU	Zárt edényben tárolandó.
	MT	Ahżen f'kontenitur magħluq.
	NL	In gesloten verpakking bewaren.
	PL	Przechowywać w zamkniętym pojemniku.
	PT	Armazenar em recipiente fechado.
	RO	A se depozita într-un recipient închis.
	SK	Uchovávať v uzavretej nádobe.
	SL	Hraniti v zaprti posodi.
	FI	Varastoi suljettuna.
	SV	Förvaras i sluten behållare.

P405	Jezik	
	BG	Да се съхранява под ключ.
	ES	Guardar bajo llave.
	CS	Skladujte uzamčené.
	DA	Opbevares under lås.
	DE	Unter Verschluss aufbewahren.
	ET	Hoida lukustatult.
	EL	Φυλάσσεται κλειδωμένο.
	EN	Store locked up.
	FR	Garder sous clef.
	GA	Stóráil faoi ghlas.
	IT	Conservare sotto chiave.
	LV	Glabāt slēgtā veidā.
	LT	Laikyti užrakintą.
	HU	Elzárva tárolandó.
	MT	Ahżen f'post imsakkar.
	NL	Achter slot bewaren.
	PL	Przechowywać pod zamknięciem.
	PT	Armazenar em local fechado à chave.
	RO	A se depozita sub cheie.
	SK	Uchovávať uzamknuté.
	SL	Hraniti zaklenjeno.

P405	Jezik	
	FI	Varastoi lukitussa tilassa.
	SV	Förvaras inlåst.
P406	Jezik	
	BG	Да се съхранява в устойчив на разяждане съд/... съд с устойчива вътрешна облицовка.
	ES	Almacenar en un recipiente resistente a la corrosión/... con revestimiento interior resistente.
	CS	Skladujte v obalu odolném proti korozi/... obalu s odolnou vnitřní vrstvou.
	DA	Opbevares i ætsningsbestandig/...beholder med modstandsdygtig indvendig belægning.
	DE	In korrosionsbeständigem/... Behälter mit korrosionsbeständiger Auskleidung aufbewahren.
	ET	Hoida sööbekindlas/...sööbekindla sisevoorderdisega mahutis.
	EL	Αποθηκεύεται σε ανθεκτικό στη διάβρωση/... περιέκτη με ανθεκτική εσωτερική επένδυση.
	EN	Store in corrosive resistant/... container with a resistant inner liner.
	FR	Stocker dans un récipient résistant à la corrosion/récipient en ... avec doublure intérieure résistant à la corrosion.
	GA	Stóráil i gcoimeádán ... frithchreimneach/... le líneáil frithchreimneach laistigh.
	IT	Conservare in recipiente resistente alla corrosione/... provvisto di rivestimento interno resistente.
	LV	Glabāt tvertnē, kas aizsargā pret koroziju/... tvertnes ar iekšējo pretkorozijas izolāciju.
	LT	Laikyti korozijai atsparioje talpykloje/..., turinčioje atsparią vidinę dangą.
	HU	Saválló/saválló bélésű ... edényben tárolandó.
	MT	Ahżen f'post reżistenti għall-korrużjoni/... kontenitur li huwa infurrat minn ġewwa b'materjal reżistenti.
	NL	In corrosiebestendige/... houder met corrosiebestendige binnenbekleding bewaren.
	PL	Przechowywać w pojemniku odpornym na korozję / ... o odpornej powłoce wewnętrznej.
	PT	Armazenar num recipiente resistente à corrosão/... com um revestimento interior resistente.
	RO	Depozitați într-un recipient rezistent la coroziune/recipient din... cu dublură interioară rezistentă la coroziune.
	SK	Uchovávať v nádobe odolnej proti korózii/... nádobe s odolnou vnútornou vrstvou.
	SL	Hraniti v posodi, odporni proti koroziji/..., z odporno notranjo oblogo.
	FI	Varastoi syöpymättömässä/... säiliössä, jossa on kestävä sisävuoraus.
	SV	Förvaras i korrosionsbeständig/... behållare med beständigt innerhölje.
P407	Jezik	
	BG	Да се остави въздушно пространство между купчините/палетите.
	ES	Dejar una separación entre los bloques/los palés de carga.
	CS	Mezi stohy/paletami ponechte vzduchovou mezeru.
	DA	Obevarer med luftmellemrum mellem stakkene/pallerne.
	DE	Luftspalt zwischen Stapeln/Paletten lassen.
	ET	Jätta virnade/kaubaaluste vahele õhuvahe.

P407	Jezik	
	EL	Να υπάρχει κενό αέρος μεταξύ των σωρών/παλετών.
	EN	Maintain air gap between stacks/pallets.
	FR	Maintenir un intervalle d'air entre les piles/palettes.
	GA	Coimeád bearna aeir idir chruacha/phailléid.
	IT	Mantenere uno spazio libero tra gli scaffali/i pallet.
	LV	Saglabāt gaisa spraugu starp krāvumiem/paletēm.
	LT	Palikti oro tarpą tarp eilių/palečių.
	HU	A rakatok/raklapok között térközt kell hagyni.
	MT	Halli l-arja tgħaddi bejn l-imniezel/il-palits.
	NL	Ruimte laten tussen stapels/pallets.
	PL	Zachować szczelinę powietrzną pomiędzy stosami/paletami.
	PT	Respeitar as distâncias mínimas entre pilhas/paletes.
	RO	Păstrați un spațiu gol între stive/paleți.
	SK	Medzi regálmi/paletami ponechajte vzduchovú medzeru.
	SL	Ohraniti zračno režo med skladi/paletami.
	FI	Jätä pinojen/kuormalavojen väliin ilmarako.
	SV	Se till att det finns luft mellan staplar/pallar.

P410	Jezik	
	BG	Да се пази от пряка слънчева светлина.
	ES	Proteger de la luz del sol.
	CS	Chraňte před slunečním zářením.
	DA	Beskyttes mod sollys.
	DE	Vor Sonnenbestrahlung schützen.
	ET	Hoida päikesevalguse eest.
	EL	Να προστατεύεται από τις ηλιακές ακτίνες.
	EN	Protect from sunlight.
	FR	Protéger du rayonnement solaire.
	GA	Cosain ó sholas na gréine.
	IT	Proteggere dai raggi solari.
	LV	Aizsargāt no saules gaismas.
	LT	Saugoti nuo saulės šviesos.
	HU	Napfénytől védendő.
	MT	Ipproteġi mid-dawl tax-xemx.
	NL	Tegen zonlicht beschermen.
	PL	Chronić przed światłem słonecznym.
	PT	Manter ao abrigo da luz solar.
	RO	A se proteja de lumina solară.

P410	Jezik	
	SK	Chránite pred slnečným žiarením.
	SL	Zaščititi pred sončno svetlobo.
	FI	Suojaa auringonvalolta.
	SV	Skyddas från solljus.

P411	Jezik	
	BG	Да се съхранява при температури, не по-високи от ... °C/...°F.
	ES	Almacenar a temperaturas no superiores a ... °C/...°F.
	CS	Skladujte při teplotě nepřesahující ... °C/...°F.
	DA	Opbevares ved en temperatur, som ikke overstiger ... °C/...°F.
	DE	Bei Temperaturen von nicht mehr als ... °C/...aufbewahren.
	ET	Hoida temperatuuril mitte üle ... °C/... °F.
	EL	Αποθηκεύεται σε θερμοκρασίες που δεν υπερβαίνουν τους ... °C/...°F.
	EN	Store at temperatures not exceeding ... °C/...°F.
	FR	Stocker à une température ne dépassant pas ... °C/... °F.
	GA	Stóráil ag teocht nach airde ná ... °C/...°F.
	IT	Conservare a temperature non superiori a ... °C/...°F.
	LV	Uzglabāt temperatūrā, kas nepārsniedz ... °C/...°F.
	LT	Laikyti ne aukštesnėje kaip ... °C/...°F temperatūroje.
	HU	A tárolási hőmérséklet legfeljebb ... °C/...°F lehet.
	MT	Ahżen f'temperaturi li ma jeċċedux ... °C/...°F.
	NL	Bij maximaal ... °C/...°F bewaren.
	PL	Przechowywać w temperaturze nieprzekraczającej ... °C/...°F.
	PT	Armazenar a uma temperatura não superior a ... °C/...°F.
	RO	A se depozita la temperaturi care să nu depășească ... °C/...°F.
	SK	Uchovávať pri teplotách do ... °C/...°F
	SL	Hraniti pri temperaturi do ... °C/... °F.
	FI	Varastoi alle ... °C/...°F lämpötilassa.
	SV	Förvaras vid högst ... °C/...°F.

P412	Jezik	
	BG	Да не се излага на температури, по-високи от 50 °C/122°F.
	ES	No exponer a temperaturas superiores a 50 °C/122°F.
	CS	Nevystavujte teplotě přesahující 50 °C/122 °F.
	DA	Må ikke udsættes for en temperatur, som overstiger 50 °C/122°F.
	DE	Nicht Temperaturen von mehr als 50 °C aussetzen.
	ET	Mitte hoida temperatuuril üle 50 °C/122 °F.
	EL	Να μην εκτίθεται σε θερμοκρασίες που υπερβαίνουν τους 50 °C/122°F.

P412	Jezik	
	EN	Do not expose to temperatures exceeding 50 °C/122°F.
	FR	Ne pas exposer à une température supérieure à 50 °C/122 °F.
	GA	Ná nocht do theocht níos airde ná 50 °C/122°F.
	IT	Non esporre a temperature superiori a 50 °C/122°F.
	LV	Nepakļaut temperatūrai, kas pārsniedz 50 °C/122°F.
	LT	Nelaikyti aukštesnėje kaip 50 °C/122°F temperatūroje.
	HU	Nem érheti 50 °C/122°F hőmérsékletet meghaladó hő.
	MT	Tesponix għal temperaturi li jeċċedu l-50 °C/122°F.
	NL	Niet blootstellen aan temperaturen boven 50 °C/122°F.
	PL	Nie wystawiać na działanie temperatury przekraczającej 50 °C/122 °F.
	PT	Não expor a temperaturas superiores a 50 °C/122°F.
	RO	Nu expuneți la temperaturi care depășesc 50 °C/122 °F.
	SK	Nevystavujte teplotám nad 50 °C/122 °F.
	SL	Ne izpostavljati temperaturam nad 50 °C/122 °F.
	FI	Ei saa altistaa yli 50 °C/122 °F lämpötiloille.
	SV	Får inte utsättas för temperaturer över 50 °C/122 °F.

P413	Jezik	
	BG	При насипни количества, по-големи от ... kg/... фунта, да се съхранява при температури, не по-високи от ... °C/...°F.
	ES	Almacenar las cantidades a granel superiores a ... kg/... lbs a temperaturas no superiores a ... °C/...°F.
	CS	Množství větší než ... kg/... liber skladujte při teplotě nepřesahující ... °C/...°F.
	DA	Bulkmængder på over ... kg/...lbs opbevares ved en temperatur, som ikke overstiger ... °C/...°F.
	DE	Schüttgut in Mengen von mehr als ... kg bei Temperaturen von nicht mehr als ... °C aufbewahren
	ET	Kogust, mis on suurem kui ... kg/... naela, hoida temperatuuril mitte üle ... °C/... °F.
	EL	Οι σωροί χύδην με βάρος άνω των ... kg/... lbs αποθηκεύονται σε θερμοκρασίες που δεν υπερβαίνουν τους ... °C/...°F.
	EN	Store bulk masses greater than ... kg/... lbs at temperatures not exceeding ... °C/...°F.
	FR	Stocker les quantités en vrac de plus de ... kg/... lb à une température ne dépassant pas ... °C/... °F.
	GA	Stóráil bulcmhaiseanna os cionn ... kg/... lb ag teocht nach airde ná ... °C/...°F.
	IT	Conservare le rinfuse di peso superiore a ...kg/...lb a temperature non superiori a ... °C/...°F.
	LV	Lielus apjomus, kas pārsniedz ... kg/... lbs, uzglabāt temperatūrā, kas nepārsniedz ... °C/...°F.
	LT	Didesnis kaip ... kg/... lbs medžiagos kiekis laikyti ne aukštesnėje kaip ... °C/... °F temperatūroje.
	HU	A ... kg/... lb tömeget meghaladó ömlesztett anyag tárolási hőmérséklete legfeljebb ... °C/...°F lehet.
	MT	Ahżen il-kwantitajiet f'massa ta' akbar minn ... kg/... lbs f'temperaturi ta' mhux aktar minn ... °C/...°F.

P413	Jezik	
	NL	Bulkmateriaal, indien meer dan ... kg/... lbs, bij temperaturen van maximaal ... °C bewaren.
	PL	Przechowywać luzem masy przekraczające ... kg/... funtów w temperaturze nieprzekraczającej ... °C/...°F.
	PT	Armazenar quantidades a granel superiores a ... kg/... lbs a uma temperatura não superior a ... °C/...°F.
	RO	Depozitați cantități în vrac mai mari de ... kg/... lbs la temperaturi care să nu depășească ... °C/...°F.
	SK	Veľké množstvo s hmotnosťou nad ... kg/... lbs uchovávať pri teplote do ... °C/...°F.
	SL	Razsute količine, večje od ... kg/... lbs, hraniti pri temperaturi do ... °C/... °F.
	FI	Säilytä yli ... kg/...lbs painoinen irtotavara enintään ... °C/...°F lämpötilassa.
	SV	Bulkprodukter som väger mer än ... kg/... lbs förvaras vid högst ... °C/...°F.
P420	Jezik	
	BG	Да се съхранява на разстояние от други материали.
	ES	Almacenar alejado de otros materiales.
	CS	Skladujte odděleně od ostatních materiálů.
	DA	Må ikke opbevares i nærheden af andre materialer.
	DE	Von anderen Materialien entfernt aufbewahren.
	ET	Hoida eemal teistest materjalidest.
	EL	Αποθηκεύεται μακριά από άλλα υλικά.
	EN	Store away from other materials.
	FR	Stocker à l'écart des autres matières.
	GA	Stóráil glan ar ábhair eile.
	IT	Conservare lontano da altri materiali.
	LV	Glabāt atsevišķi no citiem materiāliem.
	LT	Laikyti atokiau nuo kitų medžiagų.
	HU	Más anyagoktól távol tárolandó.
	MT	Ahżen 'l bogħod minn materjal ieħor.
	NL	Gescheiden van ander materiaal bewaren.
	PL	Przechowywać z dala od innych materiałów.
	PT	Armazenar afastado de outros materiais.
	RO	Depozitați departe de alte materiale.
	SK	Uchovávať oddelene od iných materiálov.
	SL	Hraniti ločeno od drugih materialov.
	FI	Varastoi erillään muista materiaaleista.
	SV	Förvaras åtskilt från andra material.

P422	Jezik	
	BG	Съдържанието да се съхранява при...
	ES	Almacenar el contenido en ...
	CS	Skladujte pod ...
	DA	Indholdet skal opbevares under ...
	DE	Inhalt in/unter ... aufbewahren
	ET	Hoida sisu
	EL	Το περιεχόμενο αποθηκεύεται σε ...
	EN	Store contents under ...
	FR	Stocker le contenu sous ...
	GA	Stóráil an t-ábhar faoi ...
	IT	Conservare sotto...
	LV	Saturu uzglabāt zem...
	LT	Turinį laikyti ...
	HU	Tartalma ... -ban/-ben tárolandó.
	MT	Ahżen il-kontenut taht ...
	NL	Onder ... bewaren.
	PL	Zawartość przechowywać w ...
	PT	Armazenar o conteúdo em ...
	RO	Depozitați conținutul sub ...
	SK	Obsah uchovávať v
	SL	Vsebino hraniti v ...
	FI	Varastoi sisältö ...
	SV	Förvara innehållet i...

P402 + P404	Jezik	
	BG	Да се съхранява на сухо място. Да се съхранява в затворен съд.
	ES	Almacenar en un lugar seco. Almacenar en un recipiente cerrado.
	CS	Skladujte na suchém místě. Skladujte v uzavřeném obalu.
	DA	Opbevares et tørt sted. Opbevares i en lukket beholder.
	DE	In einem geschlossenen Behälter an einem trockenen Ort aufbewahren.
	ET	Hoida kuivas. Hoida suletud mahutis.
	EL	Αποθηκεύεται σε στεγνό μέρος. Φυλάσσεται σε κλειστό περιέκτη.
	EN	Store in a dry place. Store in a closed container.
	FR	Stocker dans un endroit sec. Stocker dans un récipient fermé.
	GA	Stóráil in áit thirim. Stóráil i gcoimeádán iata.
	IT	Conservare in luogo asciutto e in recipiente chiuso.
	LV	Glabāt sausā vietā. Glabāt aizvērtā tvertnē.
	LT	Laikyti sausoje vietoje. Laikyti uždaroje talpykloje.

P402 + P404	Jezik	
	HU	Száraz helyen tárolandó. Zárt edényben tárolandó.
	MT	Ahżen fpost niexef. Ahżen fkontenitur maghluq.
	NL	Op een droge plaats bewaren. In gesloten verpakking bewaren.
	PL	Przechowywać w suchym miejscu. Przechowywać w zamkniętym pojemniku.
	PT	Armazenar em local seco. Armazenar em recipiente fechado.
	RO	A se depozita într-un loc uscat, într-un recipient închis.
	SK	Uchovávať na suchom mieste. Uchovávať v uzavretej nádobe.
	SL	Hraniti na suhem. Hraniti v zaprti posodi.
	FI	Varastoi kuivassa paikassa. Varastoi suljettuna.
	SV	Förvaras torrt. Förvaras i sluten behållare.
P403 + P233	Jezik	
	BG	Да се съхранява на добре проветриво място. Съдът да се съхранява плътно затворен.
	ES	Almacenar en un lugar bien ventilado. Mantener el recipiente cerrado herméticamente.
	CS	Skladujte na dobře větraném místě. Uchovávejte obal těsně uzavřený.
	DA	Opbevarer på et godt ventileret sted. Hold beholderen tæt lukket.
	DE	Behälter dicht verschlossen an einem gut belüfteten Ort aufbewahren.
	ET	Hoida hästi ventileeritavas kohas. Hoida mahuti tihedalt suletuna.
	EL	Αποθηκεύεται σε καλά αεριζόμενο χώρο. Ο περιέκτης διατηρείται ερμητικά κλειστός.
	EN	Store in a well-ventilated place. Keep container tightly closed.
	FR	Stocker dans un endroit bien ventilé. Maintenir le récipient fermé de manière étanche.
	GA	Stóráil in áit dhea-aeráilte. Coimeád an coimeádán dúnta go docht.
	IT	Tenere il recipiente ben chiuso e in luogo ben ventilato.
	LV	Glabāt labi vēdināmās telpās. Tvertni turēt cieši noslēgtu.
	LT	Laikyti gerai vėdinamoje vietoje. Talpyklą laikyti sandariai uždarytą.
	HU	Jól szellőző helyen tárolandó. Az edény szorosan lezárva tartandó.
	MT	Ahżen fpost b'ventilazzjoni tajba. Żomm il-kontenitur maghluq sew.
	NL	Op een goed geventileerde plaats bewaren. In goed gesloten verpakking bewaren.
	PL	Przechowywać w dobrze wentylowanym miejscu. Przechowywać pojemnik szczelnie zamknięty.
	PT	Armazenar em local bem ventilado. Manter o recipiente bem fechado.
	RO	A se depozita într-un spațiu bine ventilat. Păstrați recipientul închis etanș.
	SK	Uchovávať na dobre vetranom mieste. Nádobu uchovávať tesne uzavretú.
	SL	Hraniti na dobro prezračevanem mestu. Hraniti v tesno zaprti posodi.
	FI	Varastoi paikassa, jossa on hyvä ilmanvaihto. Säilytä tiiviisti suljettuna.
	SV	Förvaras på väl ventilerad plats. Förpackningen ska förvaras väl tillsluten.

P403 + P235	Jezik	
	BG	Да се съхранява на добре проветриво място. Да се съхранява на хладно.
	ES	Almacenar en un lugar bien ventilado. Mantener en lugar fresco.
	CS	Skladujte na dobře větraném místě. Uchovávejte v chladu.
	DA	Opbevares på et godt ventileret sted. Opbevares køligt.
	DE	Kühl an einem gut belüfteten Ort aufbewahren.
	ET	Hoida hästi ventileeritavas kohas. Hoida jahedas.
	EL	Αποθηκεύεται σε καλά αεριζόμενο χώρο. Διατηρείται δροσερό.
	EN	Store in a well-ventilated place. Keep cool.
	FR	Stocker dans un endroit bien ventilé. Tenir au frais.
	GA	Stóráil in áit dhea-aeráilte. Coimeád fionnuar.
	IT	Conservare in luogo fresco e ben ventilato.
	LV	Glabāt labi vēdināmās telpās. Turēt vēsumā.
	LT	Laikyti gerai vėdinamoje vietoje. Laikyti vėsioje vietoje.
	HU	Jól szellőző helyen tárolandó. Hűvös helyen tartandó.
	MT	Ahżen f'post b'ventilazzjoni tajba. Żomm frisk.
	NL	Op een goed geventileerde plaats bewaren. Koel bewaren.
	PL	Przechowywać w dobrze wentylowanym miejscu. Przechowywać w chłodnym miejscu.
	PT	Armazenar em local bem ventilado. Conservar em ambiente fresco.
	RO	A se depozita într-un spațiu bine ventilat. A se păstra la rece.
	SK	Uchovávať na dobre vetranom mieste. Uchovávať v chlade.
	SL	Hraniti na dobro prezračevanem mestu. Hraniti na hladnem.
	FI	Varastoi paikassa, jossa on hyvä ilmanvaihto. Säilytä viileässä.
	SV	Förvaras på väl ventilerad plats. Förvaras svalt.
P410 + P403	Jezik	
	BG	Да се пази от пряка слънчева светлина. Да се съхранява на добре проветриво място.
	ES	Proteger de la luz del sol. Almacenar en un lugar bien ventilado.
	CS	Chraňte před slunečním zářením. Skladujte na dobře větraném místě.
	DA	Beskyttes mod sollys. Opbevares på et godt ventileret sted.
	DE	Vor Sonnenbestrahlung geschützt an einem gut belüfteten Ort aufbewahren.
	ET	Hoida päikesevalguse eest. Hoida hästi ventileeritavas kohas.
	EL	Να προστατεύεται από τις ηλιακές ακτίνες. Αποθηκεύεται σε καλά αεριζόμενο χώρο.
	EN	Protect from sunlight. Store in a well-ventilated place.
	FR	Protéger du rayonnement solaire. Stocker dans un endroit bien ventilé.
	GA	Cosain ó sholas na gréine. Stóráil in áit dhea-aeráilte.
	IT	Proteggere dai raggi solari. Conservare in luogo ben ventilato.
	LV	Aizsargāt no saules gaismas. Glabāt labi vēdināmās telpās.

P410 + P403	Jezik	
	LT	Saugoti nuo saulės šviesos. Laikyti gerai vėdinamoje vietoje.
	HU	Napfénytől védendő. Jól szellőző helyen tárolandó.
	MT	Ipproteġi mid-dawl tax-xemx. Ahżen f'post b'ventilazzjoni tajba.
	NL	Tegen zonlicht beschermen. Op een goed geventileerde plaats bewaren.
	PL	Chronić przed światłem słonecznym. Przechowywać w dobrze wentylowanym miejscu.
	PT	Manter ao abrigo da luz solar. Armazenar em local bem ventilado.
	RO	A se proteja de lumina solară. A se depozita într-un spațiu bine ventilat.
	SK	Chránite pred slnečným žiarením. Uchovávať na dobre vetranom mieste.
	SL	Zaščititi pred sončno svetlobo. Hraniti na dobro prezračevanem mestu.
	FI	Suojaa auringonvalolta. Varastoi paikassa, jossa on hyvä ilmanvaihto.
	SV	Skyddas från solljus. Förvaras på väl ventilerad plats.
P410 + P412	Jezik	
	BG	Да се пази от пряка слънчева светлина. Да не се излага на температури, по-високи от 50 °C/122°F.
	ES	Proteger de la luz del sol. No exponer a temperaturas superiores a 50 °C/122°F.
	CS	Chraňte před slunečním zářením. Nevystavujte teplotě přesahující 50 °C/122°F.
	DA	Beskyttes mod sollys. Må ikke udsættes for en temperatur, som overstiger 50 °C/122°F.
	DE	Vor Sonnenbestrahlung schützen und nicht Temperaturen von mehr als 50 °C aussetzen.
	ET	Hoida päikesevalguse eest. Mitte hoida temperatuuril üle 50 °C/122 °F.
	EL	Να προστατεύεται από τις ηλιακές ακτίνες. Να μην εκτίθεται σε θερμοκρασίες που υπερβαίνουν τους 50 °C/122°F.
	EN	Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122°F.
	FR	Protéger du rayonnement solaire. Ne pas exposer à une température supérieure à 50 °C/122 °F.
	GA	Cosain ó sholas na gréine. Ná nocht do theocht níos airde ná 50 °C/122°F.
	IT	Proteggere dai raggi solari. Non esporre a temperature superiori a 50 °C/122°F.
	LV	Aizsargāt no saules gaismas. Nepakļaut temperatūrai, kas pārsniedz 50 °C/122°F.
	LT	Saugoti nuo saulės šviesos. Nelaikyti aukštesnėje kaip 50 °C/122°F temperatūroje.
	HU	Napfénytől védendő. Nem érheti 50 °C/122°F hőmérsékletet meghaladó hő.
	MT	Ipproteġi mid-dawl tax-xemx. Tesponix għal temperatura li teċċedi l-50°C/122°F.
	NL	Tegen zonlicht beschermen. Niet blootstellen aan temperaturen boven 50 °C/122°F.
	PL	Chronić przed światłem słonecznym. Nie wystawiać na działanie temperatury przekraczającej 50 °C/122 °F.
	PT	Manter ao abrigo da luz solar. Não expor a temperaturas superiores a 50 °C/122°F.
	RO	A se proteja de lumina solară. Nu expuneți la temperaturi care depășesc 50 °C/122 °F.
	SK	Chránite pred slnečným žiarením. Nevystavujte teplotám nad 50 °C/122 °F.
	SL	Zaščititi pred sončno svetlobo. Ne izpostavljati temperaturam nad 50 °C/122 °F.

P410 + P412	Jezik	
	FI	Suojaa auringonvalolta. Ei saa altistaa yli 50 °C/122 °F lämpötiloille.
	SV	Skyddas från solljus. Får inte utsättas för temperaturer över 50 °C/122 °F.
P411 + P235	Jezik	
	BG	Да се съхранява при температури, не по-високи от ... °C/...°F. Да се държи на хладно.
	ES	Almacenar a temperaturas no superiores a ... °C/...°F. Mantener en lugar fresco.
	CS	Skladujte při teplotě nepřesahující ... °C/...°F. Uchovávejte v chladu.
	DA	Opbevares ved en temperatur, som ikke overstiger ... °C/...°F. Opbevares køligt.
	DE	Kühl und bei Temperaturen von nicht mehr als ... °C aufbewahren.
	ET	Hoida temperatuuril mitte üle ... °C/... °F. Hoida jahedas.
	EL	Αποθηκεύεται σε θερμοκρασίες που δεν υπερβαίνουν τους ... °C/...°F. Διατηρείται δροσερό.
	EN	Store at temperatures not exceeding ... °C/...°F. Keep cool.
	FR	Stocker à une température ne dépassant pas ... °C/... °F. Tenir au frais.
	GA	Stóráil ag teocht nach airde ná ... °C/...°F. Coimeád fionnuar.
	IT	Conservare in luogo fresco a temperatura non superiori a °C/...°F.
	LV	Glabāt temperatūrā, kas nepārsniedz ... °C/...°F. Turēt vēsumā.
	LT	Laikyti ne aukštesnėje kaip ... °C/...°F temperatūroje. Laikyti vėsioje vietoje.
	HU	A tárolási hőmérséklet legfeljebb ... °C/...°F lehet. Hűvös helyen tartandó.
	MT	Aħżen f'temperaturi li ma jeċċedux ... °C/...°F. Żomm frisk.
	NL	Bij maximaal ... °C/...°F bewaren. Koel bewaren.
	PL	Przechowywać w temperaturze nieprzekraczającej ... °C/...°F. Przechowywać w chłodnym miejscu.
	PT	Armazenar a uma temperatura não superior a ... °C/...°F. Conservar em ambiente fresco.
	RO	A se depozita la temperaturi care să nu depășească ... °C/...°F. A se păstra la rece.
	SK	Uchovávať pri teplotách do ... °C/...°F. Uchovávať v chlade.
	SL	Hraniti pri temperaturi do ... °C/... °F. Hraniti na hladnem.
	FI	Varastoi alle ... °C/...°F lämpötilassa. Säilytä viileässä.
	SV	Förvaras vid högst ... °C/...°F. Förvaras svalt.

Tabela 1.5

Previdnostni stavki – odstranjevanje

P501	Jezik	
	BG	Съдържанието/съдът да се изхвърли в ...
	ES	Eliminar el contenido/el recipiente en ...
	CS	Odstraňte obsah/obal ...
	DA	Indholdet/holderen bortskaffes i ...
	DE	Inhalt/Behälter ... zuführen.

P501	Jezik	
	ET	Sisu/mahuti kõrvaldada ...
	EL	Διάθεση του περιεχομένου/περιέκτη σε ...
	EN	Dispose of contents/container to ...
	FR	Éliminer le contenu/récipient dans ...
	GA	Diúscair an t-ábhar/an coimeádán i ...
	IT	Smaltire il prodotto/recipiente in ...
	LV	Atbrīvoties no satura/tvertnes....
	LT	Turinį/talpyklą išpilti (išmesti) į ...
	HU	A tartalom/edény elhelyezése hulladékként: ...
	MT	Armi l-kontenut/il-kontenitur fi ...
	NL	Inhoud/verpakking afvoeren naar ...
	PL	Zawartość/pojemnik usuwać do ...
	PT	Eliminar o conteúdo/recipiente em ...
	RO	Aruncați conținutul/recipientul la ...
	SK	Zneškodnite obsah/nádobu ...
	SL	Odstraniti vsebino/posodo ...
	FI	Hävitä sisältö/pakkaus ...
	SV	Innehållet/behållaren lämnas till...

PRILOGA V

PIKTOGRAMI ZA NEVARNOSTI

UVOD

Piktogrami nevarnosti za posamezen razred nevarnosti, razločevanje v razredu nevarnosti in posamezno kategorijo nevarnosti izpolnjujejo določbe te priloge ter Priloge I, oddelek 1.2, in po barvi, simbolu in splošni obliki ustrezajo prikazanim vzorcem.

1. DEL 1: FIZIKALNE NEVARNOSTI

1.1. Simbol: bomba med eksplozijo

Piktogram (1)	Razred in kategorija nevarnosti (2)
GHS01 	Oddelek 2.1 Nestabilni eksplozivi Eksplozivi podrazredov 1.1, 1.2, 1.3, 1.4 Oddelek 2.8 Samoreaktivne snovi in zmesi, vrsti A, B Oddelek 2.15 Organski peroksidi, vrsti A, B

1.2. Simbol: plamen

Piktogram (1)	Razred in kategorija nevarnosti (2)
GHS02 	Oddelek 2.2 Vnetljivi plini, kategorija nevarnosti 1 Oddelek 2.3 Vnetljivi aerosoli, kategoriji nevarnosti 1, 2 Oddelek 2.6 Vnetljive tekočine, kategorije nevarnosti 1, 2, 3 Oddelek 2.7 Vnetljive trdne snovi, kategoriji nevarnosti 1, 2 Oddelek 2.8 Samoreaktivne snovi in zmesi, vrste B, C, D, E, F Oddelek 2.9 Piroforne tekočine, kategorija nevarnosti 1 Oddelek 2.10 Piroforne trdne snovi, kategorija nevarnosti 1 Oddelek 2.11 Samosegrevajoče se snovi in zmesi, kategoriji nevarnosti 1, 2 Oddelek 2.12 Snovi in zmesi, ki v stiku z vodo sproščajo vnetljive pline, kategorije nevarnosti 1, 2, 3 Oddelek 2.15 Organski peroksidi, vrste B, C, D, E, F

1.3. **Simbol: plamen okoli kroga**

Piktogram (1)	Razred in kategorija nevarnosti (2)
GHS03 	Oddelek 2.4 Oksidativni plini, kategorija nevarnosti 1 Oddelek 2.13 Oksidativne tekočine, kategorije nevarnosti 1, 2, 3 Oddelek 2.14 Oksidativne trdne snovi, kategorije nevarnosti 1, 2, 3

1.4. **Simbol: plinska jeklenka**

Piktogram (1)	Razred in kategorija nevarnosti (2)
GHS04 	Oddelek 2.5 Plini pod tlakom: stisnjeni plini; utekočinjeni plini; ohlajeni utekočinjeni plini; raztopljeni plini

1.5. **Simbol: jedkost**

Piktogram (1)	Razred in kategorija nevarnosti (2)
GHS05 	Oddelek 2.16 Jedko za kovine, kategorija nevarnosti 1

1.6. **Piktogram ni potreben za naslednje razrede in kategorije fizikalne nevarnosti:**

Oddelek 2.1: Eksplozivni podrazreda 1.5

Oddelek 2.1: Eksplozivni podrazreda 1.6

Oddelek 2.2: Vnetljivi plini, kategorija nevarnosti 2

Oddelek 2.8: Samoreaktivne snovi in zmesi, vrsta G

Oddelek 2.15: Organski peroksidi, vrsta G

2. **DEL 2: NEVARNOSTI ZA ZDRAVJE**2.1. **Simbol: lobanja in prekrizane kosti**

Piktogram (1)	Razred in kategorija nevarnosti (2)
GHS06 	Oddelek 3.1 Akutna strupenost (oralno, dermalno, pri vdihavanju), kategorije nevarnosti 1, 2, 3

2.2. Simbol: jedkost

Piktogram (1)	Razred in kategorija nevarnosti (2)
GHS05 	Oddelek 3.2 Jedkost za kožo, kategorije nevarnosti 1A, 1B, 1C Oddelek 3.3 Hude poškodbe oči, kategorija nevarnosti 1

2.3. Simbol: klicaj

Piktogram (1)	Razred in kategorija nevarnosti (2)
GHS07 	Oddelek 3.1 Akutna strupenost (oralno, dermalno, pri vdihavanju), kategorija nevarnosti 4 Oddelek 3.2 Draženje kože, kategorija nevarnosti 2 Oddelek 3.3 Draženje oči, kategorija nevarnosti 2 Oddelek 3.4 Preobčutljivost kože, kategorija nevarnosti 1 Oddelek 3.8 Specifična strupenost za posamezne organe – enkratna izpostavljenost, kategorija nevarnosti 3 Draženje dihalnih poti Narkotični učinki

2.4. Simbol: nevarnosti za zdravje

Piktogram (1)	Razred in kategorija nevarnosti (2)
GHS08 	Oddelek 3.4 Preobčutljivost dihal, kategorija nevarnosti 1 Oddelek 3.5 Mutagenost za zarodne celice, kategorije nevarnosti 1A, 1B, 2 Oddelek 3.6 Rakotvornost, kategorije nevarnosti 1A, 1B, 2 Oddelek 3.7 Strupenost za razmnoževanje, kategorije nevarnosti 1A, 1B, 2 Oddelek 3.8 Specifična strupenost za posamezne organe – enkratna izpostavljenost, kategoriji nevarnosti 1, 2 Oddelek 3.9 Specifična strupenost za posamezne organe – ponavljajoča se izpostavljenost, kategoriji nevarnosti 1, 2 Oddelek 3.10 Nevarnost pri vdihavanju, kategorija nevarnosti 1

2.5. Piktogram ni potreben za naslednje kategorije nevarnosti za zdravje:

Oddelek 3.7: Strupenost za razmnoževanje, učinki na dojenje ali prek dojenja, dodatna kategorija nevarnosti

3. DEL 3: NEVARNOSTI ZA OKOLJE

3.1. **Simbol: okolje**

Piktogram (1)	Razred in kategorija nevarnosti (2)
GHS09 	Oddelek 4.1 Nevarno za vodno okolje — kategorija akutne nevarnosti 1 — kategoriji kronične nevarnosti 1, 2

Piktogram ni potreben za naslednje razrede in kategorije nevarnosti za okolje:

Oddelek 4.1: Nevarno za vodno okolje – kronična nevarnost kategorij 3, 4

PRILOGA VI

Usklajeno razvrščanje in označevanje nekaterih nevarnih snovi

Del 1 te priloge vsebuje uvod v seznam usklajenih razvrstitev in označitev, vključno s podatki o posameznem vpisu na seznamu, ter povezane stavke o razvrstitvi in nevarnosti v tabeli 3.1, kadar je zaradi pretvarjanj razvrstitev, navedenih v Prilogi I k Direktivi 67/548/EGS, treba upoštevati še nekatere preudarke.

Del 2 te priloge določa splošna načela za pripravo dokumentacije za predlog in utemeljitev usklajene razvrstitve in označitve snovi na ravni Skupnosti.

Del 3 te priloge navaja nevarne snovi, za katere se uporablja usklajeno razvrščanje in označevanje, vzpostavljeno na ravni Skupnosti. Razvrstitev in označitev v tabeli 3.1 temeljita na kriterijih iz Priloge I te uredbe. Razvrstitev in označitev v tabeli 3.2 temeljita na kriterijih iz Priloge VI k Direktivi 67/548/EGS.

1. DEL 1: UVOD V SEZNAM USKLAJENIH RAZVRSTITEV IN OZNAČITEV

1.1. INFORMACIJE, NAVEDENE V VSAKEM VPISU

1.1.1. Številčenje vpisov in identifikacija snovi

1.1.1.1. Indeksna številka

Vpisi v delu 3 so navedeni glede na atomsko število elementa, ki je najbolj značilen za dano snov. Organske snovi so bile zaradi svoje raznovrstnosti razvrščene v razrede. Indeksna številka za vsako snov je v obliki zaporedja števk po vzorcu ABC-RST-VW-Y. ABC ustreza atomskemu številu najbolj značilnega elementa ali najbolj značilni organski skupini v molekuli. RST je zaporedna številka snovi v nizu ABC. VW označuje obliko, v kateri se snov proizvaja ali trži. Y je kontrolna številka, ki se izračuna po metodi 10-mestne številke ISBN. Številka je navedena v stolpcu z naslovom „Indeksna številka“.

1.1.1.2. Številke ES

Številka ES, npr. s seznama EINECS, ELINCS ali NLP, je uradna številka snovi v Evropski uniji. Številko EINECS je mogoče pridobiti z Evropskega seznama obstoječih snovi (EINECS) ⁽¹⁾. Številko ELINCS je mogoče pridobiti z Evropskega seznama prijavljenih novih kemijskih snovi (kot je bil spremenjen) (EUR 22543 EN, Urad za uradne publikacije Evropskih skupnosti, 2006, ISSN 1018-5593). Številko NLP je mogoče pridobiti s seznama „Bivši polimeri“ (kot je bil spremenjen) (dokument Urada za uradne publikacije Evropskih skupnosti, 1997, ISBN 92-827-8995-0). Številka ES je sedemmestno število po vzorcu XXX-XXX-X, ki se začne z 200-001-8 (EINECS), 400-010-9 (ELINCS) ali 500-001-0 (NLP). Številka je navedena v stolpcu z naslovom „Številka ES“.

1.1.1.3. Številka CAS

Za pomoč pri identifikaciji vpisa je dodana tudi številka CAS (Chemicals Abstracts Service). Opozoriti je treba, da število EINECS vključuje tako anhidridne kot hidratizirane oblike snovi in da so števila CAS za anhidridne in hidratizirane oblike pogosto različna. Pripisana številka CAS velja samo za anhidridno obliko, tako da številka CAS vpisa ne opisuje vedno tako natančno kot število EINECS. To število je navedeno v stolpcu z naslovom „Številka CAS“.

1.1.1.4. Mednarodna kemijska opredelitev

Kadar je mogoče, so nevarne snovi poimenovane z imeni po nomenklaturi IUPAC. Snovi, ki so navedene v seznamih EINECS, ELINCS ali na seznamu „Bivši polimeri“, so poimenovane z imeni s teh seznamov. V nekaterih primerih so navedena tudi druga poimenovanja, na primer splošno ali domače. Kadar koli je to mogoče, se fitofarmacevtska sredstva in biocidi poimenujejo z imeni ISO.

⁽¹⁾ UL C 146 A, 15.6.1990.

Nečistoče, dodatki in manjše sestavine se navadno ne navajajo, če ne vplivajo znatno k razvrščanju snovi.

Nekatere snovi so opisane s posebnim deležem čistosti. Snovi z višjo vsebnostjo aktivne snovi (npr. organskega peroksida) niso vključene v del 3 in imajo lahko druge nevarne lastnosti (npr. so eksplozivne) ter jih je treba v skladu s tem razvrstiti in označiti.

Kadar so navedene posebne mejne koncentracije, se te nanašajo na snov ali snovi iz vpisa. Zlasti pri vpisih za zmesi snovi ali snovi, pri katerih je navedena raven čistosti, veljajo mejne vrednosti za snov, kakor je opredeljena v delu 3, in ne za čisto snov.

Brez poseganja v člen 17(2) se pri snoveh iz dela 3 kot ime snovi, ki se navede na etiketi, uporabi eno od poimenovanj od tam. Pri nekaterih snoveh so v oglatih oklepajih navedene dodatne informacije za pomoč pri identifikaciji snovi. Teh dodatnih informacij ni treba navesti na etiketi.

Nekateri vpisi vsebujejo podatke o nečistočah; v teh primerih imenu snovi sledi besedilo: „(vsebuje $\geq$ xx % nečistoč)“. Navedba v oklepajih se nato šteje kot del imena in mora biti vključena na etiketo.

1.1.1.5. *Vpisi za skupine snovi*

Del 3 vsebuje tudi mnoge skupinske vpise. V teh primerih zahteve za razvrščanje in označevanje veljajo za vse snovi, zajete v opisu.

V nekaterih primerih se zahteve za razvrščanje in označevanje nanašajo na posamezno snov, ki sicer spada v skupinski vpis. V takšnih primerih je za to snov v delu 3 naveden poseben vpis, skupinski vpis pa se označi z besedilom „razen tistih, ki so navedeni drugje v tej prilogi“.

Posamezne snovi lahko sodijo v več skupinskih vpisov. V takšnem primeru razvrstitev snovi ustreza razvrstitvi vseh skupinskih vpisov. Če je nevarnost enaka in se razvrstitev razlikuje, se uporabi najstrožja razvrstitev.

Vpisi za soli (pod katerim koli imenom) v delu 3 zajemajo anhidridne in hidratizirane oblike, razen če ni navedeno drugače.

Števila iz seznama ES ali CAS običajno niso vključena v vpise, ki zajemajo več kot štiri posamezne snovi.

1.1.2. **Informacije v zvezi z razvrstitvijo in označitvijo vsakega posameznega vpisa v tabeli 3.1**

1.1.2.1. *Razvrstitvene oznake*

1.1.2.1.1. *Oznaka razreda nevarnosti in kategorije*

Razvrstitev za posamezne vpise temelji na kriterijih iz Priloge I, v skladu s členom 13 (a), in je prikazana z oznako, ki pomeni razred nevarnosti in kategorijo ali kategorije/podrazrede/vrste v tem razredu nevarnosti.

Oznake razreda nevarnosti in kategorij, ki se uporabljajo za vsako kategorijo nevarnosti, vključeno v razred, so navedene v Tabeli 1.1.

Tabela 1.1

Razred nevarnosti	Oznaka razreda nevarnosti in kategorije
Eksplozivno	Unst. Expl. Expl. 1.1 Expl. 1.2 Expl. 1.3 Expl. 1.4 Expl. 1.5 Expl. 1.6
Vnetljiv plin	Flam. Gas 1 Flam. Gas 2
Vnetljiv aerosol	Flam. Aerosol 1 Flam. Aerosol 2
Oksidativni plin	Ox. Gas 1
Plini pod tlakom	Press. Gas (*)
Vnetljiva tekočina	Flam. Liq. 1 Flam. Liq. 2 Flam. Liq. 3
Vnetljiva trdna snov	Flam. Sol. 1 Flam. Sol. 2
Samoreaktivna snov ali zmes	Self-react. A Self-react. B Self-react. CD Self-react. EF Self-react. G
Piroforna tekočina	Pyr. Liq. 1
Piroforna trdna snov	Pyr. Sol. 1
Samosegrevajoča se snov ali zmes	Self-heat. 1 Self-heat. 2
Snov ali zmes, ki v stiku z vodo sprošča vnetljiv plin	Water-react. 1 Water-react. 2 Water-react. 3
Oksidativna tekočina	Ox. Liq. 1 Ox. Liq. 2 Ox. Liq. 3
Oksidativna trdna snov	Ox. Sol. 1 Ox. Sol. 2 Ox. Sol. 3
Organski peroksid	Org. Perox. A Org. Perox. B Org. Perox. CD Org. Perox. EF Org. Perox. G
Snov ali zmes, jedka za kovine	Met. Corr. 1
Akutna strupenost	Acute Tox. 1 Acute Tox. 2 Acute Tox. 3 Acute Tox. 4

Razred nevarnosti	Oznaka razreda nevarnosti in kategorije
Jedkost za kožo/draženje kože	Skin Corr. 1A Skin Corr. 1B Skin Corr. 1C Skin Irrit. 2
Huda poškodba oči/draženje oči	Eye Dam. 1 Eye Irrit. 2
Preobčutljivost dihal/kože	Resp. Sens. 1 Skin Sens. 1
Mutagenost za zarodne celice	Muta. 1A Muta. 1B Muta. 2
Rakotvornost	Carc. 1A Carc. 1B Carc. 2
Strupenost za razmnoževanje	Repr. 1A Repr. 1B Repr. 2 Lact.
Specifična strupenost za ciljne organe (STOT) – enkratna izpostavljenost STOT enkrat.	STOT SE. 1 STOT SE. 2 STOT SE. 3
Specifična strupenost za ciljne organe (STOT) – ponavljajoča se izpostavljenost	STOT RE 1 STOT RE 2
Nevarnost pri vdihavanju	Asp. Tox. 1
Nevarno za vodno okolje	Aquatic Acute 1 Aquatic Chronic 1 Aquatic Chronic 2 Aquatic Chronic 3 Aquatic Chronic 4
Nevarno za ozonski plašč	Ozone
(*) glej opombo v 1.1.3.	

1.1.2.1.2. Oznake stavkov o nevarnosti

Stavki o nevarnosti, dodeljeni v skladu s členom 13(b), so navedeni v skladu s Prilogo III. Poleg tega so pri nekaterih stavkih o nevarnosti trištevilični oznaki dodane črke. Dodatno se uporabljajo naslednje oznake:

H350i	Lahko povzroči raka pri vdihavanju.
H360F	Lahko škoduje plodnosti.
H360D	Lahko škoduje nerojenemu otroku.
H361f	Sum škodljivosti za plodnost.
H361d	Sum škodljivosti za nerojenega otroka.
H360FD	Lahko škoduje plodnosti. Lahko škoduje nerojenemu otroku.

H361fd	Sum škodljivosti za plodnost. Sum škodljivosti za nerojenega otroka.
H360Fd	Lahko škoduje plodnosti. Sum škodljivosti za nerojenega otroka.
H360Df	Lahko škoduje nerojenemu otroku. Sum škodljivosti za plodnost.

1.1.2.2. Oznake za označevanje

V stolpcu za označevanja so navedeni naslednji elementi:

- (i) oznake za piktograme, kot so določene v Prilogi V, v skladu s pravili prednostne razvrstitve iz člena 26;
- (ii) oznake za opozorilne besede, „Nev“ za „nevarno“ ali „Poz“ za „pozor“, v skladu s pravili prednostne razvrstitve iz člena 20(3);
- (iii) oznake za stavke o nevarnosti, kot so določene v Prilogi III, v skladu z razvrstitvijo;
- (iv) oznake za dodatne stavke, dodeljene v skladu s členom 25 (1) in pravili, določenimi v delu 1 Priloge II.

1.1.2.3. Posebne mejne koncentracije in M-faktorji

Če se posebne mejne koncentracije za nekatere kategorije razlikujejo od splošnih mejnih koncentracij iz Priloge I, se navedejo v posebnem stolpcu skupaj z zadevno razvrstitvijo in ob uporabi enakih oznak, kot so navedene v točki 1.1.2.1.1. Če v tej prilogi za določeno kategorijo niso navedene posebne mejne koncentracije, se za razvrstitev snovi, ki vsebujejo nečistoče, dodatke ali posamezne sestavine, oziroma zmesi uporabijo splošne mejne koncentracije iz priloge I. Zvezdica (*) v tem stolpcu označuje, da za vnos v skladu z Direktivo 67/548/EGS (tabela 3.2) veljajo posebne mejne koncentracije za akutno strupenost, glej tudi točko 1.2.1.

Razen če ni navedeno drugače, so mejne koncentracije masni delež snovi, izračunan na podlagi skupne mase zmesi.

Kadar se M-faktor uskladi za snovi, razvrščene kot nevarne za vodno okolje v kategoriji akutno 1 ali kronično 1, potem je ta M-faktor naveden v istem stolpcu kot posebne mejne koncentracije. Če M-faktor v tabeli 3.1 ni naveden, ga na podlagi razpoložljivih podatkov o snovi določi proizvajalec, uvoznik ali nadaljnji uporabnik. Ta M-faktor proizvajalec, uvoznik ali nadaljnji uporabnik uporabi pri razvrstitvi zmesi, ki vsebuje snov, po metodi seštevanja. Navodila za določitev M-faktor vsebuje odstavek 4.1.3.5.5 v Prilogi I.

1.1.3. Opombe, ki se dodelijo vpisom

Opombe, ki se dodelijo posameznemu vpisu, so navedene v stolpcu z naslovom „Opombe“. Pomen opomb je:

1.1.3.1. Opombe v zvezi z identifikacijo, razvrščanjem in označevanjem snovi

Opomba A:

Brez poseganja v člen 17 mora biti ime snovi na etiketi navedeno v obliki enega od poimenovanj iz dela 3.

V delu 3 je v nekaterih primerih uporabljen splošni opis, kakršna sta „... spojine“ ali „... soli“. V tem primeru se od dobavitelja zahteva, da na etiketi navede pravo ime, pri čemer upošteva oddelek 1.1.1.4.

Opomba B:

Nekatere snovi (kisline, baze itd.) se dajejo v promet kot vodne raztopine v različnih koncentracijah in se zato zanje zahteva drugačno razvrščanje in označevanje, saj se nevarnost spreminja z različnimi koncentracijami.

V delu 3 so vpisi z opombo B splošno poimenovani kot npr.: „dušikova kislina %“.

V tem primeru mora dobavitelj na etiketi navesti koncentracijo raztopine v odstotkih. Če ni navedeno drugače, se domneva, da se koncentracija v odstotkih izračuna kot razmerje med maso sestavin.

Opomba C:

Nekatere organske snovi se lahko dajejo v promet v posebni izomerni obliki ali kot zmes več izomerov.

V tem primeru mora dobavitelj na etiketi navesti, ali je snov poseben izomer ali zmes izomerov.

Opomba D:

Nekatere snovi, ki lahko spontano polimerizirajo ali hitro razpadejo, se navadno dajejo v promet v stabilizirani obliki. V takšni obliki so navedene v delu 3.

Vendar so takšne snovi včasih dane v promet v nestabilizirani obliki. V tem primeru mora dobavitelj za imenom snovi na etiketi navesti še besedo „nestabilizirano“.

Opomba E (tabela 3.2):

Snovem s posebnimi učinki na zdravje ljudi (glej poglavje 4 Priloge VI k Direktivi 67/548/EGS), ki so razvrščene v 1. ali 2. skupino rakotvornosti, mutagenosti in/ali strupenosti za razmnoževanje, je pripisana opomba E, če so hkrati označene tudi kot zelo strupene (T+), strupene (T) ali zdravju škodljive (Xn). Pri teh snoveh se pred standardna opozorila R20, R21, R22, R23, R24, R25, R26, R27, R28, R39, R68 (zdravju škodljivo), R48 in R65, vključno z vsemi kombinacijami teh standardnih opozoril R, pripiše beseda „tudi“.

Opomba F:

Ta snov lahko vsebuje stabilizator. Če stabilizator spremeni nevarne lastnosti snovi, ki so navedene v razvrstitvi v delu 3, mora biti snov razvrščena in označena v skladu s pravili za razvrščanje in označevanje nevarnih zmesi.

Opomba G:

Ta snov se lahko trži v eksplozivni obliki, pri čemer mora biti ocenjena z uporabo ustreznih testnih metod. Njena razvrstitev in označitev morata opozarjati na njene eksplozivne lastnosti.

Opomba H (tabela 3.1):

Razvrstitev in označitev te snovi se uporablja za nevarne lastnosti, na kar kažejo tudi stavki o nevarnosti in navedeni razredi in kategorije nevarnosti. Zahteve iz člena 4 za proizvajalce, uvoznike ali nadaljnje uporabnike te snovi veljajo za vse ostale razrede nevarnosti in kategorije. Za razrede nevarnosti, pri katerih je zaradi načinov izpostavljenosti ali narave učinkov potrebna razločitev razvrstitve razreda nevarnosti, mora proizvajalec, uvoznik ali nadaljnji uporabnik upoštevati načine izpostavljenosti ali naravo učinkov, ki še niso bili upoštevani.

Končna etiketa ustreza zahtevam člena 17 in oddelka 1.2 Priloge I.

Opomba H (tabela 3.2):

Razvrstitev in označitev te snovi se nanaša na nevarne lastnosti, na kar kažejo tudi opozorilni stavki in navedene kategorije nevarnosti. Proizvajalci, uvozniki in nadaljnji uporabniki te snovi so dolžni izvesti raziskavo in se seznaniti s pomembnimi in razpoložljivimi podatki o vseh drugih lastnostih, da bodo lahko snov razvrstili in označili. Za končno označitev se uporabljajo zahteve iz poglavja 7 Priloge VI k Direktivi 67/548/EGS.

Opomba J:

Razvrščanja glede na rakotvornosti ali mutagenosti ni treba uporabljati, če je mogoče dokazati, da snov vsebuje manj kot 0,1 % m/m benzena (št. EINECS 200-753-7). Ta opomba se uporablja samo za nekatere kompleksne snovi v delu 3, pridobljene iz premoga in nafte.

Opomba K:

Razvrščanja po rakotvornosti ali mutagenosti ni treba uporabljati, če je mogoče dokazati, da snov vsebuje manj kot 0,1 % m/m 1,3-butadiena (št. EINECS 203-450-8). Če snov ni razvrščena kot rakotvorna ali mutagena, je treba uporabiti vsaj previdnostne stavke (P102-)P210-P403 (tabela 3.1) ali stavke S (2-)9-16 (tabela 3.2). Ta opomba se uporablja samo za nekatere kompleksne snovi v delu 3, pridobljene iz nafte.

Opomba L:

Snovi ni treba razvrstiti med rakotvorne, če je mogoče dokazati, da snov vsebuje manj kot 3 % izvlečka Dmso, izmerjeno z IP 346 (Določanje policikličnih aromatikov v neuporabljenih mazalnih baznih oljih in naftnih frakcijah brez asfaltena – metoda refrakcijskega indeksa ekstrakcije dimetilsulfoksida, Inštitut za nafto, London). Ta opomba se uporablja samo za nekatere kompleksne snovi v delu 3, pridobljene iz nafte.

Opomba M:

Snovi ni treba razvrstiti med rakotvorne, če je mogoče dokazati, da je masni delež benzo-[a]-pirena v snovi manjši od 0,005 % (št. EINECS 200-028-5). Ta opomba se uporablja samo za nekatere kompleksne snovi v delu 3, pridobljene iz premoga.

Opomba N:

Snovi ni treba razvrstiti med rakotvorne, če je znan celoten postopek prečiščevanja in je mogoče dokazati, da snov, iz katere je ta snov proizvedena, ni rakotvorna. Ta opomba se uporablja samo za nekatere kompleksne snovi v delu 3, pridobljene iz nafte.

Opomba P:

Razvrščanja glede na rakotvornost ali mutagenost ni treba uporabljati, če je mogoče dokazati, da snov vsebuje manj kot 0,1 % m/m benzena (št. EINECS 200-753-7).

Če snov ni razvrščena kot rakotvorna, se uporabijo vsaj previdnostni stavki (P102-)P260-P262-P301 + P310-P331 (tabela 3.1) ali stavki S (2-)23-24-62 (tabela 3.2).

Ta opomba se uporablja samo za nekatere kompleksne snovi v delu 3, pridobljene iz nafte.

Opomba Q:

Snovi ni treba razvrstiti med rakotvorne, če je mogoče dokazati, da snov izpolnjuje enega od naslednjih pogojev:

- test kratkotrajne biološke obstojnosti pri vdihavanju je pokazal, da imajo vlakna, daljša od 20 µm, ponderirano razpolovno dobo manj kot 10 dni, ali
- test kratkotrajne biološke obstojnosti pri namestitvi v sapnik je pokazal, da imajo vlakna, daljša od 20 µm, ponderirano razpolovno dobo manj kot 40 dni, ali
- ustrezen intraperitonealni test ni pokazal prekomerne rakotvornosti, ali
- v ustreznem dolgotrajnem testu z vdihavanjem ni bilo pomembnih patogenosti ali neoplastičnih sprememb.

Opomba R:

Med rakotvorne snovi ni treba razvrstiti vlaken, pri katerih je dolžinsko ponderirana geometrijska sredina premera z odbitkom dveh geometrijskih standardnih napak večja od 6 µm.

Opomba S:

Za to snov ni potrebna etiketa v skladu s členom 17 (glej poglavje 1.3 Priloge I) (tabela 3.1).

Te snovi ni treba označiti v skladu s členom 23 Direktive 67/548/EGS (glej poglavje 8 Priloge VI navedene direktive) (tabela 3.2).

Opomba T:

Ta snov se lahko da v promet v obliki, ki nima fizikalnih nevarnosti, kakršne so navedene z razvrstitvijo v vpisu v delu 3. Če rezultati ustrežne metode ali metod v skladu z delom 2 Priloge I te uredbe pokažejo, da posebna oblika snovi, dane v promet, ne kaže te ali teh fizikalnih nevarnosti, se snov razvrsti v skladu z rezultatom ali rezultati tega testa ali testov. Ustrezne informacije, vključno s sklicevanjem na ustrezne testne metode, se vključijo v varnostni list.

Opomba U (tabela 3.1):

Pri trženju morajo biti plini razvrščeni v razred „Plini pod tlakom“, v eno od teh skupin: stisnjeni plin, utekočinjeni plin, ohlajen plin ali raztopljeni plin. Skupina se izbere glede na fizikalno stanje, v katerem je plin pakiran, in jo je zato treba določiti za vsak primer posebej.

1.1.3.2. *Opombe v zvezi z razvrščanjem in označevanjem zmesi*

Opomba 1:

Navedena koncentracija ali, kadar takšne koncentracije niso navedene, splošne koncentracije iz te uredbe (tabela 3.1) ali splošne koncentracije iz Direktive 1999/45/ES (tabela 3.2) so masni deleži kovinskega elementa, izračunani glede na skupno maso zmesi.

Opomba 2:

Navedena koncentracija izocianata je masni delež prostega monomera, izračunan glede na skupno maso zmesi.

Opomba 3:

Navedena koncentracija je masni delež v vodi raztopljenih kromatnih ionov, izračunan glede na skupno maso zmesi.

Opomba 5:

Mejne koncentracije za plinaste zmesi so izražene v volumskih deležih.

Opomba 7:

Zlitine, ki vsebujejo nikelj, so razvrščene v razred preobčutljivosti kože, kadar je presežena stopnja sproščanja 0,5 µg Ni/cm²/teden, izmerjena po evropski standardni testni metodi EN 1811.

1.1.4 **Informacije v zvezi z razvrstitvijo in označitvijo vsakega posameznega vpisa v tabeli 3.2**

1.1.4.1 *Razvrstitvene oznake*

Razvrstitev je za vsako kategorijo nevarnosti (kot je določena v členu 2(2) Direktive 67/548/EGS) navadno prikazana v obliki okrajšave, ki predstavlja kategorijo nevarnosti, skupaj z ustreznim opozorilnim stavkom ali stavki. Vendar pa se v nekaterih primerih (npr. pri snoveh, ki so razvrščene kot vnetljive, povzročajo preobčutljivost ali so razvrščene kot okolju nevarne) uporabi le opozorilni stavek.

Okrajšave za posamezne kategorije nevarnosti so naslednje:

- eksplozivno: E
- oksidativno: O
- zelo lahko vnetljivo: F+
- lahko vnetljivo: F

- vnetljivo: R10
- zelo strupeno: T+
- strupeno: T
- zdravju škodljivo: Xn
- jedko: C
- dražilno: Xi
- povzroča preobčutljivost: R42 in/ali R43
- rakotvorno: Sk. rakot. (1, 2 ali 3)
- mutageno: Sk. mutag. (1, 2 ali 3)
- strupeno za razmnoževanje: Sk. razmn. (1, 2 ali 3)
- okolju nevarno: N ali R52 in/ali R53

1.1.4.2 Oznake za označevanje

- (i) črka, ki je dodeljena snovi v skladu s prilogo II Direktive 67/548/EGS (glej člen 23(2)(c) Direktive 67/548/EGS). Uporablja se kot okrajšava za simbol in za navedbo nevarnosti (če sta dodeljena);
- (ii) opozorilni stavki, ki jih sestavlja zaporedje števil, pred katerimi je črka R, ki kaže na naravo posebnih tveganj, v skladu s prilogo III Direktive 67/548/EGS (glej člen 23(2)(d) Direktive 67/548/EGS). Številke so ločene z vezajem (-), ki kaže, da gre za ločene stavke glede posebnih tveganj (R), ali s poševnico (/), ki kaže, da gre za v enem stavku sestavljeno izjavo glede posebnih tveganj, opredeljenih v Prilogi III Direktive 67/548/EGS;
- (iii) obvestilni stavki, ki jih sestavlja zaporedje števil, pred katerimi je črka S, ki kaže na priporočene varnostne ukrepe v skladu s Prilogo IV Direktive 67/548/EGS (glej člen 23(2)(e) Direktive 67/548/EGS). Tudi tu so številke ločene bodisi z vezajem bodisi s poševnico; pomen priporočenih varnostnih ukrepov je naveden v prilogi IV Direktive 67/548/EGS. Prikazani varnostni napotki se uporabljajo le za snovi; za zmesi se stavki izberejo po običajnem postopku.

Za nekatere nevarne snovi in zmesi, ki so v splošni uporabi, so nekateri stavki S obvezni.

Stavki S1, S2 in S45 so obvezni za zelo strupene, strupene in jedke snovi in zmesi, ki so v splošni uporabi.

Stavka S2 in S46 sta obvezni za vse nevarne snovi in zmesi, ki so v splošni uporabi, razen tistih, ki so bile razvrščene le kot okolju nevarne.

Varnostna napotka S1 in S2 sta v Prilogi I prikazana v oklepajih in se lahko izpustita z etikete, kadar se snov ali zmes prodaja le za industrijsko uporabo.

1.1.4.3 Posebne mejne koncentracije

Mejne koncentracije in z njimi povezana razvrstitev, potrebna za razvrstitev nevarnih zmesi, ki vsebujejo snov v skladu z Direktivo 1999/45/ES.

Če ni navedeno drugače, so mejne koncentracije masni delež snovi, izračunan na podlagi skupne mase zmesi.

Kadar mejne koncentracije niso navedene, je treba pri uporabi konvencionalne metode ocenjevanja nevarnosti za zdravje uporabiti mejne koncentracije iz Priloge II, pri uporabi konvencionalne metode ocenjevanja nevarnosti za okolje pa mejne koncentracije iz Priloge III k Direktivi 1999/45/ES.

1.1.4.4 Neskladnost s tabelo 3.1 za fizikalno nevarnost

Predlagano je, da se fizikalna nevarnost nekaterih vnosov v tabeli 3.2 posodobi pri prihodnjem prilagajanju tehničnemu napredku.

Do takrat se bo fizikalna nevarnost posameznih vnosov v omenjenih tabelah razlikovala. Ti vnosi so v tabeli 3.2 označeni s simbolom ⊗.

1.2. Razvrstitve in stavki o nevarnosti v tabeli 3.1, ki so posledica pretvarjanja razvrstitev, navedenih v prilogi I k direktivi 67/548/EGS

1.2.1. Minimalna razvrstitev

Za nekatere razrede nevarnosti, vključno z akutno strupenostjo in ponavljajočo se izpostavljenostjo STOT, razvrstitev v skladu s kriteriji iz Direktive 67/548/EGS ne ustreza neposredno razvrstitvi v razred nevarnosti in kategorijo iz te uredbe. V teh primerih se razvrstitev v tej prilogi obravnava kot minimalna razvrstitev. Ta razvrstitev se uporabi, če ni izpolnjen noben od naslednjih pogojev:

- proizvajalec ali uvoznik ima dostop do podatkov ali drugih informacij, kot je določeno v delu 1 Priloge I, ki povzročijo razvrstitev v strožjo kategorijo glede na minimalno razvrstitev. V tem primeru je treba uporabiti razvrstitev v strožjo kategorijo;
- minimalno razvrstitev je mogoče nadalje izboljšati na podlagi tabele za pretvorbo iz Priloge VII, če proizvajalec ali uvoznik pozna agregatno stanje snovi, ki se uporabi pri testih akutne strupenosti pri vdihavanju. Razvrstitev iz Priloge VII nato nadomesti minimalno razvrstitev, navedeno v tej prilogi, če se od nje razlikuje.

Minimalno razvrstitev za kategorijo v stolpcu „Razvrstitev“ v tabeli 3.1 označuje simbol (*).

Simbol (*) je uporabljen tudi v stolpcu „Posebne mejne koncentracije in M-faktorji“, kjer označuje, da za vnos v skladu z Direktivo 67/548/EGS (tabela 3.2) veljajo posebne mejne koncentracije za akutno strupenost. Teh mejnih koncentracij ni mogoče pretvoriti v mejne koncentracije v tej uredbi, sploh kadar je določena minimalna razvrstitev. Če je uporabljen simbol (*), je razvrstitev glede na akutno strupenost za ta vnos lahko še posebej pomembna.

1.2.2. Načina izpostavljenosti ni mogoče izključiti

Za nekatere razrede nevarnosti, na primer STOT, je treba način izpostavljenosti navesti v stavku o nevarnosti le, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne more povzročiti takšne nevarnosti glede na kriterije iz Priloge I. V Direktivi 67/548/EGS je način izpostavljenosti za razvrstitev z R48 naveden, kadar so bili na voljo podatki, ki so upravičili razvrstitev za ta način izpostavljenosti. Razvrstitev na podlagi Direktive 67/548/EGS, ki kaže način izpostavljenosti, se pretvori v ustrezen razred in kategorijo v skladu s to uredbo, vendar s splošnim stavkom o nevarnosti, ki ne opredeljuje načina izpostavljenosti, ker potrebne informacije niso na voljo.

Ti stavki o nevarnosti so v tabeli 3.1 označene s simbolom (**).

1.2.3. Stavki o nevarnosti za strupenost za razmnoževanje

Stavki o nevarnosti H360 in H361 nakazujejo na splošno zaskrbljenost zaradi škodljivih učinkov na plodnost in razvoj: „Lahko škoduje/sum škodljivosti za plodnost ali nerojenega otroka“. V skladu s tem kriterijem, je splošni stavek o nevarnosti mogoče nadomestiti s stavkom o nevarnosti, ki se nanaša le na lastnost, ki sproža skrb, če niti plodnost niti učinki na razvoj dokazano niso pomembni.

Da se ne bi izgubile informacije iz usklajenih razvrstitev za učinke na razmnoževanje in razvoj iz Direktive 67/548/EGS, so bile razvrstitve za zadevno lastnost pretvorjene samo za učinke z razvrstitvami po tej direktivi.

Ti stavki o nevarnosti so v tabeli 3.1 označene s simbolom (**).

1.2.4 **Pravilne razvrstitve za fizikalno nevarnost ni mogoče določiti**

Za nekatere vnose pravilne razvrstitve za fizikalno nevarnost ni mogoče določiti, ker ni na voljo dovolj podatkov za uporabo razvrstitvenih kriterijev iz te uredbe. Vnos je lahko dodeljen drugi (tudi višji) kategoriji ali celo drugemu razredu nevarnosti, kot je navedeno. Pravilno razvrstitev se potrdi s preskusom.

Vnosi s fizikalno nevarnostjo, ki jo je treba potrditi s preskusi, so v tabeli 3.1 označeni s simbolom (***).

2. DEL 2: DOKUMENTACIJA O USKLAJENEM RAZVRŠČANJU IN OZNAČEVANJU

Ta del določa splošna načela za pripravo dokumentacije za predlog in utemeljitev usklajene razvrstitve in označitve.

Ustrezni deli razdelkov 1, 2 in 3 Priloge I k Uredbi (ES) št. 1907/2006 se uporabijo za metodologijo in obliko vsake dokumentacije.

Za vso dokumentacijo se upoštevajo vse ustrezne informacije iz registracijske dokumentacije, uporabijo pa se lahko tudi druge informacije, ki so na voljo. Za informacije o nevarnosti, ki predhodno še niso bile predložene Agenciji, se v dokumentacijo vključi grobi povzetek študije.

Dokumentacija za usklajeno razvrstitev in označitev vsebuje naslednje:

— Predlog

Predlog vključuje identiteto snovi ali zadevnih snovi in predlagano usklajeno razvrstitev in označitev.

— Utemeljitev predlagane usklajene razvrstitve in označitve

Primerjava razpoložljivih informacij s kriteriji iz delov 2 do 5, ob upoštevanju splošnih načel iz dela 1, Priloge I te uredbe se dopolni in dokumentira v obliki, ki je določena v delu B poročila o kemijski varnosti v Prilogi I k Uredbi (ES) št. 1907/2006.

— Utemeljitev za druge učinke na ravni Skupnosti.

Za druge učinke, ki niso rakotvornost, mutagenost, strupenost za razmnoževanje in preobčutljivost dihal, je treba utemeljiti razloge, zakaj je potrebno delovanje na ravni Skupnosti. To ne velja za aktivne snovi v smislu Direktive 91/414/EGS ali Direktive 98/8/ES.

3. DEL 3: TABELE USKLAJENEGA RAZVRŠČANJA IN OZNAČEVANJA

Tabela 3.1: Seznam usklajenih razvrstitev in označitev nevarnih snovi je v posebnem zvezku IIIa.

Tabela 3.2: Seznam usklajenih razvrstitev in označitev nevarnih snovi iz Priloge I k Direktivi 67/548/EGS je naveden v posebnem zvezku IIIb.

Tabela 3.1

Seznam usklajenih razvrstitev in označitev nevarnih snovi

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
001-001-00-9	hydrogen	215-605-7	1333-74-0	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U
001-002-00-4	aluminium lithium hydride	240-877-9	16853-85-3	Water-react. 1	H260	GHS02 Dgr	H260			
001-003-00-X	sodium hydride	231-587-3	7646-69-7	Water-react. 1	H260	GHS02 Dgr	H260			
001-004-00-5	calcium hydride	232-189-2	7789-78-8	Water-react. 1	H260	GHS02 Dgr	H260			
003-001-00-4	lithium	231-102-5	7439-93-2	Water-react. 1 Skin Corr. 1B	H260 H314	GHS02 GHS05 Dgr	H260 H314	EUH014		
003-002-00-X	n-hexyllithium	404-950-0	21369-64-2	Water-react. 1 Pyr. Sol. 1 Skin Corr. 1A	H260 H250 H314	GHS02 GHS05 Dgr	H260 H250 H314	EUH014		
004-001-00-7	beryllium	231-150-7	7440-41-7	Carc. 1B Acute Tox. 2 (*) Acute Tox. 3 (*) STOT RE 1 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H350i H330 H301 H372 (**) H319 H335 H315 H317	GHS06 GHS08 Dgr	H350i H330 H301 H372 (**) H319 H335 H315 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
004-002-00-2	beryllium compounds with the exception of aluminium beryllium silicates, and with those specified elsewhere in this Annex	—	—	Carc. 1B Acute Tox. 2 (*) Acute Tox. 3 (*) STOT RE 1 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H350i H330 H301 H372 (**) H319 H335 H315 H317 H411	GHS06 GHS08 GHS09 Dgr	H350i H330 H301 H372 (**) H319 H335 H315 H317 H411			A
004-003-00-8	beryllium oxide	215-133-1	1304-56-9	Carc. 1B Acute Tox. 2 (*) Acute Tox. 3 (*) STOT RE 1 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H350i H330 H301 H372 (**) H319 H335 H315 H317	GHS06 GHS08 Dgr	H350i H330 H301 H372 (**) H319 H335 H315 H317			
005-001-00-X	boron trifluoride	231-569-5	7637-07-2	Press. Gas Acute Tox. 2 (*) Skin Corr. 1A	H330 H314	GHS04 GHS06 GHS05 Dgr	H330 H314	EUH014		U
005-002-00-5	boron trichloride	233-658-4	10294-34-5	Press. Gas Acute Tox. 2 (*) Acute Tox. 2 (*) Skin Corr. 1B	H330 H300 H314	GHS04 GHS06 GHS05 Dgr	H330 H300 H314	EUH014		U
005-003-00-0	boron tribromide	233-657-9	10294-33-4	Acute Tox. 2 (*) Acute Tox. 2 (*) Skin Corr. 1A	H330 H300 H314	GHS06 GHS05 Dgr	H330 H300 H314	EUH014		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
005-004-00-6	trialkylboranes, solid	—	—	Pyr. Sol. 1 Skin Corr. 1B	H250 H314	GHS02 GHS05 Dgr	H250 H314			A
005-004-01-3	trialkylboranes, liquid	—	—	Pyr. Liq. 1 Skin Corr. 1B	H250 H314	GHS02 GHS05 Dgr	H250 H314			A
005-005-00-1	trimethyl borate	204-468-9	121-43-7	Flam. Liq. 3 Acute Tox. 4 (*)	H226 H312	GHS02 GHS07 Wng	H226 H312			
005-006-00-7	dibutyltin hydrogen borate	401-040-5	75113-37-0	STOT RE 1 Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H372 (**) H312 H302 H318 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H372 (**) H312 H302 H318 H317 H410			
005-009-00-3	tetrabutylammonium butyltriphenylborate	418-080-4	120307-06-4	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
005-010-00-9	N,N-dimethylanilinium tetrakis(pentafluorophenyl)borate	422-050-6	118612-00-3	Carc. 2 Acute Tox. 4 (*) Skin Irrit. 2 Eye Dam. 1	H351 H302 H315 H318	GHS08 GHS05 GHS07 Dgr	H351 H302 H315 H318			
005-012-00-X	diethyl{4-[1,5,5-tris(4-diethylaminophenyl)penta-2,4-dienylidene]cyclohexa-2,5-dienylidene}ammonium butyltriphenylborate	418-070-1	141714-54-7	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
006-001-00-2	carbon monoxide	211-128-3	630-08-0	Flam. Gas 1 Press. Gas Repr. 1A Acute Tox. 3 (*) STOT RE 1	H220 H360D (***) H331 H372 (**)	GHS02 GHS04 GHS06 GHS08 Dgr	H220 H360D (***) H331 H372 (**)			U
006-002-00-8	phosgene; carbonyl chloride	200-870-3	75-44-5	Press. Gas Acute Tox. 2 (*) Skin Corr. 1B	H330 H314	GHS04 GHS06 GHS05 Dgr	H330 H314			U
006-003-00-3	carbon disulphide	200-843-6	75-15-0	Flam. Liq. 2 Repr. 2 STOT RE 1 Eye Irrit. 2 Skin Irrit. 2	H225 H361fd H372 (**) H319 H315	GHS02 GHS08 GHS07 Dgr	H225 H361fd H372 (**) H319 H315		Repr. 2; H361fd: C ≥ 1 % STOT RE 1; H372: C ≥ 1 % STOT RE 2; H373: 0.2 % ≤ C < 1 %	
006-004-00-9	calcium carbide	200-848-3	75-20-7	Water-react. 1	H260	GHS02 Dgr	H260			T
006-005-00-4	thiram (ISO); tetramethylthiuram disulphide	205-286-2	137-26-8	Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H373 (**) H319 H315 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H332 H302 H373 (**) H319 H315 H317 H410		M=10	
006-006-00-X	hydrogen cyanide; hydrocyanic acid	200-821-6	74-90-8	Flam. Liq. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H224 H330 H400 H410	GHS02 GHS06 GHS09 Dgr	H224 H330 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
006-006-01-7	hydrogen cyanide ... %; hydrocyanic acid ... %	200-821-6	74-90-8	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H400 H410	GHS06 GHS09 Dgr	H330 H310 H300 H410			B
006-007-00-5	salts of hydrogen cyanide with the exception of complex cyanides such as ferrocyanides, ferricyanides and mercuric oxycyanide	—	—	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H400 H410	GHS06 GHS09 Dgr	H330 H310 H300 H410	EUH032		A
006-008-00-0	antu (ISO); 1-(1-naphthyl)-2-thiourea	201-706-3	86-88-4	Acute Tox. 2 (*) Carc. 2	H300 H351	GHS06 GHS08 Dgr	H300 H351			
006-009-00-6	1-isopropyl-3-methylpyrazol-5-yl dimethylcarbamate; isolan	204-318-2	119-38-0	Acute Tox. 1 Acute Tox. 2 (*)	H310 H300	GHS06 Dgr	H310 H300			
006-010-00-1	5,5-dimethyl-3-oxocyclohex-1-enyl dimethylcarbamate 5,5-dimethyldihydroresorcinol dimethylcarbamate; dimetan	204-525-8	122-15-6	Acute Tox. 3 (*)	H301	GHS06 Dgr	H301			
006-011-00-7	carbaryl (ISO); 1-naphthyl methylcarbamate	200-555-0	63-25-2	Carc. 2 Acute Tox. 4 (*) Aquatic Acute 1	H351 H302 H400	GHS08 GHS07 GHS09 Wng	H351 H302 H400			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
006-012-00-2	ziram (ISO); zinc bis dimethyldithiocarbamate	205-288-3	137-30-4	Acute Tox. 2 (*) Acute Tox. 4 (*) STOT RE 2 (*) STOT SE 3 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H302 H373 (**) H335 H318 H317 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H330 H302 H373 (**) H335 H318 H317 H410		M=100	
006-013-00-8	metam-sodium (ISO); sodium methyldithiocarbamate	205-293-0	137-42-8	Acute Tox. 4 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H314 H317 H410	EUH031		
006-014-00-3	nabam (ISO); disodium ethylenebis(N,N'-dithiocarbamate)	205-547-0	142-59-6	Acute Tox. 4 (*) STOT SE 3 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H335 H317 H410	GHS07 GHS09 Wng	H302 H335 H317 H410			
006-015-00-9	diuron (ISO); 3-(3,4-dichlorophenyl)-1,1-dimethylurea	206-354-4	330-54-1	Carc. 2 Acute Tox. 4 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H373 (**) H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H373 (**) H410			
006-016-00-4	propoxur (ISO); 2-isopropoxyphenyl N-methylcarbamate; 2-isopropoxyphenyl methylcarbamate	204-043-8	114-26-1	Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
006-017-00-X	aldicarb (ISO); 2-methyl-2-(methylthio)propanal-O-(N-methylcarbamoyl)oxime	204-123-2	116-06-3	Acute Tox. 2 (*) Acute Tox. 2 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H311 H400 H410	GHS06 GHS09 Dgr	H330 H300 H311 H410			
006-018-00-5	aminocarb (ISO); 4-dimethylamino-3-tolyl methylcarbamate	217-990-7	2032-59-9	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410			
006-019-00-0	di-allate (ISO); S-(2,3-dichloroallyl)-N,N-diisopropylthiocarbamate	218-961-1	2303-16-4	Carc. 2 Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H410			
006-020-00-6	barban (ISO); 4-chlorbut-2-ynyl N-(3-chlorophenyl)carbamate	202-930-4	101-27-9	Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
006-021-00-1	linuron (ISO); 3-(3,4-dichlorophenyl)-1-methoxy-1-methylurea	206-356-5	330-55-2	Repr. 1B Carc. 2 Acute Tox. 4 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H360Df H351 H302 H373 (**) H400 H410	GHS08 GHS07 GHS09 Dgr	H360Df H351 H302 H373 (**) H410			
006-022-00-7	decarbofuran (ISO); 2,3-dihydro-2-methylbenzofuran-7-yl methylcarbamate	—	1563-67-3	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*)	H331 H311 H301	GHS06 Dgr	H331 H311 H301			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
006-023-00-2	mercaptodimethur (ISO); methiocarb (ISO); 3,5-dimethyl-4-methylthiophenyl N-methylcarbamate	217-991-2	2032-65-7	Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410			
006-024-00-8	proxan-sodium (ISO); sodium O-isopropylthiocarbonate	205-443-5	140-93-2	Acute Tox. 4 (*) Skin Irrit. 2 Aquatic Chronic 2	H302 H315 H411	GHS07 GHS09 Wng	H302 H315 H411			
006-025-00-3	allethrin; (RS)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1RS,3RS;1RS,3SR)-2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate; bioallethrin; (RS)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1R,3R)-2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate; [1] S-bioallethrin; (S)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1R,3R)-2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate; [2] esbiothrin; (RS)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1R,3R)-2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate [3]	209-542-4 [1] 249-013-5 [2] — [3]	584-79-2 [1] 28434-00-6 [2] 84030-86-4 [3]	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H400 H410	GHS07 GHS09 Wng	H332 H302 H410			C
006-026-00-9	carbofuran (ISO); 2,3-dihydro-2,2-dimethylbenzofuran-7-yl N-methylcarbamate	216-353-0	1563-66-2	Acute Tox. 2 (*) Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H400 H410	GHS06 GHS09 Dgr	H330 H300 H410			
006-028-00-X	dinobuton (ISO); 2-(1-methylpropyl)-4,6-dinitrophenyl isopropyl carbonate	213-546-1	973-21-7	Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
006-029-00-5	dioxacarb (ISO); 2-(1,3-dioxolan-2-yl)phenyl N-methylcarbamate	230-253-4	6988-21-2	Acute Tox. 3 (*) Aquatic Chronic 2	H301 H411	GHS06 GHS09 Dgr	H301 H411			
006-030-00-0	EPTC (ISO); S-ethyl dipropylthiocarbamate	212-073-8	759-94-4	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
006-031-00-6	formetanate (ISO); 3-[(EZ)-dimethylaminomethyleneamino] phenyl methylcarbamate	244-879-0	22259-30-9	Acute Tox. 2 (*) Acute Tox. 2 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H317 H400 H410	GHS06 GHS09 Dgr	H330 H300 H317 H410			
006-032-00-1	monolinuron (ISO); 3-(4-chlorophenyl)-1-methoxy-1-methylurea	217-129-5	1746-81-2	Acute Tox. 4 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H373 (**) H400 H410	GHS08 GHS07 GHS09 Wng	H302 H373 (**) H410			
006-033-00-7	metoxuron (ISO); 3-(3-chloro-4-methoxyphenyl)-1,1-dimethylurea	243-433-2	19937-59-8	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
006-034-00-2	pebulate (ISO); N-butyl-N-ethyl-S-propylthiocarbamate	214-215-4	1114-71-2	Acute Tox. 4 (*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
006-035-00-8	pirimicarb (ISO); 5,6-dimethyl-2-dimethylamino-pyrimidin-4-yl N,N-dimethylcarbamate	245-430-1	23103-98-2	Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410			
006-036-00-3	benzthiazuron (ISO); 1-benzothiazol-2-yl-3-methylurea	217-685-9	1929-88-0	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
006-037-00-9	promecarb (ISO); 3-isopropyl-5-methylphenyl N-methylcarbamate	220-113-0	2631-37-0	Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410			
006-038-00-4	sulfallate (ISO); 2-chloroallyl N,N-dimethyldithiocarbamate	202-388-9	95-06-7	Carc. 1B Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H410			
006-039-00-X	tri-allyl (ISO); S-2,3,3-trichloroallyl diisopropylthiocarbamate	218-962-7	2303-17-5	Acute Tox. 4 (*) STOT RE 2 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H373 (**) H317 H400 H410	GHS08 GHS07 GHS09 Wng	H302 H373 (**) H317 H410			
006-040-00-5	3-methylpyrazol-5-yl-dimethylcarbamate; monometilan	—	2532-43-6	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*)	H331 H311 H301	GHS06 Dgr	H331 H311 H301			
006-041-00-0	dimethylcarbamoyl chloride	201-208-6	79-44-7	Carc. 1B Acute Tox. 3 (*) Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H350 H331 H302 H319 H335 H315	GHS06 GHS08 Dgr	H350 H331 H302 H319 H335 H315		Carc. 1B; H350: C ≥ 0,001 %	
006-042-00-6	monuron (ISO); 3-(4-chlorophenyl)-1,1-dimethylurea	205-766-1	150-68-5	Carc. 2 Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
006-043-00-1	3-(4-chlorophenyl)-1,1-dimethyluronium trichloroacetate; monuron-TCA	—	140-41-0	Carc. 2 Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H319 H315 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H319 H315 H410			
006-044-00-7	isoproturon (ISO); 3-(4-isopropylphenyl)-1,1-dimethylurea	251-835-4	34123-59-6	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410		M=10	
006-045-00-2	methomyl (ISO); 1-(methylthio)ethylideneamino N-methylcarbamate	240-815-0	16752-77-5	Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H300 H400 H410	GHS06 GHS09 Dgr	H300 H410			
006-046-00-8	bendiocarb (ISO); 2,2-dimethyl-1,3-benzodioxol-4-yl N-methylcarbamate	245-216-8	22781-23-3	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H312 H410	GHS06 GHS09 Dgr	H331 H301 H312 H410			
006-047-00-3	bufencarb (ISO); reaction mass of 3-(1-methylbutyl)phenyl N-methylcarbamate and 3-(1-ethylpropyl)phenyl N-methylcarbamate	—	8065-36-9	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410			
006-048-00-9	ethiofencarb (ISO); 2-(ethylthiomethyl)phenyl N-methylcarbamate	249-981-9	29973-13-5	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
006-049-00-4	dixanthogen; O,O-diethyl dithiobis(thioformate)	207-944-4	502-55-6	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
006-050-00-X	1,1-dimethyl-3-phenyluronium trichloroacetate; fenuron-TCA	—	4482-55-7	Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H315 H400 H410	GHS07 GHS09 Wng	H315 H410			
006-051-00-5	ferbam (ISO); iron tris(dimethyldithiocarbamate)	238-484-2	14484-64-1	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H319 H335 H315 H410			
006-052-00-0	formetanate hydrochloride; 3-(N,N-dimethylaminomethyleneamino) phenyl N-methylcarbamate	245-656-0	23422-53-9	Acute Tox. 2 (*) Acute Tox. 2 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H317 H400 H410	GHS06 GHS09 Dgr	H330 H300 H317 H410			
006-053-00-6	isoprocarb (ISO); 2-isopropylphenyl N-methylcarbamate	220-114-6	2631-40-5	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
006-054-00-1	mexacarbate (ISO); 3,5-dimethyl-4-dimethylaminophenyl N-methylcarbamate	206-249-3	315-18-4	Acute Tox. 2 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H300 H312 H400 H410	GHS06 GHS09 Dgr	H300 H312 H410			
006-055-00-7	xylylcarb (ISO); 3,4-dimethylphenyl N-methylcarbamate; 3,4-xylyl methylcarbamate; MPMC	219-364-9	2425-10-7	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
006-056-00-2	metolcarb (ISO); m-tolyl methylcarbamate; MTMC	214-446-0	1129-41-5	Acute Tox. 4 (*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
006-057-00-8	nitrapyrin (ISO); 2-chloro-6-trichloromethylpyridine	217-682-2	1929-82-4	Acute Tox. 4 (*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
006-058-00-3	noruron (ISO); 1,1-dimethyl-3-(perhydro-4,7-methanoin-den-5-yl)urea	—	2163-79-3	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
006-059-00-9	oxamyl (ISO); N',N'-dimethylcarbamoyl(methylthio)methylenamine N-methylcarbamate;	245-445-3	23135-22-0	Acute Tox. 2 (*) Acute Tox. 2 (*) Acute Tox. 4 (*) Aquatic Chronic 2	H330 H300 H312 H411	GHS06 GHS09 Dgr	H330 H300 H312 H411			
006-060-00-4	oxycarboxin (ISO); 2,3-dihydro-6-methyl-5-(N-phenylcarbamoyl)-1,4-oxothiine 4,4-dioxide	226-066-2	5259-88-1	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
006-061-00-X	S-ethyl N-(dimethylaminopropyl)thiocarbamatehydrochloride; prothiocarb hydrochloride	243-193-9	19622-19-6	Acute Tox. 4 (*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
006-062-00-5	methyl 3,4-dichlorophenylcarbanilate; SWEP.	—	1918-18-9	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
006-063-00-0	thiobencarb (ISO); S-4-chlorobenzyl diethylthiocarbamate	248-924-5	28249-77-6	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
006-064-00-6	thiofanox (ISO); 3,3-dimethyl-1-(methylthio)butanone-O-(N-methylcarbamoyl)oxime	254-346-4	39196-18-4	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
006-065-00-1	3-chloro-6-cyano-bicyclo(2,2,1)heptan-2-one-O-(N-methylcarbamoyl)oxime; triamid	—	15271-41-7	Acute Tox. 2 (*) Acute Tox. 3 (*) Aquatic Chronic 2	H300 H311 H411	GHS06 GHS09 Dgr	H300 H311 H411			
006-066-00-7	vernolate (ISO); S-propyl dipropylthiocarbamate	217-681-7	1929-77-7	Acute Tox. 4 (*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
006-067-00-2	XMC; 3,5-xylyl methylcarbamate	—	2655-14-3	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
006-068-00-8	diazomethane	206-382-7	334-88-3	Carc. 1B	H350	GHS08 Dgr	H350			
006-069-00-3	thiophanate-methyl (ISO); 1,2-di-(3-methoxycarbonyl-2-thioureido) benzene	245-740-7	23564-05-8	Muta. 2 Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H341 H332 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H341 H332 H317 H410			
006-070-00-9	furmecyclox (ISO); N-cyclohexyl-N-methoxy-2,5-dimethyl-3-furamide	262-302-0	60568-05-0	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			
006-071-00-4	cyclooct-4-en-1-yl methyl carbonate	401-620-8	87731-18-8	Skin Sens. 1	H317	GHS07 Wng	H317			
006-072-00-X	prosulfocarb (ISO); S-benzyl N,N-dipropylthiocarbamate	401-730-6	52888-80-9	Acute Tox. 4 (*) Skin Sens. 1 Aquatic Chronic 2	H302 H317 H411	GHS07 GHS09 Wng	H302 H317 H411			
006-073-00-5	3-(dimethylamino)propylurea	401-950-2	31506-43-1	Eye Dam. 1	H318	GHS05 Dgr	H318			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
006-074-00-0	2-(3-(prop-1-en-2-yl)phenyl)prop-2-yl isocyanate	402-440-2	2094-99-7	Acute Tox. 2 (*) Skin Corr. 1B STOT RE 2 (*) Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H314 H373 (**) H334 H317 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H330 H314 H373 (**) H334 H317 H410			
006-076-00-1	mancozeb (ISO)	—	8018-01-7	STOT SE 3 Skin Sens. 1	H335 H317	GHS07 Wng	H335 H317			
006-077-00-7	maneb (ISO)	235-654-8	12427-38-2	STOT SE 3 Skin Sens. 1	H335 H317	GHS07 Wng	H335 H317			
006-078-00-2	zineb (ISO); zinc ethylenebis(dithiocarbamate) (polymeric)	235-180-1	12122-67-7	STOT SE 3 Skin Sens. 1	H335 H317	GHS07 Wng	H335 H317			
006-079-00-8	disulfiram; tetraethylthiuramdisulfide	202-607-8	97-77-8	Acute Tox. 4 (*) STOT RE 2 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H373 (**) H317 H400 H410	GHS08 GHS07 GHS09 Wng	H302 H373 (**) H317 H410			
006-080-00-3	tetramethylthiuram monosulphide	202-605-7	97-74-5	Acute Tox. 4 (*) Skin Sens. 1 Aquatic Chronic 2	H302 H317 H411	GHS07 GHS09 Wng	H302 H317 H411			
006-081-00-9	zinc bis(dibutylthiocarbamate)	205-232-8	136-23-2	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H319 H335 H315 H317 H400 H410	GHS07 GHS09 Wng	H319 H335 H315 H317 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
006-082-00-4	zinc bis(diethyldithiocarbamate)	238-270-9	14324-55-1	Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H335 H315 H317 H400 H410	GHS07 GHS09 Wng	H302 H319 H335 H315 H317 H410			
006-083-00-X	butocarboxim (ISO); 3-(methylthio)-2-butanone O-[(methylamino)carbonyl]oxime	252-139-3	34681-10-2	Flam. Liq. 3 Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H226 H331 H311 H301 H319 H400 H410	GHS02 GHS06 GHS09 Dgr	H226 H331 H311 H301 H319 H410			
006-084-00-5	carbosulfan (ISO); 2,3-dihydro-2,2-dimethyl-7-benzofuryl [(dibutylamino)thio]methylcarbamate	259-565-9	55285-14-8	Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H317 H400 H410	GHS06 GHS09 Dgr	H331 H301 H317 H410			
006-085-00-0	fenobucarb (ISO); 2-butylphenyl methylcarbamate	223-188-8	3766-81-2	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
006-086-00-6	ethyl [2-(4-phenoxyphenoxy)ethyl]carbamate; fenoxycarb	276-696-7	72490-01-8	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
006-087-00-1	2,3-dihydro-2,2-dimethyl-7-benzofuryl 2,4-dimethyl-6-oxa-5-oxo-3-thia-2,4-diazadecanoate; furathiocarb	265-974-3	65907-30-4	Acute Tox. 2 (*) Acute Tox. 3 (*) STOT RE 2 (*) Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H301 H373 (**) H319 H315 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H301 H373 (**) H319 H315 H317 H410			
006-088-00-7	benfuracarb; ethyl N-[2,3-dihydro-2,2-dimethylbenzofuran-7-yloxy carbonyl(methyl)aminothio]-N-isopropyl- β-alaninate	—	82560-54-1	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H400 H410	GHS06 GHS09 Dgr	H331 H301 H410			
006-089-00-2	chlorine dioxide	233-162-8	10049-04-4	Ox. Gas 1 Press. Gas Acute Tox. 2 (*) Skin Corr. 1B Aquatic Acute 1	H270 H330 H314 H400	GHS03 GHS04 GHS06 GHS05 GHS09 Dgr	H270 H330 H314 H400	EUH006	M=1000	U
006-089-01-X	chlorine dioxide . . . %	233-162-8	10049-04-4	Acute Tox. 3 (*) Skin Corr. 1B Aquatic Acute 1	H301 H314 H400	GHS06 GHS05 GHS09 Dgr	H301 H314 H400		Skin Corr. 1B; H314: C ≥ 10 % Skin Irrit. 2; H315: 3 % ≤ C < 10 % Eye Irrit. 2; H319: 0,3 % ≤ C < 10 % STOT SE 3; H335: C ≥ 3 % M=10	B
006-090-00-8	2-(3-iodoprop-2-yn-1-yloxy)ethyl phenyl-carbamate	408-010-0	88558-41-2	Acute Tox. 4 (*) Eye Dam. 1 Aquatic Chronic 3	H332 H318 H412	GHS05 GHS07 Dgr	H332 H318 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
007-001-00-5	ammonia, anhydrous	231-635-3	7664-41-7	Flam. Gas 2 Press. Gas Acute Tox. 3 (*) Skin Corr. 1B Aquatic Acute 1	H221 H331 H314 H400	GHS04 GHS06 GHS05 GHS09 Dgr	H221 H331 H314 H400			U
007-001-01-2	ammonia %	215-647-6	1336-21-6	Skin Corr. 1B Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400		STOT SE 3; H335: C ≥ 5 %	B
007-002-00-0	nitrogen dioxide; [1] dinitrogen tetraoxide [2]	233-272-6 [1] 234-126-4 [2]	10102-44-0 [1] 10544-72-6 [2]	Press. Gas Acute Tox. 2 (*) Skin Corr. 1B	H330 H314	GHS04 GHS06 GHS05 Dgr	H330 H314		(*)	U 5
007-003-00-6	chlormequat chloride (ISO); 2-chloroethyltrimethylammonium chloride	213-666-4	999-81-5	Acute Tox. 4 (*) Acute Tox. 4 (*)	H312 H302	GHS07 Wng	H312 H302			
007-004-00-1	nitric acid ... %	231-714-2	7697-37-2	Ox. Liq. 3 Skin Corr. 1A	H272 H314	GHS03 GHS05 Dgr	H272 H314		Skin Corr. 1A; H314: C ≥ 20 % Skin Corr. 1B; H314: 5 % ≤ C < 20 % Ox. Liq. 3; H272: C ≥ 65 %	B
007-006-00-2	ethyl nitrite	203-722-6	109-95-5	Flam. Gas 1 Press. Gas Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*)	H220 H332 H312 H302	GHS02 GHS04 GHS07 Dgr	H220 H332 H312 H302			U
007-007-00-8	ethyl nitrate	210-903-3	625-58-1	Unst. Expl.	H200	GHS01 Dgr	H200			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
007-008-00-3	hydrazine	206-114-9	302-01-2	Flam. Liq. 3 Carc. 1B Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H226 H350 H331 H311 H301 H314 H317 H400 H410	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H226 H350 H331 H311 H301 H314 H317 H410		Skin Corr. 1B; H314: C ≥ 10 % Skin Irrit. 2; H315: 3 % ≤ C < 10 % Eye Irrit. 2; H319: 3 % ≤ C < 10 %	
007-009-00-9	dicyclohexylammonium nitrite	221-515-9	3129-91-7	Acute Tox. 4 (*) Acute Tox. 4 (*)	H332 H302	GHS07 Wng	H332 H302		(*)	
007-010-00-4	sodium nitrite	231-555-9	7632-00-0	Ox. Sol. 3 Acute Tox. 3 (*) Aquatic Acute 1	H272 H301 H400	GHS03 GHS06 GHS09 Dgr	H272 H301 H400		(*)	
007-011-00-X	potassium nitrite	231-832-4	7758-09-0	Ox. Sol. 2 Acute Tox. 3 (*) Aquatic Acute 1	H272 H301 H400	GHS03 GHS06 GHS09 Dgr	H272 H301 H400		(*)	
007-012-00-5	N,N-dimethylhydrazine	200-316-0	57-14-7	Flam. Liq. 2 Carc. 1B Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Aquatic Chronic 2	H225 H350 H331 H301 H314 H411	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H225 H350 H331 H301 H314 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
007-013-00-0	1,2-dimethylhydrazine	—	540-73-8	Carc. 1B Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Chronic 2	H350 H331 H311 H301 H411	GHS06 GHS08 GHS09 Dgr	H350 H331 H311 H301 H411		Carc. 1B; H350: C ≥ 0.01 %	
007-014-00-6	salts of hydrazine	—	—	Carc. 1B Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H331 H311 H301 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H331 H311 H301 H317 H410			A
007-015-00-1	O-ethylhydroxylamine	402-030-3	624-86-2	Flam. Liq. 2 Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 1 Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1	H225 H331 H311 H301 H372 (**) H319 H317 H400	GHS02 GHS06 GHS08 GHS09 Dgr	H225 H331 H311 H301 H372 (**) H319 H317 H400			
007-016-00-7	butyl nitrite	208-862-1	544-16-1	Flam. Liq. 2 Acute Tox. 3 (*) Acute Tox. 3 (*)	H225 H331 H301	GHS02 GHS06 Dgr	H225 H331 H301			
007-017-00-2	isobutyl nitrite	208-819-7	542-56-3	Flam. Liq. 2 Carc. 1B Muta. 2 Acute Tox. 4 (*) Acute Tox. 4 (*)	H225 H350 H341 H332 H302	GHS02 GHS08 GHS07 Dgr	H225 H350 H341 H332 H302			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
007-018-00-8	sec-butyl nitrite	213-104-8	924-43-6	Flam. Liq. 2 Acute Tox. 4 (*) Acute Tox. 4 (*)	H225 H332 H302	GHS02 GHS07 Dgr	H225 H332 H302			
007-019-00-3	tert-butyl nitrite	208-757-0	540-80-7	Flam. Liq. 2 Acute Tox. 4 (*) Acute Tox. 4 (*)	H225 H332 H302	GHS02 GHS07 Dgr	H225 H332 H302			
007-020-00-9	pentyl nitrite; [1] 'amyl nitrite', mixed isomers [2]	207-332-7 [1] 203-770-8 [2]	463-04-7 [1] 110-46-3 [2]	Flam. Liq. 2 Acute Tox. 4 (*) Acute Tox. 4 (*)	H225 H332 H302	GHS02 GHS07 Dgr	H225 H332 H302			
007-021-00-4	hydrazobenzene; 1,2-diphenylhydrazine	204-563-5	122-66-7	Carc. 1B Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H410			
007-022-00-X	hydrazine bis(3-carboxy-4-hydroxybenzenesulfonate)	405-030-1	—	Carc. 1B Acute Tox. 4 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 3	H350 H302 H314 H317 H412	GHS08 GHS05 GHS07 Dgr	H350 H302 H314 H317 H412			
007-023-00-5	sodium 3,5-bis(3-(2,4-di-tert-pentylphenoxy)propylcarbamoyl)benzenesulfonate	405-510-0	—	Skin Irrit. 2 Skin Sens. 1	H315 H317	GHS07 Wng	H315 H317			
007-024-00-0	2-(decylthio)ethylammonium chloride	405-640-8	36362-09-1	STOT RE 2 (*) Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H315 H318 H400 H410	GHS08 GHS05 GHS09 Dgr	H373 (**) H315 H318 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
007-025-00-6	(4-hydrazinophenyl)-N-methylmethanesulfonamide hydrochloride	406-090-1	81880-96-8	Muta. 2 Acute Tox. 3 (*) STOT RE 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H341 H301 H372 (**) H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H341 H301 H372 (**) H317 H410			
007-026-00-1	oxo-((2,2,6,6-tetramethylpiperidin-4-yl)amino)carbonylaceto-hydrazide	413-230-5	122035-71-6	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
007-027-00-7	1,6-bis(3,3-bis((1-methylpentylidenimino)propyl)ureido)hexane	420-190-2	771478-66-1	Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H373 (**) H314 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H312 H302 H373 (**) H314 H317 H410			
008-001-00-8	oxygen	231-956-9	7782-44-7	Ox. Gas 1 Press. Gas	H270	GHS03 GHS04 Dgr	H270			U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
008-003-00-9	hydrogen peroxide solution ... %	231-765-0	7722-84-1	Ox. Liq. 1 Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1A	H271 H332 H302 H314	GHS03 GHS05 GHS07 Dgr	H271 H332 H302 H314		Ox. Liq. 1; H271: C ≥ 70 %**** Ox. Liq. 2; H272: 50 % ≤ C < 70 %**** (*) Skin Corr. 1A; H314: C ≥ 70 % Skin Corr. 1B; H314: 50 % ≤ C < 70 % Skin Irrit. 2; H315: 35 % ≤ C < 50 % Eye Dam. 1; H318: 8 % ≤ C < 50 % Eye Irrit. 2; H319: 5 % ≤ C < 8 % STOT SE 3; H335; C ≥ 35 %	B
009-001-00-0	fluorine	231-954-8	7782-41-4	Ox. Gas 1 Press. Gas Acute Tox. 2 (*) Skin Corr. 1A	H270 H330 H314	GHS03 GHS04 GHS06 GHS05 Dgr	H270 H330 H314			U
009-002-00-6	hydrogen fluoride	231-634-8	7664-39-3	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) Skin Corr. 1A	H330 H310 H300 H314	GHS06 GHS05 Dgr	H330 H310 H300 H314			
009-003-00-1	hydrofluoric acid ... %	231-634-8	7664-39-3	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) Skin Corr. 1A	H330 H310 H300 H314	GHS06 GHS05 Dgr	H330 H310 H300 H314		Skin Corr. 1A; H314: C ≥ 7 % Skin Corr. 1B; H314: 1 % ≤ C < 7 % Eye Irrit. 2; H319: 0,1 % ≤ C < 1 %	B

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
009-004-00-7	sodium fluoride	231-667-8	7681-49-4	Acute Tox. 3 (*) Eye Irrit. 2 Skin Irrit. 2	H301 H319 H315	GHS06 Dgr	H301 H319 H315	EUH032		
009-005-00-2	potassium fluoride	232-151-5	7789-23-3	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*)	H331 H311 H301	GHS06 Dgr	H331 H311 H301			
009-006-00-8	ammonium fluoride	235-185-9	12125-01-8	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*)	H331 H311 H301	GHS06 Dgr	H331 H311 H301			
009-007-00-3	sodium bifluoride; sodium hydrogen difluoride	215-608-3	1333-83-1	Acute Tox. 3 (*) Skin Corr. 1B	H301 H314	GHS06 GHS05 Dgr	H301 H314		(*) Skin Corr. 1B; H314: $C \geq 1\%$ Skin Irrit. 2; H315: $0,1\% \leq C < 1\%$ Eye Irrit. 2; H319: $0,1\% \leq C < 1\%$	
009-008-00-9	potassium bifluoride; potassium hydrogen difluoride	232-156-2	7789-29-9	Acute Tox. 3 (*) Skin Corr. 1B	H301 H314	GHS06 GHS05 Dgr	H301 H314		(*) Skin Corr. 1B; H314: $C \geq 1\%$ Skin Irrit. 2; H315: $0,1\% \leq C < 1\%$ Eye Irrit. 2; H319: $0,1\% \leq C < 1\%$	
009-009-00-4	ammonium bifluoride; ammonium hydrogen difluoride	215-676-4	1341-49-7	Acute Tox. 3 (*) Skin Corr. 1B	H301 H314	GHS06 GHS05 Dgr	H301 H314		(*) Skin Corr. 1B; H314: $C \geq 1\%$ Skin Irrit. 2; H315: $0,1\% \leq C < 1\%$ Eye Irrit. 2; H319: $0,1\% \leq C < 1\%$	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
009-010-00-X	fluoroboric acid ... %	240-898-3	16872-11-0	Skin Corr. 1B	H314	GHS05 Dgr	H314		Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H315: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 %	B
009-011-00-5	fluorosilicic acid ... %	241-034-8	16961-83-4	Skin Corr. 1B	H314	GHS05 Dgr	H314			B
009-012-00-0	alkali fluorosilicates(Na); [1] alkali fluorosilicates(K); [2] alkali fluorosilicates(NH4) [3]	240-934-8 [1] 240-896-2 [2] 240-968-3 [3]	16893-85-9 [1] 16871-90-2 [2] 16919-19-0 [3]	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*)	H331 H311 H301	GHS06 Dgr	H331 H311 H301		(*)	A
009-013-00-6	fluorosilicates, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 4 (*)	H302	GHS07 Wng	H302		(*)	A
009-014-00-1	lead hexafluorosilicate	247-278-1	25808-74-6	Repr. 1A Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H360Df H332 H302 H373 (**) H400 H410	GHS08 GHS07 GHS09 Dgr	H360Df H332 H302 H373 (**) H410			1
009-015-00-7	sulphuryl difluoride	220-281-5	2699-79-8	Press. Gas Acute Tox. 3 (*) STOT RE 2 (*) Aquatic Acute 1	H331 H373 (**) H400	GHS04 GHS06 GHS08 GHS09 Dgr	H331 H373 (**) H400			U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
009-016-00-2	trisodium hexafluoroaluminate; cryolite	237-410-6 239-148-8	13775-53-6 15096-52-3	STOT RE 1 Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 2	H372 (**) H332 H302 H411	GHS08 GHS07 GHS09 Dgr	H372 (**) H332 H302 H411			C
009-017-00-8	potassium mu-fluoro-bis(triethylaluminium)	400-040-2	12091-08-6	Flam. Sol. 1 Water-react. 1 Skin Corr. 1A Acute Tox. 4 (*)	H228 H270 H314 H332	GHS02 GHS05 GHS07 Dgr	H228 H270 H314 H332	EUH014		T
009-018-00-3	magnesium hexafluorosilicate	241-022-2	16949-65-8	Acute Tox. 3 (*)	H301	GHS06 Dgr	H301		(*)	
011-001-00-0	sodium	231-132-9	7440-23-5	Water-react. 1 Skin Corr. 1B	H260 H314	GHS02 GHS05 Dgr	H260 H314	EUH014		
011-002-00-6	sodium hydroxide; caustic soda	215-185-5	1310-73-2	Skin Corr. 1A	H314	GHS05 Dgr	H314		Skin Corr. 1A; H314: C ≥ 5 % Skin Corr. 1B; H314: 2 % ≤ C < 5 % Skin Irrit. 2; H315: 0,5 % ≤ C < 2 % Eye Irrit. 2; H319: 0,5 % ≤ C < 2 %	
011-003-00-1	sodium peroxide	215-209-4	1313-60-6	Ox. Sol. 1 Skin Corr. 1A	H271 H314	GHS03 GHS05 Dgr	H271 H314			
011-004-00-7	sodium azide	247-852-1	26628-22-8	Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H300 H400 H410	GHS06 GHS09 Dgr	H300 H400 H410	EUH032		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
011-005-00-2	sodium carbonate	207-838-8	497-19-8	Eye Irrit. 2	H319	GHS07 Wng	H319			
011-006-00-8	sodium cyanate	213-030-6	917-61-3	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
011-007-00-3	propoxycarbazone-sodium	—	181274-15-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410		M=10	
012-001-00-3	magnesium powder (pyrophoric)	231-104-6	7439-95-4	Water-react. 1 Pyr. Sol. 1	H260 H250	GHS02 Dgr	H260 H250			T
012-002-00-9	magnesium, powder or turnings	231-104-6	—	Flam. Sol. 1 Water-react. 2 Self-heat. 1	H228 H261 H252	GHS02 Dgr	H228 H261 H252			T
012-003-00-4	magnesium alkyls	—	—	Pyr. Liq. 1 Water-react. 1 Skin Corr. 1B	H250 H260 H314	GHS02 GHS05 Dgr	H250 H260 H314	EUH014		A
013-001-00-6	aluminium powder (pyrophoric)	231-072-3	7429-90-5	Water-react. 2 Pyr. Sol. 1	H261 H250	GHS02 Dgr	H261 H250			T
013-002-00-1	aluminium powder (stabilised)	231-072-3	—	Water-react. 2 Flam.Sol. 3	H261 H228	GHS02 Dgr	H261 H228			T
013-003-00-7	aluminium chloride, anhydrous	231-208-1	7446-70-0	Skin Corr. 1B	H314	GHS05 Dgr	H314			
013-004-00-2	aluminium alkyls	—	—	Pyr. Liq. 1 Water-react. 1 Skin Corr. 1B	H250 H260 H314	GHS02 GHS05 Dgr	H250 H260 H314	EUH014		A
013-005-00-8	diethyl(ethyldimethylsilanolato)aluminium	401-160-8	55426-95-4	Water-react. 1 Pyr. Liq. 1 Skin Corr. 1A	H260 H250 H314	GHS02 GHS05 Dgr	H260 H250 H314	EUH014		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
013-006-00-3	(ethyl-3-oxobutanoato-O'1,O'3)(2-dimethylaminoethanolato)(1-methoxypropan-2-olato)aluminium(III), dimerised	402-370-2	—	Flam. Liq. 3 Eye Dam. 1	H226 H318	GHS02 GHS05 Dgr	H226 H318			
013-007-00-9	poly(oxo(2-butoxyethyl-3-oxobutanoato-O'1,O'3)aluminium)	403-430-0	—	Eye Dam. 1	H318	GHS05 Dgr	H318			
013-008-00-4	di-n-octylaluminium iodide	408-190-0	7585-14-0	Pyr. Liq. 1 Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H250 H314 H400 H410	GHS02 GHS05 GHS09 Dgr	H250 H314 H410	EUH014		
013-009-00-X	sodium (n-butyl)x(ethyl)y-1,5-dihydro)aluminate x = 0.5 y = 1.5	418-720-2	—	Flam. Sol. 1 Water-react. 1 Pyr. Sol. 1 Acute Tox. 4 (*) Skin Corr. 1A	H228 H260 H250 H332 H314	GHS02 GHS05 GHS07 Dgr	H228 H260 H250 H332 H314	EUH014		T
014-001-00-9	trichlorosilane	233-042-5	10025-78-2	Flam. Liq. 1 Pyr. Liq. 1 Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1A	H224 H250 H332 H302 H314	GHS02 GHS05 GHS07 Dgr	H224 H250 H332 H302 H314	EUH014 EUH029	(*) STOT SE 3; H335: C ≥ 1 %	T
014-002-00-4	silicon tetrachloride	233-054-0	10026-04-7	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315	EUH014		
014-003-00-X	dimethyldichlorosilane	200-901-0	75-78-5	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H225 H319 H335 H315	GHS02 GHS07 Dgr	H225 H319 H335 H315			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
014-004-00-5	trichloro(methyl)silane; methyltrichlorosilane	200-902-6	75-79-6	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H225 H319 H335 H315	GHS02 GHS07 Dgr	H225 H319 H335 H315	EUH014	Skin Irrit. 2; H315: C ≥ 1 % Eye Irrit. 2; H319: C ≥ 1 % STOT SE 3; H335: C ≥ 1 %	
014-005-00-0	tetraethyl silicate; ethyl silicate	201-083-8	78-10-4	Flam. Liq. 3 Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3	H226 H332 H319 H335	GHS02 GHS07 Wng	H226 H332 H319 H335			
014-006-00-6	bis(4-fluorophenyl)-methyl-(1,2,4-triazol-4-ylmethyl)silane hydrochloride	401-380-4	—	Eye Irrit. 2 Aquatic Chronic 2	H319 H411	GHS07 GHS09 Wng	H319 H411			
014-007-00-1	triethoxyisobutylsilane	402-810-3	17980-47-1	Skin Irrit. 2	H315	GHS07 Wng	H315			
014-008-00-7	(chloromethyl)bis(4-fluorophenyl)methylsilane	401-200-4	85491-26-5	Aquatic Chronic 2	H411	GHS09	H411			
014-009-00-2	isobutylisopropyldimethoxysilane	402-580-4	111439-76-0	Flam. Liq. 3 Acute Tox. 4 (*) Skin Irrit. 2	H226 H332 H315	GHS02 GHS07 Wng	H226 H332 H315			
014-010-00-8	disodium metasilicate	229-912-9	6834-92-0	Skin Corr. 1B STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335			
014-011-00-3	cyclohexyldimethoxymethylsilane	402-140-1	17865-32-6	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
014-012-00-9	bis(3-(trimethoxysilyl)propyl)amine	403-480-3	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
014-013-00-4	α -hydroxypoly(methyl-(3-(2,2,6,6-tetramethylpiperidin-4-yloxy)propyl)siloxane)	404-920-7	—	Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1B Aquatic Chronic 2	H312 H302 H314 H411	GHS05 GHS07 GHS09 Dgr	H312 H302 H314 H411			
014-014-00-X	etacelasil (ISO); 6-(2-chloroethyl)-6-(2-methoxyethoxy)-2,5,7,10-tetraoxa-6-silaundecane	253-704-7	37894-46-5	Repr. 1B Acute Tox. 4 (*) STOT RE 2 (*)	H360D (***) H302 H373 (**)	GHS08 GHS07 Dgr	H360D (***) H302 H373 (**)			
014-015-00-5	α -trimethylsilyl- ω -trimethylsiloxy poly[oxy(methyl-3-(2-(2-methoxypropoxy)propoxy)propylsilanediy)]-co-oxy(dimethylsilane))	406-420-4	69430-40-6	Aquatic Chronic 4	H413	—	H413			
014-016-00-0	reaction mass of: 1,3-dihex-5-en-1-yl-1,1,3,3-tetramethyldisiloxane; 1,3-dihex-n-en-1-yl-1,1,3,3-tetramethyldisiloxane	406-490-6	—	Aquatic Chronic 2	H411	GHS09	H411			
014-017-00-6	flusilazole (ISO); bis(4-fluorophenyl)(methyl)(1H-1,2,4-triazol-1-ylmethyl)silane	—	85509-19-9	Carc. 2 Repr. 1B Acute Tox. 4 (*) Aquatic Chronic 2	H351 H360D (***) H302 H411	GHS08 GHS07 GHS09 Dgr	H351 H360D (***) H302 H411			
014-018-00-1	octamethylcyclotetrasiloxane	209-136-7	556-67-2	Repr. 2 Aquatic Chronic 4	H361f (***) H413	GHS08 Wng	H361f (***) H413			
014-019-00-7	reaction mass of: 4-[[bis-(4-fluorophenyl)methylsilyl]methyl]-4H-1,2,4-triazole; 1-[[bis-(4-fluorophenyl)methylsilyl]methyl]-1H-1,2,4-triazole	403-250-2	—	Carc. 2 Repr. 1B Acute Tox. 4 (*) Aquatic Chronic 2	H351 H360D (***) H302 H411	GHS08 GHS07 GHS09 Dgr	H351 H360D (***) H302 H411			
014-020-00-2	bis(1,1-dimethyl-2-propynyloxy)dimethylsilane	414-960-7	53863-99-3	Acute Tox. 4 (*)	H332	GHS07 Wng	H332			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
014-021-00-8	tris(isopropenyloxy)phenyl silane	411-340-8	52301-18-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H400 H410			
014-022-00-3	reaction product of: (2-hydroxy-4-(3-propenoxy)benzophenone and triethoxysilane) with (hydrolysis product of silica and methyltrimethoxysilane)	401-530-9	—	Flam. Sol. 1 STOT SE 1 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*)	H228 H370 (**) H332 H312 H302	GHS02 GHS08 GHS07 Dgr	H228 H370 (**) H332 H312 H302			T
014-023-00-9	α,ω -dihydroxypoly(hex-5-en-1-ylmethylsiloxane)hoxysilane with (hydrolysis product of silica and methyltrimethoxysilane)iazole	408-160-7	125613-45-8	Aquatic Chronic 2	H411	GHS09	H411			
014-024-00-4	1-((3-(3-chloro-4-fluorophenyl)propyl)dime-thylsilanyl)-4-ethoxybenzene	412-620-2	121626-74-2	Aquatic Chronic 2	H411	GHS09	H411			
014-025-00-X	4-[3-(diethoxymethylsilylpropoxy)-2,2,6,6-tetramethyl]piperidine	411-400-3	102089-33-8	Acute Tox. 4 (*) STOT RE 2 (*) Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 3	H302 H373 (**) H315 H318 H412	GHS08 GHS05 GHS07 Dgr	H302 H373 (**) H315 H318 H412			
014-026-00-5	dichloro-(3-(3-chloro-4-fluorophenyl)propyl)methylsilane	407-180-3	770722-36-6	Skin Corr. 1A	H314	GHS05 Dgr	H314			
014-027-00-0	chloro(3-(3-chloro-4-fluorophenyl)propyl)dimethylsilane	410-270-5	770722-46-8	Skin Corr. 1A	H314	GHS05 Dgr	H314			
014-028-00-6	α -[3-(1-oxoprop-2-enyl)-1-oxypropyl]dimethoxysilyloxy- ω -[3(1-oxoprop-2-enyl)-1-oxypropyl]dimethoxysilyl poly(dimethylsiloxane)	415-290-8	193159-06-7	Skin Sens. 1	H317	GHS07 Wng	H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
014-029-00-1	O,O'-(ethenylmethylsilylene)di[(4-methylpentan-2-one)oxime]	421-870-1	156145-66-3	Repr. 2 Acute Tox. 4 (*) STOT RE 2 (*)	H361f (***) H302 H373 (**)	GHS08 GHS07 Wng	H361f (***) H302 H373 (**)			
014-030-00-7	[(dimethylsilylene)bis((1,2,3,3a,7a-η)-1H-inden-1-ylidene)dimethyl]hafnium	422-060-0	137390-08-0	Acute Tox. 2 (*)	H300	GHS06 Dgr	H300			
014-031-00-2	bis(1-methylethyl)-dimethoxysilane	421-540-7	18230-61-0	Flam. Liq. 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H226 H315 H317 H412	GHS02 GHS07 Wng	H226 H315 H317 H412			
014-032-00-8	dicyclopentyl dimethoxysilane	404-370-8	126990-35-0	Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H400 H410	GHS05 GHS09 Dgr	H315 H318 H410			
015-001-00-1	white phosphorus	231-768-7	12185-10-3	Pyr. Sol. 1 Acute Tox. 2 (*) Acute Tox. 2 (*) Skin Corr. 1A Aquatic Acute 1	H250 H330 H300 H314 H400	GHS02 GHS06 GHS05 GHS09 Dgr	H250 H330 H300 H314 H400			
015-002-00-7	red phosphorus	231-768-7	7723-14-0	Flam. Sol. 1 Aquatic Chronic 3	H228 H412	GHS02 Dgr	H228 H412			
015-003-00-2	calcium phosphide; tricalcium diphosphide	215-142-0	1305-99-3	Water-react. 1 Acute Tox. 2 (*) Aquatic Acute 1	H260 H300 H400	GHS02 GHS06 GHS09 Dgr	H260 H300 H400	EUH029		T

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-004-00-8	aluminium phosphide	244-088-0	20859-73-8	Water-react. 1 Acute Tox. 2 (*) Aquatic Acute 1	H260 H300 H400	GHS02 GHS06 GHS09 Dgr	H260 H300 H400	EUH029 EUH032		T
015-005-00-3	magnesium phosphide; trimagnesium diphosphide	235-023-7	12057-74-8	Water-react. 1 Acute Tox. 2 (*) Aquatic Acute 1	H260 H300 H400	GHS02 GHS06 GHS09 Dgr	H260 H300 H400	EUH029		T
015-006-00-9	trizinc diphosphide; zinc phosphide	215-244-5	1314-84-7	Water-react. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H260 H300 H400 H410	GHS02 GHS06 GHS09 Dgr	H260 H300 H410	EUH029 EUH032		T
015-007-00-4	phosphorus trichloride	231-749-3	7719-12-2	Acute Tox. 2 (*) Acute Tox. 2 (*) STOT RE 2 (*) Skin Corr. 1A	H330 H300 H373 (**) H314	GHS06 GHS08 GHS05 Dgr	H330 H300 H373 (**) H314	EUH014 EUH029		
015-008-00-X	phosphorus pentachloride	233-060-3	10026-13-8	Acute Tox. 2 (*) Acute Tox. 4 (*) STOT RE 2 (*) Skin Corr. 1B	H330 H302 H373 (**) H314	GHS06 GHS08 GHS05 Dgr	H330 H302 H373 (**) H314	EUH014 EUH029		
015-009-00-5	phosphoryl trichloride	233-046-7	10025-87-3	Acute Tox. 2 (*) STOT RE 1 Acute Tox. 4 (*) Skin Corr. 1A	H330 H372 (**) H302 H314	GHS06 GHS08 GHS05 Dgr	H330 H372 (**) H302 H314	EUH014 EUH029		
015-010-00-0	phosphorus pentoxide	215-236-1	1314-56-3	Skin Corr. 1A	H314	GHS05 Dgr	H314			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-011-00-6	phosphoric acid ... %, orthophosphoric acid ... %	231-633-2	7664-38-2	Skin Corr. 1B	H314	GHS05 Dgr	H314		Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H315: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 %	B
015-012-00-1	tetraphosphorus trisulphide; phosphorus sesquisulphid	215-245-0	1314-85-8	Flam. Sol. 2 Water-react. 1 Acute Tox. 4 (*) Aquatic Acute 1	H228 H260 H302 H400	GHS02 GHS07 GHS09 Dgr	H228 H260 H302 H400			T
015-013-00-7	triethyl phosphate	201-114-5	78-40-0	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
015-014-00-2	tributyl phosphate	204-800-2	126-73-8	Carc. 2 Acute Tox. 4 (*) Skin Irrit. 2	H351 H302 H315	GHS08 GHS07 Wng	H351 H302 H315			
015-015-00-8	tricresyl phosphate (<i>o-o-o-</i> , <i>o-o-m-</i> , <i>o-o-p-</i> , <i>o-m-m-</i> , <i>o-m-p-</i> , <i>o-p-p-</i>); tritolyl phosphate (<i>o-o-o-</i> , <i>o-o-m-</i> , <i>o-o-p-</i> , <i>o-m-m-</i> , <i>o-m-p-</i> , <i>o-p-p-</i>);	201-103-5	78-30-8	STOT SE 1 Aquatic Chronic 2	H370 (**) H411	GHS08 GHS09 Dgr	H370 (**) H411		STOT SE 1; H370: C ≥ 1 % STOT SE 2; H371: 0,2 % ≤ C < 1 %	C
015-016-00-3	tricresyl phosphate (<i>m-m-m-</i> , <i>m-m-p-</i> , <i>m-p-p-</i> , <i>p-p-p-</i>); tritolyl phosphate (<i>m-m-m-</i> , <i>m-m-p-</i> , <i>m-p-p-</i> , <i>p-p-p-</i>);	201-105-6	78-32-0	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 2	H312 H302 H411	GHS07 GHS09 Wng	H312 H302 H411		(*)	C
015-019-00-X	dichlorvos (ISO); 2,2-dichlorovinyl dimethyl phosphate	200-547-7	62-73-7	Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Sens. 1 Aquatic Acute 1	H330 H311 H301 H317 H400	GHS06 GHS09 Dgr	H330 H311 H301 H317 H400			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-020-00-5	mevinphos (ISO); 2-methoxycarbonyl-1-methylvinyl dimethyl phosphate	232-095-1	7786-34-7	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410		M=10000	
015-021-00-0	trichlorfon (ISO); dimethyl 2,2,2-trichloro-1-hydroxyethyl-phosphonate	200-149-3	52-68-6	Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H400 H410		M=1000	
015-022-00-6	phosphamidon (ISO); 2-chloro-2-diethylcarbamoyl-1-methylvinyl dimethyl phosphate	236-116-5	13171-21-6	Muta. 2 Acute Tox. 2 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H341 H300 H311 H400 H410	GHS06 GHS08 GHS09 Dgr	H341 H300 H311 H410			
015-023-00-1	pyrazoxon; diethyl 3-methylpyrazol-5-yl phosphate	—	108-34-9	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*)	H330 H310 H300	GHS06 Dgr	H330 H310 H300			
015-024-00-7	triamiphos (ISO); 5-amino-3-phenyl-1,2,4-triazol-1-yl-N,N,N', N'-tetramethylphosphonic diamide	—	1031-47-6	Acute Tox. 1 Acute Tox. 2 (*)	H310 H300	GHS06 Dgr	H310 H300			
015-025-00-2	TEPP (ISO); tetraethyl pyrophosphate	203-495-3	107-49-3	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1	H310 H300 H400	GHS06 GHS09 Dgr	H310 H300 H400			
015-026-00-8	schradan (ISO); octamethylpyrophosphoramide	205-801-0	152-16-9	Acute Tox. 1 Acute Tox. 2 (*)	H310 H300	GHS06 Dgr	H310 H300			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-027-00-3	sulfotep (ISO); O,O,O,O-tetraethyl dithiopyrophosphate	222-995-2	3689-24-5	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410		M=1000	
015-028-00-9	demeton-O (ISO); O,O-diethyl-O-2-ethylthioethyl phosphorothioate	206-053-8	298-03-3	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1	H310 H300 H400	GHS06 GHS09 Dgr	H310 H300 H400			
015-029-00-4	demeton-S (ISO); diethyl-S-2-ethylthioethyl phosphorothioate	204-801-8	126-75-0	Acute Tox. 1 Acute Tox. 2 (*)	H310 H300	GHS06 Dgr	H310 H300			
015-030-00-X	demeton-O-methyl (ISO); O-2-ethylthioethyl O,O-dimethyl phosphorothioate	212-758-1	867-27-6	Acute Tox. 3 (*)	H301	GHS06 Dgr	H301			
015-031-00-5	demeton-S-methyl (ISO); S-2-ethylthioethyl dimethyl phosphorothioate	213-052-6	919-86-8	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Chronic 2	H311 H301 H411	GHS06 GHS09 Dgr	H311 H301 H411			
015-032-00-0	prothoate (ISO); O,O-diethyl isopropylcarbamoylmethyl phosphorodithioate	218-893-2	2275-18-5	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Chronic 3	H310 H300 H412	GHS06 Dgr	H310 H300 H412			
015-033-00-6	phorate (ISO); O,O-diethyl ethylthiomethyl phosphorodithioate	206-052-2	298-02-2	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410		M=1000	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-034-00-1	parathion (ISO); O,O-diethyl O-4-nitrophenyl phosphorothioate	200-271-7	56-38-2	Acute Tox. 2 (*) Acute Tox. 2 (*) Acute Tox. 3 (*) STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H311 H372 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H300 H311 H372 (**) H410		M=100	
015-035-00-7	parathion - methyl (ISO); O,O-dimethyl O-4-nitrophenyl phosphorothioate	206-050-1	298-00-0	Flam. Liq. 3 Acute Tox. 2 (*) Acute Tox. 2 (*) Acute Tox. 3 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H226 H330 H300 H311 H373 (**) H400 H410	GHS02 GHS06 GHS08 GHS09 Dgr	H226 H330 H300 H311 H373 (**) H410		M=100	
015-036-00-2	O-ethyl O-4-nitrophenyl phenylphosphonothioate; EPN	218-276-8	2104-64-5	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			
015-037-00-8	phenkapton (ISO); S-(2,5-dichlorophenylthiomethyl) O,O-diethyl phosphorodithioate	218-892-7	2275-14-1	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410			
015-038-00-3	coumaphos (ISO); O-3-chloro-4-methylcoumarin-7-yl O,O-diethyl phosphorothioate	200-285-3	56-72-4	Acute Tox. 2 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H300 H312 H400 H410	GHS06 GHS09 Dgr	H300 H312 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-039-00-9	azinphos-methyl (ISO); O,O-dimethyl-4-oxobenzotriazin-3-ylmethyl phosphorodithioate	201-676-1	86-50-0	Acute Tox. 2 (*) Acute Tox. 2 (*) Acute Tox. 3 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H311 H317 H400 H410	GHS06 GHS09 Dgr	H330 H300 H311 H317 H410			
015-040-00-4	diazinon (ISO); O,O-diethyl O-2-isopropyl-6-methylpyrimidin-4-yl phosphorothioate	206-373-8	333-41-5	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H400 H410			
015-041-00-X	malathion (ISO); 1,2-bis (ethoxycarbonyl) ethyl O,O-dimethyl phosphorodithioate	204-497-7	121-75-5	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H400 H410		M=100	
015-042-00-5	chlorthion O-(3-chloro-4-nitrophenyl) O,O-dimethyl phosphorothioate	207-902-5	500-28-7	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410		M=100	
015-043-00-0	phosnichlor (ISO); O-4-chloro-3-nitrophenyl O,O-dimethyl phosphorothioate	—	5826-76-6	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*)	H332 H312 H302	GHS07 Wng	H332 H312 H302			
015-044-00-6	carbophenothion (ISO); 4-chlorophenylthiomethyl O,O-diethyl phosphorodithioate	212-324-1	786-19-6	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-045-00-1	mecarbam (ISO); N-ethoxycarbonyl-N-methylcarbamoylmethyl O,O-diethyl phosphorodithioate	219-993-9	2595-54-2	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H400 H410			
015-046-00-7	oxydemeton-methyl; S-2-(ethylsulphinyl)ethyl O,O-dimethyl phosphorothioate	206-110-7	301-12-2	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1	H311 H301 H400	GHS06 GHS09 Dgr	H311 H301 H400			
015-047-00-2	ethion (ISO); O,O,O',O'-tetraethyl S,S'-methylenedi (phosphorodithioate); diethion	209-242-3	563-12-2	Acute Tox. 3 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H312 H400 H410	GHS06 GHS09 Dgr	H301 H312 H410		M=10000	
015-048-00-8	fenthion (ISO); O,O-dimethyl-O-(4-methylthion- <i>m</i> -tolyl) phosphorothioate	200-231-9	55-38-9	Muta. 2 Acute Tox. 3 (*) STOT RE 1 Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H341 H331 H372 (**) H312 H302 H400 H410	GHS06 GHS08 GHS09 Dgr	H341 H331 H372 (**) H312 H302 H410			
015-049-00-3	endosulfan (ISO); S-5-methoxy-4-oxopyran-2-ylmethyl dimethyl phosphorothioate	220-472-3	2778-04-3	Acute Tox. 3 (*) Acute Tox. 3 (*)	H311 H301	GHS06 Dgr	H311 H301			
015-050-00-9	thiometon (ISO); S-2-ethylthioethyl O,O-dimethyl phosphorodithioate	211-362-6	640-15-3	Acute Tox. 3 (*) Acute Tox. 4 (*)	H301 H312	GHS06 Dgr	H301 H312			
015-051-00-4	dimethoate (ISO); O,O-dimethyl methylcarbamoylmethyl phosphorodithioate	200-480-3	60-51-5	Acute Tox. 4 (*) Acute Tox. 4 (*)	H312 H302	GHS07 Wng	H312 H302			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-052-00-X	fenchlorphos (ISO); O,O-dimethyl O-2,4,5-trichlorophenyl phosphorothioate	206-082-6	299-84-3	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
015-053-00-5	menazon (ISO); S-[(4,6-diamino-1,3,5-triazin-2-yl)methyl] O,O-dimethyl phosphorodithioate	201-123-4	78-57-9	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
015-054-00-0	fenitrothion (ISO); O,O-dimethyl O-4-nitro- <i>m</i> -tolyl phosphorothioate	204-524-2	122-14-5	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
015-055-00-6	naled (ISO); 1,2-dibromo-2,2-dichloroethyl dimethyl phosphate	206-098-3	300-76-5	Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1	H312 H302 H319 H315 H400	GHS07 GHS09 Wng	H312 H302 H319 H315 H400		M=1000	
015-056-00-1	azinphos-ethyl (ISO); O,O-diethyl 4-oxobenzotriazin-3-ylmethyl phosphorodithioate	220-147-6	2642-71-9	Acute Tox. 2 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410			
015-057-00-7	formothion (ISO); N-formyl-N-methylcarbamoylmethyl O,O-dimethyl phosphorodithioate	219-818-6	2540-82-1	Acute Tox. 4 (*) Acute Tox. 4 (*)	H312 H302	GHS07 Wng	H312 H302			
015-058-00-2	morphothion (ISO); O,O-dimethyl-S-(morpholinocarbonylmethyl) phosphorodithioate	205-628-0	144-41-2	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-059-00-8	vamidothion (ISO); O,O-dimethyl S-2-(1-methylcarbamoyl-ethylthio) ethyl phosphorothioate	218-894-8	2275-23-2	Acute Tox. 3 (*) Acute Tox. 4 (*) Aquatic Acute 1	H301 H312 H400	GHS06 GHS09 Dgr	H301 H312 H400			
015-060-00-3	disulfoton (ISO); O,O-diethyl 2-ethylthioethyl phosphorodithioate	206-054-3	298-04-4	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			
015-061-00-9	dimefox (ISO); tetramethylphosphorodiamidic fluoride	204-076-8	115-26-4	Acute Tox. 1 Acute Tox. 2 (*)	H310 H300	GHS06 Dgr	H310 H300			
015-062-00-4	mipafox (ISO); N,N'- di-isopropylphosphorodiamidic fluoride	206-742-3	371-86-8	STOT SE 1	H370 (**)	GHS08 Dgr	H370 (**)			
015-063-00-X	dioxathion (ISO); 1,4-dioxan-2,3-diyl-O,O,O',O'-tetraethyl di (phosphorodithioate)	201-107-7	78-34-2	Acute Tox. 2 (*) Acute Tox. 2 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H311 H400 H410	GHS06 GHS09 Dgr	H330 H300 H311 H410		M=1000	
015-064-00-5	bromophos-ethyl (ISO); O-4-bromo-2,5-dichlorophenyl O,O-diethyl phosphorothioate	225-399-0	4824-78-6	Acute Tox. 3 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H312 H400 H410	GHS06 GHS09 Dgr	H301 H312 H410			
015-065-00-0	S-[2-(ethylsulphinyl)ethyl] O,O-dimethyl phosphorodithioate	—	2703-37-9	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) Aquatic Chronic 2	H330 H310 H300 H411	GHS06 GHS09 Dgr	H330 H310 H300 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-066-00-6	omethoate (ISO); O,O-dimethyl S-methylcarbamoylmethyl phosphorothioate	214-197-8	1113-02-6	Acute Tox. 3 (*) Acute Tox. 4 (*) Aquatic Acute 1	H301 H312 H400	GHS06 GHS09 Dgr	H301 H312 H400			
015-067-00-1	phosalone (ISO); S-(6-chloro-2-oxobenzoxazolin-3-ylmethyl) O,O-diethyl phosphorodithioate	218-996-2	2310-17-0	Acute Tox. 3 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H312 H400 H410	GHS06 GHS09 Dgr	H301 H312 H410			
015-068-00-7	dichlofenthion (ISO); O-2,4-dichlorophenyl O,O-diethyl phosphorothioate	202-564-5	97-17-6	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H400 H410			
015-069-00-2	methidathion (ISO); 2,3-dihydro-5-methoxy-2-oxo-1,3,4-thiadiazol-3-ylmethyl-O,O-dimethylphosphorodithioate	213-449-4	950-37-8	Acute Tox. 2 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H300 H312 H400 H410	GHS06 GHS09 Dgr	H300 H312 H410			
015-070-00-8	cyanthoate (ISO); S-(N-(1-cyano-1-methylethyl)carbamoylmethyl) O,O-diethyl phosphorothioate	223-099-4	3734-95-0	Acute Tox. 2 (*) Acute Tox. 3 (*)	H300 H311	GHS06 Dgr	H300 H311			
015-071-00-3	chlorfenvinphos (ISO); 2-chloro-1-(2,4 dichlorophenyl) vinyl diethyl phosphate	207-432-0	470-90-6	Acute Tox. 2 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410			
015-072-00-9	monocrotophos (ISO); dimethyl-1-methyl-2-(methylcarbamoyl) vinyl phosphate	230-042-7	6923-22-4	Muta. 2 Acute Tox. 2 (*) Acute Tox. 2 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H341 H330 H300 H311 H400 H410	GHS06 GHS08 GHS09 Dgr	H341 H330 H300 H311 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-073-00-4	dicrotophos (ISO); (Z)-2-dimethylcarbamoyl-1-methylvinyl dimethyl phosphate	205-494-3	141-66-2	Acute Tox. 2 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410			
015-074-00-X	crufomate (ISO); 4-tert-butyl-2-chlorophenyl methyl methylphosphoramidate	206-083-1	299-86-5	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
015-075-00-5	S-[2-(isopropylsulphinyl)ethyl] O,O-dimethyl phosphorothioate	—	2635-50-9	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*)	H331 H311 H301	GHS06 Dgr	H331 H311 H301			
015-076-00-0	potasan; O,O-diethyl O-(4-methylcoumarin-7-yl) phosphorothioate	—	299-45-6	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H400 H410	GHS06 GHS09 Dgr	H330 H310 H300 H410		M=1000	
015-077-00-6	2,2-dichlorovinyl 2-ethylsulphinyethyl methyl phosphate	—	7076-53-1	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*)	H331 H311 H301	GHS06 Dgr	H331 H311 H301			
015-078-00-1	demeton-S-methylsulphon (ISO); S-2-ethylsulphonylethyl dimethyl phosphorothioate	241-109-5	17040-19-6	Acute Tox. 3 (*) Acute Tox. 4 (*) Aquatic Chronic 2	H301 H312 H411	GHS06 GHS09 Dgr	H301 H312 H411			
015-079-00-7	acephate (ISO); O,S-dimethyl acetylphosphoramidothioate	250-241-2	30560-19-1	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
015-080-00-2	amidithion (ISO); 2-methoxyethylcarbamoylmethyl O,O-dimethyl phosphorodithioate	—	919-76-6	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-081-00-8	O,O,O',O'-tetrapropyl dithiopyrophosphate	221-817-0	3244-90-4	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
015-082-00-3	azothoate (ISO); O-4-(4-chlorophenylazo)phenyl O,O-dimethyl phosphorothioate	227-419-3	5834-96-8	Acute Tox. 4 (*) Acute Tox. 4 (*)	H332 H302	GHS07 Wng	H332 H302			
015-083-00-9	bensulide (ISO); O,O-diisopropyl 2-phenylsulphonylaminoethyl phosphorodithioate	212-010-4	741-58-2	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
015-084-00-4	chlorpyrifos (ISO); O,O-diethyl O-3,5,6-trichloro-2-pyridyl phosphorothioate	220-864-4	2921-88-2	Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H400 H410		M=10000	
015-085-00-X	chlorphonium chloride (ISO); tributyl (2,4-dichlorobenzyl) phosphonium chloride	204-105-4	115-78-6	Acute Tox. 3 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2	H301 H312 H319 H315	GHS06 Dgr	H301 H312 H319 H315			
015-086-00-5	coumithoate (ISO); O,O-diethyl O-7,8,9,10-tetrahydro-6-oxo-benzo(c)chromen-3-yl phosphorothioate	—	572-48-5	Acute Tox. 3 (*)	H301	GHS06 Dgr	H301			
015-087-00-0	cyanophos (ISO); O-4-cyanophenyl O,O-dimethyl phosphorothioate	220-130-3	2636-26-2	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-088-00-6	dialifos (ISO); 2-chloro-1-phthalimidoethyl O,O-diethyl phosphorodithioate	233-689-3	10311-84-9	Acute Tox. 2 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H400 H410			
015-089-00-1	ethoate-methyl (ISO); ethylcarbamoylmethyl O,O-dimethyl phosphorodithioate	204-121-1	116-01-8	Acute Tox. 4 (*) Acute Tox. 4 (*)	H312 H302	GHS07 Wng	H312 H302			
015-090-00-7	fensulfothion (ISO); O,O-diethyl O-4-methylsulfinylphenyl phosphorothioate	204-114-3	115-90-2	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			
015-091-00-2	fonofos (ISO); O-ethyl phenyl ethylphosphonodithioate	213-408-0	944-22-9	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			
015-092-00-8	phosacetim (ISO); O,O-bis(4-chlorophenyl) N-acetimido-yl-phosphoramidothioate	223-874-7	4104-14-7	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			
015-093-00-3	leptophos (ISO); O-4-bromo-2,5-dichlorophenyl O-methyl phenylphosphorothioate	244-472-8	21609-90-5	Acute Tox. 3 (*) STOT SE 1 Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H370 (**) H312 H400 H410	GHS06 GHS08 GHS09 Dgr	H301 H370 (**) H312 H410			
015-094-00-9	mephosfolan (ISO); diethyl 4-methyl-1,3-dithiolan-2-ylidene-phosphoramidate	213-447-3	950-10-7	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Chronic 2	H310 H300 H411	GHS06 GHS09 Dgr	H310 H300 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-095-00-4	methamidophos (ISO); O,S-dimethyl phosphoramidothioate	233-606-0	10265-92-6	Acute Tox. 2 (*) Acute Tox. 2 (*) Acute Tox. 3 (*) Aquatic Acute 1	H330 H300 H311 H400	GHS06 GHS09 Dgr	H330 H300 H311 H400			
015-096-00-X	oxydisulfoton (ISO); O,O-diethyl S-2-ethylsulphinylethyl phosphorodithioate	219-679-1	2497-07-6	Acute Tox. 2 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410		M=10	
015-097-00-5	phenthoate (ISO); ethyl 2-(dimethoxyphosphinothioylthio)-2-phenylacetate	219-997-0	2597-03-7	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410		M=100	
015-098-00-0	trichloronate (ISO); O-ethyl O-2,4,5-trichlorophenyl ethylphosphonothioate	206-326-1	327-98-0	Acute Tox. 2 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410			
015-099-00-6	pirimiphos-ethyl (ISO); O,O-diethyl O-2-diethylamino-6-methylpyrimidin-4-yl phosphorothioate	245-704-0	23505-41-1	Acute Tox. 3 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H312 H400 H410	GHS06 GHS09 Dgr	H301 H312 H410			
015-100-00-X	phoxim (ISO); α-(diethoxyphosphinothioylimino) phenylacetonitrile	238-887-3	14816-18-3	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410		M=1000	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-101-00-5	phosmet (ISO); O,O-dimethyl phthalimidomethyl S-phosphorodithioate	211-987-4	732-11-6	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410		M=100	
015-102-00-0	tris(2-chloroethyl) phosphate	204-118-5	115-96-8	Carc. 2 Acute Tox. 4 (*) Aquatic Chronic 2	H351 H302 H411	GHS08 GHS07 GHS09 Wng	H351 H302 H411			
015-103-00-6	phosphorus tribromide	232-178-2	7789-60-8	Skin Corr. 1B STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335	EUH014		
015-104-00-1	diphosphorus pentasulphide; phosphorus pentasulphide	215-242-4	1314-80-3	Flam. Sol. 1 Water-react. 1 Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1	H228 H260 H332 H302 H400	GHS02 GHS07 GHS09 Dgr	H228 H260 H332 H302 H400	EUH029		T
015-105-00-7	triphenyl phosphite	202-908-4	101-02-0	Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H315 H400 H410	GHS07 GHS09 Wng	H319 H315 H410		Skin Irrit. 2; H315: C ≥ 5 % Eye Irrit. 2; H319: C ≥ 5 %	
015-106-00-2	hexamethylphosphoric triamide; hexamethylphosphoramidate	211-653-8	680-31-9	Carc. 1B Muta. 1B	H350 H340	GHS08 Dgr	H350 H340		Carc. 1B; H350: C ≥ 0.01 %	
015-107-00-8	ethoprophos (ISO); ethyl-S,S-dipropyl phosphorodithioate	236-152-1	13194-48-4	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 3 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H301 H317 H400 H410	GHS06 GHS09 Dgr	H330 H310 H301 H317 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-108-00-3	bromophos (ISO); O-4-bromo-2,5-dichlorophenyl O,O-dimethyl phosphorothioate	218-277-3	2104-96-3	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410		M=100	
015-109-00-9	crotoxyphos (ISO); 1-phenylethyl 3-(dimethoxyphosphinyloxy) isocrotonate	231-720-5	7700-17-6	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410		M=10	
015-110-00-4	cyanofenphos (ISO); O-4-cyanophenyl O-ethyl phenylphosphorothioate	—	13067-93-1	Acute Tox. 3 (*) STOT SE 1 Acute Tox. 4 (*) Eye Irrit. 2 Aquatic Chronic 2	H301 H370 (**) H312 H319 H411	GHS06 GHS08 GHS09 Dgr	H301 H370 (**) H312 H319 H411			
015-111-00-X	phosfolan (ISO); diethyl 1,3-dithiolan-2-ylidenephosphoramidate	213-423-2	947-02-4	Acute Tox. 1 Acute Tox. 2 (*)	H310 H300	GHS06 Dgr	H310 H300			
015-112-00-5	thionazin (ISO); O,O-diethyl O-pyrazin-2-yl phosphorothioate;	206-049-6	297-97-2	Acute Tox. 1 Acute Tox. 2 (*)	H310 H300	GHS06 Dgr	H310 H300			
015-114-00-6	chlormephos (ISO); S-chloromethyl O,O-diethyl phosphorodithioate	246-538-1	24934-91-6	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			
015-115-00-1	chlorthiophos (ISO)	244-663-6	21923-23-9	Acute Tox. 2 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-116-00-7	demephion-O (ISO); O,O-dimethyl O-2-methylthioethyl phosphorothioate	211-666-9	682-80-4	Acute Tox. 2 (*) Acute Tox. 3 (*)	H300 H311	GHS06 Dgr	H300 H311			
015-117-00-2	demephion-S (ISO); O,O-dimethyl S-2-methylthioethyl phosphorothioate	219-971-9	2587-90-8	Acute Tox. 2 (*) Acute Tox. 3 (*)	H300 H311	GHS06 Dgr	H300 H311			
015-118-00-8	demeton	—	8065-48-3	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1	H310 H300 H400	GHS06 GHS09 Dgr	H310 H300 H400			
015-119-00-3	dimethyl 4-(methylthio)phenyl phosphate	—	3254-63-5	Acute Tox. 1 Acute Tox. 2 (*)	H310 H300	GHS06 Dgr	H310 H300			
015-120-00-9	ditalimfos (ISO); O,O-diethyl phthalimidophosphonothioate	225-875-8	5131-24-8	Skin Irrit. 2 Skin Sens. 1	H315 H317	GHS07 Wng	H315 H317			
015-121-00-4	edifenphos (ISO); O-ethyl S,S-diphenyl phosphorodithioate	241-178-1	17109-49-8	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H312 H317 H400 H410	GHS06 GHS09 Dgr	H331 H301 H312 H317 H410			
015-122-00-X	etrimfos (ISO); O-6-ethoxy-2-ethylpyrimidin-4-yl O,O-dimethylphosphorothioate	253-855-9	38260-54-7	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410		M=10	
015-123-00-5	fenamiphos (ISO); ethyl-4-methylthio- <i>m</i> -tolyl isopropyl phosphoramidate	244-848-1	22224-92-6	Acute Tox. 2 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410		M=100	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-124-00-0	fosthietan (ISO); diethyl 1,3-dithietan-2-ylidenephosphoramidate	244-437-7	21548-32-3	Acute Tox. 1 Acute Tox. 2 (*)	H310 H300	GHS06 Dgr	H310 H300			
015-125-00-6	glyphosine (ISO); N,N-bis(phosphonomethyl)glycine	219-468-4	2439-99-8	Eye Dam. 1	H318	GHS05 Dgr	H318			
015-126-00-1	heptenophos (ISO); 7-chlorobicyclo(3.2.0)hepta-2,6-dien-6-yl dimethyl phosphate	245-737-0	23560-59-0	Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410		M=100	
015-127-00-7	iprobenfos(ISO); S-benzyl diisopropyl phosphorothioate	247-449-0	26087-47-8	Acute Tox. 4 (*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
015-128-00-2	IPSP; S-ethylsulphinylmethyl O,O-diisopropylphosphorodithioate	—	5827-05-4	Acute Tox. 1 Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H310 H301 H400 H410	GHS06 GHS09 Dgr	H310 H301 H410		M=100	
015-129-00-8	isofenphos (ISO); O-ethyl O-2-isopropoxycarbonylphenyl-isopropylphosphoramidothioate	246-814-1	25311-71-1	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410		M=100	
015-130-00-3	isothioate (ISO); S-2-isopropylthioethyl O,O-dimethyl phosphorodithioate;	—	36614-38-7	Acute Tox. 3 (*) Acute Tox. 3 (*)	H311 H301	GHS06 Dgr	H311 H301			
015-131-00-9	isoxathion (ISO); O,O-diethyl O-5-phenylisoxazol-3-ylphosphorothioate	242-624-8	18854-01-8	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-132-00-4	S-(chlorophenylthiomethyl) O,O-dimethylphosphorodithioate; methylcarbophenothione	—	953-17-3	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410		M=1000	
015-133-00-X	piperophos (ISO); S-2-methylpiperidinocarbonylmethyl-O,O-dipropyl phosphorodithioate	—	24151-93-7	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410		M=10	
015-134-00-5	pirimiphos-methyl (ISO); O-(2-diethylamino-6-methylpyrimidin-4-yl) O,O-dimethyl phosphorothioate	249-528-5	29232-93-7	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
015-135-00-0	profenofos (ISO) O-(4-bromo-2-chlorophenyl) O-ethyl S-propyl phosphorothioate;	255-255-2	41198-08-7	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410		M=1000	
015-136-00-6	trans-isopropyl-3-[[[(ethylamino)methoxyfosfinothiyl]oxy]crotonate; isopropyl 3-[[[(ethylamino)methoxyphosphinothiyl]oxy]isocrotonate; propetamphos (ISO)	250-517-2	31218-83-4	Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410		M=100	
015-137-00-1	pyrazophos (ISO); O,O-diethyl O-(6-ethoxycarbonyl-5-methylpyrazolo[2,3-a]pyrimidin-2-yl) phosphorothioate	236-656-1	13457-18-6	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H400 H410	GHS07 GHS09 Wng	H332 H302 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-138-00-7	quinalphos (ISO); O,O-diethyl-O-quinoxalin-2-yl phosphorothioate	237-031-6	13593-03-8	Acute Tox. 3 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H312 H400 H410	GHS06 GHS09 Dgr	H301 H312 H410		M=1000	
015-139-00-2	terbufos (ISO); S-tert-butylthiomethyl O,O-diethylphosphorodithioate;	235-963-8	13071-79-9	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410		M=1000	
015-140-00-8	triazophos (ISO); O,O-diethyl-O-1-phenyl-1H,2,4-triazol-3-yl phosphorothioate	245-986-5	24017-47-8	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H312 H400 H410	GHS06 GHS09 Dgr	H331 H301 H312 H410			
015-141-00-3	ethylenediammonium O,O-bis(octyl) phosphorodithioate, mixed isomers	400-520-1	—	Skin Corr. 1B Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H314 H302 H400 H410	GHS05 GHS07 GHS09 Dgr	H314 H302 H410			
015-142-00-9	butyl (dialkyloxy(dibutoxyphosphoryloxy)) titanium (trialkyloxy)titanium phosphate	401-100-0	—	Flam. Liq. 2 Eye Irrit. 2 Aquatic Chronic 2	H225 H319 H411	GHS02 GHS07 GHS09 Dgr	H225 H319 H411			T
015-143-00-4	reaction mass of 2-chloroethyl chloropropyl 2-chloroethylphosphonate, reaction mass of isomers and 2-chloroethyl chloropropyl 2-chloropropylphosphonate, reaction mass of isomers	401-740-0	—	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
015-144-00-X	reaction mass of pentyl methylphosphinate and 2-methylbutyl methylphosphinate	402-090-0	87025-52-3	Skin Corr. 1B	H314	GHS05 Dgr	H314			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-145-00-5	reaction mass of copper(I) O,O-diisopropyl phosphorodithioate and copper(I) O-isopropyl O-(4-methylpent-2-yl) phosphorodithioate and copper(I) O,O-bis(4-methylpent-2-yl) phosphorodithioate	401-520-4	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
015-146-00-0	S-(tricyclo(5.2.1.0 ^{2,6})deca-3-en-8(or 9)-yl O-(isopropyl or isobutyl or 2-ethylhexyl) O-(isopropyl or isobutyl or 2-ethylhexyl) phosphorodithioate	401-850-9	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
015-147-00-6	reaction mass of C ₁₂₋₁₄ -tert-alkylammonium diphenyl phosphorothioate and dinonyl sulphide (or disulphide)	400-930-0	—	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H315 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H411			
015-148-00-1	2-(diphosphonomethyl)succinic acid	403-070-4	51395-42-7	Skin Corr. 1B Skin Sens. 1	H314 H317	GHS05 GHS07 Dgr	H314 H317			
015-149-00-7	reaction mass of: hexyldioctylphosphineoxide; dihexyloctylphosphineoxide; trioctylphosphineoxide	403-470-9	—	Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H314 H400 H410	GHS05 GHS09 Dgr	H314 H410			
015-150-00-2	(2-(1,3-dioxolan-2-yl)ethyl)triphenylphosphonium bromide	404-940-6	86608-70-0	Acute Tox. 4 (*) Eye Dam. 1 STOT RE 2 (*) Aquatic Chronic 3	H302 H318 H373 (**) H412	GHS08 GHS05 GHS07 Dgr	H302 H318 H373 (**) H412			
015-151-00-8	tris(isopropyl/tert-butylphenyl) phosphate	405-010-2	—	Aquatic Chronic 2	H411	GHS09	H411			
015-152-00-3	dioxabenzofos (ISO); 2-methoxy-4H-1,3,2-benzodioxaphosphorin 2-sulphide	223-292-3	3811-49-2	Acute Tox. 3 (*) Acute Tox. 3 (*) STOT SE 1 Aquatic Chronic 2	H311 H301 H370 (**) H411	GHS06 GHS08 GHS09 Dgr	H311 H301 H370 (**) H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-153-00-9	isazofos (ISO); O-(5-chloro-1-isopropyl-1,2,4-triazol-3-yl) O,O-diethyl phosphorothioate	255-863-8	42509-80-8	Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H311 H301 H373 (**) H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H311 H301 H373 (**) H317 H410			
015-154-00-4	2-chloroethylphosphonic acid; ethephon	240-718-3	16672-87-0	Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1B Aquatic Chronic 3	H332 H312 H314 H412	GHS05 GHS07 Dgr	H332 H312 H314 H412		STOT SE 3; H335: C ≥ 5 %	
015-155-00-X	ammonium 2-amino-4-(hydroxymethylphosphinyl)butyrate; glufosinate ammonium	278-636-5	77182-82-2	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
015-156-00-5	methyl 3-[(dimethoxyphosphinothioyl)oxy]methacrylate; [1] methacrifos (ISO); methyl (E)-3-[(dimethoxyphosphinothioyl)oxy]methacrylate [2]	250-366-9 [1] — [2]	30864-28-9 [1] 62610-77-9 [2]	Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
015-157-00-0	phosphonic acid; [1] phosphorous acid [2]	237-066-7 [1] 233-663-1 [2]	13598-36-2 [1] 10294-56-1 [2]	Acute Tox. 4 (*) Skin Corr. 1A	H302 H314	GHS05 GHS07 Dgr	H302 H314			
015-158-00-6	(η-cyclopentadienyl)(η-cumenyl)iron(1+) hexafluorophosphate(1-)	402-340-9	32760-80-8	Aquatic Chronic 3	H412	—	H412			
015-159-00-1	hydroxyphosphonoacetic acid	405-710-8	23783-26-8	Acute Tox. 4 (*) STOT RE 2 (*) Skin Corr. 1B Skin Sens. 1	H302 H373 (**) H314 H317	GHS08 GHS05 GHS07 Dgr	H302 H373 (**) H314 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-160-00-7	vanadyl pyrophosphate	406-260-5	58834-75-6	Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H319 H317 H412	GHS07 Wng	H319 H317 H412			
015-161-00-2	divanadyl pyrophosphate	407-130-0	65232-89-5	Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H317 H411			
015-162-00-8	vanadium(IV) oxide hydrogen phosphate hemihydrate, lithium, zinc, molybdenum, iron and chlorine-doped	407-350-7	—	Acute Tox. 4 (*) STOT RE 2 (*) Eye Dam. 1 Aquatic Chronic 2	H332 H373 (**) H318 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H332 H373 (**) H318 H411			
015-163-00-3	bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentylphosphin oxide	412-010-6	145052-34-2	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
015-164-00-9	calcium P,P'-(1-hydroxyethylene)bis(hydrogen phosphonate)dihydrate	400-480-5	36669-85-9	Aquatic Chronic 3	H412	—	H412			
015-165-00-4	reaction mass of: thiobis(4,1-phenylene)-S,S,S',S'-tetraphenyldisulfonium bishexafluorophosphate; diphenyl(4-phenylthiophenyl)sulfonium hexafluorophosphate	404-986-7	—	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
015-166-00-X	3,9-bis(2,6-di-tert-butyl-4-methylphenoxy)-2,4,8,10-tetraoxa-3,9-diphosphaspiro[5.5]undecane	410-290-4	80693-00-1	Aquatic Chronic 4	H413	—	H413			
015-167-00-5	3-(hydroxyphenylphosphinyl)propanoic acid	411-200-6	14657-64-8	Eye Dam. 1	H318	GHS05 Dgr	H318			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-168-00-0	fosthiazate (ISO); (RS)-S-sec-butyl-O-ethyl-2-oxo-1,3-thiazolidin-3-ylphosphonothioate	—	98886-44-3	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H312 H317 H400 H410	GHS06 GHS09 Dgr	H331 H301 H312 H317 H410	EUH070		
015-169-00-6	tributyltetradecylphosphonium tetrafluoroborate	413-520-1	—	Acute Tox. 4 (*) STOT RE 2 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H373 (**) H314 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H302 H373 (**) H314 H317 H410			
015-170-00-1	reaction mass of: di-(1-octane-N,N,N-trimethylammonium) octylphosphate; 1-octane-N,N,N-trimethylammonium di-octylphosphate; 1-octane-N,N,N-trimethylammonium octylphosphate	407-490-9	—	Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1B	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314			
015-171-00-7	O,O,O-tris(2(or 4)-C ₉₋₁₀ -isoalkylphenyl)phosphorothioate	406-940-1	—	Aquatic Chronic 2	H411	GHS09	H411			
015-172-00-2	reaction mass of: bis(isotridecylammonium) mono(di-(4-methylpent-2-yloxy)thiophosphorothionylisopropyl)phosphate; isotridecylammonium bis(di-(4-methylpent-2-yloxy)thiophosphorothionylisopropyl)phosphate	406-240-6	—	Flam. Liq. 3 Skin Corr. 1B Aquatic Chronic 2	H226 H314 H411	GHS02 GHS05 GHS09 Dgr	H226 H314 H411			
015-173-00-8	methyl [2-(1,1-dimethylethyl)-6-methoxypyrimidin-4-yl]ethylphosphonothioate	414-080-3	117291-73-3	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-174-00-3	1-chloro-N,N-diethyl-1,1-diphenyl-1-(phenylmethyl)phosphoramine	411-370-1	82857-68-9	Acute Tox. 3 (*) Eye Dam. 1 Aquatic Chronic 2	H301 H318 H411	GHS06 GHS05 GHS09 Dgr	H301 H318 H411			
015-175-00-9	tert-butyl (triphenylphosphoranylidene) acetate	412-880-7	35000-38-5	Acute Tox. 3 (*) STOT RE 2 (*) Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H301 H373 (**) H319 H317 H411	GHS06 GHS08 GHS09 Dgr	H301 H373 (**) H319 H317 H411			
015-176-00-4	P,P,P',P'-tetrakis-(o-methoxyphenyl)propane-1,3-diphosphine	413-430-2	116163-96-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
015-177-00-X	((4-phenylbutyl)hydroxyphosphoryl)acetic acid	412-170-7	83623-61-4	STOT RE 2 (*) Eye Dam. 1 Skin Sens. 1	H373 (**) H318 H317	GHS08 GHS05 Dgr	H373 (**) H318 H317			
015-178-00-5	(R)-α-phenylethylammonium (-)-(1R, 2S)-(1,2-epoxypropyl)phosphonate monohydrate	418-570-8	25383-07-7	Repr. 2 Aquatic Chronic 2	H361f (***) H411	GHS08 GHS09 Wng	H361f (***) H411			
015-179-00-0	UVCB condensation product of: tetrakis-hydroxymethylphosphonium chloride, urea and distilled hydrogenated C ₁₆₋₁₈ tallow alkylamine	422-720-8	166242-53-1	Carc. 2 Acute Tox. 4 (*) STOT RE 2 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H373 (**) H314 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H351 H302 H373 (**) H314 H317 H410			
015-180-00-6	[R-(R*,S*)]-[[2-methyl-1-(1-oxopropoxy)propoxy]-(4-phenylbutyl)phosphinyl] acetic acid, (-)-cinchonidine (1:1) salt	415-820-8	137590-32-0	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
015-181-00-1	phosphine	232-260-8	7803-51-2	Flam. Gas 1 Press. Gas Acute Tox. 2 (*) Skin Corr. 1B Aquatic Acute 1	H220 H330 H314 H400	GHS02 GHS04 GHS06 GHS05 GHS09 Dgr	H220 H330 H314 H400			U
015-184-00-8	Salts of glyphosate, with the exception of those specified elsewhere in this Annex	—	—	Aquatic Chronic 2	H411	GHS09	H411			A
015-186-00-9	chlorpyrifos-methyl (ISO) O,O-dimethyl O-3,5,6-trichloro-2-pyridyl phosphorothioate	227-011-5	5598-13-0	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410		M=10000	
015-187-00-4	reaction mass of: tetrasodium(((2-hydroxyethyl)imino)bis(methylene))bisphosphonate, N-oxide; trisodium ((tetrahydro-2-hydroxy-4H-1,4,2-oxazaphosphorin-4-yl)-methyl)phosphonate, N-oxide, P-oxide	417-540-1	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
015-189-00-5	phenyl bis(2,4,6-trimethylbenzoyl)-phosphine oxide	423-340-5	162881-26-7	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
016-001-00-4	hydrogen sulphide	231-977-3	7783-06-4	Flam. Gas 1 Press. Gas Acute Tox. 2 (*) Aquatic Acute 1	H220 H330 H400	GHS02 GHS04 GHS06 GHS09 Dgr	H220 H330 H400			U
016-002-00-X	barium sulphide	244-214-4	21109-95-5	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1	H332 H302 H400	GHS07 GHS09 Wng	H332 H302 H400	EUH031		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
016-003-00-5	barium polysulphides	256-814-3	50864-67-0	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H319 H335 H315 H400	GHS07 GHS09 Wng	H319 H335 H315 H400	EUH031		
016-004-00-0	calcium sulphide	243-873-5	20548-54-3	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H319 H335 H315 H400	GHS07 GHS09 Wng	H319 H335 H315 H400	EUH031		
016-005-00-6	calcium polysulphides	215-709-2	1344-81-6	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H319 H335 H315 H400	GHS07 GHS09 Wng	H319 H335 H315 H400	EUH031		
016-006-00-1	dipotassium sulphide; potassium sulphide	215-197-0	1312-73-8	Skin Corr. 1B Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400	EUH031		
016-007-00-7	potassium polysulphides	253-390-1	37199-66-9	Skin Corr. 1B Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400	EUH031		
016-008-00-2	ammonium polysulphides	232-989-1	9080-17-5	Skin Corr. 1B Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400	EUH031	EUH031: C ≥ 1 %	
016-009-00-8	disodium sulphide; sodium sulphide	215-211-5	1313-82-2	Skin Corr. 1B Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400	EUH031		
016-010-00-3	sodium polysulphides	215-686-9	1344-08-7	Acute Tox. 3 (*) Skin Corr. 1B Aquatic Acute 1	H301 H314 H400	GHS06 GHS05 GHS09 Dgr	H301 H314 H400	EUH031		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
016-011-00-9	sulphur dioxide	231-195-2	7446-09-5	Press. Gas Acute Tox. 3 (*) Skin Corr. 1B	H331 H314	GHS04 GHS06 GHS05 Dgr	H331 H314		(*)	U 5
016-012-00-4	disulphur dichloride; sulfur monochloride	233-036-2	10025-67-9	Acute Tox. 3 (*) Acute Tox. 4 (*) Skin Corr. 1A Aquatic Acute 1	H301 H332 H314 H400	GHS06 GHS05 GHS09 Dgr	H301 H332 H314 H400	EUH014 EUH029	STOT SE 3; H335: C ≥ 1 %	
016-013-00-X	sulphur dichloride	234-129-0	10545-99-0	Skin Corr. 1B STOT SE 3 Aquatic Acute 1	H314 H335 H400	GHS05 GHS07 GHS09 Dgr	H314 H335 H400	EUH014	STOT SE 3; H335: C ≥ 5 %	
016-014-00-5	sulphur tetrachloride	—	13451-08-6	Skin Corr. 1B Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400	EUH014	STOT SE 3; H335: C ≥ 5 %	
016-015-00-0	thionyl dichloride; thionyl chloride	231-748-8	7719-09-7	Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1A	H332 H302 H314	GHS05 GHS07 Dgr	H332 H302 H314	EUH014 EUH029	STOT SE 3; H335: C ≥ 1 %	
016-016-00-6	sulphuryl chloride	232-245-6	7791-25-5	Skin Corr. 1B STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335	EUH014		
016-017-00-1	chlorosulphonic acid	232-234-6	7790-94-5	Skin Corr. 1A STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335	EUH014		
016-018-00-7	fluorosulphonic acid	232-149-4	7789-21-1	Acute Tox. 4 (*) Skin Corr. 1A	H332 H314	GHS05 GHS07 Dgr	H332 H314			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
016-019-00-2	oleum ... % SO ₃	—	—	Skin Corr. 1A STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335	EUH014		B
016-020-00-8	sulphuric acid ... %	231-639-5	7664-93-9	Skin Corr. 1A	H314	GHS05 Dgr	H314		Skin Corr. 1A; H314: C ≥ 15 % Skin Irrit. 2; H315: 5 % ≤ C < 15 % Eye Irrit. 2; H319: 5 % ≤ C < 15 %	B
016-021-00-3	methanethiol; methyl mercaptan	200-822-1	74-93-1	Flam. Gas. 1 Press. Gas Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H220 H331 H400 H410	GHS02 GHS04 GHS06 GHS09 Dgr	H220 H331 H410			U
016-022-00-9	ethanethiol; ethyl mercaptan	200-837-3	75-08-1	Flam. Liq. 2 Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H225 H332 H400 H410	GHS02 GHS07 GHS09 Dgr	H225 H332 H410			
016-023-00-4	dimethyl sulphate	201-058-1	77-78-1	Carc. 1B Muta. 2 Acute Tox. 2 (*) Acute Tox. 3 (*) Skin Corr. 1B Skin Sens. 1	H350 H341 H330 H301 H314 H317	GHS06 GHS08 GHS05 Dgr	H350 H341 H330 H301 H314 H317		Carc. 1B; H350: C ≥ 0.01 % Muta. 2; H341: C ≥ 0.01 % STOT SE 3; H335: C ≥ 5 %	
016-024-00-X	dimexano(ISO); bis(methoxythiocarbonyl) disulphide	215-993-8	1468-37-7	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
016-025-00-5	disul (ISO); 2-(2,4-dichlorophenoxy)ethyl hydrogensulphate; 2,4-DES	205-259-5	149-26-8	Acute Tox. 4 (*) Skin Irrit. 2 Eye Dam. 1	H302 H315 H318	GHS05 GHS07 Dgr	H302 H315 H318			
016-026-00-0	sulphamidic acid; sulphamic acid; sulfamic acid	226-218-8	5329-14-6	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 3	H319 H315 H412	GHS07 Wng	H319 H315 H412			
016-027-00-6	diethyl sulphate	200-589-6	64-67-5	Carc. 1B Muta. 1B Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1B	H350 H340 H332 H312 H302 H314	GHS05 GHS08 GHS07 Dgr	H350 H340 H332 H312 H302 H314			
016-028-00-1	sodium dithionite; sodium hydrosulphite	231-890-0	7775-14-6	Self-heat. 1 Acute Tox. 4 (*)	H251 H302	GHS02 GHS07 Dgr	H251 H302	EUH031		
016-029-00-7	p-toluenesulphonic acid, containing more than 5 % H ₂ SO ₄	—	—	Skin Corr. 1B	H314	GHS05 Dgr	H314		Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H315: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 %	
016-030-00-2	p-toluenesulphonic acid (containing a maximum of 5 % H ₂ SO ₄)	203-180-0	104-15-4	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315		STOT SE 3; H335: C ≥ 20 %	
016-031-00-8	tetrahydrothiophene-1,1-dioxide; sulpholane	204-783-1	126-33-0	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
016-032-00-3	1,3-propanesultone; 1,2-oxathiolane 2,2-dioxide	214-317-9	1120-71-4	Carc. 1B Acute Tox. 4 (*) Acute Tox. 4 (*)	H350 H312 H302	GHS08 GHS07 Dgr	H350 H312 H302		Carc. 1B; H350: C ≥ 0,01 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
016-033-00-9	dimethylsulfamoylchloride	236-412-4	13360-57-1	Carc. 1B Acute Tox. 2 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1B	H350 H330 H312 H302 H314	GHS06 GHS05 GHS08 Dgr	H350 H330 H312 H302 H314			
016-034-00-4	tetrasodium 3,3'-(piperazine-1,4-diylbis((6-chloro-1,3,5-triazine-2,4-diyl)imino(2-acetamido)-4,1-phenyleneazo))bis(naphthalene-1,5-disulphonate)	400-010-9	81898-60-4	Skin Sens. 1	H317	GHS07 Wng	H317			
016-035-00-X	pentasodium 5-anilino-3-(4-(4-(6-chloro-4-(3-sulphonatoanilino)-1,3,5-triazin-2-ylamino)-2,5-dimethylphenylazo)-2,5-disulphonatophenylazo)-4-hydroxynaphthalene-2,7-disulphonate	400-120-7	—	Eye Irrit. 2	H319	GHS07 Wng	H319			
016-036-00-5	tetrasodium 5-(4,6-dichloro-5-cyanopyrimidin-2-ylamino)-4-hydroxy-2,3-azodinaphthalene-1,2,5,7-disulphonate	400-130-1	—	Resp. Sens. 1 Aquatic Chronic 2	H334 H411	GHS08 GHS09 Dgr	H334 H411			
016-037-00-0	disodium 1-amino-4-(4-benzenesulphonamido-3-sulphonatoanilino)anthraquinone-2-sulphonate	400-350-8	85153-93-1	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
016-038-00-6	disodium 6-((4-chloro-6-(N-methyl)-2-toluidino)-1,3,5-triazin-2-ylamino)-1-hydroxy-2-(4-methoxy-2-sulphonatophenylazo)naphthalene-3-sulphonate	400-380-1	86393-35-3	Skin Sens. 1	H317	GHS07 Wng	H317			
016-039-00-1	tetrasodium 2-(6-chloro-4-(4-(2,5-dimethyl-4-(2,5-disulphonatophenylazo)phenylazo)-3-ureidoanilino)-1,3,5-triazin-2-ylamino)benzene-1,4-disulphonate	400-430-2	—	Skin Sens. 1	H317	GHS07 Wng	H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
016-040-00-7	reaction mass of disodium 6-(2,4-dihydroxyphenylazo)-3-(4-(4-(2,4-dihydroxyphenylazo)anilino)-3-sulphonatophenylazo)-4-hydroxynaphthalene-2-sulphonate and disodium 6-(2,4-diaminophenylazo)-3-(4-(4-(2,4-diaminophenylazo)anilino)-3-sulphonatophenylazo)-4-hydroxynaphthalene-2-sulphonate and trisodium 6-(2,4-dihydroxyphenylazo)-3-(4-(4-(7-(2,4-dihydroxyphenylazo)-1-hydroxy-3-sulphonato-2-naphthylazo)anilino)-3-sulphonatophenylazo)-4-hydroxynaphthalene-2-sulphonate	400-570-4	—	Eye Irrit. 2	H319	GHS07 Wng	H319			
016-041-00-2	calcium 2,5-dichloro-4-(4-((5-chloro-4-methyl-2-sulphonatophenyl)azo)-5-hydroxy-3-methylpyrazol-1-yl)benzenesulphonate	400-710-4	—	Acute Tox. 4 (*)	H332	GHS07 Wng	H332			
016-042-00-8	tetrasodium 5-benzamido-3-(5-(4-fluoro-6-(1-sulphonato-2-naphthylamino)-1,3,5-triazin-2-ylamino)-2-sulphonatophenylazo)-4-hydroxynaphthalene-2,7- disulphonate	400-790-0	85665-97-0	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			
016-043-00-3	dilithium 6-acetamido-4-hydroxy-3-(4-((2-sulphonatooxy)ethylsulphonyl)phenylazo)naphthalene-2-sulphonate	401-010-1	—	Skin Sens. 1	H317	GHS07 Wng	H317			
016-044-00-9	disodium S,S-hexane-1,6-diyl-di(thiosulphate) dihydrate	401-320-7	—	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
016-045-00-4	lithium sodium hydrogen 4-amino-6-(5-(5-chloro-2,6-difluoropyrimidin-4-ylamino)-2-sulphonatophenylazo)-5-hydroxy-3-(4-(2-(sulphonatooxy)ethylsulphonyl)phenylazo)naphthalene-2,7-disulphonate	401-560-2	108624-00-6	Skin Sens. 1	H317	GHS07 Wng	H317			
016-046-00-X	sodium hydrogensulphate	231-665-7	7681-38-1	Eye Dam. 1	H318	GHS05 Dgr	H318			
016-047-00-5	hexasodium 7-(4-(4-(4-(2,5-disulphonatoanilino)-6-fluoro-1,3,5-triazin-2-ylamino)-2-methylphenylazo)-7-sulphonatonaphthylazo)naphthalene-1,3,5- trisulphonate	401-650-1	85665-96-9	Skin Sens. 1	H317	GHS07 Wng	H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
016-048-00-0	sodium 3,5-dichloro-2-(5-cyano-2,6-bis(3-hydroxypropylamino)-4-methylpyridin-3-ylazo)benzenesulphonate	401-870-8	—	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
016-049-00-6	calcium octadecylxylenesulphonate	402-040-8	—	Skin Corr. 1B Aquatic Chronic 2	H314 H411	GHS05 GHS09 Dgr	H314 H411			
016-050-00-1	potassium sodium 5-(4-chloro-6-(N-(4-(4-chloro-6-(5-hydroxy-2,7-disulphonato-6-(2-sulphonatophenylazo)-4-naphthylamino)-1,3,5-triazin-2-ylamino) phenyl-N-methyl) amino)-1,3,5-triazin-2-ylamino)-4-hydroxy-3-(2-sulphonatophenylazo)naphthalene-2,7-disulphonat	402-150-6	—	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			
016-051-00-7	trisodium 7-(4-(6-fluoro-4-(2-(2-vinylsulphonylethoxy)ethylamino)-1,3,5-triazin-2-ylamino)-2-ureidophenylazo)naphthalene-1,3,6- trisulphonate	402-170-5	106359-91-5	Skin Sens. 1	H317	GHS07 Wng	H317			
016-052-00-2	benzyltributylammonium 4-hydroxynaphthalene-1-sulphonate	402-240-5	102561-46-6	Acute Tox. 4 (*) Aquatic Chronic 2	H332 H411	GHS07 GHS09 Wng	H332 H411			
016-053-00-8	(C ₁₆ or C ₁₈ -n-alkyl)(C ₁₆ or C ₁₈ -n-alkyl) ammonium 2-((C ₁₆ or C ₁₈ -n-alkyl)(C ₁₆ or C ₁₈ -n-alkyl)carbamoyl)benzenesulphonate	402-460-1	—	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 4	H315 H317 H413	GHS07 Wng	H315 H317 H413			
016-054-00-3	sodium 4-(2,4,4-trimethylpentylcarbonyloxy)benzenesulfonate	400-030-8	—	Acute Tox. 3 (*) STOT RE 1 Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Sens. 1	H331 H372 (**) H302 H319 H335 H317	GHS06 GHS08 Dgr	H331 H372 (**) H302 H319 H335 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
016-055-00-9	tetrasodium 4-amino-3,6-bis(5-(6-chloro-4-(2-hydroxyethylamino)-1,3,5-triazin-2-ylamino)-2-sulfonatophenylazo)-5-hydroxynaphthalene-2,7-sulfonate (containing > 35 % sodium chloride and sodium acetate)	400-510-7	—	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
016-056-00-4	potassium hydrogensulphate	231-594-1	7646-93-7	Skin Corr. 1B STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335			
016-057-00-X	styrene-4-sulfonyl chloride	404-770-2	2633-67-2	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H315 H318 H317	GHS05 GHS07 Dgr	H315 H318 H317			
016-058-00-5	thionyl chloride, reaction products with 1,3,4-thiadiazol-2,5-dithiol, <i>tert</i> -nonanethiol and C ₁₂₋₁₄ - <i>tert</i> -alkylamine	404-820-3	—	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H315 H317 H412	GHS07 Wng	H315 H317 H412			
016-059-00-0	N,N,N',N'-tetramethyldithiobis(ethylene)diamine dihydrochloride	405-300-9	17339-60-5	Acute Tox. 4 (*) Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H317 H400 H410	GHS07 GHS09 Wng	H302 H319 H317 H410			
016-060-00-6	diammonium peroxodisulphate; ammonium persulphate	231-786-5	7727-54-0	Ox. Sol. 3 Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Skin Sens. 1	H272 H302 H319 H335 H315 H334 H317	GHS03 GHS08 GHS07 Dgr	H272 H302 H319 H335 H315 H334 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
016-061-00-1	dipotassium peroxodisulphate; potassium persulphate	231-781-8	7727-21-1	Ox. Sol. 3 Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Skin Sens. 1	H272 H302 H319 H335 H315 H334 H317	GHS03 GHS08 GHS07 Dgr	H272 H302 H319 H335 H315 H334 H317			
016-062-00-7	bensultap (ISO); 1,3-bis(phenylsulfonylthio)-2-(N,N-dimethylamino)propane	—	17606-31-4	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
016-063-00-2	sodium metabisulphite	231-673-0	7681-57-4	Acute Tox. 4 (*) Eye Dam. 1	H302 H318	GHS05 GHS07 Dgr	H302 H318	EUH031		
016-064-00-8	sodium hydrogensulphite . . . %; sodium bisulphite . . . %	231-548-0	7631-90-5	Acute Tox. 4 (*)	H302	GHS07 Wng	H302	EUH031		B
016-065-00-3	sodium 1-amino-4-[2-methyl-5-(4-methylphenylsulfonylamino)phenylamino]anthraquinone-2-sulfonate	400-100-8	84057-97-6	Aquatic Chronic 2	H411	GHS09	H411			
016-066-00-9	tetrasodium [5-((4-amino-6-chloro-1,3,5-triazin-2-yl)amino)-2-((2-hydroxy-3,5-disulfonatophenylazo)-2-sulfonatobenzylidenehydrazino)benzoate]copper(II)	404-070-7	116912-62-0	Aquatic Chronic 3	H412	—	H412			
016-067-00-4	(4-methylphenyl)mesitylene sulfonate	407-530-5	67811-06-7	Aquatic Chronic 4	H413	—	H413			
016-068-00-X	sodium 3,5-bis(tetradecyloxycarbonyl)benzenesulfinate	407-720-8	155160-86-4	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
016-069-00-5	3,5-bis-(tetradecyloxycarbonyl)benzenesulfonic acid	407-990-7	141915-64-2	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
016-070-00-0	4-benzyloxy-4'-(2,3-epoxy-2-methylprop-1-yloxy)diphenylsulfone	408-220-2	—	Aquatic Chronic 4	H413	—	H413			
016-071-00-6	trisodium 3-amino-6,13-dichloro-10-((3-((4-chloro-6-(2-sulfophenylamino)-1,3,5-triazin-2-yl)amino)propyl) amino)-4,11-triphenoxydioxazinedisulfonate	410-130-3	136248-03-8	Skin Sens. 1	H317	GHS07 Wng	H317			
016-072-00-1	3-amino-4-hydroxy-N-(2-methoxyethyl)-benzenesulfonamide	411-520-6	112195-27-4	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			
016-073-00-7	tetrakis(phenylmethyl)thioperoxydi(carbothioamide)	404-310-0	10591-85-2	Aquatic Chronic 4	H413	—	H413			
016-074-00-2	6-fluoro-2-methyl-3-(4-methylthiobenzyl)indene	405-410-7	—	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H315 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H411			
016-075-00-8	2,2'-diallyl-4,4'-sulfonyldiphenol	411-570-9	41481-66-7	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
016-076-00-3	2,3-bis((2-mercaptoethyl)thio)-1-propanethiol	411-290-7	131538-00-6	Acute Tox. 4 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H373 (**) H400 H410	GHS08 GHS07 GHS09 Wng	H302 H373 (**) H410			
016-077-00-9	2-chloro-p-toluenesulfochloride	412-890-1	42413-03-6	Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 3	H314 H317 H412	GHS05 GHS07 Dgr	H314 H317 H412			
016-078-00-4	4-methyl-N,N-bis(2-(((4-methylphenyl)sulfonyl)amino)ethyl)benzenesulfonamide	413-300-5	56187-04-3	Aquatic Chronic 4	H413	—				

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
016-079-00-X	N,N-bis(2-(p-toluenesulfonyloxy)ethyl)-p-toluenesulfonamide	412-920-3	16695-22-0	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
016-080-00-5	sodium 2-anilino-5-(2-nitro-4-(N-phenylsulfamoyl))anilinobenzenesulfonate	412-320-1	31361-99-6	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
016-081-00-0	hexahydrocyclopenta[c]pyrrole-1-(1H)-ammonium N-ethoxycarbonyl-N-(p-tolylsulfonyl)azanide	418-350-1	—	Muta. 2 Acute Tox. 4 (*) Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H341 H302 H319 H317 H411	GHS08 GHS07 GHS09 Wng	H341 H302 H319 H317 H411			
016-082-00-6	ethoxysulfuron (ISO); 1-(4,6-dimethoxypyrimidin-2-yl)-3-(2-ethoxyphenoxy-sulfonyl)urea	—	126801-58-9	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
016-083-00-1	acibenzolar-S-methyl; benzo[1,2,3]thiadiazole-7-carbothioic acid S-methyl ester	420-050-0	135158-54-2	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H319 H335 H315 H317 H400 H410	GHS07 GHS09 Wng	H319 H335 H315 H317 H410			
016-084-00-7	prosulfuron; 1-(4-methoxy-6-methyl-1,3,5-triazin-2-yl)-3-[2-(3,3,3-trifluoropropyl)phenylsulfonyl]urea	—	94125-34-5	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
016-085-00-2	flazasulfuron (ISO); 1-(4,6-dimethoxypyrimidin-2-yl)-3-(3-trifluoromethyl-2-pyridylsulfonyl)urea	—	104040-78-0	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
016-086-00-8	tetrasodium 10-amino-6,13-dichloro-3-(3-(4-(2,5-disulfonatoanilino)-6-fluoro-1,3,5-triazin-2-ylamino)prop-3-ylamino)-5,12-dioxo-7,14-diazapentacene-4,11-disulfonate	402-590-9	109125-56-6	Eye Dam. 1	H318	GHS05 Dgr	H318			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
016-087-00-3	reaction mass of: thiobis(4,1-phenylene)-S,S,S',S'-tetraphenyldisulfonium bishexafluorophosphate; diphenyl(4-phenylthiophenyl)sulfonium hexafluorophosphate; propylene carbonate	403-490-8	104558-95-4	Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H319 H317 H400 H410	GHS07 GHS09 Wng	H319 H317 H410			
016-088-00-9	4-(bis(4-(diethylamino)phenyl)methyl)benzene-1,2-dimethanesulfonic acid	407-280-7	71297-11-5	Aquatic Chronic 3	H412	—	H412			
016-089-00-4	reaction mass of esters of 5,5',6,6',7,7'-hexahydroxy-3,3,3',3'-tetramethyl-1,1'-spirobiindan and 2-diazo-1,2-dihydro-1-oxo-5-sulfonaphthalene	413-840-1	—	Self-react. C **** Aquatic Chronic 4	H242 H413	GHS02 Dgr	H242 H413			
016-090-00-X	4-methyl-N-(methylsulfonyl)benzenesulfonamide	415-040-8	14653-91-9	Acute Tox. 4 (*) STOT SE 3 Eye Dam. 1	H302 H335 H318	GHS05 GHS07 Dgr	H302 H335 H318			
016-091-00-5	C ₁₂₋₁₄ -tert-alkyl ammonium 1-amino-9,10-dihydro-9,10-dioxo-4-(2,4,6-trimethylamino)-anthracen-2-sulfonate	414-110-5	—	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
016-093-00-6	reaction mass of: 4-(7-hydroxy-2,4,4-trimethyl-2-chromanil)resorcinol-4-yl-tris(6-diazo-5,6-dihydro-5-oxonaphthalen-1-sulfonate); 4-(7-hydroxy-2,4,4-trimethyl-2-chromanil)resorcinolbis(6-diazo-5,6-dihydro-5-oxonaphthalen-1-sulfonate) (2:1)	414-770-4	140698-96-0	Self-react. C**** Carc. 2	H242 H351	GHS02 GHS08 Dgr	H242 H351			
016-095-00-7	reaction mass of: reaction product of 4,4'-methylenebis[2-(4-hydroxybenzyl)-3,6-dimethylphenol] and 6-diazo-5,6-dihydro-5-oxo-naphthalenesulfonate (1:2); Reaction product of 4,4'-methylenebis[2-(4-hydroxybenzyl)-3,6-dimethylphenol] and 6-diazo-5,6-dihydro-5-oxo-naphthalenesulfonate (1:3)	417-980-4	—	Self-react. C**** Carc. 2	H242 H351	GHS02 GHS08 Dgr	H242 H351			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
016-096-00-2	thifensulfuron-methyl (ISO); methyl 3-(4-methoxy-6-methyl-1,3,5-triazin-2-ylcarbamoylsulfamoyl)thiophene-2-carboxylate	—	79277-27-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
017-001-00-7	chlorine	231-959-5	7782-50-5	Ox. Gas 1 Press. Gas Acute Tox. 3 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H270 H331 H319 H335 H315 H400	GHS03 GHS04 GHS06 GHS09 Dgr	H270 H331 H319 H335 H315 H400			U
017-002-00-2	hydrogen chloride	231-595-7	7647-01-0	Press. Gas Acute Tox. 3 (*) Skin Corr. 1A	H331 H314	GHS04 GHS06 GHS05 Dgr	H331 H314			U 5
017-002-01-X	hydrochloric acid ... %	231-595-7	—	Skin Corr. 1B STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335		Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H315: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 % STOT SE 3; H335: C ≥ 10 %	B
017-003-00-8	barium chlorate	236-760-7	13477-00-4	Ox. Sol. 1 Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 2	H271 H332 H302 H411	GHS03 GHS07 GHS09 Dgr	H271 H332 H302 H411			
017-004-00-3	potassium chlorate	223-289-7	3811-04-9	Ox. Sol. 1 Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 2	H271 H332 H302 H411	GHS03 GHS07 GHS09 Dgr	H271 H332 H302 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
017-005-00-9	sodium chlorate	231-887-4	7775-09-9	Ox. Sol. 1 Acute Tox. 4 (*) Aquatic Chronic 2	H271 H302 H411	GHS03 GHS07 GHS09 Dgr	H271 H302 H411			
017-006-00-4	perchloric acid ... %	231-512-4	7601-90-3	Ox. Liq. 1 Skin Corr. 1A	H271 H314	GHS03 GHS05 Dgr	H271 H314		Skin Corr. 1A; H314: C ≥ 50 % Skin Corr. 1B; H314: 10 % ≤ C < 50 % Skin Irrit. 2; H315: 1 % ≤ C < 10 % Eye Irrit. 2; H319: 1 % ≤ C < 10 % Ox. Liq. 1; H271: C > 50 %; Ox. Liq. 2; H272: C ≤ 50 %;	B
017-007-00-X	barium perchlorate	236-710-4	13465-95-7	Ox. Sol. 1 Acute Tox. 4 (*) Acute Tox. 4 (*)	H271 H332 H302	GHS03 GHS07 Dgr	H271 H332 H302			
017-008-00-5	potassium perchlorate	231-912-9	7778-74-7	Ox. Sol. 1 Acute Tox. 4 (*)	H271 H302	GHS03 GHS07 Dgr	H271 H302			
017-009-00-0	ammonium perchlorate	232-235-1	7790-98-9	Expl. 1.1 Ox. Sol. 1	H201 H271	GHS01 Dgr	H201 H271	EUH044		T
017-010-00-6	sodium perchlorate	231-511-9	7601-89-0	Ox. Sol. 1 Acute Tox. 4 (*)	H271 H302	GHS03 GHS07 Dgr	H271 H302			
017-011-00-1	sodium hypochlorite, solution ... % Cl active	231-668-3	7681-52-9	Skin Corr. 1B Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400	EUH031	EUH031: C ≥ 5 %	B

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
017-012-00-7	calcium hypochlorite	231-908-7	7778-54-3	Ox. Sol. 2 Acute Tox. 4 (*) Skin Corr. 1B Aquatic Acute 1	H272 H302 H314 H400	GHS03 GHS05 GHS07 GHS09 Dgr	H272 H302 H314 H400	EUH031	Skin Corr. 1B; H314: C ≥ 10 % Skin Irrit. 2; H315: 3 % ≤ C < 10 % Eye Dam. 1; H31: 3 % ≤ C < 10 % Eye Irrit. 2; H319: 0,5 % ≤ C < 3 % STOT SE 3; H335: C ≥ 3 %	T
017-013-00-2	calcium chloride	233-140-8	10043-52-4	Eye Irrit. 2	H319	GHS07 Wng	H319			
017-014-00-8	ammonium chloride	235-186-4	12125-02-9	Acute Tox. 4 (*) Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			
017-015-00-3	(2-(aminomethyl)phenyl)acetylchloride hydrochloride	417-410-4	61807-67-8	Acute Tox. 4 (*) Skin Corr. 1A Skin Sens. 1	H302 H314 H317	GHS05 GHS07 Dgr	H302 H314 H317			
017-016-00-9	methyltriphenylphosphonium chloride	418-400-2	1031-15-8	Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H312 H302 H315 H318 H411	GHS05 GHS07 GHS09 Dgr	H312 H302 H315 H318 H411			
017-017-00-4	(Z)-13-docosenyl-N,N-bis(2-hydroxyethyl)-N-methyl-ammonium-chloride	426-210-6	120086-58-0	Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H314 H400 H410	GHS05 GHS09 Dgr	H314 H410			
017-018-00-X	N,N,N-trimethyl-2,3-bis(stearoyloxy)propylammonium chloride	405-660-7	—	Aquatic Chronic 2	H411	GHS09	H411			
017-019-00-5	(R)-1,2,3,4-tetrahydro-6,7-dimethoxy-1-veratrylisoquinoline hydrochloride	415-110-8	54417-53-7	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
017-020-00-0	ethyl propoxy aluminium chloride	421-790-7	13014-29-4	Water-react. 1 Skin Corr. 1A	H260 H314	GHS02 GHS05 Dgr	H260 H314	EUH014		
017-021-00-6	behenamidopropyl-dimethyl-(dihydroxypropyl) ammonium chloride	423-420-1	136920-10-0	Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H318 H317 H410			
019-001-00-2	potassium	231-119-8	7440-09-7	Water-react. 1 Skin Corr. 1B	H260 H314	GHS02 GHS05 Dgr	H260 H314	EUH014		
019-002-00-8	potassium hydroxide; caustic potash	215-181-3	1310-58-3	Acute Tox. 4 (*) Skin Corr. 1A	H302 H314	GHS05 GHS07 Dgr	H302 H314		Skin Corr. 1A; H314: C ≥ 5 % Skin Corr. 1B; H314: 2 % ≤ C < 5 % Skin Irrit. 2; H315: 0,5 % ≤ C < 2 % Eye Irrit. 2; H319: 0,5 % ≤ C < 2 %	
020-001-00-X	calcium	231-179-5	7440-70-2	Water-react. 2	H261	GHS02 Dgr	H261			
020-002-00-5	calcium cyanide	209-740-0	592-01-8	Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H300 H400 H410	GHS06 GHS09 Dgr	H300 H410	EUH032		
020-003-00-0	reaction mass of: dicalcium (bis(2-hydroxy-5-tetra-propenylphenylmethyl)methylamine) dihydroxide; tri-calcium (tris(2-hydroxy-5-tetra-propenylphenylmethyl)methylamine)tri-hydroxide; poly[calcium ((2-hydroxy-5-tetra-propenylphenylmethyl)methylamine)hydroxide]	420-470-4	—	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
022-001-00-5	titanium tetrachloride	231-441-9	7550-45-0	Skin Corr. 1B	H314	GHS05 Dgr	H314	EUH014		
022-002-00-0	titanium(4+) oxalate	403-260-7	—	Eye Dam. 1	H318	GHS05 Dgr	H318			
022-003-00-6	bis(η ⁵ -cyclopentadienyl)-bis(2,6-difluoro-3-[pyrrol-1-yl]-phenyl)titanium	412-000-1	125051-32-3	Flam. Sol. 1 Repr. 2 STOT RE 2 (*) Aquatic Chronic 2	H228 H361f (***) H373 (**) H411	GHS02 GHS08 GHS09 Dgr	H228 H361f (***) H373 (**) H411			T
023-001-00-8	divanadium pentaoxide; vanadium pentoxide	215-239-8	1314-62-1	Muta. 2 Repr. 2 STOT RE 1 Acute Tox. 4 (*) Acute Tox. 4 (*) STOT SE 3 Aquatic Chronic 2	H341 H361d (***) H372 (**) H332 H302 H335 H411	GHS08 GHS07 GHS09 Dgr	H341 H361d (***) H372 (**) H332 H302 H335 H411			
024-001-00-0	chromium (VI) trioxide	215-607-8	1333-82-0	Ox. Sol. 1 Carc. 1A Muta. 1B Repr. 2 Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 1 Skin Corr. 1A Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H271 H350 H340 H361f (***) H330 H311 H301 H372 (**) H314 H334 H317 H400 H410	GHS03 GHS06 GHS08 GHS05 GHS09 Dgr	H271 H350 H340 H361f (***) H330 H311 H301 H372 (**) H314 H334 H317 H410	STOT SE 3; H335: C ≥ 1 %		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
024-002-00-6	potassium dichromate	231-906-6	7778-50-9	Ox. Sol. 2 Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 (*) Acute Tox. 3 (*) STOT RE 1 Acute Tox. 4 (*) Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H272 H350 H340 H360FD H330 H301 H372 (**) H312 H314 H334 H317 H410	GHS03 GHS06 GHS08 GHS05 GHS09 Dgr	H272 H350 H340 H360FD H330 H301 H372 (**) H312 H314 H334 H317 H410		STOT SE 3; H335: C ≥ 5 %	3
024-003-00-1	ammonium dichromate	232-143-1	7789-09-5	Ox. Sol. 2 **** Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 (*) Acute Tox. 3 (*) STOT RE 1 Acute Tox. 4 (*) Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H272 H350 H340 H360FD H330 H301 H372 (**) H312 H314 H334 H317 H400 H410	GHS03 GHS06 GHS08 GHS05 GHS09 Dgr	H272 H350 H340 H360FD H330 H301 H372 (**) H312 H314 H334 H317 H410		STOT SE 3; H335: C ≥ 5 % Resp. Sens.; H334: C ≥ 0,2 % Skin Sens.; H317: C ≥ 0,2 %	G 3

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
024-004-00-7	sodium dichromate anhydrate	234-190-3	10588-01-9	Ox. Sol. 2 Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 (*) Acute Tox. 3 (*) STOT RE 1 Acute Tox. 4 (*) Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H272 H350 H340 H360-FD H330 H301 H372 (**) H312 H314 H312 H314 H334 H317 H400 H410	GHS03 GHS06 GHS08 GHS05 GHS09 Dgr	H272 H350 H340 H360FD H330 H301 H372 (**) H312 H314 H334 H317 H410		STOT SE 3; H335: C ≥ 5 % Resp. Sens.; H334: C ≥ 0,2 % Skin Sens.; H317: C ≥ 0,2 %	3
024-004-01-4	sodium dichromate, dihydrate	234-190-3	7789-12-0	Ox. Sol. 2 Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 (*) Acute Tox. 3 (*) STOT RE 1 Acute Tox. 4 (*) Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H272 H350 H340 H360-FD H330 H301 H372 (**) H312 H314 H312 H314 H334 H317 H400 H410	GHS03 GHS06 GHS08 GHS05 GHS09 Dgr	H272 H350 H340 H360FD H330 H301 H372 (**) H312 H314 H334 H317 H410		STOT SE 3; H335: C ≥ 5 % Resp. Sens.; H334: C ≥ 0,2 % Skin Sens.; H317: C ≥ 0,2 %	3

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
024-005-00-2	chromyl dichloride; chromic oxychloride	239-056-8	14977-61-8	Ox. Liq. 1 Carc. 1B Muta. 1B Skin Corr. 1A Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H271 H350i H340 H314 H317 H400 H410	GHS03 GHS08 GHS05 GHS07 GHS09 Dgr	H271 H350i H340 H314 H317 H410		Skin Corr. 1A; H314: C ≥ 10 % Skin Corr. 1B; H314: 5 % ≤ C < 10 % Skin Irrit. 2; H315: 0,5 % ≤ C < 5 % Eye Irrit. 2; H319: 0,5 % ≤ C < 5 % STOT SE 3; H335: 0,5 % ≤ C < 5 % Skin Sens. 1; H317: C ≥ 0,5 %	T 3
024-006-00-8	potassium chromate	232-140-5	7789-00-6	Carc. 1B Muta. 1B Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350i H340 H319 H335 H315 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350i H340 H319 H335 H315 H317 H410		Skin Sens. 1; H317: C ≥ 0,5 %	3
024-007-00-3	zinc chromates including zinc potassium chromate	—	—	Carc. 1A Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H317 H410			A
024-008-00-9	calcium chromate	237-366-8	13765-19-0	Carc. 1B Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
024-009-00-4	strontium chromate	232-142-6	7789-06-2	Carc. 1B Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H400 H410			
024-010-00-X	dichromium tris(chromate); chromium III chromate; chromic chromate	246-356-2	24613-89-6	Ox. Sol. 1 Carc. 1B Skin Corr. 1A Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H271 H350 H314 H317 H400 H410	GHS03 GHS08 GHS05 GHS07 GHS09 Dgr	H271 H350 H314 H317 H410			T
024-011-00-5	ammonium bis(1-(3,5-dinitro-2-oxidophenylazo)-3-(N-phenylcarbamoyl)-2-naphtholato)chromate(1-)	400-110-2	109125-51-1	Self-react. C **** Aquatic Acute 1 Aquatic Chronic 1	H242 H400 H410	GHS02 GHS09 Dgr	H242 H410			
024-012-00-0	trisodium bis(7-acetamido-2-(4-nitro-2-oxidophenylazo)-3-sulphonato-1-naphtholato)chromate(1-)	400-810-8	—	Muta. 2	H341	GHS08 Wng	H341			
024-013-00-6	trisodium (6-anilino-2-(5-nitro-2-oxidophenylazo)-3-sulphonato-1-naphtholato)(4-sulphonato-1,1'-azodi-2,2'naphtholato)chromate(1-)	402-500-8	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
024-014-00-1	trisodium bis(2-(5-chloro-4-nitro-2-oxidophenylazo)-5-sulphonato-1-naphtholato)chromate(1-)	402-870-0	93952-24-0	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
024-015-00-7	disodium (3-methyl-4-(5-nitro-2-oxidophenylazo)-1-phenylpyrazololato)(1-(3-nitro-2-oxido-5-sulfonatophenylazo)-2-naphtholato)chromate(1-)	404-930-1	—	Acute Tox. 4 (*) Eye Dam. 1 Aquatic Chronic 2	H332 H318 H411	GHS05 GHS07 GHS09 Dgr	H332 H318 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
024-016-00-2	tetradecylammonium bis(1-(5-chloro-2-oxidophenylazo)-2-naphtholato)chromate(1-)	405-110-6	88377-66-6	STOT RE 2 (*) Aquatic Chronic 4	H373 (**) H413	GHS08 Wng	H373 (**) H413			
024-017-00-8	Chromium (VI) compounds, with the exception of barium chromate and of compounds specified elsewhere in this Annex	—	—	Carc. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350i H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350i H317 H410			A
024-018-00-3	sodium chromate	231-889-5	7775-11-3	Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 (*) Acute Tox. 3 (*) STOT RE 1 Acute Tox. 4 (*) Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H340 H360FD H330 H301 H372 (**) H312 H314 H334 H317 H334 H317 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H350 H340 H360FD H330 H301 H372 (**) H312 H314 H334 H317 H410		Resp. Sens.; H334: C ≥ 0,2 % Skin Sens.; H317: C ≥ 0,2 %	3

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
024-019-00-9	Main component: acetoacetic acid anilide / 3-amino-1-hydroxybenzene (ATAN-MAP): trisodium {6-[(2 or 3 or 4)-amino-(4 or 5 or 6)-hydroxyphenylazo]-5'-(phenylsulfamoyl)-3-sulfonatonaphthalene-2-azobenzene-1,2'-diolato}-{6"-[1-(phenylcarbamoyl)ethylazo]-5'''-(phenylsulfamoyl)-3'''-sulfonatonaphthalene-2"-azobenzene-1",2'''-diolato}chromate (III); by-product 1: acetoacetic acid anilide / acetoacetic acid anilide (ATAN-ATAN): trisodium bis{6-[1-(phenylcarbamoyl)ethylazo]-5'-(phenylsulfonyl)-3-sulfonatonaphthalene-2-azobenzene-1,2'-diolato}chromate (III); by-product 2: 3-amino-1-hydroxybenzene / 3-amino-1-hydroxybenzene (MAP-MAP): trisodium bis{6-[(2 or 3 or 4)-amino-(4 or 5 or 6)-hydroxyphenylazo]-5'-(phenylsulfamoyl)-3-sulfonatonaphthalene-2-azobenzene-1,2'-diolato} chromate (III)	419-230-1	—	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
024-020-00-4	trisodium bis[(3'-nitro-5'-sulfonato(6-amino-2-[4-(2-hydroxy-1-naphthylazo)phenylsulfonylamino]pyrimidin-5-azo)benzene-2',4'-diolato)]chromate(III)	418-220-4	—	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
025-001-00-3	manganese dioxide	215-202-6	1313-13-9	Acute Tox. 4 (*) Acute Tox. 4 (*)	H332 H302	GHS07 Wng	H332 H302			
025-002-00-9	potassium permanganate	231-760-3	7722-64-7	Ox. Sol. 2 Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H272 H302 H400 H410	GHS03 GHS07 GHS09 Dgr	H272 H302 H410			
025-003-00-4	manganese sulphate	232-089-9	7785-87-7	STOT RE 2 (*) Aquatic Chronic 2	H373 (**) H411	GHS08 GHS09 Wng	H373 (**) H411			
025-004-00-X	bis(N,N',N"-trimethyl-1,4,7-triazacyclononane)-trioxo-dimanganese (IV) di(hexafluorophosphate) monohydrate	411-760-1	116633-53-5	Aquatic Chronic 2	H411	GHS09	H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
025-005-00-5	reaction mass of: tri-sodium [29H, 31H-phthalocyanine-C,C,C-trisulfonato (6-)-N29, N30,N31,N32] manganate (3-); tetrasodium [29H,31H-phthalocyanine-C,C,C,C-tetrasulfonato (6-)-N29,N30,N31,N32], manganate (3-); pentasodium [29H,31H-phthalocyanine-C,C,C,C,C-pentasulfonato (6-)-N29,N30,N31,N32] manganate (3-)	417-660-4	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
026-001-00-6	(η-cumene)-(η-cyclopentadienyl)iron(II) hexafluoroantimonate	407-840-0	100011-37-8	Acute Tox. 4 (*) Eye Dam. 1 Aquatic Chronic 3	H302 H318 H412	GHS05 GHS07 Dgr	H302 H318 H412			
026-002-00-1	(η-cumene)-(η-cyclopentadienyl)iron(II) trifluoromethane-sulfonate	407-880-9	117549-13-0	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
027-001-00-9	cobalt	231-158-0	7440-48-4	Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 4	H334 H317 H413	GHS08 Dgr	H334 H317 H413			
027-002-00-4	cobalt oxide	215-154-6	1307-96-6	Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
027-003-00-X	cobalt sulphide	215-273-3	1317-42-6	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
027-004-00-5	cobalt dichloride	231-589-4	7646-79-9	Carc. 1B Acute Tox. 4 (*) Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350i H302 H334 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350i H302 H334 H317 H410		Carc. 1B; H350i; C ≥ 0,01 % (*)	1
027-005-00-0	cobalt sulphate	233-334-2	10124-43-3	Carc. 1B Acute Tox. 4 (*) Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350i H302 H334 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350i H302 H334 H317 H410		Carc. 1B; H350i; C ≥ 0,01 %	1
028-001-00-1	tetracarbonylnickel; nickel tetracarbonyl	236-669-2	13463-39-3	Flam. Liq. 2 Carc. 2 Repr. 1B Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H225 H351 H360D (***) H330 H400 H410	GHS02 GHS06 GHS08 GHS09 Dgr	H225 H351 H360D (***) H330 H410			
028-002-00-7	nickel	231-111-4	7440-02-0	Carc. 2 Skin Sens. 1	H351 H317	GHS08 GHS07 Wng	H351 H317			
028-003-00-2	nickel monoxide	215-215-7	1313-99-1	Carc. 1Ai Skin Sens. 1 Aquatic Chronic 4	H350i H317 H413	GHS08 GHS07 Dgr	H350i H317 H413			
028-004-00-8	nickel dioxide	234-823-3	12035-36-8	Carc. 1Ai Skin Sens. 1 Aquatic Chronic 4	H350i H317 H413	GHS08 GHS07 Dgr	H350i H317 H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
028-005-00-3	dinickel trioxide	215-217-8	1314-06-3	Carc. 1Ai Skin Sens. 1 Aquatic Chronic 4	H350i H317 H413	GHS08 GHS07 Dgr	H350i H317 H413			
028-006-00-9	nickel sulphide	240-841-2	16812-54-7	Carc. 1Ai Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350i H317 H400 H410	GHS08 GHS07 GHS07 GHS09 Dgr	H350i H317 H410			
028-007-00-4	nickel subsulphide; trinickel disulphide	234-829-6	12035-72-2	Carc. 1Ai Skin Sens. 1 Aquatic Chronic 2	H350i H317 H411	GHS08 GHS07 GHS09 Dgr	H350i H317 H411			
028-008-00-X	nickel dihydroxide	235-008-5	12054-48-7	Carc. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H332 H302 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H332 H302 H317 H410			
028-009-00-5	nickel sulphate	232-104-9	7786-81-4	Carc. 2 Acute Tox. 4 (*) Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H334 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H351 H302 H334 H317 H410			
028-010-00-0	nickel carbonate	222-068-2	3333-67-3	Carc. 2 Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H317 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
029-001-00-4	copper chloride; copper (I) chloride; cuprous chloride	231-842-9	7758-89-6	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H400 H410			
029-002-00-X	dicopper oxide; copper (I) oxide	215-270-7	1317-39-1	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
029-003-00-5	Naphthenic acids, copper salts; copper naphthenate	215-657-0	1338-02-9	Flam. Liq. 3 Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H226 H302 H400 H410	GHS02 GHS07 GHS09 Wng	H226 H302 H410			
029-004-00-0	copper sulphate	231-847-6	7758-98-7	Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H315 H410			
029-005-00-6	(tris(chloromethyl)phthalocyaninato)copper (II), reaction products with N-methylpiperazine and methoxyacetic acid	401-260-1	—	Eye Irrit. 2	H319	GHS07 Wng	H319			
029-006-00-1	tris(octadec-9-enylammonium) (trisulfonatophthalocyaninato)copper(II)	403-210-4	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
029-007-00-7	(trisodium (2-((3-(6-(2-chloro-5-sulfonato)anilino)-4-(3-carboxypyridinio)-1,3,5-triazin-2-ylamino)-2-oxido-5-sulfonatophenylazo)phenylmethylazo)-4-sulfonatobenzoato)copper(3-)) hydroxide	404-670-9	89797-01-3	Skin Sens. 1	H317	GHS07 Wng	H317			G

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
029-008-00-2	copper(II) methanesulfonate	405-400-2	54253-62-2	Acute Tox. 4 (*) Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H318 H410			
029-009-00-8	phthalocyanine-N-[3-(diethylamino)propyl] sulfonamide copper complex	413-650-9	93971-95-0	Aquatic Chronic 3	H412	—	H412			
029-010-00-3	reaction mass of compounds from (dodecakis(p-tolylthio)phthalocyaninato)copper(II) to (hexadecakis(p-tolylthio)phthalocyaninato)copper(II)	407-700-9	101408-30-4	Skin Sens. 1	H317	GHS07 Wng	H317			
029-011-00-9	sodium [29H,31H-phthalocyaninato-(2-)-N29,N30,N31,N32]-((3-(N-methyl-N-(2-hydroxyethyl)amino)propyl)amino)sulfonylsulfonate, copper complex	412-730-0	150522-10-4	Skin Corr. 1B	H314	GHS05 Dgr	H314			
029-012-00-4	sodium ((N-(3-trimethylammoniopropyl)sulfamoyl)methylsulfonatophthalocyaninato)copper(II)	407-340-2	124719-24-0	Eye Dam. 1	H318	GHS05 Dgr	H318			
029-013-00-X	trisodium(2-(α-(3-(4-chloro-6-(2-(2-(vinylsulfonyl)ethoxy)ethylamino)-1,3,5-triazin-2-ylamino)-2-oxido-5-sulfonatophenylazo)benzylidenehydrazino)-4-sulfonatobenzoato)copper(II)	407-580-8	130201-51-3	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
030-001-00-1	zinc powder - zinc dust (pyrophoric)	231-175-3	7440-66-6	Water-react. 1 Pyr. Sol. 1 Aquatic Acute 1 Aquatic Chronic 1	H260 H250 H400 H410	GHS02 GHS09 Dgr	H260 H250 H410			T
030-001-01-9	zinc powder - zinc dust (stabilised)	231-175-3	7440-66-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
030-003-00-2	zinc chloride	231-592-0	7646-85-7	Acute Tox. 4 (*) Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H314 H410		STOT SE 3; H335: C ≥ 5 %	
030-004-00-8	dimethylzinc; [1] diethylzinc [2]	208-884-1 [1] 209-161-3 [2]	544-97-8 [1] 557-20-0 [2]	Pyr. Liq. 1 Water-react. 1 Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H250 H260 H314 H400 H410	GHS02 GHS05 GHS09 Dgr	H250 H260 H314 H410	EUH014		
030-005-00-3	diamminediisocyanatozinc	401-610-3	—	Acute Tox. 4 (*) Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1	H302 H318 H334 H317 H400	GHS05 GHS08 GHS07 GHS09 Dgr	H302 H318 H334 H317 H400			
030-006-00-9	zinc sulphate (hydrous) (mono-, hexa- and hepta hydrate); [1] zinc sulphate (anhydrous) [2]	231-793-3 [1] 231-793-3 [2]	7446-19-7 [1] 7733-02-0 [2]	Acute Tox. 4 (*) Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H318 H410			
030-007-00-4	bis(3,5-di-tert-butylsalicylato-O ¹ ,O ²)zinc	403-360-0	42405-40-3	Flam. Sol. 1 Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H228 H302 H400 H410	GHS02 GHS07 GHS09 Dgr	H228 H302 H410			T
030-008-00-X	hydroxo(2-(benzenesulfonamido)benzoato) zinc(II)	403-750-0	113036-91-2	Acute Tox. 4 (*) Aquatic Chronic 2	H332 H411	GHS07 GHS09 Wng	H332 H411			
030-011-00-6	trizinc bis(orthophosphate)	231-944-3	7779-90-0	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
030-013-00-7	zinc oxide	215-222-5	1314-13-2	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
033-001-00-X	arsenic	231-148-6	7440-38-2	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H400 H410	GHS06 GHS09 Dgr	H331 H301 H410			
033-002-00-5	arsenic compounds, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H400 H410	GHS06 GHS09 Dgr	H331 H301 H410		(*)	A 1
033-003-00-0	diarsenic trioxide; arsenic trioxide	215-481-4	1327-53-3	Carc. 1A Acute Tox. 2 (*) Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H300 H314 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H350 H300 H314 H410			
033-004-00-6	diarsenic pentaoxide; arsenic pentoxide; arsenic oxide	215-116-9	1303-28-2	Carc. 1A Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H350 H331 H301 H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H331 H301 H410			
033-005-00-1	arsenic acid and its salts	—	—	Carc. 1A Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H350 H331 H301 H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H331 H301 H410			A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
033-006-00-7	arsine	232-066-3	7784-42-1	Flam. Gas 1 Press. Gas Acute Tox. 2 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H220 H330 H373 (**) H400 H410	GHS02 GHS04 GHS06 GHS08 GHS09 Dgr	H220 H330 H373 (**) H410			U
033-007-00-2	tert-butylarsine	423-320-6	4262-43-5	Pyr. Liq. 1 Acute Tox. 2 (*)	H250 H330	GHS02 GHS06 Dgr	H250 H330			
034-001-00-2	selenium	231-957-4	7782-49-2	Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*) Aquatic Chronic 4	H331 H301 H373 (**) H413	GHS06 GHS08 Dgr	H331 H301 H373 (**) H413			
034-002-00-8	selenium compounds except cadmium sulphoselenide	—	—	Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H301 H373 (**) H410			A
034-003-00-3	sodium selenite	233-267-9	10102-18-8	Acute Tox. 2 (*) Acute Tox. 3 (*) Skin Sens. 1 Aquatic Chronic 2	H300 H331 H317 H411	GHS06 GHS09 Dgr	H300 H331 H317 H411	EUH031		
035-001-00-5	bromine	231-778-1	7726-95-6	Acute Tox. 2 (*) Skin Corr. 1A Aquatic Acute 1	H330 H314 H400	GHS06 GHS05 GHS09 Dgr	H330 H314 H400			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
035-002-00-0	hydrogen bromide	233-113-0	10035-10-6	Press. Gas Skin Corr. 1A STOT SE 3	H314 H335	GHS04 GHS05 GHS07 Dgr	H314 H335			U
035-002-01-8	hydrobromic acid ... %	—	—	Skin Corr. 1B STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335		Skin Corr. 1B; H314: C ≥ 40 % Skin Irrit. 2; H315: 10 % ≤ C < 40 % Eye Irrit. 2; H319: 10 % ≤ C < 40 % STOT SE 3; H335: C ≥ 10 %	B
035-003-00-6	potassium bromate	231-829-8	7758-01-2	Ox. Sol. 1 Carc. 1B Acute Tox. 3 (*)	H271 H350 H301	GHS03 GHS06 GHS08 Dgr	H271 H350 H301			
035-004-00-1	2-hydroxyethylammonium perbromide	407-440-6	—	Ox. Sol. 2 **** Acute Tox. 4 (*) Skin Corr. 1A Skin Sens. 1 Aquatic Acute 1	H272 H302 H314 H317 H400	GHS03 GHS05 GHS07 GHS09 Dgr	H272 H302 H314 H317 H400			
040-001-00-3	zirconium powder (pyrophoric)	231-176-9	7440-67-7	Water-react. 1 Pyr. Sol. 1	H260 H250	GHS02 Dgr	H260 H250			T
040-002-00-9	zirconium powder, dry (non pyrophoric)	—	—	Self-heat. 1	H251	GHS02 Dgr	H251			T
042-001-00-9	molybdenum trioxide	215-204-7	1313-27-5	STOT RE 2 (*) Eye Irrit. 2 STOT SE 3	H373 (**) H319 H335	GHS08 GHS07 Wng	H373 (**) H319 H335			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
042-002-00-4	tetrakis(dimethylditetradecylammonium) hexa-μ-oxotetra-μ3-oxodi-μ5-oxotetradecao-xooctamolybdate(4-)	404-760-8	117342-25-3	Acute Tox. 3 (*) Eye Dam. 1 Aquatic Chronic 4	H331 H318 H413	GHS06 GHS05 Dgr	H331 H318 H413			
042-003-00-X	tetrakis(trimethylhexadecylammonium) hexa-μ-oxotetra-μ3-oxodi-μ5-oxotetradecaoxooctamolybdate(4-)	404-860-1	116810-46-9	Flam. Sol. 1 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H228 H318 H400 H410	GHS02 GHS05 GHS09 Dgr	H228 H318 H410			T
042-004-00-5	Reaction product of ammonium molybdate and C ₁₂ -C ₂₄ -diethoxylated alkylamine (1:5-1:3)	412-780-3	—	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H315 H317 H411	GHS07 GHS09 Wng	H315 H317 H411			
047-001-00-2	silver nitrate	231-853-9	7761-88-8	Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H314 H400 H410	GHS05 GHS09 Dgr	H314 H410			
048-001-00-5	cadmium compounds, with the exception of cadmium sulphoselenide (xCdS.yCdSe), reaction mass of cadmium sulphide with zinc sulphide (xCdS.yZnS), reaction mass of cadmium sulphide with mercury sulphide (xCdS.yHgS), and those specified elsewhere in this Annex	—	—	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410		(*)	A 1
048-002-00-0	cadmium (non-pyrophoric); [1] cadmium oxide (non-pyrophoric) [2]	231-152-8 [1] 215-146-2 [2]	7440-43-9 [1] 1306-19-0 [2]	Carc. 1B Muta. 2 Repr. 2 Acute Tox. 2 (*) STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H341 H361fd H330 H372 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H341 H361fd H330 H372 (**) H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
048-003-00-6	cadmium diformate; cadmiumformate	224-729-0	4464-23-7	Acute Tox. 3 (*) Acute Tox. 3 (*) Carc. 2 STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H351 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H301 H351 H373 (**) H410		(*) STOT RE 2; H373: C ≥ 0,25 %	
048-004-00-1	cadmium cyanide	208-829-1	542-83-6	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) Carc. 2 STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H351 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H351 H373 (**) H410	EUH032	STOT RE 2; H373: C ≥ 0,1 % EUH032: C ≥ 1 %	
048-005-00-7	cadmiumhexafluorosilicate(2-); cadmium fluorosilica	241-084-0	17010-21-8	Acute Tox. 3 (*) Acute Tox. 3 (*) Carc. 2 STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H351 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H301 H351 H373 (**) H410		(*) STOT RE 2; H373: C ≥ 0,1 %	
048-006-00-2	cadmium fluoride	232-222-0	7790-79-6	Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 (*) Acute Tox. 3 (*) STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H340 H360FD H330 H301 H372 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H340 H360FD H330 H301 H372 (**) H410		Carc. 1B; H350: C ≥ 0.01 % * oral STOT RE 1; H372: C ≥ 7 % STOT RE 2: 0,1 % ≤ C < 7 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
048-007-00-8	cadmium iodide	232-223-6	7790-80-9	Acute Tox. 3 (*) Acute Tox. 3 (*) Carc. 2 STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H351 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H301 H351 H373 (**) H410		(*) STOT RE 2; H373: C ≥ 0,1 %	
048-008-00-3	cadmium chloride	233-296-7	10108-64-2	Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 (*) Acute Tox. 3 (*) STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H340 H360-FD H330 H301 H372 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H340 H360FD H330 H301 H372 (**) H410		Carc. 1B; H350: C ≥ 0,01 % * oral STOT RE 1; H372: C ≥ 7 % STOT RE 2; H373: 0,1 % ≤ C < 7 %	
048-009-00-9	cadmium sulphate	233-331-6	10124-36-4	Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 (*) Acute Tox. 3 (*) STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H340 H360-FD H330 H301 H372 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H340 H360FD H330 H301 H372 (**) H410		Carc. 1B; H350: C ≥ 0,01 % * oral STOT RE 1; H372: C ≥ 7 % STOT RE 2; H373: 0,1 % ≤ C < 7 %	
048-010-00-4	cadmium sulphide	215-147-8	1306-23-6	Carc. 1B Muta. 2 Repr. 2 STOT RE 1 Acute Tox. 4 (*) Aquatic Chronic 4	H350 H341 H361fd H372 (**) H302 H413	GHS08 GHS07 Dgr	H350 H341 H361fd H372 (**) H302 H413		(*) STOT RE 1; H372: C ≥ 10 % STOT RE 2; H373: 0,1 % ≤ C < 10 %	1

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
048-011-00-X	cadmium (pyrophoric)	231-152-8	7440-43-9	Pyr. Sol. 1 Carc. 1B Muta. 2 Repr. 2 Acute Tox. 2 (*) STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H250 H350 H341 H361fd H330 H372 (**) H400 H410	GHS02 GHS06 GHS08 GHS09 Dgr	H250 H350 H341 H361fd H330 H372 (**) H410			
050-001-00-5	tin tetrachloride; stannic chloride	231-588-9	7646-78-8	Skin Corr. 1B Aquatic Chronic 3	H314 H412	GHS05 Dgr	H314 H412		STOT SE 3; H335: C ≥ 5 %	
050-002-00-0	cyhexatin (ISO); hydroxytricyclohexylstannane; tri(cyclohexyl)tin hydroxide	236-049-1	13121-70-5	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410			
050-003-00-6	fentin acetate (ISO); triphenyltin acetate	212-984-0	900-95-8	Carc. 2 Repr. 2 Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 1 STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H361d (***) H330 H311 H301 H372 (**) H335 H315 H318 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H361d (***) H330 H311 H301 H372 (**) H335 H315 H318 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
050-004-00-1	fentin hydroxide (ISO); triphenyltin hydroxide	200-990-6	76-87-9	Carc. 2 Repr. 2 Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 1 STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H361d (***) H330 H311 H301 H372 (**) H335 H315 H318 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H361d (***) H330 H311 H301 H372 (**) H335 H315 H318 H410			
050-005-00-7	trimethyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H400 H410	GHS06 GHS09 Dgr	H330 H310 H300 H410		(*)	A 1
050-006-00-2	triethyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H400 H410	GHS06 GHS09 Dgr	H330 H310 H300 H410		(*)	A 1
050-007-00-8	tripropyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410		(*)	A 1

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
050-008-00-3	tributyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3 (*) STOT RE 1 Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H301 H372 H312 H319 H315 H400 H410	GHS06 GHS08 GHS09 Dgr	H301 H372 (**) H312 H319 H315 H410		* oral STOT RE 1; H372: C ≥ 1 % STOT RE 2; H373: 0,25 % ≤ C < 1 % * dermal Eye Irrit. 2; H319: C ≥ 1 % Skin Irrit. 2; H315: C ≥ 1 %	A 1
050-009-00-9	fluorotripentylstannane; [1] hexapentylstannoxane [2]	243-546-7 [1] 247-143-7 [2]	20153-49-5 [1] 25637-27-8 [2]	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410		(*)	1
050-010-00-4	fluorotrihexylstannane	243-547-2	20153-50-8	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410		(*)	1
050-011-00-X	triphenyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410		(*)	A 1
050-012-00-5	tetracyclohexylstannane; [1] chlorotricyclohexylstannane; [2] butyltricyclohexylstannane [3]	215-910-5 [1] 221-437-5 [2] 230-358-5 [3]	1449-55-4 [1] 3091-32-5 [2] 7067-44-9 [3]	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410		(*)	A 1

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
050-013-00-0	trioctyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 4	H319 H335 H315 H413	GHS07 Wng	H319 H335 H315 H413		Skin Irrit. 2; H315: C ≥ 1 % Eye Irrit. 2; H319: C ≥ 1 % STOT SE 3; H335: C ≥ 1 %	A 1
050-017-00-2	fenbutatin oxide (ISO); bis(tris(2-methyl-2-phenylpropyl)tin)oxide	236-407-7	13356-08-6	Acute Tox. 2 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H330 H319 H315 H400 H410	GHS06 GHS09 Dgr	H330 H319 H315 H410			
050-018-00-8	tin(II) methanesulphonate	401-640-7	53408-94-9	Skin Corr. 1B Acute Tox. 4 (*) Skin Sens. 1	H314 H302 H317	GHS05 GHS07 Dgr	H314 H302 H317			
050-019-00-3	azocyclotin (ISO); 1-(tricyclohexylstannyl)-1H-1,2,4-triazole	255-209-1	41083-11-8	Acute Tox. 2 (*) Acute Tox. 3 (*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H301 H335 H315 H318 H400 H410	GHS06 GHS05 GHS09 Dgr	H330 H301 H335 H315 H318 H410			
050-020-00-9	trioctylstannane	413-320-4	869-59-0	STOT RE 1 Skin Irrit. 2 Aquatic Chronic 4	H372 (**) H315 H413	GHS08 GHS07 Dgr	H372 (**) H315 H413			
051-001-00-8	antimony trichloride	233-047-2	10025-91-9	Skin Corr. 1B Aquatic Chronic 2	H314 H411	GHS05 GHS09 Dgr	H314 H411		STOT SE 3; H335: C ≥ 5 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
051-002-00-3	antimony pentachloride	231-601-8	7647-18-9	Skin Corr. 1B Aquatic Chronic 2	H314 H411	GHS05 GHS09 Dgr	H314 H411		STOT SE 3; H335: C ≥ 5 %	
051-003-00-9	antimony compounds, with the exception of the tetroxide (Sb ₂ O ₄), pentoxide (Sb ₂ O ₅), trisulphide (Sb ₂ S ₃), pentasulphide (Sb ₂ S ₅) and those specified elsewhere in this Annex	—	—	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 2	H332 H302 H411	GHS07 GHS09 Wng	H332 H302 H411		(*)	A 1
051-004-00-4	antimony trifluoride	232-009-2	7783-56-4	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Chronic 2	H331 H311 H301 H411	GHS06 GHS09 Dgr	H331 H311 H301 H411			
051-005-00-X	antimony trioxide	215-175-0	1309-64-4	Carc. 2	H351	GHS08 Wng	H351			
051-006-00-5	diphenyl(4-phenylthiophenyl)sulfonium hexafluoroantimonate	403-500-0	—	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
051-007-00-0	bis(4-dodecylphenyl)iodonium hexafluoroantimonate	404-420-9	71786-70-4	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
053-001-00-3	iodine	231-442-4	7553-56-2	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1	H332 H312 H400	GHS07 GHS09 Wng	H332 H312 H400			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
053-002-00-9	hydrogen iodide	233-109-9	10034-85-2	Press. Gas Skin Corr. 1A	H314	GHS04 GHS05 Dgr	H314		Skin Corr. 1A; H314: C ≥ 10 % Skin Corr. 1B; H314: 0,2 % ≤ C < 10 % Skin Irrit. 2; H315: 0,02 % ≤ C < 0,2 % Eye Irrit. 2; H319: 0,02 % ≤ C < 0,2 % STOT SE 3; H335: C ≥ 0,02 %	U 5
053-002-01-6	hydriodic acid ... %	—	—	Skin Corr. 1B	H314	GHS05 Dgr			Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H315: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 %	B
053-005-00-5	(4-(1-methylethyl)phenyl)-(4-methylphenyl) iodonium tetrakis(pentafluorophenyl)borate (1-)	422-960-3	178233-72-2	Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H373 (**) H400 H410	GHS08 GHS07 GHS09 Wng	H312 H302 H373 (**) H410			
056-001-00-1	barium peroxide	215-128-4	1304-29-6	Ox. Sol. 2 Acute Tox. 4 (*) Acute Tox. 4 (*)	H272 H332 H302	GHS03 GHS07 Dgr	H272 H332 H302			
056-002-00-7	barium salts, with the exception of barium sulphate, salts of 1-azo-2-hydroxynaphthalenyl aryl sulphonic acid, and of salts specified elsewhere in this Annex	—	—	Acute Tox. 4 (*) Acute Tox. 4 (*)	H332 H302	GHS07 Wng	H332 H302		(*)	A 1
056-003-00-2	barium carbonate	208-167-3	513-77-9	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
056-004-00-8	barium chloride	233-788-1	10361-37-2	Acute Tox. 3 (*) Acute Tox. 4 (*)	H301 H332	GHS06 Dgr	H301 H332			
072-001-00-4	hafnium tetra- <i>n</i> -butoxide	411-740-2	22411-22-9	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
074-001-00-X	hexasodium tungstate hydrate	412-770-9	12141-67-2	Acute Tox. 4 (*) Eye Dam. 1 Aquatic Chronic 3	H302 H318 H412	GHS05 GHS07 Dgr	H302 H318 H412			
074-002-00-5	Reaction products of tungsten hexachloride with 2-methylpropan-2-ol, nonylphenol and pentane-2,4-dione	408-250-6	—	Flam. Liq. 2 Acute Tox. 4 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H225 H332 H314 H317 H400 H410	GHS02 GHS05 GHS07 GHS09 Dgr	H225 H332 H314 H317 H410			
076-001-00-5	osmium tetroxide; osmic acid	244-058-7	20816-12-0	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) Skin Corr. 1B	H330 H310 H300 H314	GHS06 GHS05 Dgr	H330 H310 H300 H314			
078-001-00-0	tetrachloroplatinates with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3 (*) Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H318 H334 H317			A
078-002-00-6	diammonium tetrachloroplatinate	237-499-1	13820-41-2	Acute Tox. 3 (*) Skin Irrit. 2 Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H315 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H315 H318 H334 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
078-003-00-1	disodium tetrachloroplatinate	233-051-4	10026-00-3	Acute Tox. 3 (*) Skin Irrit. 2 Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H315 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H315 H318 H334 H317			
078-004-00-7	dipotassium tetrachloroplatinate	233-050-9	10025-99-7	Acute Tox. 3 (*) Skin Irrit. 2 Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H315 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H315 H318 H334 H317			
078-005-00-2	hexachloroplatinates with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3 (*) Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H318 H334 H317			A
078-006-00-8	disodium hexachloroplatinate	240-983-5	16923-58-3	Acute Tox. 3 (*) Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H318 H334 H317			
078-007-00-3	dipotassium hexachloroplatinate	240-979-3	16921-30-5	Acute Tox. 3 (*) Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H318 H334 H317			
078-008-00-9	diammonium hexachloroplatinate	240-973-0	16919-58-7	Acute Tox. 3 (*) Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H318 H334 H317			
078-009-00-4	hexachloroplatinic acid	241-010-7	16941-12-1	Acute Tox. 3 (*) Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1	H301 H314 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H314 H334 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
080-001-00-0	mercury	231-106-7	7439-97-6	Acute Tox. 3 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H373 (**) H410			
080-002-00-6	inorganic compounds of mercury with the exception of mercuric sulphide and those specified elsewhere in this Annex	—	—	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 (**) H410		(*) STOT RE 2; H373: C ≥ 0,1 %	A 1
080-003-00-1	dimercury dichloride; mercurous chloride; calomel	233-307-5	10112-91-1	Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H335 H315 H410			
080-004-00-7	organic compounds of mercury with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 (**) H410		(*) STOT RE 2; H373: C ≥ 0,1 %	A 1
080-005-00-2	mercury difulminate; mercuric fulminate; fulminate of mercury	211-057-8	628-86-4	Unst. Expl. Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H200 H331 H311 H301 H373 (**) H400 H410	GHS01 GHS06 GHS08 GHS09 Dgr	H200 H331 H311 H301 H373 (**) H400 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
080-005-01-X	mercury difulminate; mercuric fulminate; fulminate of mercury [≥ 20 % phlegmatiser]	211-057-8	628-86-4	Expl. 1.1 Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H201 H331 H311 H301 H373 (**) H400 H410	GHS01 GHS06 GHS08 GHS09 Dgr	H201 H331 H311 H301 H373 (**) H400 H410			
080-006-00-8	dimercury dicyanide oxide; mercuric oxycyanide	215-629-8	1335-31-5	Expl. 1.1 Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H201 H331 H311 H301 H373 (**) H400 H410	GHS01 GHS06 GHS08 GHS09 Dgr	H201 H331 H311 H301 H373 (**) H410			T
080-007-00-3	dimethylmercury; [1] diethylmercury [2]	209-805-3 [1] 211-000-7 [2]	593-74-8 [1] 627-44-1 [2]	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 (**) H410		(*) STOT RE 2; H373: C $\geq 0,05$ %	1
080-008-00-9	phenylmercury nitrate; [1] phenylmercury hydroxide; [2] basic phenylmercury nitrate [3]	200-242-9 [1] 202-866-7 [2] — [3]	55-68-5 [1] 100-57-2 [2] 8003-05-2 [3]	Acute Tox. 3 (*) STOT RE 1 Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H301 H372 (**) H314 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H301 H372 (**) H314 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
080-009-00-4	2-methoxyethylmercury chloride	204-659-7	123-88-6	Acute Tox. 3 (*) STOT RE 1 Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H301 H372 (**) H314 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H301 H372 (**) H314 H410			
080-010-00-X	mercury dichloride; mercuric chloride	231-299-8	7487-94-7	Acute Tox. 2 (*) STOT RE 1 Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H300 H372 (**) H314 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H300 H372 (**) H314 H410			
080-011-00-5	phenylmercury acetate	200-532-5	62-38-4	Acute Tox. 3 (*) STOT RE 1 Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H301 H372 (**) H314 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H301 H372 (**) H314 H410			
081-001-00-3	thallium	231-138-1	7440-28-0	Acute Tox. 2 (*) Acute Tox. 2 (*) STOT RE 2 (*) Aquatic Chronic 4	H330 H300 H373 (**) H413	GHS06 GHS08 Dgr	H330 H300 H373 (**) H413			
081-002-00-9	thallium compounds, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 2 (*) Acute Tox. 2 (*) STOT RE 2 (*) Aquatic Chronic 2	H330 H300 H373 (**) H411	GHS06 GHS08 GHS09 Dgr	H330 H300 H373 (**) H411			A
081-003-00-4	dithallium sulphate; thallic sulphate	231-201-3	7446-18-6	Acute Tox. 2 (*) STOT RE 1 Skin Irrit. 2 Aquatic Chronic 2	H300 H372 (**) H315 H411	GHS06 GHS08 GHS09 Dgr	H300 H372 (**) H315 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
082-001-00-6	lead compounds with the exception of those specified elsewhere in this Annex	—	—	Repr. 1A Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H360Df H332 H302 H373 (**) H400 H410	GHS08 GHS07 GHS09 Dgr	H360Df H332 H302 H373 (**) H410		Repr. 2; H361f: C ≥ 2,5 % (*) STOT RE 2; H373: C ≥ 0,5 %	A 1
082-002-00-1	lead alkyls	—	—	Repr. 1A Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H360Df H330 H310 H300 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H360Df H330 H310 H300 H373 (**) H410		Repr. 1A; H360D: C ≥ 0,1 % (*) STOT RE 2; H373: C ≥ 0,05 %	A 1
082-003-00-7	lead diazide; lead azide	236-542-1	13424-46-9	Unst. Expl. Repr. 1A Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H200 H360Df H332 H302 H373 (**) H400 H410	GHS01 GHS08 GHS07 GHS09 Dgr	H200 H360Df H332 H302 H373 (**) H410			1
082-003-01-4	lead diazide; lead azide [≥ 20 % phlegmatiser]	236-542-1	13424-46-9	Expl. 1.1 Repr. 1A Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H201 H360Df H332 H302 H373 (**) H400 H410	GHS01 GHS08 GHS07 GHS09 Dgr	H201 H360Df H332 H302 H373 (**) H410			1

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
082-004-00-2	lead chromate	231-846-0	7758-97-6	Carc. 2 Repr. 1A STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H360Df H373 (**) H400 H410	GHS08 GHS09 Dgr	H351 H360Df H373 (**) H410			1
082-005-00-8	lead di(acetate)	206-104-4	301-04-2	Repr. 1A STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H360Df H373 (**) H400 H410	GHS08 GHS09 Dgr	H360Df H373 (**) H410			1
082-006-00-3	trilead bis(orthophosphate)	231-205-5	7446-27-7	Repr. 1A STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H360Df H373 (**) H400 H410	GHS08 GHS09 Dgr	H360Df H373 (**) H410			1
082-007-00-9	lead acetate, basic	215-630-3	1335-32-6	Carc. 2 Repr. 1A STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H360Df H373 (**) H400 H410	GHS08 GHS09 Dgr	H351 H360Df H373 (**) H410			1
082-008-00-4	lead(II) methanesulphonate	401-750-5	17570-76-2	Repr. 1A Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Skin Irrit. 2 Eye Dam. 1	H360Df H332 H302 H373 (**) H315 H318	GHS08 GHS05 GHS07 Dgr	H360Df H332 H302 H373 (**) H315 H318			1

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
082-009-00-X	Lead sulfochromate yellow; C.I. Pigment Yellow 34; [This substance is identified in the Colour Index by Colour Index Constitution Number, C.I. 77603.]	215-693-7	1344-37-2	Carc. 2 Repr. 1A STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H360-Df H373 (**) H400 H410	GHS08 GHS09 Dgr	H351 H360Df H373 (**) H410			1
082-010-00-5	Lead chromate molybdate sulfate red; C.I. Pigment Red 104; [This substance is identified in the Colour Index by Colour Index Constitution Number, C.I. 77605.]	235-759-9	12656-85-8	Carc. 2 Repr. 1A STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H360-Df H373 (**) H400 H410	GHS08 GHS09 Dgr	H351 H360Df H373 (**) H410			1
082-011-00-0	lead hydrogen arsenate	232-064-2	7784-40-9	Carc. 1A Repr. 1A Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H350 H360-Df H331 H301 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H360Df H331 H301 H373 (**) H410			1
092-001-00-8	uranium	231-170-6	7440-61-1	Acute Tox. 2 (*) Acute Tox. 2 (*) STOT RE 2 (*) Aquatic Chronic 4	H330 H300 H373 (**) H413	GHS06 GHS08 Dgr	H330 H300 H373 (**) H413			
092-002-00-3	uranium compounds	—	—	Acute Tox. 2 (*) Acute Tox. 2 (*) STOT RE 2 (*) Aquatic Chronic 2	H330 H300 H373 (**) H411	GHS06 GHS08 GHS09 Dgr	H330 H300 H373 (**) H411			A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
601-001-00-4	methane	200-812-7	74-82-8	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U
601-002-00-X	ethane	200-814-8	74-84-0	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U
601-003-00-5	propane	200-827-9	74-98-6	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U
601-004-00-0	butane; [1] and isobutane [2]	203-448-7 [1] 200-857-2 [2]	106-97-8 [1] 75-28-5 [2]	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			C U
601-004-01-8	butane (containing ≥ 0.1 % butadiene (203-450-8)); [1] isobutane (containing ≥ 0.1 % butadiene (203-450-8)) [2]	203-448-7 [1] 200-857-2 [2]	106-97-8 [1] 75-28-5 [2]	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			C S U
601-005-00-6	2,2-dimethylpropane; neopentane	207-343-7	463-82-1	Flam. Gas 1 Press. Gas Aquatic Chronic 2	H220 H411	GHS02 GHS04 GHS09 Dgr	H220 H411			U
601-006-00-1	pentane	203-692-4	109-66-0	Flam. Liq. 2 Asp. Tox. 1 STOT SE 3 Aquatic Chronic 2	H225 H304 H336 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H304 H336 H411	EUH066		C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
601-007-00-7	hexane, reaction mass of isomers (containing < 5 % n-hexane (203-777-6))	—	—	Flam. Liq. 2 Asp. Tox. 1 Skin Irrit. 2 STOT SE 3 Aquatic Chronic 2	H225 H304 H315 H336 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H304 H315 H336 H411			C
601-008-00-2	heptane [and isomers] [1]	205-563-8 [1] 203-548-0 [2] 207-346-3 [3] 209-230-8 [4] 209-280-0 [5] 209-643-3 [6] 209-680-5 [7] 209-730-6 [8] 210-529-0 [9] 250-610-8 [10]	142-82-5 [1] 108-08-7 [2] 464-06-2 [3] 562-49-2 [4] 565-59-3 [5] 589-34-4 [6] 590-35-2 [7] 591-76-4 [8] 617-78-7 [9] 31394-54-4 [10]	Flam. Liq. 2 Asp. Tox. 1 Skin Irrit. 2 STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H225 H304 H315 H336 H400 H410	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H304 H315 H336 H410			C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
601-009-00-8	octane [and isomers] [1]	203-892-1 [1] 208-759-1 [2] 209-207-2 [3] 209-243-9 [4] 209-266-4 [5] 209-292-6 [6] 209-504-7 [7] 209-547-1 [8] 209-649-6 [9] 209-650-1 [10] 209-660-6 [11] 209-689-4 [12] 209-745-8 [13] 209-747-9 [14] 209-855-6 [15] 210-187-2 [16] 210-621-0 [17] 213-923-0 [18] 247-861-0 [19]	111-65-9 [1] 540-84-1 [2] 560-21-4 [3] 563-16-6 [4] 564-02-3 [5] 565-75-3 [6] 583-48-2 [7] 584-94-1 [8] 589-43-5 [9] 589-53-7 [10] 589-81-1 [11] 590-73-8 [12] 592-13-2 [13] 592-27-8 [14] 594-82-1 [15] 609-26-7 [16] 619-99-8 [17] 1067-08-9 [18] 26635-64-3 [19]	Flam. Liq. 2 Asp. Tox. 1 Skin Irrit. 2 STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H225 H304 H315 H336 H400 H410	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H304 H315 H336 H410		C	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
601-010-00-3	ethylene	200-815-3	74-85-1	Flam. Gas 1 Press. Gas STOT SE 3	H220 H336	GHS02 GHS04 GHS07 Dgr	H220 H336			U
601-011-00-9	propene; propylene	204-062-1	115-07-1	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U
601-012-00-4	but-1-ene; [1] butene, mixed-1-and-2-isomers; [2] 2-methylpropene; [3] (Z)-but-2-ene; [4] (E)-but-2-ene [5]	203-449-2 [1] 203-452-9 [2] 204-066-3 [3] 209-673-7 [4] 210-855-3 [5]	106-98-9 [1] 107-01-7 [2] 115-11-7 [3] 590-18-1 [4] 624-64-6 [5]	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			C U
601-013-00-X	1,3-butadiene; buta-1,3-diene	203-450-8	106-99-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			D U
601-014-00-5	isoprene (stabilised) 2-methyl-1,3-butadiene	201-143-3	78-79-5	Flam. Liq. 1 Carc. 1B Muta. 2 Aquatic Chronic 3	H224 H350 H341 H412	GHS02 GHS08 Dgr	H224 H350 H341 H412			D
601-015-00-0	acetylene; ethyne	200-816-9	74-86-2	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220	EUH006		U
601-016-00-6	cyclopropane	200-847-8	75-19-4	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
601-017-00-1	cyclohexane	203-806-2	110-82-7	Flam. Liq. 2 Asp. Tox. 1 Skin Irrit. 2 STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H225 H304 H315 H336 H400 H410	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H304 H315 H336 H410			
601-018-00-7	methylcyclohexane	203-624-3	108-87-2	Flam. Liq. 2 Asp. Tox. 1 Skin Irrit. 2 STOT SE 3 Aquatic Chronic 2	H225 H304 H315 H336 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H304 H315 H336 H411			
601-019-00-2	1,4-dimethylcyclohexane	209-663-2	589-90-2	Flam. Liq. 2 Asp. Tox. 1 Skin Irrit. 2 STOT SE 3 Aquatic Chronic 2	H225 H304 H315 H336 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H304 H315 H336 H411			
601-020-00-8	benzene	200-753-7	71-43-2	Flam. Liq. 2 Carc. 1A Muta. 1B STOT RE 1 Asp. Tox. 1 Eye Irrit. 2 Skin Irrit. 2	H225 H350 H340 H372 (**) H304 H319 H315	GHS02 GHS08 GHS07 Dgr	H225 H350 H340 H372 (**) H304 H319 H315			E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
601-021-00-3	toluene	203-625-9	108-88-3	Flam. Liq. 2 Repr. 2 Asp. Tox. 1 STOT RE 2 (*) Skin Irrit. 2 STOT SE 3	H225 H361d (***) H304 H373 (**) H315 H336	GHS02 GHS08 GHS07 Dgr	H225 H361d (***) H304 H373 (**) H315 H336			
601-022-00-9	<i>o</i> -xylene; [1] <i>p</i> -xylene; [2] <i>m</i> -xylene; [3] xylene [4]	202-422-2 [1] 203-396-5 [2] 203-576-3 [3] 215-535-7 [4]	95-47-6 [1] 106-42-3 [2] 108-38-3 [3] 1330-20-7 [4]	Flam. Liq. 3 Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Irrit. 2	H226 H332 H312 H315	GHS02 GHS07 Wng	H226 H332 H312 H315		(*)	C
601-023-00-4	ethylbenzene	202-849-4	100-41-4	Flam. Liq. 2 Acute Tox. 4 (*)	H225 H332	GHS02 GHS07 Dgr	H225 H332			
601-024-00-X	cumene; [1] propylbenzene [2]	202-704-5 [1] 203-132-9 [2]	98-82-8 [1] 103-65-1 [2]	Flam. Liq. 3 Asp. Tox. 1 STOT SE 3 Aquatic Chronic 2	H226 H304 H335 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H226 H304 H335 H411			C
601-025-00-5	mesitylene; 1,3,5-trimethylbenzene	203-604-4	108-67-8	Flam. Liq. 3 STOT SE 3 Aquatic Chronic 2	H226 H335 H411	GHS02 GHS07 GHS09 Wng	H226 H335 H411		STOT SE 3; H335: C ≥ 25 %	
601-026-00-0	styrene	202-851-5	100-42-5	Flam. Liq. 3 Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2	H226 H332 H319 H315	GHS02 GHS07 Wng	H226 H332 H319 H315		(*)	D

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
601-027-00-6	2-phenylpropene; α -methylstyrene	202-705-0	98-83-9	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3 Aquatic Chronic 2	H226 H319 H335 H411	GHS02 GHS07 GHS09 Wng	H226 H319 H335 H411		STOT SE 3; H335: C $\geq$ 25 %	
601-028-00-1	2-methylstyrene; 2-vinyltoluene	210-256-7	611-15-4	Acute Tox. 4 (*) Aquatic Chronic 2	H332 H411	GHS07 GHS09 Wng	H332 H411			
601-029-00-7	dipentene; limonene; [1] (R)- <i>p</i> -mentha-1,8-diene; d-limonene; [2] (S)- <i>p</i> -mentha-1,8-diene; l-limonene; [3] <i>trans</i> -1-methyl-4-(1-methylvinyl)cyclohexene; [4] ($\pm$)-1-methyl-4-(1-methylvinyl)cyclohexene [5]	205-341-0 [1] 227-813-5 [2] 227-815-6 [3] 229-977-3 [4] 231-732-0 [5]	138-86-3 [1] 5989-27-5 [2] 5989-54-8 [3] 6876-12-6 [4] 7705-14-8 [5]	Flam. Liq. 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H226 H315 H317 H400 H410	GHS02 GHS07 GHS09 Wng	H226 H315 H317 H410			C
601-030-00-2	cyclopentane	206-016-6	287-92-3	Flam. Liq. 2 Aquatic Chronic 3	H225 H412	GHS02 Dgr	H225 H412			
601-031-00-8	2,4,4-trimethylpent-1-ene	203-486-4	107-39-1	Flam. Liq. 2 Aquatic Chronic 2	H225 H411	GHS02 GHS09 Dgr	H225 H411			
601-032-00-3	benzo[a]pyrene; benzo[def]chrysene	200-028-5	50-32-8	Carc. 1B Muta. 1B Repr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H340 H360FD H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H340 H360FD H317 H410		Carc. 1B; H350: C $\geq$ 0,01 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
601-033-00-9	benz[a]anthracene	200-280-6	56-55-3	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410			
601-034-00-4	benz[e]acephenanthrylene	205-911-9	205-99-2	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410			
601-035-00-X	benzo[j]fluoranthene	205-910-3	205-82-3	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410			
601-036-00-5	benzo[k]fluoranthene	205-916-6	207-08-9	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410			
601-037-00-0	n-hexane	203-777-6	110-54-3	Flam. Liq. 2 Repr. 2 Asp. Tox. 1 STOT RE 2 (*) Skin Irrit. 2 STOT SE 3 Aquatic Chronic 2	H225 H361f (***) H304 H373 (**) H315 H336 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H361f (***) H304 H373 (**) H315 H336 H411		STOT RE 2; H373: C ≥ 5 %	
601-041-00-2	dibenz[a,h]anthracene	200-181-8	53-70-3	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410		Carc. 1B; H350: C ≥ 0,01 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
601-042-00-8	biphenyl; diphenyl	202-163-5	92-52-4	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H319 H335 H315 H410			
601-043-00-3	1,2,4-trimethylbenzene	202-436-9	95-63-6	Flam. Liq. 3 Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H226 H332 H319 H335 H315 H411	GHS02 GHS07 GHS09 Wng	H226 H332 H319 H335 H315 H411			
601-044-00-9	3a,4,7,7a-tetrahydro-4,7-methanoindene	201-052-9	77-73-6	Flam. Liq. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H225 H332 H302 H319 H335 H315 H411	GHS02 GHS07 GHS09 Dgr	H225 H332 H302 H319 H335 H315 H411			
601-045-00-4	1,2,3,4-tetrahydronaphthalene	204-340-2	119-64-2	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H319 H315 H411	GHS07 GHS09 Wng	H319 H315 H411	EUH019		
601-046-00-X	7-methylocta-1,6-diene	404-210-7	42152-47-6	Flam. Liq. 3 Aquatic Acute 1 Aquatic Chronic 1	H226 H400 H410	GHS02 GHS09 Wng	H226 H410			
601-047-00-5	m-mentha-1,3(8)-diene	404-150-1	17092-80-7	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
601-048-00-0	chrysene	205-923-4	218-01-9	Carc. 1B Muta. 2 Aquatic Acute 1 Aquatic Chronic 1	H350 H341 H400 H410	GHS08 GHS09 Dgr	H350 H341 H410			
601-049-00-6	benzo[e]pyrene	205-892-7	192-97-2	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410			
601-051-00-7	4-phenylbut-1-ene	405-980-7	768-56-9	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
601-052-00-2	naphthalene	202-049-5	91-20-3	Carc. 2 Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H400 H410	GHS07 GHS08 GHS09 Wng	H351 H302 H410			
601-053-00-8	nonylphenol; [1] 4-nonylphenol, branched [2]	246-672-0 [1] 284-325-5 [2]	25154-52-3 [1] 84852-15-3 [2]	Repr. 2 Acute Tox. 4 (*) Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H361fd H302 H314 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H361fd H302 H314 H410			
601-054-00-3	reaction mass of isomers of: dibenzylbenzene; dibenzyl(methyl)benzene; dibenzyl(dimethyl)benzene; dibenzyl(trimethyl)benzene	405-570-8	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
601-055-00-9	reaction mass of isomers of: mono-(2-tetradecyl)naphthalenes; di-(2-tetradecyl)naphthalenes; tri-(2-tetradecyl)naphthalenes	410-190-0	132983-41-6	Eye Irrit. 2 Aquatic Chronic 4	H319 H413	GHS07 Wng	H319 H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
601-056-00-4	reaction mass of isomers of: methyldiphenylmethane; dimethyldiphenylmethane	405-470-4	73807-39-3	Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H315 H400 H410	GHS07 GHS09 Wng	H315 H410			
601-057-00-X	N-dodecyl-[3-(4-(dimethylamino)benzamido)-propyl]dimethylammonium tosylate	421-130-8	156679-41-3	Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H318 H317 H410			
601-058-00-5	di-L-para-menthene	417-870-6	83648-84-4	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
601-059-00-0	methyl 2-benzylidene-3-oxobutyrate	420-940-9	15768-07-7	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H319 H315 H411	GHS07 GHS09 Wng	H319 H315 H411			
601-060-00-6	1,2-bis[4-fluoro-6-{4-sulfo-5-(2-(4-sulfonylphenylamino)-3,6-disulfo-8-aminonaphthalene-7-ylazo)phenylamino}-1,3,5-triazin-2-ylamino]ethane;x-sodium, y-potassium salts x = 7,755 y = 0,245	417-610-1	155522-09-1	Skin Sens. 1	H317	GHS07 Wng	H317			
601-061-00-1	(ethyl-1,2-ethanediyl)[-2-[[[(2-hydroxyethyl)methylamino]acetyl]-propyl]ω-(nonylphe-noxy)poly]oxy-(methyl-1,2-ethanediyl)	418-960-8	—	Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H314 H317 H411	GHS05 GHS07 GHS09 Dgr	H314 H317 H411			
601-062-00-7	reaction mass of: branched triacontane; branched dotriacontane; branched tetratriacontane; branched hexatriacontane	417-030-9	151006-59-6	Aquatic Chronic 4	H413	—	H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
601-063-00-2	reaction mass of isomers of branched tetracosane	417-060-2	151006-61-0	Acute Tox. 4 (*) Aquatic Chronic 4	H332 H413	GHS07 Wng	H332 H413			
601-064-00-8	branched hexatriacontane	417-070-7	151006-62-1	Aquatic Chronic 4	H413	—	H413			
601-065-00-3	reaction mass of: (1'-α,3'-α,6'-α-2,2,3',7',7'-pentamethylspiro(1,3-dioxane-5,2'-norcarane)); (1'α,3'β,6'α)-2,2,3',7',7'-pentamethylspiro(1,3-dioxane-5,2'-norcarane)	416-930-9	—	STOT RE 2 (*) Eye Dam. 1 Aquatic Chronic 2	H373 (**) H318 H411	GHS08 GHS05 GHS09 Dgr	H373 (**) H318 H411			
601-066-00-9	1-(4-(trans-4-heptylcyclohexyl)phenyl) ethanone	426-820-2	78531-60-9	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
601-067-00-4	triethyl arsenate	427-700-2	15606-95-8	Carc. 1A Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H350 H331 H301 H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H331 H301 H410			
601-068-00-X	1,2-diacetoxybut-3-ene	421-720-5	18085-02-4	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
601-069-00-5	2-ethyl-1-(2-(1,3-dioxanyl)ethyl)-pyridinium bromide	422-680-1	287933-44-2	Aquatic Chronic 3	H412	—	H412			
601-071-00-6	1-dimethoxymethyl-2-nitro-benzene	423-830-9	20627-73-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
601-073-00-7	1-bromo-3,5-difluorobenzene	416-710-2	461-96-1	Flam. Liq. 3 Acute Tox. 4 (*) STOT RE 2 (*) Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H226 H302 H373 (**) H315 H317 H400 H410	GHS02 GHS08 GHS07 GHS09 Wng	H226 H302 H373 (**) H315 H317 H410			
601-074-00-2	reaction mass of: 4-(2,2,3-trimethylcyclopent-3-en-1-yl)-1-methyl-2-oxabicyclo[2.2.2]octane; 1-(2,2,3-trimethylcyclopent-3-en-1-yl)-5-methyl-6-oxabicyclo[3.2.1]octane; spiro[cyclohex-3-en-1-yl-[(4,5,6,6a-tetrahydro-3,6',6',6'a-tetramethyl)-1,3'(3'aH)-[2H]cyclopenta[b]furan]; spiro[cyclohex-3-en-1-yl-[(4,5,6,6a-tetrahydro-4,6',6',6'a-tetramethyl)-1,3'(3'aH)-[2H]cyclopenta[b]]furan]	422-040-1	—	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H319 H315 H411	GHS07 GHS09 Wng	H319 H315 H411			
601-085-00-2	isopentane; 2-methylbutane	201-142-8	78-78-4	Flam. Liq. 1 Asp. Tox. 1 STOT SE 3 Aquatic Chronic 2	H224 H304 H336 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H224 H304 H336 H411	EUH066		
602-001-00-7	chloromethane; methyl chloride	200-817-4	74-87-3	Flam. Gas 1 Press. Gas Carc. 2 STOT RE 2 (*)	H220 H351 H373 (**) H373 (**)	GHS02 GHS04 GHS08 Dgr	H220 H351 H373 (**)			U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-002-00-2	bromomethane; methylbromide	200-813-2	74-83-9	Press. Gas Muta. 2 Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Ozone	H341 H331 H301 H373 (**) H319 H335 H315 H400 EU-H059	GHS04 GHS06 GHS08 GHS09 Dgr	H341 H331 H301 H373 (**) H319 H335 H315 H400	EUH059		U
602-003-00-8	dibromomethane	200-824-2	74-95-3	Acute Tox. 4 (*) Aquatic Chronic 3	H332 H412	GHS07 Wng	H332 H412		(*)	
602-004-00-3	dichloromethane; methylene chloride	200-838-9	75-09-2	Carc. 2	H351	GHS08 Wng	H351			
602-005-00-9	methyl iodide; iodomethane	200-819-5	74-88-4	Carc. 2 Acute Tox. 4 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT SE 3 Skin Irrit. 2	H351 H312 H331 H301 H335 H315	GHS06 GHS08 Dgr	H351 H312 H331 H301 H335 H315			
602-006-00-4	trichloromethane; chloroform	200-663-8	67-66-3	Carc. 2 Acute Tox. 4 (*) STOT RE 2 (*) STOT RE 2 (*) Skin Irrit. 2	H351 H302 H373 (**) H373 (**) H315	GHS07 GHS08 Wng	H351 H302 H373 (**) H373 (**) H315		(*) STOT RE 2; H373: C ≥ 5 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-007-00-X	bromoform; tribromomethane	200-854-6	75-25-2	Acute Tox. 3 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H331 H319 H315 H411	GHS06 GHS09 Dgr	H331 H319 H315 H411			
602-008-00-5	carbon tetrachloride; tetrachloromethane	200-262-8	56-23-5	Carc. 2 Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 1 Aquatic Chronic 3 Ozone	H351 H331 H311 H301 H372 (**) H412 EU-H059	GHS06 GHS08 Dgr	H351 H331 H311 H301 H372 (**) H412	EUH059	(*) STOT RE 1; H372: C ≥ 1 % STOT RE 2; H373: 0,2 % ≤ C < 1 %	
602-009-00-0	chloroethane	200-830-5	75-00-3	Flam. Gas 1 Press. Gas Carc. 2 Aquatic Chronic 3	H220 H351 H412	GHS02 GHS04 GHS08 Dgr	H220 H351 H412			U
602-010-00-6	1,2-dibromoethane	203-444-5	106-93-4	Carc. 1B Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H350 H331 H311 H301 H319 H335 H315 H411	GHS06 GHS08 GHS09 Dgr	H350 H331 H311 H301 H319 H335 H315 H411		(*)	
602-011-00-1	1,1-dichloroethane	200-863-5	75-34-3	Flam. Liq. 2 Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Aquatic Chronic 3	H225 H302 H319 H335 H412	GHS02 GHS07 Dgr	H225 H302 H319 H335 H412		(*)	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-012-00-7	1,2-dichloroethane; ethylene dichloride	203-458-1	107-06-2	Flam. Liq. 2 Carc. 1B Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H225 H350 H302 H319 H335 H315	GHS02 GHS08 GHS07 Dgr	H225 H350 H302 H319 H335 H315			
602-013-00-2	1,1,1-trichloroethane; methyl chloroform	200-756-3	71-55-6	Acute Tox. 4 (*) Ozone	H332 EU-H059	GHS07 Wng	H332	EUH059		F
602-014-00-8	1,1,2-trichloroethane	201-166-9	79-00-5	Carc. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*)	H351 H332 H312 H302	GHS08 GHS07 Wng	H351 H332 H312 H302	EUH066	(*)	
602-015-00-3	1,1,2,2-tetrachloroethane	201-197-8	79-34-5	Acute Tox. 2 (*) Acute Tox. 1 Aquatic Chronic 2	H330 H310 H411	GHS06 GHS09 Dgr	H330 H310 H411			
602-016-00-9	1,1,2,2-tetrabromoethane	201-191-5	79-27-6	Acute Tox. 2 (*) Eye Irrit. 2 Aquatic Chronic 3	H330 H319 H412	GHS06 Dgr	H330 H319 H412			
602-017-00-4	pentachloroethane	200-925-1	76-01-7	Carc. 2 STOT RE 1 Aquatic Chronic 2	H351 H372 (**) H411	GHS08 GHS09 Dgr	H351 H372 (**) H411		STOT RE 1; H372: C ≥ 1 % STOT RE 2; H373: 0,2 % ≤ C < 1 %	
602-018-00-X	1-chloropropane; [1] 2-chloropropane [2]	208-749-7 [1] 200-858-8 [2]	540-54-5 [1] 75-29-6 [2]	Flam. Liq. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*)	H225 H332 H312 H302	GHS02 GHS07 Dgr	H225 H332 H312 H302			C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-019-00-5	1-bromopropane; n-propyl bromide	203-445-0	106-94-5	Flam. Liq. 2 Repr. 1B STOT RE 2 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 STOT SE 3	H225 H360-FD H373 (**) H319 H335 H315 H336	GHS02 GHS08 GHS07 Dgr	H225 H360FD H373 (**) H319 H335 H315 H336			
602-020-00-0	1,2-dichloropropane; propylene dichloride	201-152-2	78-87-5	Flam. Liq. 2 Acute Tox. 4 (*) Acute Tox. 4 (*)	H225 H332 H302	GHS02 GHS07 Dgr	H225 H332 H302			
602-021-00-6	1,2-dibromo-3-chloropropane	202-479-3	96-12-8	Carc. 1B Muta. 1B Repr. 1A Acute Tox. 3 (*) STOT RE 2 (*) Aquatic Chronic 3	H350 H340 H360F (***) H301 H373 (**) H412	GHS06 GHS08 Dgr	H350 H340 H360F (***) H301 H373 (**) H412			
602-022-00-1	1-chloropentane; [1] 2-chloropentane; [2] 3-chloropentane [3]	208-846-4 [1] 210-885-7 [2] 210-467-4 [3]	543-59-9 [1] 625-29-6 [2] 616-20-6 [3]	Flam. Liq. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*)	H225 H332 H312 H302	GHS02 GHS07 Dgr	H225 H332 H312 H302			C
602-023-00-7	vinyl chloride; chloroethylene	200-831-0	75-01-4	Press. Gas Flam. Gas 1 Carc. 1A	H220 H350	GHS02 GHS08 Dgr	H220 H350			D U
602-024-00-2	bromoethylene	209-800-6	593-60-2	Press. Gas Flam. Gas 1 Carc. 1B	H220 H350	GHS02 GHS08 Dgr	H220 H350			U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-025-00-8	1,1-dichloroethylene; vinylidene chloride	200-864-0	75-35-4	Flam. Liq. 1 Carc. 2 Acute Tox. 4 (*)	H224 H351 H332	GHS02 GHS08 GHS07 Dgr	H224 H351 H332		(*)	D
602-026-00-3	1,2-dichloroethylene; [1] cis-dichloroethylene; [2] trans-dichloroethylene [3]	208-750-2 [1] 205-859-7 [2] 205-860-2 [3]	540-59-0 [1] 156-59-2 [2] 156-60-5 [3]	Flam. Liq. 2 Acute Tox. 4 (*) Aquatic Chronic 3	H225 H332 H412	GHS02 GHS07 Dgr	H225 H332 H412		(*)	C
602-027-00-9	trichloroethylene; trichloroethene	201-167-4	79-01-6	Carc. 1B Muta. 2 Eye Irrit. 2 Skin Irrit. 2 STOT SE 3 Aquatic Chronic 3	H350 H341 H319 H315 H336 H412	GHS08 GHS07 Dgr	H350 H341 H319 H315 H336 H412			
602-028-00-4	tetrachloroethylene	204-825-9	127-18-4	Carc. 2 Aquatic Chronic 2	H351 H411	GHS08 GHS09 Wng	H351 H411			
602-029-00-X	3-chloropropene; allyl chloride	203-457-6	107-05-1	Flam. Liq. 2 Carc. 2 Muta. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H225 H351 H341 H332 H312 H302 H373 (**) H319 H335 H315 H400	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H351 H341 H332 H312 H302 H373 (**) H319 H335 H315 H400			D

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-030-00-5	1,3-dichloropropene; [1] (Z)-1,3-dichloropropene [2]	208-826-5 [1] 233-195-8 [2]	542-75-6 [1] 10061-01-5 [2]	Flam. Liq. 3 Acute Tox. 3 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H226 H301 H332 H312 H319 H335 H315 H317 H400 H410	GHS02 GHS06 GHS09 Dgr	H226 H301 H332 H312 H319 H335 H315 H317 H410			C D
602-031-00-0	1,1-dichloropropene	209-253-3	563-58-6	Flam. Liq. 2 Acute Tox. 3 (*) Aquatic Chronic 3	H225 H301 H412	GHS02 GHS06 Dgr	H225 H301 H412			
602-032-00-6	3-chloro-2-methylpropene	209-251-2	563-47-3	Flam. Liq. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H225 H332 H302 H314 H317 H411	GHS02 GHS05 GHS07 GHS09 Dgr	H225 H332 H302 H314 H317 H411			
602-033-00-1	chlorobenzene	203-628-5	108-90-7	Flam. Liq. 3 Acute Tox. 4 (*) Aquatic Chronic 2	H226 H332 H411	GHS02 GHS07 GHS09 Wng	H226 H332 H411		(*)	
602-034-00-7	1,2-dichlorobenzene; o-dichlorobenzene	202-425-9	95-50-1	Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H335 H315 H410		(*)	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-035-00-2	1,4-dichlorobenzene; <i>p</i> -dichlorobenzene	203-400-5	106-46-7	Carc. 2 Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H319 H400 H410	GHS08 GHS09 Wng	H351 H319 H410			
602-036-00-8	chloroprene (stabilised); 2-chlorobuta-1,3-diene (stabilised)	204-818-0	126-99-8	Flam. Liq. 2 Carc. 1B Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H225 H350 H332 H302 H373 (**) H319 H335 H315	GHS02 GHS08 GHS07 Dgr	H225 H350 H332 H302 H373 (**) H319 H335 H315			D
602-037-00-3	α -chlorotoluene; benzyl chloride	202-853-6	100-44-7	Carc. 1B Acute Tox. 3 (*) Acute Tox. 4 (*) STOT RE 2 (*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1	H350 H331 H302 H373 (**) H335 H315 H318	GHS06 GHS08 GHS05 Dgr	H350 H331 H302 H373 (**) H335 H315 H318			
602-038-00-9	α,α,α -trichlorotoluene; benzotrichloride	202-634-5	98-07-7	Carc. 1B Acute Tox. 3 (*) Acute Tox. 4 (*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1	H350 H331 H302 H335 H315 H318	GHS06 GHS08 GHS05 Dgr	H350 H331 H302 H335 H315 H318			
602-039-00-4	polychlorobiphenyls; PCB	215-648-1	1336-36-3	STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H400 H410	GHS08 GHS09 Wng	H373 (**) H410		STOT RE 2; H373: C $\geq$ 0,005 %	C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-040-00-X	2-chlorotoluene; [1] 3-chlorotoluene; [2] 4-chlorotoluene; [3] chlorotoluene [4]	202-424-3 [1] 203-580-5 [2] 203-397-0 [3] 246-698-2 [4]	95-49-8 [1] 108-41-8 [2] 106-43-4 [3] 25168-05-2 [4]	Acute Tox. 4 (*) Aquatic Chronic 2	H332 H411	GHS07 GHS09 Wng	H332 H411			C
602-041-00-5	pentachloronaphthalene	215-320-8	1321-64-8	Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H319 H315 H400 H410	GHS07 GHS09 Wng	H312 H302 H319 H315 H410			C
602-042-00-0	1,2,3,4,5,6-hexachlorcyclohexanes with the exception of those specified elsewhere in this Annex	—	—	Carc. 2 Acute Tox. 3 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H301 H312 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H301 H312 H410			A C
602-043-00-6	lindane (ISO); γ-HCH or γ-BHC; γ-1,2,3,4,5,6-hexachlorocyclohexane	200-401-2	58-89-9	Acute Tox. 3 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Lact. Aquatic Acute 1 Aquatic Chronic 1	H301 H332 H312 H373 (**) H362 H400 H410	GHS06 GHS08 GHS09 Dgr	H301 H332 H312 H373 (**) H362 H410		M=10	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-044-00-1	camphechlor (ISO); toxaphene;	232-283-3	8001-35-2	Carc. 2 Acute Tox. 3 (*) Acute Tox. 4 (*) STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H301 H312 H335 H315 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H301 H312 H335 H315 H410			
602-045-00-7	DDT (ISO); clofenotane (INN); dicophane; 1,1,1-trichloro-2,2-bis(4-chlorophenyl)ethane; dichlorodiphenyltrichloroethane	200-024-3	50-29-3	Carc. 2 Acute Tox. 3 (*) STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H301 H372 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H301 H372 (**) H410			
602-046-00-2	heptachlor (ISO); 1,4,5,6,7,8,8-heptachloro-3a,4,7,7a-tetrahydro-4,7-methanoindene	200-962-3	76-44-8	Carc. 2 Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H311 H301 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H311 H301 H373 (**) H410			
602-047-00-8	chlordan (ISO); 1,2,4,5,6,7,8,8-octachloro-3a,4,7,7a-tetrahydro-4,7-methanoindan	200-349-0	57-74-9	Carc. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H312 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H312 H302 H410			
602-048-00-3	aldrin (ISO)	206-215-8	309-00-2	Carc. 2 Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H311 H301 H372 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H311 H301 H372 (**) H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-049-00-9	dieldrin (ISO)	200-484-5	60-57-1	Carc. 2 Acute Tox. 1 Acute Tox. 3 (*) STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H310 H301 H372 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H310 H301 H372 (**) H410			
602-050-00-4	(1α,4α,4aβ,5β,8β,8aβ)-1,2,3,4,10,10-hexachloro-1,4,4a,5,8,8a-hexahydro-1,4:5,8-dimethanonaphthalene; isodrin	207-366-2	465-73-6	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H400 H410	GHS06 GHS09 Dgr	H330 H310 H300 H410			
602-051-00-X	endrin (ISO); 1,2,3,4,10,10-hexachloro-6,7-epoxy-1,4,4a,5,6,7,8,8a-octahydro-1,4:5,8-dimethanonaphthalene	200-775-7	72-20-8	Acute Tox. 2 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410			
602-052-00-5	endosulfan (ISO); 1,2,3,4,7,7-hexachloro-8,9,10-trinorborn-2-en-5,6-ylenedimethyl sulphite	204-079-4	115-29-7	Acute Tox. 3 (*) Acute Tox. 3 (*) Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H319 H400 H410	GHS06 GHS09 Dgr	H311 H301 H319 H410			
602-053-00-0	isobenzan (ISO); 1,3,4,5,6,7,8,8-octachloro-1,3,3a,4,7,7a-hexahydro-4,7-methanoisobenzofuran	206-045-4	297-78-9	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1	H310 H300 H400	GHS06 GHS09 Dgr	H310 H300 H400			
602-054-00-6	3-iodpropene; allyl iodide	209-130-4	556-56-9	Flam. Liq. 2 Skin Corr. 1B	H226 H314	GHS02 GHS05 Dgr	H226 H314			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-055-00-1	bromoethane; ethyl bromide	200-825-8	74-96-4	Flam. Liq. 2 Carc. 2 Acute Tox. 4 (*) Acute Tox. 4 (*)	H225 H351 H332 H302	GHS02 GHS08 GHS07 Dgr	H225 H351 H332 H302			
602-056-00-7	α,α,α-trifluorotoluene; benzotrifluoride	202-635-0	98-08-8	Flam. Liq. 2 Aquatic Chronic 2	H225 H411	GHS02 GHS09 Dgr	H225 H411			
602-057-00-2	α-bromotoluene; benzyl bromide	202-847-3	100-39-0	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315			
602-058-00-8	α,α-dichlorotoluene; benzylidene chloride; benzal chloride	202-709-2	98-87-3	Carc. 2 Acute Tox. 3 (*) Acute Tox. 4 (*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1	H351 H331 H302 H335 H315 H318	GHS06 GHS08 GHS05 Dgr	H351 H331 H302 H335 H315 H318			
602-059-00-3	1-chlorobutane; butyl chloride	203-696-6	109-69-3	Flam. Liq. 2	H225	GHS02 Dgr	H225			
602-060-00-9	bromobenzene	203-623-8	108-86-1	Flam. Liq. 3 Skin Irrit. 2 Aquatic Chronic 2	H226 H315 H411	GHS02 GHS07 GHS09 Wng	H226 H315 H411			
602-061-00-4	hexafluoropropene; hexafluoropropylene	204-127-4	116-15-4	Press. Gas Acute Tox. 4 (*) STOT SE 3	H332 H335	GHS07 Wng	H332 H335			U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-062-00-X	1,2,3-trichloropropane	202-486-1	96-18-4	Carc. 1B Repr. 1B Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*)	H350 H360F (***) H332 H312 H302	GHS08 GHS07 Dgr	H350 H360F (***) H332 H312 H302			D
602-063-00-5	heptachlor epoxide; 2,3-epoxy-1,4,5,6,7,8,8-heptachloro-3a,4,7,7a-tetrahydro-4,7-methanoindane	213-831-0	1024-57-3	Carc. 2 Acute Tox. 3 (*) STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H301 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H301 H373 (**) H410			
602-064-00-0	1,3-dichloro-2-propanol	202-491-9	96-23-1	Carc. 1B Acute Tox. 3 (*) Acute Tox. 4 (*)	H350 H301 H312	GHS06 GHS08 Dgr	H350 H301 H312			
602-065-00-6	hexachlorobenzene	204-273-9	118-74-1	Carc. 1B STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H372 (**) H400 H410	GHS08 GHS09 Dgr	H350 H372 (**) H410			
602-066-00-1	tetrachloro- <i>p</i> -benzoquinone	204-274-4	118-75-2	Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H315 H400 H410	GHS07 GHS09 Wng	H319 H315 H410			
602-067-00-7	1,3-dichlorbenzene	208-792-1	541-73-1	Acute Tox. 4 (*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
602-068-00-2	ethylene bis(trichloroacetate)	219-732-9	2514-53-6	Skin Irrit. 2	H315	GHS07 Wng	H315			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-069-00-8	dichloroacetylene	—	7572-29-4	Unst. Expl. Carc. 2 STOT RE 2 (*)	H200 H351 H373 (**)	GHS01 GHS08 Wng	H200 H351 H373 (**)			
602-070-00-3	3-chloro-4,5,a,a,pentafluorotoluene	401-930-3	77227-99-7	Flam. Liq. 3 Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1	H226 H332 H302 H400	GHS02 GHS07 GHS09 Wng	H226 H332 H302 H400			
602-071-00-9	bromobenzylbromotoluene, reaction mass of isomers	402-210-1	99688-47-8	STOT RE 2 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H317 H400 H410	GHS08 GHS07 GHS09 Wng	H373 (**) H317 H410			
602-072-00-4	dichloro [(dichlorophenyl)methyl]methylbenzene, reaction mass of isomers; (dichlorophenyl)(dichlorotolyl)methane, reaction mass of isomers (IUPAC)	278-404-3	76253-60-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
602-073-00-X	1,4-dichlorobut-2-ene	212-121-8	764-41-0	Carc. 1B Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H330 H311 H301 H314 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H350 H330 H311 H301 H314 H410		Carc. 1B; H350: C ≥ 0,01 % STOT SE 3; H335: C ≥ 5 %	
602-074-00-5	pentachlorobenzene	210-172-0	608-93-5	Flam. Sol. 1 Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H228 H302 H400 H410	GHS02 GHS07 GHS09 Dgr	H228 H302 H410			T

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-075-00-0	4,4,5,5-tetrachloro-1,3-dioxolan-2-one	404-060-2	22432-68-4	Acute Tox. 2 (*) Acute Tox. 4 (*) Skin Corr. 1B	H330 H302 H314	GHS06 GHS05 Dgr	H330 H302 H314			
602-076-00-6	2,3,4-trichlorobut-1-ene	219-397-9	2431-50-7	Carc. 2 Acute Tox. 3 (*) Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H331 H302 H319 H335 H315 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H331 H302 H319 H335 H315 H410		Carc. 2; H351: C ≥ 0,1 %	
602-077-00-1	dodecachloropentacyclo[5.2.1.0 ^{2,6} .0 ^{3,9} .0 ^{5,8}]decane; mirex	219-196-6	2385-85-5	Carc. 2 Repr. 2 Lact. Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H361fd H362 H312 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H361fd H362 H312 H302 H410			
602-078-00-7	hexachlorocyclopentadiene	201-029-3	77-47-4	Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 4 (*) Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H330 H311 H302 H314 H400 H410	GHS06 GHS05 GHS09 Dgr	H330 H311 H302 H314 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-079-00-2	2,3-dichloropropene; 2,3-dichloropropylene	201-153-8	78-88-6	Flam. Liq. 2 Muta. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 3	H225 H341 H332 H312 H302 H335 H315 H318 H412	GHS02 GHS08 GHS05 GHS07 Dgr	H225 H341 H332 H312 H302 H335 H315 H318 H412			
602-080-00-8	alkanes, C ₁₀₋₁₃ , chloro	287-476-5	85535-84-8	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			
602-081-00-3	2-chloro-4,5-difluorobenzoic acid	405-380-5	—	Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1	H312 H302 H318 H317	GHS05 GHS07 Dgr	H312 H302 H318 H317			
602-082-00-9	2,2,6,6-tetrakis(bromomethyl)-4-oxaheptane-1,7-diol	408-020-5	109678-33-3	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
602-083-00-4	diphenyl ether, pentabromo derivative pentabromodiphenyl ether	251-084-2	32534-81-9	STOT RE 2 (*) Lact. Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H362 H400 H410	GHS08 GHS09 Wng	H373 (**) H362 H410			
602-084-00-X	1,1-dichloro-1-fluoroethane	404-080-1	1717-00-6	Aquatic Chronic 3 Ozone	H412 EU-H059	—	H412	EUH059		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-085-00-5	2-bromopropane	200-855-1	75-26-3	Flam. Liq. 2 Repr. 1A STOT RE 2 (*)	H225 H360F (***) H373 (**)	GHS02 GHS08 Dgr	H225 H360F (***) H373 (**)	EUH066		
602-086-00-0	trifluoriodomethane; trifluoromethyl iodide	219-014-5	2314-97-8	Muta. 2	H341	GHS08 Wng	H341			
602-087-00-6	1,2,4-trichlorobenzene	204-428-0	120-82-1	Acute Tox. 4 (*) Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H400 H410	GHS07 GHS09 Wng	H302 H315 H410			
602-088-00-1	2,3-dibromopropan-1-ol; 2,3-dibromo-1-propanol	202-480-9	96-13-9	Carc. 1B Repr. 2 Acute Tox. 3 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 3	H350 H361f (***) H311 H332 H302 H412	GHS08 GHS07 Dgr	H350 H361f (***) H311 H332 H302 H412			
602-089-00-7	4-bromo-2-chlorofluorobenzene	405-580-2	60811-21-4	Acute Tox. 4 (*) Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H400 H410	GHS07 GHS09 Wng	H302 H315 H410			
602-090-00-2	1-allyl-3-chloro-4-fluorobenzene	406-630-6	121626-73-1	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
602-091-00-8	1,3-dichloro-4-fluorobenzene	406-160-1	1435-48-9	Acute Tox. 4 (*) STOT RE 2 (*) Skin Irrit. 2	H302 H373 (**) H315 H411	GHS08 GHS07 Wng	H302 H373 (**) H315 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
602-092-00-3	1-bromo-3,4,5-trifluorobenzene	418-480-9	138526-69-9	Flam. Liq. 3 Carc. 2 Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H226 H351 H315 H318 H411	GHS02 GHS08 GHS05 GHS09 Dgr	H226 H351 H315 H318 H411			
602-093-00-9	$\alpha,\alpha,\alpha,4$ -tetrachlorotoluene; <i>p</i> -chlorobenzotrichloride	226-009-1	5216-25-1	Carc. 1B Repr. 2 STOT RE 1 Acute Tox. 4 (*) Acute Tox. 4 (*) STOT SE 3 Skin Irrit. 2	H350 H361f (***) H372 (**) H312 H302 H335 H315	GHS08 GHS07 Dgr	H350 H361f (***) H372 (**) H312 H302 H335 H315			
602-094-00-4	diphenylether; octabromo derivate	251-087-9	32536-52-0	Repr. 1B	H360-Df	GHS08 Dgr	H360Df			
602-096-00-5	malachite green hydrochloride; [1] malachite green oxalate [2]	209-322-8 [1] 219-441-7 [2]	569-64-2 [1] 2437-29-8 [2]	Repr. 2 Acute Tox. 4 (*) Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H361d (***) H302 H318 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H361d (***) H302 H318 H410			
602-097-00-0	1-bromo-9-(4,4,5,5,5-pentafluoropentylthio)nonane	422-850-5	148757-89-5	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
603-001-00-X	methanol	200-659-6	67-56-1	Flam. Liq. 2 Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT SE 1	H225 H331 H311 H301 H370 (**)	GHS02 GHS06 GHS08 Dgr	H225 H331 H311 H301 H370 (**)		(*) STOT SE 1; H370: C $\geq$ 10 % STOT SE 2; H371: 3 % $\leq$ C < 10 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-002-00-5	ethanol; ethyl alcohol	200-578-6	64-17-5	Flam. Liq. 2	H225	GHS02 Dgr	H225			
603-003-00-0	propan-1-ol; <i>n</i> -propanol	200-746-9	71-23-8	Flam. Liq. 2 Eye Dam. 1 STOT SE 3	H225 H318 H336	GHS02 GHS05 GHS07 Dgr	H225 H318 H336			
603-004-00-6	butan-1-ol; <i>n</i> -butanol	200-751-6	71-36-3	Flam. Liq. 3 Acute Tox. 4 (*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1 STOT SE 3	H226 H302 H335 H315 H318 H336	GHS02 GHS05 GHS07 Dgr	H226 H302 H335 H315 H318 H336			
603-005-00-1	2-methylpropan-2-ol; <i>tert</i> -butyl alcohol	200-889-7	75-65-0	Flam. Liq. 2 Acute Tox. 4 (*)	H225 H332	GHS02 GHS07 Dgr	H225 H332			
603-006-00-7	pentanol isomers, with the exception of those specified elsewhere in this Annex	250-378-8		Flam. Liq. 3 Acute Tox. 4 (*) STOT SE 3	H226 H332 H335	GHS02 GHS07 Wng	H226 H332 H335	EUH066		C
603-007-00-2	2-methylbutan-2-ol; <i>tert</i> -pentanol	200-908-9	75-85-4	Flam. Liq. 2 Acute Tox. 4 (*) STOT SE 3 Skin Irrit. 2	H225 H332 H335 H315	GHS02 GHS07 Dgr	H225 H332 H335 H315			
603-008-00-8	4-methylpentan-2-ol; methyl isobutyl carbinol	203-551-7	108-11-2	Flam. Liq. 3 STOT SE 3	H226 H335	GHS02 GHS07 Wng	H226 H335		STOT SE 3; H335: C ≥ 25 %	
603-009-00-3	cyclohexanol	203-630-6	108-93-0	Acute Tox. 4 (*) Acute Tox. 4 (*) STOT SE 3 Skin Irrit. 2	H332 H302 H335 H315	GHS07 Wng	H332 H302 H335 H315			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-010-00-9	2-methylcyclohexanol, mixed isomers; [1] <i>cis</i> -2-methylcyclohexanol; [2] <i>trans</i> -2-methylcyclohexanol [3]	209-512-0 [1] 231-187-9 [2] 231-186-3 [3]	583-59-5 [1] 7443-70-1 [2] 7443-52-9 [3]	Acute Tox. 4 (*)	H332	GHS07 Wng	H332			C
603-011-00-4	2-methoxyethanol; ethylene glycol monomethyl ether	203-713-7	109-86-4	Flam. Liq. 3 Repr. 1B Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*)	H226 H360-FD H332 H312 H302	GHS02 GHS08 GHS07 Dgr	H226 H360FD H332 H312 H302			
603-012-00-X	2-ethoxyethanol; ethylene glycol monoethyl ether	203-804-1	110-80-5	Flam. Liq. 3 Repr. 1B Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*)	H226 H360-FD H332 H312 H302	GHS02 GHS08 GHS07 Dgr	H226 H360FD H332 H312 H302			
603-013-00-5	2-isopropoxyethanol; ethylene glycol monoisopropyl ether	203-685-6	109-59-1	Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2	H332 H312 H319	GHS07 Wng	H332 H312 H319			
603-014-00-0	2-butoxyethanol; ethylene glycol monobutyl ether; butyl cellosolve	203-905-0	111-76-2	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2	H332 H312 H302 H319 H315	GHS07 Wng	H332 H312 H302 H319 H315			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-015-00-6	allyl alcohol	203-470-7	107-18-6	Flam. Liq. 2 Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H225 H331 H311 H301 H319 H335 H315 H400	GHS02 GHS06 GHS09 Dgr	H225 H331 H311 H301 H319 H335 H315 H400			
603-016-00-1	4-hydroxy-4-methylpentan-2-one; diacetone alcohol	204-626-7	123-42-2	Eye Irrit. 2	H319	GHS07 Wng	H319		Eye Irrit. 2; H319: C ≥ 10 %	
603-018-00-2	furfuryl alcohol	202-626-1	98-00-0	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*)	H332 H312 H302	GHS07 Wng	H332 H312 H302		(*)	
603-019-00-8	dimethyl ether	204-065-8	115-10-6	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U
603-020-00-3	ethyl methyl ether	—	540-67-0	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U
603-021-00-9	methyl vinyl ether	203-475-4	107-25-5	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			D U
603-022-00-4	diethyl ether; ether	200-467-2	60-29-7	Flam. Liq. 1 Acute Tox. 4 (*) STOT SE 3	H224 H302 H336	GHS02 GHS07 Dgr	H224 H302 H336	EUH019 EUH066		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-023-00-X	ethylene oxide; oxirane	200-849-9	75-21-8	Flam. Gas 1 Press. Gas Carc. 1B Muta. 1B Acute Tox. 3 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H220 H350 H340 H331 H319 H335 H315	GHS02 GHS04 GHS06 GHS08 Dgr	H220 H350 H340 H331 H319 H335 H315			U
603-024-00-5	1,4-dioxane	204-661-8	123-91-1	Flam. Liq. 2 Carc. 2 Eye Irrit. 2 STOT SE 3	H225 H351 H319 H335	GHS02 GHS08 GHS07 Dgr	H225 H351 H319 H335	EUH019 EUH066		D
603-025-00-0	tetrahydrofuran	203-726-8	109-99-9	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H335	GHS02 GHS07 Dgr	H225 H319 H335	EUH019	Eye Irrit. 2; H319: C ≥ 25 % STOT SE 3; H335: C ≥ 25 %	
603-026-00-6	1-chloro-2,3-epoxypropane; epichlorhydrin	203-439-8	106-89-8	Flam. Liq. 3 Carc. 1B Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Skin Sens. 1	H226 H350 H331 H311 H301 H314 H317	GHS02 GHS06 GHS08 GHS05 Dgr	H226 H350 H331 H311 H301 H314 H317		(*)	
603-027-00-1	ethanediol; ethylene glycol	203-473-3	107-21-1	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
603-028-00-7	2-chloroethanol; ethylene chlorohydrin	203-459-7	107-07-3	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*)	H330 H310 H300	GHS06 Dgr	H330 H310 H300			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-029-00-2	bis(2-chloroethyl) ether	203-870-1	111-44-4	Carc. 2 Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*)	H351 H330 H310 H300	GHS06 GHS08 Dgr	H351 H330 H310 H300			
603-030-00-8	2-aminoethanol; ethanolamine	205-483-3	141-43-5	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1B	H332 H312 H302 H314	GHS05 GHS07 Dgr	H332 H312 H302 H314		STOT SE 3; H335: C ≥ 5 %	
603-031-00-3	1,2-dimethoxyethane; ethylene glycol dimethyl ether; EGDME	203-794-9	110-71-4	Flam. Liq. 2 Repr. 1B Acute Tox. 4 (*)	H225 H360-FD H332	GHS02 GHS08 GHS07 Dgr	H225 H360FD H332	EUH019		
603-032-00-9	ethylene dinitrate; ethylene glycol dinitrate	211-063-0	628-96-6	Unst. Expl. Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) STOT RE 2 (*)	H200 H330 H310 H300 H373 (**)	GHS01 GHS06 GHS08 Dgr	H200 H330 H310 H300 H373 (**)			
603-033-00-4	oxydiethylene dinitrate; diethylene glycol dinitrate; digol dinitrate	211-745-8	693-21-0	Unst. Expl Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) STOT RE 2 (*) Aquatic Chronic 3	H200 H330 H310 H300 H373 (**) H412	GHS01 GHS06 GHS08 Dgr	H200 H330 H310 H300 H373 (**) H412			
603-033-01-1	oxydiethylene dinitrate; diethylene glycol dinitrate; digol dinitrate; [>25 % phlegmatiser]	211-745-8	693-21-0	Expl. 1.1 Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) STOT RE 2 (*) Aquatic Chronic 3	H201 H330 H310 H300 H373 (**) H412	GHS01 GHS06 GHS08 Dgr	H201 H330 H310 H300 H373 (**) H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-034-00-X	glycerol trinitrate; nitroglycerine	200-240-8	55-63-0	Unst. Expl. Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) STOT RE 2 (*) Aquatic Chronic 2	H200 H330 H310 H300 H373 (**) H411	GHS01 GHS06 GHS08 GHS09 Dgr	H200 H330 H310 H300 H373 (**) H411			
603-034-01-7	glycerol trinitrate; nitroglycerine; [>40 % phlegmatiser]	200-240-8	55-63-0	Expl. 1.1 Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) STOT RE 2 (*) Aquatic Chronic 2	H201 H330 H310 H300 H373 (**) H411	GHS01 GHS06 GHS08 GHS09 Dgr	H201 H330 H310 H300 H373 (**) H411			
603-035-00-5	pentaerythritol tetranitrate; pentaerythrite tetranitrate; P.E.T.N.	201-084-3	78-11-5	Unst. Expl.	H200	GHS01 Dgr	H200			
603-035-01-2	pentaerythritol tetranitrate; pentaerythrite tetranitrate; P.E.T.N.; [>20 % phlegmatiser]	201-084-3	78-11-5	Expl. 1.1	H201	GHS01 Dgr	H201			T
603-036-00-0	mannitol hexanitrate; nitromannite	239-924-6	15825-70-4	Unst. Expl.	H200	GHS01 Dgr	H200			
603-036-01-8	mannitol hexanitrate; nitromannite; [≥40 % phlegmatiser]	239-924-6	15825-70-4	Expl. 1.1	H201	GHS01 Dgr	H201			
603-037-00-6	cellulose nitrate;	—	—	Expl. 1.1	H201	GHS01 Dgr	H201	EUH001		T

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-038-00-1	allyl glycidyl ether; allyl 2,3-epoxypropyl ether; prop-2-en-1-yl 2,3-epoxypropyl ether	203-442-4	106-92-3	Flam. Liq. 3 Carc. 2 Muta. 2 Repr. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H226 H351 H341 H361f (***) H332 H302 H335 H315 H318 H317 H412	GHS02 GHS08 GHS05 GHS07 Dgr	H226 H351 H341 H361f (***) H332 H302 H335 H315 H318 H317 H412			
603-039-00-7	butyl glycidyl ether; butyl 2,3-epoxypropyl ether	219-376-4	2426-08-6	Flam. Liq. 3 Carc. 2 Muta. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) STOT SE 3 Skin Sens. 1 Aquatic Chronic 3	H226 H351 H341 H332 H302 H335 H317 H412	GHS02 GHS08 GHS07 Wng	H226 H351 H341 H332 H302 H335 H317 H412			
603-040-00-2	sodium methanolate; sodium methoxide; [1] potassium methanolate; potassium methoxide; [2] lithium methanolate; lithium methoxide [3]	204-699-5 [1] 212-736-1 [2] 212-737-7 [3]	124-41-4 [1] 865-33-8 [2] 865-34-9 [3]	Self-heat 1 Skin Corr. 1B	H251 H314	GHS02 GHS05 Dgr	H251 H314	EUH014		T
603-041-00-8	potassium ethanolate; potassium ethoxide; [1] sodium ethanolate; sodium ethoxide [2]	213-029-0 [1] 205-487-5 [2]	917-58-8 [1] 141-52-6 [2]	Self-heat 1 Skin Corr. 1B	H251 H314	GHS02 GHS05 Dgr	H251 H314	EUH014		T
603-042-00-3	aluminium-tri-isopropoxide	209-090-8	555-31-7	Flam. Sol. 1	H228	GHS02 Dgr	H228			T

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-043-00-9	triarimol (ISO); 2,4-dichloro- α -(pyrimidin-5-yl) benzhydryl alcohol	—	26766-27-8	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
603-044-00-4	dicofol (ISO); 2,2,2-trichloro-1,1-bis(4-chlorophenyl)ethanol	204-082-0	115-32-2	Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H315 H317 H400 H410	GHS07 GHS09 Wng	H312 H302 H315 H317 H410			
603-045-00-X	diisopropyl ether; [1] dipropyl ether [2]	203-560-6 [1] 203-869-6 [2]	108-20-3 [1] 111-43-3 [2]	Flam. Liq. 2 STOT SE 3	H225 H336	GHS02 GHS07 Dgr	H225 H336	EUH019 EUH066		C
603-046-00-5	bis (chloromethyl) ether; oxybis(chloromethane)	208-832-8	542-88-1	Flam. Liq. 2 Carc. 1A Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 4 (*)	H225 H350 H330 H311 H302	GHS02 GHS06 GHS08 Dgr	H225 H350 H330 H311 H302		Carc. 1A; H350: C $\geq$ 0,001 %	
603-047-00-0	2-dimethylaminoethanol; N,N-dimethylethanolamine	203-542-8	108-01-0	Flam. Liq. 3 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1B	H226 H332 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H226 H332 H312 H302 H314		STOT SE 3; H335: C $\geq$ 5 %	
603-048-00-6	2-diethylaminoethanol; N,N-diethylethanolamine	202-845-2	100-37-8	Flam. Liq. 3 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1B	H226 H332 H312 H302 H314	GHS02 GHS05 GHS07 GHS09 Dgr	H226 H332 H312 H302 H314		STOT SE 3; H335: C $\geq$ 5 %	
603-049-00-1	chlorfenethol (ISO); 1,1-bis (4-chlorophenyl) ethanol	201-246-3	80-06-8	Acute Tox. 4 (*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-050-00-7	1-(2-butoxypropoxy)propan-2-ol	246-011-6	24083-03-2	Acute Tox. 4 (*) Acute Tox. 4 (*)	H312 H302	GHS07 Wng	H312 H302			
603-051-00-2	2-ethylbutan-1-ol	202-621-4	97-95-0	Acute Tox. 4 (*) Acute Tox. 4 (*)	H312 H302	GHS07 Wng	H312 H302			
603-052-00-8	3-butoxypropan-2-ol; propylene glycol monobutyl ether	225-878-4	5131-66-8	Eye Irrit. 2 Skin Irrit. 2	H319 H315	GHS07 Wng	H319 H315			
603-053-00-3	2-methylpentane-2,4-diol	203-489-0	107-41-5	Eye Irrit. 2 Skin Irrit. 2	H319 H315	GHS07 Wng	H319 H315			
603-054-00-9	di-n-butyl ether; dibutyl ether	205-575-3	142-96-1	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 3	H226 H319 H335 H315 H412	GHS02 GHS07 Wng	H226 H319 H335 H315 H412		STOT SE 3; H335: C ≥ 10 %	
603-055-00-4	propylene oxide; 1,2-epoxypropane; methyloxirane	200-879-2	75-56-9	Flam. Liq. 1 Carc. 1B Muta. 1B Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H224 H350 H340 H332 H312 H302 H319 H335 H315	GHS02 GHS08 GHS07 Dgr	H224 H350 H340 H332 H312 H302 H319 H335 H315			
603-056-00-X	[(p-tolyloxy)methyl]oxirane; [1] [(m-tolyloxy)methyl]oxirane; [2] 2,3-epoxypropyl o-tolyl ether; [3] [(tolyloxy)methyl]oxirane; cresyl glycidyl ether [4]	218-574-8 [1] 218-575-3 [2] 218-645-3 [3] 247-711-4 [4]	2186-24-5 [1] 2186-25-6 [2] 2210-79-9 [3] 26447-14-3 [4]	Muta. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H341 H315 H317 H411	GHS08 GHS07 GHS09 Wng	H341 H315 H317 H411			C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-057-00-5	benzyl alcohol	202-859-9	100-51-6	Acute Tox. 4 (*) Acute Tox. 4 (*)	H332 H302	GHS07 Wng	H332 H302			
603-058-00-0	1,3-propylene oxide	207-964-3	503-30-0	Flam. Liq. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*)	H225 H332 H312 H302	GHS02 GHS07 Dgr	H225 H332 H312 H302			
603-059-00-6	hexan-1-ol	203-852-3	111-27-3	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
603-060-00-1	2,2'-bioxirane; 1,2:3,4-diepoxybutane	215-979-1	1464-53-5	Carc. 1B Muta. 1B Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B	H350 H340 H330 H311 H301 H314	GHS06 GHS08 GHS05 Dgr	H350 H340 H330 H311 H301 H314			
603-061-00-7	tetrahydro-2-furylmethanol; tetrahydrofurfuryl alcohol	202-625-6	97-99-4	Eye Irrit. 2	H319	GHS07 Wng	H319			
603-062-00-2	tetrahydrofuran-2,5-diylldimethanol	203-239-0	104-80-3	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315		STOT SE 3; H335: C ≥ 10 %	
603-063-00-8	2,3-epoxypropan-1-ol; glycidol; oxiranemethanol	209-128-3	556-52-5	Carc. 1B Muta. 2 Repr. 1B Acute Tox. 3 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H350 H341 H360F (***) H331 H312 H302 H319 H335 H315	GHS06 GHS08 Dgr	H350 H341 H360F (***) H331 H312 H302 H319 H335 H315			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-064-00-3	1-methoxy-2-propanol; monopropylene glycol methyl ether	203-539-1	107-98-2	Flam. Liq. 3	H226	GHS02 Wng	H226			
603-065-00-9	resorcinol diglycidyl ether; 1,3-bis(2,3-epoxypropoxy)benzene	202-987-5	101-90-6	Carc. 2 Muta. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H351 H341 H312 H302 H319 H315 H317 H412	GHS08 GHS07 Wng	H351 H341 H312 H302 H319 H315 H317 H412			
603-066-00-4	1,2-epoxy-4-epoxyethylcyclohexane; vinylcyclohexane diepoxide	203-437-7	106-87-6	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Carc. 2	H331 H311 H301 H351	GHS06 GHS08 Dgr	H331 H311 H301 H351		(*)	
603-067-00-X	phenyl glycidyl ether; 2,3-epoxypropyl phenyl ether; 1,2-epoxy-3-phenoxypropane	204-557-2	122-60-1	Carc. 1B Muta. 2 Acute Tox. 4 (*) STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H350 H341 H332 H335 H315 H317 H412	GHS08 GHS07 Dgr	H350 H341 H332 H335 H315 H317 H412			
603-068-00-5	2,3-epoxypropyl-2-ethylcyclohexyl ether; ethylcyclohexylglycidyl ether	—	130014-35-6	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			
603-069-00-0	2,4,6-tris(dimethylaminomethyl)phenol	202-013-9	90-72-2	Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2	H302 H319 H315	GHS07 Wng	H302 H319 H315			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-070-00-6	2-amino-2-methylpropanol	204-709-8	124-68-5	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 3	H319 H315 H412	GHS07 Wng	H319 H315 H412			
603-071-00-1	2,2'-iminodiethanol; diethanolamine	203-868-0	111-42-2	Acute Tox. 4 (*) STOT RE 2 (*) Skin Irrit. 2 Eye Dam. 1	H302 H373 (**) H315 H318	GHS08 GHS05 GHS07 Dgr	H302 H373 (**) H315 H318			
603-072-00-7	1,4-bis(2,3 epoxypoxy)butane; butanedioldiglycidyl ether	219-371-7	2425-79-8	Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H332 H312 H319 H315 H317	GHS07 Wng	H332 H312 H319 H315 H317			
603-073-00-2	bis-[4-(2,3-epoxipropoxy)phenyl]propane	216-823-5	1675-54-3	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317		Eye Irrit. 2; H319: C ≥ 5 % Skin Irrit. 2; H315: C ≥ 5 %	
603-074-00-8	reaction product: bisphenol-A-(epichlorhydrin); epoxy resin (number average molecular weight ≤ 700)	500-033-5	25068-38-6	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H319 H315 H317 H411	GHS07 GHS09 Wng	H319 H315 H317 H411		Eye Irrit. 2; H319: C ≥ 5 % Skin Irrit. 2; H315: C ≥ 5 %	
603-075-00-3	chlormethyl methyl ether; chlorodimethyl ether	203-480-1	107-30-2	Flam. Liq. 2 Carc. 1A Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*)	H225 H350 H332 H312 H302	GHS02 GHS08 GHS07 Dgr	H225 H350 H332 H312 H302			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-076-00-9	but-2-yne-1,4-diol; 2-butyne-1,4-diol	203-788-6	110-65-6	Skin Corr. 1B Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 4 (*) STOT RE 2 (*) Skin Sens. 1	H314 H331 H301 H312 H373 (**) H317	GHS06 GHS05 GHS08 Dgr	H314 H331 H301 H312 H373 (**) H317		Skin Corr. 1B; H314: C ≥ 50 % Skin Irrit. 2; H315: 25 % ≤ C < 50 % Eye Irrit. 2; H319: 25 % ≤ C < 50 %	D
603-077-00-4	1-dimethylaminopropan-2-ol; dimepranol (INN)	203-556-4	108-16-7	Flam. Liq. 3 Acute Tox. 4 (*) Skin Corr. 1B	H226 H302 H314	GHS02 GHS05 GHS07 Dgr	H226 H302 H314			
603-078-00-X	prop-2-yn-1-ol; propargyl alcohol	203-471-2	107-19-7	Flam. Liq. 3 Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Aquatic Chronic 2	H226 H331 H311 H301 H314 H411	GHS02 GHS06 GHS05 GHS09 Dgr	H226 H331 H311 H301 H314 H411			
603-079-00-5	2,2'-(methylimino)diethanol; N-methyldiethanolamine	203-312-7	105-59-9	Eye Irrit. 2	H319	GHS07 Wng	H319			
603-080-00-0	2-methylaminoethanol; N-methylethanolamine; N-methyl-2-ethanolamine; N-methyl-2-amino ethanol; 2-(methylamino)ethanol	203-710-0	109-83-1	Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1B	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314		STOT SE 3; H335: C ≥ 5 %	
603-081-00-6	2,2'-thiodiethanol; thiodiglycol	203-874-3	111-48-8	Eye Irrit. 2	H319	GHS07 Wng	H319			
603-082-00-1	1-aminopropan-2-ol; isopropanolamine	201-162-7	78-96-6	Skin Corr. 1B	H314	GHS05 Dgr	H314			
603-083-00-7	1,1'-iminodipropan-2-ol; di-isopropanolamine	203-820-9	110-97-4	Eye Irrit. 2	H319	GHS07 Wng	H319			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-084-00-2	styrene oxide; (epoxyethyl)benzene; phenyloxirane	202-476-7	96-09-3	Carc. 1B Acute Tox. 4 (*) Eye Irrit. 2	H350 H312 H319	GHS08 GHS07 Dgr	H350 H312 H319			
603-085-00-8	bronopol (INN); 2-bromo-2-nitropropane-1,3-diol	200-143-0	52-51-7	Acute Tox. 4 (*) Acute Tox. 4 (*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1	H312 H302 H335 H315 H318 H400	GHS05 GHS07 GHS09 Dgr	H312 H302 H335 H315 H318 H400			
603-086-00-3	ethirimol (ISO); 5-butyl-2-ethylamino-6-methylpyrimidin-4-ol	245-949-3	23947-60-6	Acute Tox. 4 (*)	H312	GHS07 Wng	H312			
603-087-00-9	2-ethylhexane-1,3-diol; octylene glycol; ethoexadiol	202-377-9	94-96-2	Eye Dam. 1	H318	GHS05 Dgr	H318			
603-088-00-4	2-(octylthio)ethanol; 2-hydroxyethyl octyl sulphide	222-598-4	3547-33-9	Eye Dam. 1	H318	GHS05 Dgr	H318			
603-089-00-X	7,7-dimethyl-3-oxa-6-azaoctan-1-ol	400-390-6	—	Skin Corr. 1A Acute Tox. 4 (*)	H314 H302	GHS05 GHS07 Dgr	H314 H302			
603-090-00-5	2-(2-bromoethoxy)anisole	402-010-4	4463-59-6	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
603-091-00-0	exo-1-methyl-4-(1-methylethyl)-7-oxabicyclo[2.2.1]heptan-2-ol	402-470-6	87172-89-2	Acute Tox. 4 (*) Eye Dam. 1	H302 H318	GHS05 GHS07 Dgr	H302 H318			
603-092-00-6	2-methyl-4-phenylpentanol	402-770-7	92585-24-5	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-093-00-1	cinmethylin (ISO); <i>exo</i> -(±)-1-methyl-2-(2-methylbenzyloxy)-4-isopropyl-7-oxabicyclo(2.2.1)heptane	402-410-9	87818-31-3	Acute Tox. 4 (*) Aquatic Chronic 2	H332 H411	GHS07 GHS09 Dgr	H332 H411			
603-094-00-7	1,3-bis(2,3-epoxypropoxy)-2,2-dimethylpropane	241-536-7	17557-23-2	Skin Irrit. 2 Skin Sens. 1	H315 H317	GHS07 Wng	H315 H317			
603-095-00-2	2-(propyloxy)ethanol; EGPE	220-548-6	2807-30-9	Acute Tox. 4 (*) Eye Irrit. 2	H312 H319	GHS07 Wng	H312 H319			
603-096-00-8	2-(2-butoxyethoxy)ethanol; diethylene glycol monobutyl ether	203-961-6	112-34-5	Eye Irrit. 2	H319	GHS07 Wng	H319			
603-097-00-3	1,1',1''-nitritotripropan-2-ol; triisopropanolamine	204-528-4	122-20-3	Eye Irrit. 2 Aquatic Chronic 3	H319 H412	GHS07 Wng	H319 H412			
603-098-00-9	2-phenoxyethanol	204-589-7	122-99-6	Acute Tox. 4 (*) Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			
603-099-00-4	3-(N-methyl-N-(4-methylamino-3-nitrophenyl)amino)propane-1,2-diol hydrochloride	403-440-5	93633-79-5	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
603-100-00-8	1,2-dimethoxypropane	404-630-0	7778-85-0	Flam. Liq. 2	H225	GHS02 Dgr	H225	EUH019		
603-101-00-3	tetrahydro-2-isobutyl-4-methylpyran-4-ol, mixed isomers (<i>cis</i> and <i>trans</i>)	405-040-6	—	Eye Irrit. 2	H319	GHS07 Wng	H319			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-102-00-9	1,2-epoxybutane	203-438-2	106-88-7	Flam. Liq. 2 Carc. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 3	H225 H351 H332 H312 H302 H319 H335 H315 H412	GHS02 GHS08 GHS07 Dgr	H225 H351 H332 H312 H302 H319 H335 H315 H412			
603-103-00-4	oxirane, mono[(C ₁₂₋₁₄ -alkyloxy)methyl] derivs.	271-846-8	68609-97-2	Skin Irrit. 2 Skin Sens. 1	H315 H317	GHS07 Wng	H315 H317			
603-104-00-X	fenarimol (ISO); 2,4'-dichloro- α -(pyrimidin-5-yl)benzhydryl alcohol	262-095-7	60168-88-9	Repr. 2 Lact. Aquatic Chronic 2	H361fd H362 H411	GHS08 GHS09 Wng	H361fd H362 H411			
603-105-00-5	furan	203-727-3	110-00-9	Flam. Liq. 1 Carc. 1B Muta. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Skin Irrit. 2 Aquatic Chronic 3	H224 H350 H341 H332 H302 H373 (**) H315 H412	GHS02 GHS08 GHS07 Dgr	H224 H350 H341 H332 H302 H373 (**) H315 H412	EUH019		
603-106-00-0	2-methoxypropanol	216-455-5	1589-47-5	Flam. Liq. 3 Repr. 1B STOT SE 3 Skin Irrit. 2 Eye Dam. 1	H226 H360D (***) H335 H315 H318	GHS02 GHS08 GHS05 GHS07 Dgr	H226 H360D (***) H335 H315 H318			
603-107-00-6	2-(2-methoxyethoxy)ethanol; diethylene glycol monomethyl ether	203-906-6	111-77-3	Repr. 2	H361d (***)	GHS08 Wng	H361d (***)			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-108-00-1	2-methylpropan-1-ol; iso-butanol	201-148-0	78-83-1	Flam. Liq. 3 STOT SE 3 Skin Irrit. 2 Eye Dam. 1 STOT SE 3	H226 H335 H315 H318 H336	GHS02 GHS05 GHS07 Dgr	H226 H335 H315 H318 H336			
603-117-00-0	propan-2-ol; isopropyl alcohol; isopropanol	200-661-7	67-63-0	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H336	GHS02 GHS07 Dgr	H225 H319 H336			
603-118-00-6	6-dimethylaminohexan-1-ol	404-680-3	1862-07-3	Acute Tox. 4 (*) Skin Corr. 1B Aquatic Chronic 3	H302 H314 H412	GHS05 GHS07 Dgr	H302 H314 H412			
603-119-00-1	1,1'-(1,3-phenylenedioxy)bis(3-(2-(prop-2-enyl)phenoxy)propan-2-ol)	405-840-5	—	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
603-120-00-7	2-methyl-5-phenylpentanol	405-890-8	25634-93-9	Eye Irrit. 2 Skin Irrit. 2	H319 H315	GHS07 Wng	H319 H315			
603-121-00-2	4-[4-(1,3-dihydroxyprop-2-yl)phenylamino]-1,8-dihydroxy-5-nitroanthraquinone	406-057-1	114565-66-1	Carc. 2 Skin Sens. 1 Aquatic Chronic 4	H351 H317 H413	GHS08 GHS07 Wng	H351 H317 H413			
603-122-00-8	sodium 2-ethylhexanolate	406-150-7	38411-13-1	Flam. Sol. 1 Skin Corr. 1B Aquatic Chronic 3	H228 H314 H412	GHS02 GHS05 Dgr	H228 H314 H412			T
603-123-00-3	4-methyl-8-methylenetricyclo[3.3.1.1 ^{3,7}]decan-2-ol	406-330-5	122760-84-3	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H315 H317 H411	GHS07 GHS09 Wng	H315 H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-124-00-9	1,4-bis[2-(vinylxy)ethoxy]benzene	406-900-3	84563-49-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
603-125-00-4	2-(2,4-dichlorophenyl)-1-(1H-1,2,4-triazol-1-yl)pent-4-en-2-ol	407-850-5	89544-40-1	Acute Tox. 4 (*) Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			
603-126-00-X	2-((4-methyl-2-nitrophenyl)amino)ethanol	408-090-7	100418-33-5	Acute Tox. 4 (*) Skin Sens. 1 Aquatic Chronic 3	H302 H317 H412	GHS07 Wng	H302 H317 H412			
603-127-00-5	butan-2-ol; [1] (S)-butan-2-ol; [2] (R)-butan-2-ol; [3] (±)-butan-2-ol [4]	201-158-5 [1] 224-168-1 [2] 238-967-8 [3] 240-029-8 [4]	78-92-2 [1] 4221-99-2 [2] 14898-79-4 [3] 15892-23-6 [4]	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3 STOT SE 3	H226 H319 H335 H336	GHS02 GHS07 Wng	H226 H319 H335 H336			C
603-128-00-0	2-(phenylmethoxy)naphthalene	405-490-3	613-62-7	Aquatic Chronic 4	H413	—	H413			
603-129-00-6	1-tert-butoxypropan-2-ol	406-180-0	57018-52-7	Flam. Liq. 3 Eye Dam. 1	H226 H318	GHS02 GHS05 Dgr	H226 H318			
603-130-00-1	reaction mass of isomers of: α-((dimethyl)biphenyl)-ω-hydroxypoly(oxyethylene)	406-325-8	—	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
603-131-00-7	reaction mass of: 1-deoxy-1-[methyl-(1-oxododecyl)amino]-D-glucitol; 1-deoxy-1-[methyl-(1-oxotetradecyl)amino]-D-glucitol (3:1)	407-290-1	—	Eye Dam. 1	H318	GHS05 Dgr	H318			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-132-00-2	2-hydroxymethyl-9-methyl-6-(1-methylethyl)-1,4-dioxaspiro[4.5]decane	408-200-3	63187-91-7	Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 3	H315 H318 H412	GHS05 Dgr	H315 H318 H412			
603-133-00-8	reaction mass of: 3-[(4-amino-2-chloro-5-nitrophenyl)amino]-propane-1,2-diol; 3,3'-(2-chloro-5-nitro-1,4-phenylenedii-mino)bis(propan-1,2-diol)	408-240-1	—	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
603-134-00-3	reaction mass of substituted dodecyl and/or tetradecyl, diphenyl ethers. The substance is produced by the Friedel Crafts reaction. The catalyst is removed from the reaction product. Diphenyl ether is substituted by C ₁ -C ₁₀ alkyl groups. The alkyl groups are bonded randomly between C ₁ and C ₆ . Linear C ₁₂ and C ₁₄ , 50/50 used.	410-450-3	—	Aquatic Chronic 4	H413	—	H413			
603-135-00-9	bis[[2,2',2''-nitritoltris-[ethanolato]]-1-N,O]-bis[2-(2-methoxyethoxy)ethoxy]-titanium	410-500-4	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
603-136-00-4	3-((4-(bis(2-hydroxyethyl)amino)-2-nitrophenyl)amino)-1-propanol	410-910-3	104226-19-9	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
603-137-00-X	reaction mass of: 1-deoxy-1-[methyl-(1-oxohexadecyl)amino]-D-glucitol; 1-deoxy-1-[methyl-(1-oxooctadecyl)amino]-D-glucitol	411-130-6	—	Eye Dam. 1	H318	GHS05 Dgr	H318			
603-138-00-5	3-(2,2-dimethyl-3-hydroxypropyl)toluene; (alt.): 2,2-dimethyl-3-(3-methylphenyl)propanol	403-140-4	103694-68-4	Aquatic Chronic 3	H412	—	H412			
603-139-00-0	bis(2-methoxyethyl) ether	203-924-4	111-96-6	Flam. Liq. 3 Repr. 1B	H226 H360-FD	GHS02 GHS08 Dgr	H226 H360FD	EUH019		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-140-00-6	2,2' -oxybisethanol; diethylene glycol	203-872-2	111-46-6	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
603-141-00-1	reaction mass of: dodecyloxy-1-methyl-1-[oxy-poly-(2-hydroxymethylethanoxy)]pentadecane; dodecyloxy-1-methyl-1-[oxy-poly-(2-hydroxymethylethanoxy)]heptadecane	413-780-6	—	Aquatic Chronic 3	H412	—	H412			
603-142-00-7	2-(2-(2-hydroxyethoxy)ethyl)-2-aza-bicyclo [2.2.1]heptane	407-360-1	116230-20-7	Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Skin Irrit. 2 Eye Dam. 1	H312 H302 H373 (**) H315 H318	GHS06 GHS08 GHS05 Dgr	H312 H302 H373 (**) H315 H318			
603-143-00-2	R-2,3-epoxy-1-propanol	404-660-4	57044-25-4	Self-react. C **** Carc. 1B Muta. 2 Repr. 1B Acute Tox. 3 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1B	H242 H350 H341 H360F (***) H331 H312 H302 H314	GHS02 GHS06 GHS08 GHS05 Dgr	H242 H350 H341 H360F (***) H331 H312 H302 H314			
603-144-00-8	reaction mass of: 2,6,9-trimethyl-2,5,9-cyclododecatrien-1-ol; 6,9-dimethyl-2-methylen-5,9-cyclododecadien-1-ol	413-530-6	111850-00-1	Aquatic Chronic 2	H411	GHS09	H411			
603-145-00-3	2-isopropyl-2-(1-methylbutyl)-1,3-dimethoxypropane	406-970-5	129228-11-1	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
603-146-00-9	2-[(2-[2-(dimethylamino)ethoxy]ethyl)methylamino]ethanol	406-080-7	83016-70-0	Acute Tox. 4 (*) Skin Corr. 1B Aquatic Chronic 3	H302 H314 H412	GHS05 GHS07 Dgr	H302 H314 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-147-00-4	(-)-trans-4-(4'-fluorophenyl)-3-hydroxymethyl-N-methylpiperidine	406-030-4	105812-81-5	Acute Tox. 4 (*) Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			
603-148-00-X	1,4-bis[(vinyloxy)methyl]cyclohexane	413-370-7	17351-75-6	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
603-149-00-5	reaction mass of diastereoisomers of 1-(1-hydroxyethyl)-4-(1-methylethyl)cyclohexane	407-640-3	63767-86-2	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H319 H315 H411	GHS07 GHS09 Wng	H319 H315 H411			
603-150-00-0	(±) trans-3,3-dimethyl-5-(2,2,3-trimethylcyclopent-3-en-1-yl)-pent-4-en-2-ol	411-580-3	107898-54-4	Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H315 H400 H410	GHS07 GHS09 Wng	H315 H410			
603-151-00-6	(±)-2-(2,4-dichlorophenyl)-3-(1H-1,2,4-triazol-1-yl)propan-1-ol	413-570-4	—	Aquatic Chronic 3	H412	—	H412			
603-152-00-1	2-(4-tert-butylphenyl)ethanol	410-020-5	5406-86-0	Repr. 2 STOT RE 2 (*) Eye Dam. 1 Aquatic Chronic 2	H361f (***) H373 (**) H318 H411	GHS08 GHS05 GHS09 Dgr	H361f (***) H373 (**) H318 H411			
603-153-00-7	3-((2-nitro-4-(trifluoromethyl)phenyl)amino)propane-1,2-diol	410-010-0	104333-00-8	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
603-154-00-2	1-[(2-tert-butyl)cyclohexyloxy]-2-butanol	412-300-2	139504-68-0	Aquatic Chronic 2	H411	GHS09	H411			
603-155-00-8	Reaction products of 2-(4,6-bis(2,4-dimethylphenyl)-1,3,5-triazin-2-yl)-5-hydroxyphenol with ((C ₁₀₋₁₆ , rich in C ₁₂₋₁₃ alkyloxy)methyl)oxyrane	410-560-1	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-156-00-3	2-(2,4-dichlorophenyl)-2-(2-propenyl)oxirane	411-210-0	89544-48-9	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
603-157-00-9	6,9-bis(hexadecyloxymethyl)-4,7-dioxanone-1,2,9-triol	411-450-6	143747-72-2	Aquatic Chronic 4	H413	—	H413			
603-158-00-4	reaction mass of 4 diastereoisomers of 2,7-dimethyl-10-(1-methylethyl)-1-oxaspiro [4.5]deca-3,6-diene	412-460-3	—	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
603-159-00-X	2-cyclododecylpropan-1-ol	411-410-8	118562-73-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
603-160-00-5	1,2-diethoxypropane	412-180-1	10221-57-5	Flam. Liq. 2	H225	GHS02 Dgr	H225	EUH019		
603-161-00-0	1,3-diethoxypropane	413-140-6	3459-83-4	Flam. Liq. 3	H226	GHS02 Wng	H226			
603-162-00-6	α [2-[[[(2-hydroxyethyl)methylamino]acetyl]amino]propyl]- ω nonylphenoxy)poly[oxo(methyl-1,2-ethanediyl)]	413-420-8	144736-29-8	Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H314 H317 H411	GHS05 GHS07 GHS09 Dgr	H314 H317 H411			
603-163-00-1	2-phenyl-1,3-propanediol	411-810-2	1570-95-2	Eye Dam. 1	H318	GHS05 Dgr	H318			
603-164-00-7	2-butyl-4-chloro-4,5-dihydro-5-hydroxymethyl-1-[2'-(2-triphenylmethyl-1,2,3,4-2H-tetrazol-5-yl)-1,1'-biphenyl-4-methyl]-1H-imidazole	412-420-5	133909-99-6	Aquatic Chronic 4	H413	—	H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-165-00-2	reaction mass of: 4-allyl-2,6-bis(2,3-epoxypropyl)phenol; 4-allyl-6-[3-[6-[3-[3-(4-allyl-2,6-bis(2,3-epoxypropyl)phenoxy)-2-hydroxypropyl]-4-allyl-2-(2,3-epoxypropyl)phenoxy]-2-hydroxypropyl]-4-allyl-2-(2,3-epoxypropyl)phenoxy]-2-hydroxypropyl]-2-(2,3-epoxypropyl)phenol; 4-allyl-6-[3-(4-allyl-2,6-bis(2,3-epoxypropyl)phenoxy)-2-hydroxypropyl]-2-(2,3-epoxypropyl)phenol; 4-allyl-6-[3-[6-[3-(4-allyl-2,6-bis(2,3-epoxypropyl)phenoxy)-2-hydroxypropyl]-4-allyl-2-(2,3-epoxypropyl)phenoxy]-2-hydroxypropyl]-2-(2,3-epoxypropyl)phenol	417-470-1	—	Muta. 2 Skin Sens. 1	H341 H317	GHS08 GHS07 Wng	H341 H317			
603-166-00-8	R-1-chloro-2,3-epoxypropane	424-280-2	51594-55-9	Flam. Liq. 3 Carc. 1B Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Skin Sens. 1	H226 H350 H331 H311 H301 H314 H317	GHS02 GHS06 GHS08 GHS05 Dgr	H226 H350 H331 H311 H301 H314 H317			
603-167-00-3	3,3',5,5'-tetra- <i>tert</i> -butylbiphenyl-2,2'-diol	407-920-5	6390-69-8	Aquatic Chronic 4	H413	GHS05 Dgr	H413			
603-168-00-9	3-(2-ethylhexyloxy)propane-1,2-diol	408-080-2	70445-33-9	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
603-169-00-4	(±)- <i>trans</i> -4-(4-fluorophenyl)-3-hydroxymethyl-N-methylpiperidine	415-550-0	109887-53-8	Acute Tox. 4 (*) Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-170-00-X	reaction mass of: 2-methyl-1-(6-methylbicyclo[2.2.1]hept-5-en-2-yl)pent-1-en-3-ol; 2-methyl-1-(1-methylbicyclo[2.2.1]hept-5-en-2-yl)-pent-1-en-3-ol; 2-methyl-1-(5-methylbicyclo[2.2.1]hept-5-en-2-yl)pent-1-en-3-ol	415-990-3	67739-11-1	Eye Irrit. 2 Aquatic Chronic 2	H319 H411	GHS07 GHS09 Wng	H319 H411			
603-171-00-5	5-thiazolylmethanol	414-780-9	38585-74-9	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
603-172-00-0	mono-2-[2-(4-dibenzo[b,f][1,4]thiazepin-11-yl)piperazinium-1-yl]ethoxy)ethanol <i>trans</i> -butenedioate	415-180-1	773058-82-5	Acute Tox. 4 (*) Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			
603-173-00-6	4,4-dimethyl-3,5,8-trioxabicyclo[5.1.0]octane	421-750-9	57280-22-5	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			
603-174-00-1	4-cyclohexyl-2-methyl-2-butanol	420-630-3	83926-73-2	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
603-175-00-7	2-(2-hexyloxyethoxy)ethanol; DEGHE; diethylene glycol monoethyl ether; 3,6-dioxo-1-dodecanol; hexyl carbitol; 3,6-dioxadodecan-1-ol	203-988-3	112-59-4	Acute Tox. 4 (*) Eye Dam. 1	H312 H318	GHS05 GHS07 Dgr	H312 H318			
603-176-00-2	1,2-bis(2-methoxyethoxy)ethane; TEGDME; triethylene glycol dimethyl ether; triglyme	203-977-3	112-49-2	Repr. 1B	H360-Df	GHS08 Dgr	H360Df	EUH019		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-177-00-8	1-ethoxypropan-2-ol; 2PG1EE; 1-ethoxy-2-propanol; propylene glycol monoethyl ether; [1] 2-ethoxy-1-methylethyl acetate; 2PG1EEA [2]	216-374-5 [1] 259-370-9 [2]	1569-02-4 [1] 54839-24-6 [2]	Flam. Liq. 3 STOT SE 3	H226 H336	GHS02 GHS07 Wng	H226 H336			
603-178-00-3	2-hexyloxyethanol; ethylene glycol monoethyl ether; n-hexylglycol	203-951-1	112-25-4	Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1B	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314			
603-179-00-9	ergocalciferol (ISO); Vitamin D2	200-014-9	50-14-6	Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 1	H330 H311 H301 H372 (**)	GHS06 GHS08 Dgr	H330 H311 H301 H372 (**)			
603-180-00-4	colecalfiferol; Vitamin D3	200-673-2	67-97-0	Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 1	H330 H311 H301 H372 (**)	GHS06 GHS08 Dgr	H330 H311 H301 H372 (**)			
603-181-00-X	tert-butyl methyl ether; MTBE; 2-methoxy-2-methylpropane	216-653-1	1634-04-4	Flam. Liq. 2 Skin Irrit. 2	H225 H315	GHS02 GHS07 Dgr	H225 H315			
603-183-00-0	2-[2-(2-butoxyethoxy)ethoxy]ethanol; TEGBE; triethylene glycol monobutyl ether; butoxytriethylene glycol	205-592-6	143-22-6	Eye Dam. 1	H318	GHS05 Dgr	H318		Eye Dam. 1; H318: C ≥ 30 % Eye Irrit. 2; H319: 20 % ≤ C < 30 %	
603-184-00-6	2-(hydroxymethyl)-2-[[2-hydroxy-3-(isooctadecyloxy)propoxy]methyl]-1,3-propanediol	416-380-1	146925-83-9	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
603-185-00-1	2,4-dichloro-3-ethyl-6-nitrophenol	420-740-1	99817-36-4	Acute Tox. 3 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H301 H318 H317 H400 H410	GHS06 GHS05 GHS09 Dgr	H301 H318 H317 H410			
603-186-00-7	trans-(5RS,6SR)-6-amino-2,2-dimethyl-1,3-dioxepan-5-ol	419-050-3	79944-37-9	Skin Sens. 1	H317	GHS07 Wng	H317			
603-187-00-2	2-((4,6-bis(4-(2-(1-methylpyridinium-4-yl)vinyl)phenylamino)-1,3,5-triazin-2-yl)(2-hydroxyethyl)amino)ethanol dichloride	419-360-9	163661-77-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
603-189-00-3	reaction mass of complexes of: titanium, 2,2'-oxydiethanol, ammonium lactate, nitri-lotris(2-propanol) and ethylene glycol	405-250-8	—	Aquatic Chronic 2	H411	GHS09	H411			
603-191-00-4	2-(4,6-bis(2,4-dimethylphenyl)-1,3,5-triazin-2-yl)-5-(3-((2-ethylhexyl)oxy)-2-hydroxypropoxy)phenol	419-740-4	137658-79-8	Aquatic Chronic 4	H413	—	H413			
603-195-00-6	2-[4-(4-methoxyphenyl)-6-phenyl-1,3,5-triazin-2-yl]-phenol	430-810-3	154825-62-4	Aquatic Chronic 3	H412	—	H412			
603-196-00-1	2-(7-ethyl-1 <i>H</i> -indol-3-yl)ethanol	431-020-1	41340-36-7	Acute Tox. 4 (*) STOT RE 2 (*) Aquatic Chronic 2	H302 H373 (**) H411	GHS08 GHS07 GHS09 Wng	H302 H373 (**) H411			
603-197-00-7	tebuconazole (ISO); 1-(4-chlorophenyl)-4,4-dimethyl-3-(1,2,4-triazol-1-ylmethyl)pentan-3-ol	403-640-2	107534-96-3	Repr. 2 Acute Tox. 4 (*) Aquatic Chronic 2	H361d (***) H302 H411	GHS08 GHS07 GHS09 Wng	H361d (***) H302 H411			
603-199-00-8	etoxazol (ISO); (RS)-5-tert-butyl-2-[2-(2,6-difluorophenyl)-4,5-dihydro-1,3-oxazol-4-yl]phenetole	—	153233-91-1	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410		M=100	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
604-001-00-2	phenol; carbolic acid; monohydroxybenzene; phenylalcohol	203-632-7	108-95-2	Muta. 2 Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*) Skin Corr. 1B	H341 H331 H311 H301 H373 (**) H314	GHS06 GHS08 GHS05 Dgr	H341 H331 H311 H301 H373 (**) H314		(*) Skin Corr. 1B; H314: C ≥ 3 % Skin Irrit. 2; H315: 1 % ≤ C < 3 % Eye Irrit. 2; H319: 1 % ≤ C < 3 %	
604-002-00-8	pentachlorophenol	201-778-6	87-86-5	Carc. 2 Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H330 H311 H301 H319 H335 H315 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H330 H311 H301 H319 H335 H315 H410			
604-003-00-3	sodium pentachlorophenolate; [1] potassium pentachlorophenolate [2]	205-025-2 [1] 231-911-3 [2]	131-52-2 [1] 7778-73-6 [2]	Carc. 2 Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H330 H311 H301 H319 H335 H315 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H330 H311 H301 H319 H335 H315 H410			
604-004-00-9	m-cresol; [1] o-cresol; [2] p-cresol; [3] mix-cresol [4]	203-577-9 [1] 202-423-8 [2] 203-398-6 [3] 215-293-2 [4]	108-39-4 [1] 95-48-7 [2] 106-44-5 [3] 1319-77-3 [4]	Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B	H311 H301 H314	GHS06 GHS05 Dgr	H311 H301 H314		(*)	C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
604-005-00-4	1,4-dihydroxybenzene; hydroquinone; quinol	204-617-8	123-31-9	Carc. 2 Muta. 2 Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H351 H341 H302 H318 H317 H400	GHS08 GHS05 GHS07 GHS09 Dgr	H351 H341 H302 H318 H317 H400			
604-006-00-X	3,4-xilenol; [1] 2,5-xilenol; [2] 2,4-xilenol; [3] 2,3-xilenol; [4] 2,6-xilenol; [5] xilenol; [6] 2,4(or 2,5)-xilenol [7]	202-439-5 [1] 202-461-5 [2] 203-321-6 [3] 208-395-3 [4] 209-400-1 [5] 215-089-3 [6] 276-245-4 [7]	95-65-8 [1] 95-87-4 [2] 105-67-9 [3] 526-75-0 [4] 576-26-1 [5] 1300-71-6 [6] 71975-58-1 [7]	Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Aquatic Chronic 2	H311 H301 H314 H411	GHS06 GHS05 GHS09 Dgr	H311 H301 H314 H411			C
604-007-00-5	2-naphthol	205-182-7	135-19-3	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1	H332 H302 H400	GHS07 GHS09 Wng	H332 H302 H400			
604-008-00-0	2-chlorophenol; [1] 4-chlorophenol; [2] 3-chlorophenol; [3] chlorophenol [4]	202-433-2 [1] 203-402-6 [2] 203-582-6 [3] 246-691-4 [4]	95-57-8 [1] 106-48-9 [2] 108-43-0 [3] 25167-80-0 [4]	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 2	H332 H312 H302 H411	GHS07 GHS09 Wng	H332 H312 H302 H411			C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
604-009-00-6	pyrogallol; 1,2,3-trihydroxybenzene	201-762-9	87-66-1	Muta. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 3	H341 H332 H312 H302 H412	GHS08 GHS07 Wng	H341 H332 H312 H302 H412		(*)	
604-010-00-1	resorcinol; 1,3-benzenediol	203-585-2	108-46-3	Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1	H302 H319 H315 H400	GHS07 GHS09 Wng	H302 H319 H315 H400		(*)	
604-011-00-7	2,4-dichlorophenol	204-429-6	120-83-2	Acute Tox. 3 (*) Acute Tox. 4 (*) Skin Corr. 1B Aquatic Chronic 2	H311 H302 H314 H411	GHS06 GHS05 GHS09 Dgr	H311 H302 H314 H411			
604-012-00-2	4-chloro- <i>o</i> -cresol; 4-chloro-2-methyl phenol	216-381-3	1570-64-5	Acute Tox. 3 (*) Skin Corr. 1A Aquatic Acute 1	H331 H314 H400	GHS06 GHS05 GHS09 Dgr	H331 H314 H400		STOT SE 3; H335: C ≥ 1 %	
604-013-00-8	2,3,4,6-tetrachlorophenol	200-402-8	58-90-2	Acute Tox. 3 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H301 H319 H315 H400 H410	GHS06 GHS09 Dgr	H301 H319 H315 H410		(*) Eye Irrit. 2; H319: C ≥ 5 % Skin Irrit. 2; H315: C ≥ 5 %	
604-014-00-3	chlorocresol; 4-chloro- <i>m</i> -cresol; 4-chloro-3-methylphenol	200-431-6	59-50-7	Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H312 H302 H318 H317 H400	GHS05 GHS07 GHS09 Dgr	H312 H302 H318 H317 H400		(*)	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
604-015-00-9	2,2'-methylenebis-(3,4,6-trichlorophenol); hexachlorophene	200-733-8	70-30-4	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410		(*)	
604-016-00-4	1,2-dihydroxybenzene; pyrocatechol	204-427-5	120-80-9	Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2	H312 H302 H319 H315	GHS07 Wng	H312 H302 H319 H315			
604-017-00-X	2,4,5-trichlorophenol	202-467-8	95-95-4	Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H315 H410		(*) Eye Irrit. 2; H319: C ≥ 5 % Skin Irrit. 2; H315: C ≥ 5 %	
604-018-00-5	2,4,6-trichlorophenol	201-795-9	88-06-2	Carc. 2 Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H319 H315 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H319 H315 H410			
604-019-00-0	dichlorophen (ISO)	202-567-1	97-23-4	Acute Tox. 4 (*) Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H400 H410	GHS07 GHS09 Wng	H302 H319 H410			
604-020-00-6	2-phenylphenol (ISO) biphenyl-2-ol; 2-hydroxybiphenyl;	201-993-5	90-43-7	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H319 H335 H315 H400	GHS07 GHS09 Wng	H319 H335 H315 H400			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
604-021-00-1	sodium 2-biphenylate; 2-phenylphenol, sodium salt	205-055-6	132-27-4	Acute Tox. 4 (*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1	H302 H335 H315 H318 H400	GHS05 GHS07 GHS09 Wng	H302 H335 H315 H318 H400			
604-022-00-7	2,2-dimethyl-1,3-benzodioxol-4-ol	400-900-7	22961-82-6	Eye Dam. 1	H318	GHS05 Dgr	H318			
604-023-00-2	2,4-dichloro-3-ethylphenol	401-060-4	—	Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H314 H400 H410	GHS05 GHS09 Dgr	H314 H410			
604-024-00-8	4,4-isobutylethylidenediphenol	401-720-1	6807-17-6	Repr. 1B Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H360F (***) H319 H400 H410	GHS08 GHS09 Dgr	H360F (***) H319 H410			
604-025-00-3	2,5-bis(1,1-dimethylbutyl)hydroquinone	400-220-0	—	Aquatic Chronic 2	H411	GHS09	H411			
604-026-00-9	2,2-spirobi(6-hydroxy-4,4,7-trimethylchromane)	400-270-3	—	Aquatic Chronic 2	H411	GHS09	H411			
604-027-00-4	2-methyl-5-(1,1,3,3-tetramethylbutyl)hydroquinone	400-530-6	—	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			
604-028-00-X	4-amino-3-fluorophenol	402-230-0	399-95-1	Carc. 1B Acute Tox. 4 (*) Skin Sens. 1 Aquatic Chronic 2	H350 H302 H317 H411	GHS08 GHS07 GHS09 Dgr	H350 H302 H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
604-029-00-5	1-naphtol	201-969-4	90-15-3	Acute Tox. 4 (*) Acute Tox. 4 (*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1	H312 H302 H335 H315 H318	GHS05 GHS07 Dgr	H312 H302 H335 H315 H318			
604-030-00-0	bisphenol A; 4,4'-isopropylidenediphenol	201-245-8	80-05-7	Repr. 2 STOT SE 3 Eye Dam. 1 Skin Sens. 1	H361f (***) H335 H318 H317	GHS08 GHS05 GHS07 Dgr	H361f (***) H335 H318 H317			
604-031-00-6	guaiacol	201-964-7	90-05-1	Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2	H302 H319 H315	GHS07 Wng	H302 H319 H315			
604-032-00-1	thymol	201-944-8	89-83-8	Acute Tox. 4 (*) Skin Corr. 1B Aquatic Chronic 2	H302 H314 H411	GHS05 GHS07 GHS09 Dgr	H302 H314 H411			
604-033-00-7	isobutyl but-3-enoate	401-170-2	24342-03-8	Flam. Liq. 3	H226	GHS02 Wng	H226			
604-034-00-2	4,4'-thiodi-o-cresol	403-330-7	24197-34-0	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
604-035-00-8	4-nonylphenol, reaction products with formaldehyde and dodecane-1-thiol	404-160-6	—	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
604-036-00-3	4,4'-oxybis(ethylenethio)diphenol	404-590-4	90884-29-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
604-037-00-9	3,5-xilenol; 3,5-dimethylphenol	203-606-5	108-68-9	Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B	H311 H301 H314	GHS06 GHS05 Dgr	H311 H301 H314			
604-038-00-4	4-chloro-3,5-dimethylphenol; [1] chloroxylenol [2]	201-793-8 [1] 215-316-6 [2]	88-04-0 [1] 1321-23-9 [2]	Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H302 H319 H315 H317	GHS07 Wng	H302 H319 H315 H317			
604-039-00-X	ethyl 2-[4-[(6-chlorobenzoxazol-2-yl)oxy]phenoxy]propionate; fenoxaprop-ethyl	266-362-9	66441-23-4	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
604-040-00-5	fomesafen (ISO); 5-[2-chloro-4-(trifluoromethyl)phenoxy]-N-(methylsulphonyl)-2-nitrobenzamide	276-439-9	72178-02-0	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
604-041-00-0	acifluorfen (ISO); 5-[2-chloro-4-(trifluoromethyl)phenoxy]-2-nitrobenzoic acid [1] sodium 5-[2-chloro-4-(trifluoromethyl)phenoxy]-2-nitrobenzoate; acifluorfen-sodium [2]	256-634-5 [1] 263-560-7 [2]	50594-66-6 [1] 62476-59-9 [2]	Acute Tox. 4 (*) Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H315 H318 H410			
604-042-00-6	4-nitrosophenol	203-251-6	104-91-6	Muta. 2 Acute Tox. 4 (*) Eye Dam. 1 Aquatic Chronic 2	H341 H302 H318 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H341 H302 H318 H411			
604-043-00-1	monobenzone; 4-hydroxyphenyl benzyl ether; hydroquinone monobenzyl ether	203-083-3	103-16-2	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			
604-044-00-7	mequinol; 4-methoxyphenol; hydroquinone monomethyl ether	205-769-8	150-76-5	Acute Tox. 4 (*) Eye Irrit. 2 Skin Sens. 1	H302 H319 H317	GHS07 Wng	H302 H319 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
604-045-00-2	2,3,5-trimethylhydroquinone	211-838-3	700-13-0	Acute Tox. 4 (*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H335 H315 H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H332 H335 H315 H318 H317 H410			
604-046-00-8	4-(4-isopropoxyphenylsulfonyl)phenol	405-520-5	95235-30-6	Aquatic Chronic 2	H411	GHS09	H411			
604-047-00-3	4-(4-tolyloxy)biphenyl	405-730-7	51601-57-1	STOT RE 2 (*) Aquatic Chronic 4	H373 (**) H413	GHS08 Wng	H373 (**) H413			
604-048-00-9	4,4',4''-(ethan-1,1,1-triyl)triphenol	405-800-7	27955-94-8	Aquatic Chronic 2	H411	GHS09	H411			
604-049-00-4	4-4'-methylenebis(oxyethylenethio)diphenol	407-480-4	93589-69-6	Aquatic Chronic 2	H411	GHS09	H411			
604-051-00-5	3,5-bis((3,5-di-tert-butyl-4-hydroxy)benzyl)-2,4,6-trimethylphenol	401-110-5	87113-78-8	Aquatic Chronic 3	H412	—	H412			
604-052-00-0	2,2'-methylenebis(6-(2H-benzotriazol-2-yl)-4-(1,1,3,3-tetramethylbutyl)phenol)	403-800-1	103597-45-1	Aquatic Chronic 4	H413	—	H413			
604-053-00-6	2-methyl-4-(1,1-dimethylethyl)-6-(1-methylpentadecyl)-phenol	410-760-9	157661-93-3	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
604-054-00-1	reaction mass of: 2-methoxy-4-(tetrahydro-4-methylene-2H-pyran-2-yl)-phenol; 4-(3,6-dihydro-4-methyl-2H-pyran-2-yl)-2-methoxyphenol	412-020-0	—	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
604-055-00-7	2,2'-((3,3',5,5'-tetramethyl-(1,1'-biphenyl)-4,4'-diyl)-bis(oxymethylene))-bis-oxirane	413-900-7	85954-11-6	Muta. 2	H341	GHS08 Wng	H341			
604-056-00-2	2-(2-hydroxy-3,5-dinitroanilino)ethanol	412-520-9	99610-72-7	Flam. Sol. 2 Repr. 2 Acute Tox. 4 (*)	H228 H361f (***) H302	GHS02 GHS07 GHS08 Dgr	H228 H361f (***) H302			
604-057-00-8	reaction mass of: isomers of 2-(2H-benzotriazol-2-yl)-4-methyl-(n)-dodecylphenol; isomers of 2-(2H-benzotriazol-2-yl)-4-methyl-(n)-tetracosylphenol; isomers of 2-(2H-benzotriazol-2-yl)-4-methyl-5,6-didodecyl-phenol. n=5 or 6	401-680-5	—	Aquatic Chronic 2	H411	GHS09	H411			
604-058-00-3	1,2-bis(3-methylphenoxy)ethane	402-730-9	54914-85-1	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
604-059-00-9	2-n-hexadecylhydroquinone	406-400-5	—	STOT RE 2 (*) Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 4	H373 (**) H315 H317 H413	GHS08 GHS07 Wng	H373 (**) H315 H317 H413			
604-060-00-4	9,9-bis(4-hydroxyphenyl)fluorene	406-950-6	3236-71-3	Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H315 H400 H410	GHS07 GHS09 Wng	H319 H315 H410			
604-061-00-X	reaction mass of: 2-chloro-5-sec-tetradecyl-hydroquinones where sec-tetradecyl= 1-methyltridecyl; 1-ethyl-dodecyl; 1-propylundecyl; 1-butyldecyl; 1-pentyl-nonyl; 1-hexyl-octyl	407-740-7	—	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H315 H317 H412	GHS07 Wng	H315 H317 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
604-062-00-5	2,4-dimethyl-6-(1-methyl-pentadecyl)phenol	411-220-5	—	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
604-063-00-0	5,6-dihydroxyindole	412-130-9	3131-52-0	Acute Tox. 4 (*) Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			
604-064-00-6	2-(4,6-diphenyl-1,3,5-triazin-2-yl)-5-((hexyl oxy)-phenol	411-380-6	147315-50-2	Aquatic Chronic 4	H413	—	H413			
604-065-00-1	4,4',4''-(1-methylpropan-1-yl-3-ylidene)tris (2-cyclohexyl-5-methylphenol)	407-460-5	111850-25-0	Aquatic Chronic 2	H411	GHS09	H411			
604-066-00-7	reaction mass of: phenol, 6-(1,1-dimethylethyl)-4-tetrapropyl-2-[(2-hydroxy-5-tetrapropylphenyl)methyl] (C ₄₁ -compound) and methane, 2,2'-bis[6-(1,1-dimethyl-ethyl)-1-hydroxy-4-tetrapropyl-phenyl]- (C ₄₅ -compound); 2,6-bis(1,1-dimethylethyl)-4-tetra-propyl-phenol and 2-(1,1-dimethylethyl)-4-tetra-propyl-phenol; 2,6-bis[(6-(1,1-dimethylethyl)-1-hydroxy-4-tetrapropylphenyl)methyl]-4-(tetrapropyl) phenol and 2-[(6-(1,1-dimethylethyl)-1-hydroxy-4-tetrapropylphenyl)methyl]-6-[1-hydroxy-4-tetrapropylphenyl)methyl]-4-(tetrapropyl)phenol	414-550-8	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
604-067-00-2	reaction mass of: 2,2'-[[[(2-hydroxyethyl) imino]bis(methylene)bis[4-dodecyl]phenol]; formaldehyde, oligomer with 4-dodecyl phenol and 2-aminoethanol(n = 2); formaldehyde, oligomer with 4-dodecyl phenol and 2-aminoethanol(n = 3, 4 and higher)	414-520-4	—	Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H400 H410	GHS05 GHS09 Dgr	H315 H318 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
604-068-00-8	(±)-4-[2-[[3-(4-hydroxyphenyl)-1-methylpropyl]amino]-1-hydroxyethyl]phenol hydrochloride	415-170-5	90274-24-1	Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Sens. 1	H332 H302 H317	GHS07 Wng	H332 H302 H317			
604-069-00-3	2-(1-methylpropyl)-4-tert-butylphenol	421-740-4	51390-14-8	Skin Corr. 1B Aquatic Chronic 2	H314 H411	GHS05 GHS09 Dgr	H314 H411			
604-070-00-9	triclosan; 2,4,4'-trichloro-2'-hydroxy-diphenyl-ether; 5-chloro-2-(2,4-dichlorophenoxy)phenol	222-182-2	3380-34-5	Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H315 H400 H410	GHS07 GHS09 Wng	H319 H315 H410		M=100	
605-001-00-5	formaldehyde ... %	200-001-8	50-00-0	Carc. 2 Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Skin Sens. 1	H351 H331 H311 H301 H314 H317	GHS06 GHS08 GHS05 Dgr	H351 H331 H311 H301 H314 H317		(*) Skin Corr. 1B; H314: C ≥25 % Skin Irrit. 2; H315: 5 % ≤ C < 25 % Eye Irrit. 2; H319: 5 % ≤ C < 25 % STOT SE 3; H335: C ≥ 5 % Skin Sens. 1; H317: C ≥ 0,2 %	B D
605-002-00-0	1,3,5-trioxan; trioxymethylene	203-812-5	110-88-3	Flam. Sol. 1 Repr. 2 STOT SE 3	H228 H361d (***) H335	GHS02 GHS08 GHS07 Dgr	H228 H361d (***) H335			T
605-003-00-6	acetaldehyde; ethanal	200-836-8	75-07-0	Flam. Liq. 1 Carc. 2 Eye Irrit. 2 STOT SE 3	H224 H351 H319 H335	GHS02 GHS08 GHS07 Dgr	H224 H351 H319 H335			
605-004-00-1	2,4,6-trimethyl-1,3,5-trioxan; paraldehyde	204-639-8	123-63-7	Flam. Liq. 3	H226	GHS02 Dgr	H226			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
605-005-00-7	2,4,6,8-tetramethyl-1,3,5,7-tetraoxacyclooctane; metaldehyde	203-600-2	108-62-3	Flam. Sol. 2 Acute Tox. 4 (*)	H228 H302	GHS02 GHS07 Wng	H228 H302			
605-006-00-2	butyraldehyde	204-646-6	123-72-8	Flam. Liq. 2	H225	GHS02 Dgr	H225			
605-007-00-8	1,1-dimethoxyethane; dimethyl acetal	208-589-8	534-15-6	Flam. Liq. 2	H225	GHS02 Dgr	H225			
605-008-00-3	acrylaldehyde; acrolein; prop-2-enal	203-453-4	107-02-8	Flam. Liq. 2 Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Aquatic Acute 1	H225 H330 H311 H301 H314 H400	GHS02 GHS06 GHS05 GHS09 Dgr	H225 H330 H311 H301 H314 H400			D
605-009-00-9	crotonaldehyde; 2-butenal; [1] (E)-2-butenal; (E)-crotonaldehyde [2]	224-030-0 [1] 204-647-1 [2]	4170-30-3 [1] 123-73-9 [2]	Flam. Liq. 2 Muta. 2 Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1	H225 H341 H330 H311 H301 H373 (**) H335 H315 H318 H400	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H225 H341 H330 H311 H301 H373 (**) H335 H315 H318 H400			
605-010-00-4	2-furaldehyde	202-627-7	98-01-1	Carc. 2 Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3	H351 H331 H301 H312 H319 H335	GHS06 GHS08 Dgr	H351 H331 H301 H312 H319 H335		(*)	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
605-011-00-X	2-chlorobenzaldehyde; o-chlorobenzaldehyde	201-956-3	89-98-5	Skin Corr. 1B	H314	GHS05 Dgr	H314			
605-012-00-5	benzaldehyde	202-860-4	100-52-7	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
605-013-00-0	chloralose (INN); (R)-1,2-O-(2,2,2-trichloroethylidene)-α-D-glucofuranose; glucochloralose; anhydroglucochloral	240-016-7	15879-93-3	Acute Tox. 4 (*) Acute Tox. 4 (*)	H332 H302	GHS07 Wng	H332 H302			
605-014-00-6	chloral hydrate; 2,2,2-trichloroethane-1,1-diol	206-117-5	302-17-0	Acute Tox. 3 (*) Eye Irrit. 2 Skin Irrit. 2	H301 H319 H315	GHS06 Dgr	H301 H319 H315			
605-015-00-1	1,1-diethoxyethane; acetal	203-310-6	105-57-7	Flam. Liq. 2 Eye Irrit. 2 Skin Irrit. 2	H225 H319 H315	GHS02 GHS07 Dgr	H225 H319 H315			
605-016-00-7	glyoxal... %; ethandial... %	203-474-9	107-22-2	Muta. 2 Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H341 H332 H319 H315 H317	GHS07 GHS08 Wng	H341 H332 H319 H315 H317		(*)	B
605-017-00-2	1,3-dioxolane	211-463-5	646-06-0	Flam. Liq. 2	H225	GHS02 Dgr	H225			
605-018-00-8	propanal; propionaldehyde	204-623-0	123-38-6	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H225 H319 H335 H315	GHS02 GHS07 Dgr	H225 H319 H335 H315			
605-019-00-3	citral	226-394-6	5392-40-5	Skin Irrit. 2 Skin Sens. 1	H315 H317	GHS07 Wng	H315 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
605-020-00-9	safrole; 5-allyl-1,3-benzodioxole	202-345-4	94-59-7	Carc. 1B Muta. 2 Acute Tox. 4 (*)	H350 H341 H302	GHS08 GHS07 Dgr	H350 H341 H302			
605-021-00-4	formaldehyde, reaction products with butylphenol	294-145-9	91673-30-2	Skin Sens. 1	H317	GHS07 Wng	H317			
605-022-00-X	glutaral; glutaraldehyde; 1,5-pentanedial	203-856-5	111-30-8	Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1	H331 H301 H314 H334 H317 H400	GHS06 GHS08 GHS05 GHS09 Dgr	H331 H301 H314 H334 H317 H400		(*) Skin Corr. 1B; H314: C ≥ 10 % Skin Irrit. 2; H315: 0,5 % ≤ C < 10 % Eye Dam. ; H318: 2 % ≤ C < 10 % Eye Irrit. 2; H319: 0,5 % ≤ C < 2 % STOT SE; H335: C ≥ 0,5 % Skin Sens. 1; H317: C ≥ 0,5 %	
605-025-00-6	chloroacetaldehyde	203-472-8	107-20-0	Carc. 2 Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Aquatic Acute 1	H351 H330 H311 H301 H314 H400	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H330 H311 H301 H314 H400		STOT SE 3; H335: C ≥ 5 %	
605-026-00-1	2,5,7,7-tetramethyloctanal	405-690-0	114119-97-0	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H315 H317 H411	GHS07 GHS09 Wng	H315 H317 H411			
605-027-00-7	reaction mass of: 3a,4,5,6,7,7a-hexahydro-4,7-methano-1H-indene-6-carboxaldehyde; 3a,4,5,6,7,7a-hexahydro-4,7-methano-1H-indene-5-carboxaldehyde	410-480-7	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
605-028-00-2	β -methyl-3-(1-methylethyl)-benzenepropional	412-050-4	125109-85-5	Aquatic Chronic 2	H411	GHS09	H411			
605-029-00-8	2-cyclohexylpropanal	412-270-0	2109-22-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
605-030-00-3	1-(p-methoxyphenyl)acetaldehyde oxime	411-510-1	3353-51-3	Skin Sens. 1	H317	GHS07 Wng	H317			
605-031-00-9	reaction mass of: 2,2-dimethoxyethanal [this component is considered to be anhydrous in terms of identity, structure and composition. However, 2,2-dimethoxyethanal will exist in a hydrated form. 60 % anhydrous is equivalent to 70.4 % hydrate; water(Including free water and water in hydrated 2,2-dimethoxyethanal)]	421-890-0	—	Skin Sens. 1	H317	GHS07 Wng	H317			
606-001-00-8	acetone; propan-2-one; propanone	200-662-2	67-64-1	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H336	GHS02 GHS07 Dgr	H225 H319 H336	EUH066		
606-002-00-3	butanone; ethyl methyl ketone	201-159-0	78-93-3	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H336	GHS02 GHS07 Dgr	H225 H319 H336	EUH066		
606-003-00-9	heptan-3-one; butyl ethyl ketone	203-388-1	106-35-4	Flam. Liq. 3 Acute Tox. 4 (*) Eye Irrit. 2	H226 H332 H319	GHS02 GHS07 Wng	H226 H332 H319			
606-004-00-4	4-methylpentan-2-one; isobutyl methyl ketone	203-550-1	108-10-1	Flam. Liq. 2 Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3	H225 H332 H319 H335	GHS02 GHS07 Dgr	H225 H332 H319 H335	EUH066		
606-005-00-X	2,6-dimethylheptan-4-one; di-isobutyl ketone	203-620-1	108-83-8	Flam. Liq. 3 STOT SE 3	H226 H335	GHS02 GHS07 Wng	H226 H335		STOT SE 3; H335: C $\geq$ 10 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
606-006-00-5	pentan-3-one; diethyl ketone	202-490-3	96-22-0	Flam. Liq. 2 STOT SE 3 STOT SE 3	H225 H335 H336	GHS02 GHS07 Dgr	H225 H335 H336	EUH066		
606-007-00-0	3-methylbutan-2-one; methyl isopropyl ketone	209-264-3	563-80-4	Flam. Liq. 2	H225	GHS02 Dgr	H225			
606-009-00-1	4-methylpent-3-en-2-one; mesityl oxide	205-502-5	141-79-7	Flam. Liq. 3 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*)	H226 H332 H312 H302	GHS02 GHS07 Wng	H226 H332 H312 H302		(*)	
606-010-00-7	cyclohexanone	203-631-1	108-94-1	Flam. Liq. 3 Acute Tox. 4 (*)	H226 H332	GHS02 GHS07 Wng	H226 H332			
606-011-00-2	2-methylcyclohexanone	209-513-6	583-60-8	Flam. Liq. 3 Acute Tox. 4 (*)	H226 H332	GHS02 GHS07 Wng	H226 H332			
606-012-00-8	3,5,5-trimethylcyclohex-2-enone; isophorone	201-126-0	78-59-1	Carc. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3	H351 H312 H302 H319 H335	GHS08 GHS07 Wng	H351 H312 H302 H319 H335		STOT SE 3; H335: C ≥ 10 %	
606-013-00-3	p-benzoquinone; quinone	203-405-2	106-51-4	Acute Tox. 3 (*) Acute Tox. 3 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H331 H301 H319 H335 H315 H400	GHS06 GHS09 Dgr	H331 H301 H319 H335 H315 H400			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
606-014-00-9	chlorophacinone (ISO); 2-(2-(4-chlorophenyl)phenylacetyl)indan-1,3-dione	223-003-0	3691-35-8	Acute Tox. 1 Acute Tox. 2 (*) Acute Tox. 3 (*) STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H331 H372 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H310 H300 H331 H372 (**) H410			
606-016-00-X	pindone (ISO); 2-pivaloylindan-1,3-dione	201-462-8	83-26-1	Acute Tox. 3 (*) STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H301 H372 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H301 H372 (**) H410			
606-017-00-5	diketene; diketen	211-617-1	674-82-8	Flam. Liq. 3 Acute Tox. 4 (*)	H226 H332	GHS02 GHS07 Wng	H226 H332			D
606-018-00-0	dichlone (ISO); 2,3-dichloro-1,4-naphthoquinone	204-210-5	117-80-6	Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H315 H410			
606-019-00-6	chlordecone (ISO); perchloropentacyclo[5,3,0,0 ^{2,6} ,0 ^{3,9} ,0 ^{4,8}] decan-5-one; decachloropentacyclo[5,2,1,0 ^{2,6} ,0 ^{3,9} ,0 ^{5,8}] decan-4-one	205-601-3	143-50-0	Carc. 2 Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H311 H301 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H311 H301 H410			
606-020-00-1	5-methylheptan-3-one	208-793-7	541-85-5	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3	H226 H319 H335	GHS02 GHS07 Wng	H226 H319 H335		STOT SE 3; H335: C ≥ 10 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
606-021-00-7	N-methyl-2-pyrrolidone	212-828-1	872-50-4	Eye Irrit. 2 Skin Irrit. 2	H319 H315	GHS07 Wng	H319 H315			
606-022-00-2	1-phenyl-3-pyrazolidone	202-155-1	92-43-3	Acute Tox. 4(*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
606-023-00-8	4-methoxy-4-methylpentan-2-one	203-512-4	107-70-0	Flam. Liq. 3 Acute Tox. 4(*)	H226 H332	GHS02 GHS07 Wng	H226 H332			
606-024-00-3	heptan-2-one; methyl amyl ketone	203-767-1	110-43-0	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4(*)	H226 H332 H302	GHS02 GHS07 Wng	H226 H332 H302			
606-025-00-9	cyclopentanone	204-435-9	120-92-3	Flam. Liq. 3 Eye Irrit. 2 Skin Irrit. 2	H226 H319 H315	GHS02 GHS07 Wng	H226 H319 H315			
606-026-00-4	5-methylhexan-2-one; isoamyl methyl ketone	203-737-8	110-12-3	Flam. Liq. 3 Acute Tox. 4 *	H226 H332	GHS02 GHS07 Wng	H226 H332			
606-027-00-X	heptan-4-one; di-n-propyl ketone	204-608-9	123-19-3	Flam. Liq. 3 Acute Tox. 4(*)	H226 H332	GHS02 GHS07 Wng	H226 H332			
606-028-00-5	2,4-dimethylpentan-3-one; di-isopropyl ketone	209-294-7	565-80-0	Flam. Liq. 2 Acute Tox. 4 *	H225 H332	GHS02 GHS07 Dgr	H225 H332			
606-029-00-0	pentane-2,4-dione; acetylacetone	204-634-0	123-54-6	Flam. Liq. 3 Acute Tox. 4(*)	H226 H302	GHS02 GHS07 Wng	H226 H302			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
606-030-00-6	hexan-2-one; methyl butyl ketone; butyl methyl ketone; methyl- <i>n</i> -butyl ketone	209-731-1	591-78-6	Flam. Liq. 3 Repr. 2 STOT RE 1 STOT SE 3	H226 H361f (***) H372 (**) H336	GHS02 GHS08 GHS07 Dgr	H226 H361f (***) H372 (**) H336			
606-031-00-1	3-propanolide; 1,3-propiolactone	200-340-1	57-57-8	Carc. 1B Acute Tox. 2(*) Eye Irrit. 2 Skin Irrit. 2	H350 H330 H319 H315	GHS06 GHS08 Dgr	H350 H330 H319 H315			
606-032-00-7	hexachloroacetone	204-129-5	116-16-5	Acute Tox. 4(*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
606-033-00-2	2-(3,4-dichlorophenyl)-4-methyl-1,2,4-oxadiazolidinedione; methazole	243-761-6	20354-26-1	Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H312 H302 H319 H315 H411	GHS07 GHS09 Wng	H312 H302 H319 H315 H411			
606-034-00-8	metribuzin (ISO); 4-amino-6- <i>tert</i> -butyl-3-methylthio-1,2,4-triazin-5(4 <i>H</i>)-one; 4-amino-4,5-dihydro-6-(1,1-dimethylethyl)-3-methylthio-1,2,4-triazin-5-one	244-209-7	21087-64-9	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
606-035-00-3	chloridazon (ISO); 5-amino-4-chloro-2-phenylpyridazine-3-(2 <i>H</i>)-one; pyrazon	216-920-2	1698-60-8	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
606-036-00-9	quinomethionate; chinomethionat (ISO); 6-methyl-1,3-dithiolo(4,5-b)quinoxalin-2-one	219-455-3	2439-01-2	Repr. 2 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) STOT RE 2(*) Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361f (***) H332 H312 H302 H373 (**) H319 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H361f (***) H332 H312 H302 H373 (**) H319 H317 H410			
606-037-00-4	triadimefon (ISO); 1-(4-chlorophenoxy)-3,3-dimethyl-1-(1,2,4-triazol-1-yl)butanone	256-103-8	43121-43-3	Acute Tox. 4(*) Skin Sens. 1 Aquatic Chronic 2	H302 H317 H411	GHS07 GHS09 Wng	H302 H317 H411			
606-038-00-X	diphacinone (ISO); 2-diphenylacetylindan-1,3-dione	201-434-5	82-66-6	Acute Tox. 2(*) STOT RE 1	H300 H372 (**)	GHS06 GHS08 Dgr	H300 H372 (**)			
606-039-00-5	5(or 6)-tert-butyl-2'-chloro-6'-ethylamino-3',7'-dimethylspiro(isobenzofuran-1(1H),9'-xanthene)-3-one	400-680-2	—	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H332 H400 H410	GHS07 GHS09 Wng	H332 H410			
606-040-00-0	(N-benzyl-N-ethyl)amino-3-hydroxyacetophenone hydrochloride	401-840-4	55845-90-4	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
606-041-00-6	2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one	400-600-6	71868-10-5	Acute Tox. 4(*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
606-042-00-1	acetophenone	202-708-7	98-86-2	Acute Tox. 4(*) Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
606-043-00-7	2,4-di- <i>tert</i> -butylcyclohexanone	405-340-7	13019-04-0	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
606-044-00-2	2,4,6-trimethylbenzophenone	403-150-9	954-16-5	Acute Tox. 4(*) Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H400 H410	GHS07 GHS09 Wng	H302 H319 H410			
606-045-00-8	oxadiazon (ISO); 3-[2,4-dichloro-5-(1-methylethoxy)phenyl]- 5-(1,1-dimethylethyl)-1,3,4-oxadiazol-2 (3 <i>H</i>)-one	243-215-7	19666-30-9	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-046-00-3	reaction mass of <i>cis</i> - and <i>trans</i> -cyclohexadec- 8-en-1-one	401-700-2	3100-36-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-047-00-9	2-benzyl-2-dimethylamino-4-morpholino- butyrophenone	404-360-3	119313-12-1	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-048-00-4	2'-anilino-3'-methyl-6'-dipentylaminospiro (isobenzofuran-1(1 <i>H</i>),9'-xanthen)-3-one	406-480-1	—	Aquatic Chronic 4	H413	—	H413			
606-049-00-X	4-(<i>trans</i> -4-propylcyclohexyl)acetophenone	406-700-6	78531-61-0	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
606-050-00-5	6-anilino-1-benzoyl-4-(4- <i>tert</i> -pentylphenoxy)naphto[1,2,3- <i>de</i>]quinoline-2,7-(3 <i>H</i>)- dione	412-480-2	72453-58-8	Aquatic Chronic 2	H411	GHS09	H411			
606-051-00-0	4-pentylcyclohexanone	406-670-4	61203-83-6	Aquatic Chronic 2	H411	GHS09	H411			
606-052-00-6	4-(<i>N,N</i> -dibutylamino)-2-hydroxy-2'-carboxybenzophenone	410-410-5	54574-82-2	Aquatic Chronic 3	H412	—	H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
606-053-00-1	flurtamone (ISO); (RS)-5-methylamino-2-phenyl-4-(α , α , α -trifluoro- <i>m</i> -tolyl)furan-3(2 <i>H</i>)-one	—	96525-23-4	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-054-00-7	isoxaflutole (ISO); 5-cyclopropyl-1,2-oxazol-4-yl α , α , α -trifluoro-2-mesyl- <i>p</i> -tolyl ketone	—	141112-29-0	Repr. 2 Aquatic Acute 1 Aquatic Chronic 1	H361d (***) H400 H410	GHS08 GHS09 Wng	H361d (***) H410			
606-055-00-2	1-(2,3-dihydro-1,3,3,6-tetramethyl-1-(1-methylethyl)-1 <i>H</i> -inden-5-yl)ethanone	411-180-9	92836-10-7	Acute Tox. 4(*) STOT RE 2(*) Aquatic Chronic 2	H302 H373 (**) H411	GHS08 GHS07 GHS09 Wng	H302 H373 (**) H411			
606-056-00-8	4-chloro-3',4'-dimethoxybenzophenone	404-610-1	116412-83-0	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-057-00-3	4-propylcyclohexanone	406-810-4	40649-36-3	Skin Irrit. 2 Aquatic Chronic 3	H315 H412	GHS07 Wng	H315 H412			
606-058-00-9	4'-fluoro-2,2-dimethoxyacetophenone	407-500-1	21983-80-2	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
606-059-00-4	2,4-difluoro- α -(1 <i>H</i> -1,2,4-triazol-1-yl)acetophenone hydrochloride	412-390-3	86386-75-6	Acute Tox. 4(*) Eye Dam. 1 Skin Sens. 1	H302 H318 H317	GHS05 GHS07 Dgr	H302 H318 H317			
606-060-00-X	reaction mass of: <i>trans</i> -2,4-dimethyl-2-(5,6,7,8-tetrahydro-5,5,8,8-tetramethylnaphthalene-2-yl)-1,3-dioxolane; <i>cis</i> -2,4-dimethyl-2-(5,6,7,8-tetrahydro-5,5,8,8-tetramethylnaphthalene-2-yl)-1,3-dioxolane	412-950-7	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
606-061-00-5	(3-chlorophenyl)-(4-methoxy-3-nitrophenyl) methanone	423-290-4	66938-41-8	Muta. 2 Aquatic Acute 1 Aquatic Chronic 1	H341 H400 H410	GHS08 GHS09 Wng	H341 H410			
606-062-00-0	tetrahydrothiopyran-3-carboxaldehyde	407-330-8	61571-06-0	Repr. 1B Eye Dam. 1 Aquatic Chronic 3	H360D (***) H318 H412	GHS08 GHS05 Dgr	H360D (***) H318 H412			
606-063-00-6	(E)-3-(2-chlorophenyl)-2-(4-fluorophenyl) propenal	410-980-5	112704-51-5	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			
606-064-00-1	pregn-5-ene-3,20-dione bis(ethylene ketal)	407-450-0	7093-55-2	Aquatic Chronic 4	H413	—	H413			
606-065-00-7	1-(4-morpholinophenyl)butan-1-one	413-790-0	—	Aquatic Chronic 2	H411	GHS09	H411			
606-066-00-2	(E)-5[(4-chlorophenyl)methylene]-2,2-dimethylcyclopentanone	410-440-9	164058-20-2	Aquatic Chronic 2	H411	GHS09	H411			
606-067-00-8	reaction mass of: 1-(2,3,6,7,8,9-hexahydro-1,1-dimethyl-1H-benz(g)inden-4-yl)ethanone; 1-(2,3,5,6,7,8-hexahydro-1,1-dimethyl-1H-benz(f)inden-4-yl)ethanone; 1-(2,3,6,7,8,9-hexahydro-1,1-dimethyl-1H-benz(g)inden-5-yl)ethanone; 1-(2,3,6,7,8,9-hexahydro-3,3-dimethyl-1H-benz(g)inden-5-yl)ethanone	414-870-8	96792-67-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-068-00-3	2,7,11-trimethyl-13-(2,6,6-trimethylcyclohex-1-en-1-yl)tridecahexaen-2,4,6,8,10,12-al	415-770-7	1638-05-7	STOT RE 2(*) Skin Sens. 1 Aquatic Chronic 3	H373 (**) H317 H412	GHS08 GHS07 Wng	H373 (**) H317 H412			
606-069-00-9	spiro[1,3-dioxolane-2,5'-(4',4',8',8'-tetramethyl-hexahydro-3',9'-methanonaphthalene)]	415-460-1	154171-76-3	Aquatic Chronic 2	H411	GHS09	H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
606-070-00-4	butroxydim (ISO); 5-(3-butyryl-2,4,6-trimethylphenyl)-2-[1-(ethoxyimino)propyl]-3-hydroxycyclohex-2-en-1-one	414-790-3	138164-12-2	Repr. 2 Acute Tox. 4(*) Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H361fd H302 H315 H400 H410	GHS08 GHS07 GHS09 Wng	H361fd H302 H315 H410			
606-071-00-X	17-spiro(5,5-dimethyl-1,3-dioxan-2-yl)androsta-1,4-diene-3-one	421-050-3	13258-43-0	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-072-00-5	3-acetyl-1-phenyl-pyrrolidine-2,4-dione	421-600-2	719-86-8	STOT RE 2(*) Aquatic Chronic 2	H373 (**) H411	GHS08 GHS09 Wng	H373 (**) H411			
606-073-00-0	4,4'-bis(dimethylamino)benzophenone; Michler's ketone	202-027-5	90-94-8	Carc. 1B Muta. 2 Eye Dam. 1	H350 H341 H318	GHS08 GHS05 Dgr	H350 H341 H318			
606-075-00-1	1-benzyl-5-ethoxyimidazolidine-2,4-dione	417-340-4	65855-02-9	Acute Tox. 4(*)	H302	GHS07 Wng	H302			
606-076-00-7	1-((2-quinolinyl-carbonyl)oxy)-2,5-pyrrolidinedione	418-630-3	136465-99-1	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
606-077-00-2	(3S,4S)-3-hexyl-4-[(R)-2-hydroxytridecyl]-2-oxetanone	418-650-2	104872-06-2	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-078-00-8	1-octylazepin-2-one	420-040-6	59227-88-2	Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H314 H317 H411	GHS05 GHS07 GHS09 Dgr	H314 H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
606-079-00-3	2- <i>n</i> -butyl-benzo[d]isothiazol-3-one	420-590-7	4299-07-4	Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H314 H317 H410			
606-080-00-9	Reaction product of: 3-hydroxy-5,7-di- <i>tert</i> -butylbenzofuran-2-one with <i>o</i> -xylene	417-100-9	—	Aquatic Chronic 4	H413		H413			
606-081-00-4	(3β, 5α, 6β)-3-(acetyloxy)-5-bromo-6-hydroxy-androstan-17-one	419-790-7	4229-69-0	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
606-082-00-X	reaction mass of: butan-2-one oxime; syn- <i>O,O'</i> -di(butan-2-one oxime)diethoxysilane	406-930-7		STOT RE 1 Skin Sens. 1 Aquatic Chronic 3	H372 (**) H317 H412	GHS08 GHS07 Dgr	H372 (**) H317 H412			
606-083-00-5	2-chloro-5- <i>sec</i> -hexadecylhydroquinone	407-750-1	137193-60-3	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H319 H315 H317 H412	GHS07 Wng	H319 H315 H317 H412			
606-084-00-0	1-(4-methoxy-5-benzofuranyl)-3-phenyl-1,3-propanedione	414-540-3	484-33-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-085-00-6	(1 <i>R</i> ,4 <i>S</i>)-2-azabicyclo[2.2.1]hept-5-en-3-one	418-530-1	79200-56-9	Acute Tox. 4(*) Eye Dam. 1 Skin Sens. 1	H302 H318 H317	GHS05 GHS07 Dgr	H302 H318 H317			
606-086-00-1	1-(3,3-dimethylcyclohexyl)pent-4-en-1-one	422-330-8	56973-87-6	Aquatic Chronic 2	H411	GHS09	H411			
606-087-00-7	6-ethyl-5-fluoro-4(3 <i>H</i>)-pyrimidone	422-460-5	137234-87-8	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
606-088-00-2	2,4,4,7-tetramethyl-6-octen-3-one	422-520-0	74338-72-0	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
606-089-00-8	reaction mass of: 1,4-diamino-2-chloro-3-phenoxyanthraquinone; 1,4-diamino-2,3-bis-phenoxyanthraquinone	423-220-2	12223-77-7	Aquatic Chronic 4	H413	—	H413			
606-091-00-9	6-chloro-5-(2-chloroethyl)-1,3-dihydroindol-2-one	421-320-0	118289-55-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-092-00-4	reaction mass of: (E)-oxacyclohexadec-12-en-2-one; (E)-oxacyclohexadec-13-en-2-one; a) (Z)-oxacyclohexadec-(12)-en-2-one and b) (Z)-oxacyclohexadec-(13)-en-2-one	422-320-3		Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-001-00-0	formic acid ... %	200-579-1	64-18-6	Skin Corr. 1A	H314	GHS05 Dgr	H314		Skin Corr. 1A; H314: C ≥ 90 % Skin Corr. 1B; H314: 10 % ≤ C < 90 % Skin Irrit. 2; H315: 2 % ≤ C < 10 % Eye Irrit. 2; H319: 2 % ≤ C < 10 %	B
607-002-00-6	acetic acid ... %	200-580-7	64-19-7	Flam. Liq. 3 Skin Corr. 1A	H226 H314	GHS02 GHS05 Dgr	H226 H314		Skin Corr. 1A; H314: C ≥ 90 % Skin Corr. 1B; H314: 25 % ≤ C < 90 % Skin Irrit. 2; H315: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 %	B

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-003-00-1	chloroacetic acid	201-178-4	79-11-8	Acute Tox. 3(*) Skin Corr. 1B Aquatic Acute 1	H301 H314 H400	GHS06 GHS05 GHS09 Dgr	H301 H314 H400			
607-004-00-7	TCA (ISO); trichloroacetic acid	200-927-2	76-03-9	Skin Corr. 1A Aquatic Acute 1 Aquatic Chronic 1	H314 H400 H410	GHS05 GHS09 Dgr	H314 H410		STOT SE 3; H335: C ≥ 1 %	
607-005-00-2	TCA-sodium (ISO); sodium trichloroacetate	211-479-2	650-51-1	STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H335 H400 H410	GHS07 GHS09 Wng	H335 H410			
607-006-00-8	oxalic acid	205-634-3	144-62-7	Acute Tox. 4(*) Acute Tox. 4(*)	H312 H302	GHS07 Wng	H312 H302		(*)	
607-007-00-3	salts of oxalic acid	—	—	Acute Tox. 4(*) Acute Tox. 4(*)	H312 H302	GHS07 Wng	H312 H302		(*)	A
607-008-00-9	acetic anhydride	203-564-8	108-24-7	Flam. Liq. 3 Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B	H226 H332 H302 H314	GHS02 GHS05 GHS07 Dgr	H226 H332 H302 H314		Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H315: 5 % ≤ C < 25 % Eye Dam. 1; H318: 5 % ≤ C < 25 % Eye Irrit. 2; H319: 1 % ≤ C < 5 % STOT SE 3; H335: C ≥ 5 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-009-00-4	phthalic anhydride	201-607-5	85-44-9	Acute Tox. 4(*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H302 H335 H315 H318 H334 H317	GHS08 GHS05 GHS07 Dgr	H302 H335 H315 H318 H334 H317			
607-010-00-X	propionic anhydride	204-638-2	123-62-6	Skin Corr. 1B	H314	GHS05 Dgr	H314		Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H315: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 %	
607-011-00-5	acetyl chloride	200-865-6	75-36-5	Flam. Liq. 2 Skin Corr. 1B	H225 H314	GHS02 GHS05 Dgr	H225 H314	EUH014		
607-012-00-0	benzoyl chloride	202-710-8	98-88-4	Skin Corr. 1B	H314	GHS05 Dgr	H314			
607-013-00-6	dimethyl carbonate	210-478-4	616-38-6	Flam. Liq. 2	H225	GHS02 Dgr	H225			
607-014-00-1	methyl formate	203-481-7	107-31-3	Flam. Liq. 1 Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3	H224 H332 H302 H319 H335	GHS02 GHS07 Dgr	H224 H332 H302 H319 H335			
607-015-00-7	ethyl formate	203-721-0	109-94-4	Flam. Liq. 2 Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3	H225 H332 H302 H319 H335	GHS02 GHS07 Dgr	H225 H332 H302 H319 H335			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-016-00-2	propyl formate; [1] isopropyl formate [2]	203-798-0 [1] 210-901-2 [2]	110-74-7 [1] 625-55-8 [2]	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 STOT SE 3	H225 H319 H335 H336	GHS02 GHS07 Dgr	H225 H319 H335 H336			C
607-017-00-8	butyl formate; [1] tert-butyl formate; [2] isobutyl formate [3]	209-772-5 [1] 212-105-0 [2] 208-818-1 [3]	592-84-7 [1] 762-75-4 [2] 542-55-2 [3]	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H335	GHS02 GHS07 Dgr	H225 H319 H335			C
607-018-00-3	isopentyl formate; [1] 2-methylbutyl formate [2]	203-769-2 [1] 252-343-2 [2]	110-45-2 [1] 35073-27-9 [2]	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H335	GHS02 GHS07 Dgr	H225 H319 H335			C
607-019-00-9	methyl chloroformate	201-187-3	79-22-1	Flam. Liq. 2 Acute Tox. 2(*) Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B	H225 H330 H312 H302 H314	GHS02 GHS06 GHS05 Dgr	H225 H330 H312 H302 H314			
607-020-00-4	ethyl chloroformate	208-778-5	541-41-3	Flam. Liq. 2 Acute Tox. 2(*) Acute Tox. 4(*) Skin Corr. 1B	H225 H330 H302 H314	GHS02 GHS06 GHS05 Dgr	H225 H330 H302 H314			
607-021-00-X	methyl acetate	201-185-2	79-20-9	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H336	GHS02 GHS07 Dgr	H225 H319 H336	EUH066		
607-022-00-5	ethyl acetate	205-500-4	141-78-6	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H336	GHS02 GHS07 Dgr	H225 H319 H336	EUH066		
607-023-00-0	vinyl acetate	203-545-4	108-05-4	Flam. Liq. 2	H225	GHS02 Dgr	H225			D

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-024-00-6	propyl acetate; [1] isopropyl acetate [2]	203-686-1 [1] 203-561-1 [2]	109-60-4 [1] 108-21-4 [2]	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H336	GHS02 GHS07 Dgr	H225 H319 H336	EUH066		C
607-025-00-1	<i>n</i> -butyl acetate	204-658-1	123-86-4	Flam. Liq. 3 STOT SE 3	H226 H336	GHS02 GHS07 Wng	H226 H336	EUH066		
607-026-00-7	<i>sec</i> -butyl acetate; [1] <i>isobutyl</i> acetate; [2] <i>tert</i> -butyl acetate [3]	203-300-1 [1] 203-745-1 [2] 208-760-7 [3]	105-46-4 [1] 110-19-0 [2] 540-88-5 [3]	Flam. Liq. 2	H225	GHS02 Dgr	H225	EUH066		C
607-027-00-2	methyl propionate	209-060-4	554-12-1	Flam. Liq. 2 Acute Tox. 4(*)	H225 H332	GHS02 GHS07 Dgr	H225 H332			
607-028-00-8	ethyl propionate	203-291-4	105-37-3	Flam. Liq. 2	H225	GHS02 Dgr	H225			
607-029-00-3	<i>n</i> -butyl propionate; [1] <i>sec</i> -butyl propionate; [2] <i>iso</i> -butyl propionate [3]	209-669-5 [1] - [2] 208-746-0 [3]	590-01-2 [1] 591-34-4 [2] 540-42-1 [3]	Flam. Liq. 3	H226	GHS02 Wng	H226			C
607-030-00-9	propyl propionate	203-389-7	106-36-5	Flam. Liq. 3 Acute Tox. 4(*)	H226 H332	GHS02 GHS07 Wng	H226 H332			
607-031-00-4	butyl butyrate	203-656-8	109-21-7	Flam. Liq. 3	H226	GHS02 Wng	H226			C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-032-00-X	ethyl acrylate	205-438-8	140-88-5	Flam. Liq. 2 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H225 H332 H312 H302 H319 H335 H315 H317	GHS02 GHS07 Dgr	H225 H332 H312 H302 H319 H335 H315 H317		Skin Irrit. 2; H315: C ≥ 5 % Eye Irrit. 2; H319: C ≥ 5 % STOT SE 3; H335: C ≥ 5 %	D
607-033-00-5	n-butyl methacrylate	202-615-1	97-88-1	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H226 H319 H335 H315 H317	GHS02 GHS07 Wng	H226 H319 H335 H315 H317			D
607-034-00-0	methyl acrylate; methyl propenoate	202-500-6	96-33-3	Flam. Liq. 2 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H225 H332 H312 H302 H319 H335 H315 H317	GHS02 GHS07 Dgr	H225 H332 H312 H302 H319 H335 H315 H317			D
607-035-00-6	methyl methacrylate; methyl 2-methylprop-2-enoate; methyl 2-methylpropenoate	201-297-1	80-62-6	Flam. Liq. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H225 H335 H315 H317	GHS02 GHS07 Dgr	H225 H335 H315 H317			D
607-036-00-1	2-methoxyethyl acetate; methylglycol acetate	203-772-9	110-49-6	Repr. 1B Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*)	H360-FD H332 H312 H302	GHS08 GHS07 Dgr	H360FD H332 H312 H302			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-037-00-7	2-ethoxyethyl acetate; ethylglycol acetate	203-839-2	111-15-9	Repr. 1B Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*)	H360-FD H332 H312 H302	GHS08 GHS07 Dgr	H360FD H332 H312 H302			
607-038-00-2	2-butoxyethyl acetate; butylglycol acetate	203-933-3	112-07-2	Acute Tox. 4(*) Acute Tox. 4(*)	H332 H312	GHS07 Wng	H332 H312			
607-039-00-8	2,4-D (ISO); 2,4-dichlorophenoxyacetic acid	202-361-1	94-75-7	Acute Tox. 4(*) STOT SE 3 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H302 H335 H318 H317 H412	GHS05 GHS07 Dgr	H302 H335 H318 H317 H412			
607-040-00-3	salts of 2,4-D	—	—	Acute Tox. 4(*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H317 H411			A
607-041-00-9	2,4,5-T (ISO); 2,4,5-trichlorophenoxy acetic acid	202-273-3	93-76-5	Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H335 H315 H410			
607-042-00-4	salts and esters of 2,4,5-T; salts and esters of 2,4,5-trichlorophenoxy acetic acid	—	—	Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H335 H315 H410			A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-043-00-X	dicamba (ISO); 2,5-dichloro-6-methoxybenzoic acid; 3,6-dichloro-2-methoxybenzoic acid	217-635-6	1918-00-9	Acute Tox. 4(*) Eye Dam. 1 Aquatic Chronic 3	H302 H318 H412	GHS05 GHS07 Dgr	H302 H318 H412			
607-044-00-5	3,6-dichloro- <i>o</i> -anisic acid, compound with dimethylamine (1:1); [1] potassium 3,6-dichloro- <i>o</i> -anisate [2]	218-951-7 [1] 233-002-7 [2]	2300-66-5 [1] 10007-85-9 [2]	Eye Irrit. 2 Aquatic Chronic 3	H319 H412	GHS07 Wng	H319 H412			
607-045-00-0	dichlorprop (ISO); 2-(2,4-dichlorophenoxy) propionic acid	204-390-5	120-36-5	Acute Tox. 4(*) Acute Tox. 4(*) Skin Irrit. 2 Eye Dam. 1	H312 H302 H315 H318	GHS05 GHS07 Dgr	H312 H302 H315 H318			
607-046-00-6	salts of dichlorprop	—	—	Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*)	H332 H312 H302	GHS07 Wng	H332 H312 H302			A
607-047-00-1	fenoprop (ISO); 2-(2,4,5-trichlorophenoxy)propionic acid	202-271-2	93-72-1	Acute Tox. 4(*) Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H400 H410	GHS07 GHS09 Wng	H302 H315 H410			
607-048-00-7	salts of fenoprop; salts of 2-(2,4,5-trichlorophenoxy)propionic acid	—	—	Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410			A
607-049-00-2	mecoprop (ISO); 2-(4-chloro- <i>o</i> -tolylxy) propionic acid; (<i>RS</i>)-2-(4-chloro- <i>o</i> -tolylxy)propionic acid; [1] 2-(4-chloro-2-methylphenoxy)propionic acid [2]	230-386-8 [1] 202-264-4 [2]	7085-19-0 [1] 708519-0 [2]	Acute Tox. 4(*) Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H315 H318 H410		M=100	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-050-00-8	salts of mecoprop	—	—	Acute Tox. 4(*) Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H315 H318 H410			A
607-051-00-3	MCPA (ISO); 4-chloro- <i>o</i> -tolyloxyacetic acid	202-360-6	94-74-6	Acute Tox. 4(*) Skin Irrit. 2 Eye Dam. 1	H302 H315 H318	GHS05 GHS07 Dgr	H302 H315 H318			
607-052-00-9	salts and esters of MCPA	—	—	Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*)	H332 H312 H302	GHS07 Wng	H332 H312 H302			A
607-053-00-4	MCPB (ISO); 4-(4-chloro- <i>o</i> -tolyloxy) butyric acid	202-365-3	94-81-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-054-00-X	salts and esters of MCPB	—	—	Acute Tox. 4(*)	H302	GHS07 Wng	H302			A
607-055-00-5	endothal-sodium (ISO); disodium 7-oxabicyclo(2,2,1)heptane-2,3-dicarboxylate	204-959-8	129-67-9	Acute Tox. 3(*) Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H301 H312 H319 H335 H315	GHS06 Dgr	H301 H312 H319 H335 H315			
607-056-00-0	warfarin (ISO); [1] (<i>S</i>)-4-hydroxy-3-(3-oxo-1-phenylbutyl)-2-benzopyrone; [2] (<i>R</i>)-4-hydroxy-3-(3-oxo-1-phenylbutyl)-2-benzopyrone [3]	201-377-6 [1] 226-907-3 [2] 226-908-9 [3]	81-81-2 [1] 5543-57-7 [2] 5543-58-8 [3]	Repr. 1A STOT RE 1 Aquatic Chronic 3	H360D (***) H372 (**) H412	GHS08 Dgr	H360D (***) H372 (**) H412			
607-057-00-6	coumachlor (ISO); 3-[1-(4-chlorophenyl)-3-oxobutyl]-4-hydroxycoumarin	201-378-1	81-82-3	STOT RE 2 * Aquatic Chronic 3	H373 (**) H412	GHS08 Wng	H373 (**) H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-058-00-1	coumafuryl (ISO); fumarin; (RS)-3-(1-(2-furyl)-3-oxobutyl)4-hydroxy-coumarin; 4-hydroxy-3-[3-oxo-1-(2-furyl) butyl]coumarin	204-195-5	117-52-2	Acute Tox. 3 * STOT RE 1 Aquatic Chronic 3	H301 H372 (**) H412	GHS06 GHS08 Dgr	H301 H372 (**) H412			
607-059-00-7	coumatetralyl; 4-hydroxy-3-(1,2,3,4-tetrahydro-1-naphthyl)coumarin	227-424-0	5836-29-3	Acute Tox. 1 Acute Tox. 2 * STOT RE 1 Aquatic Chronic 3	H310 H300 H372 (**) H412	GHS06 GHS08 Dgr	H310 H300 H372 (**) H412			
607-060-00-2	dicoumarol; 4,4'-dihydroxy-3,3'-methylenebis(2H-chromen-2-one)	200-632-9	66-76-2	STOT RE 1 Acute Tox. 4 * Aquatic Chronic 2	H372 (**) H302 H411	GHS08 GHS07 GHS09 Dgr	H372 (**) H302 H411			
607-061-00-8	acrylic acid; prop-2-enoic acid	201-177-9	79-10-7	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A Aquatic Acute 1	H226 H332 H312 H302 H314 H400	GHS02 GHS05 GHS07 GHS09 Dgr	H226 H332 H312 H302 H314 H400		STOT SE 3; H335: C ≥ 1 %	D
607-062-00-3	n-butyl acrylate	205-480-7	141-32-2	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H226 H319 H335 H315 H317	GHS02 GHS07 Wng	H226 H319 H335 H315 H317			D
607-063-00-9	isobutyric acid	201-195-7	79-31-2	Acute Tox. 4 * Acute Tox. 4 *	H312 H302	GHS07 Wng	H312 H302			
607-064-00-4	benzyl chloroformate	207-925-0	501-53-1	Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H314 H400 H410	GHS05 GHS09 Dgr	H314 H410		STOT SE 3; H335: C ≥ 5 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-065-00-X	bromoacetic acid	201-175-8	79-08-3	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1A Aquatic Acute 1	H331 H311 H301 H314 H400	GHS06 GHS05 GHS09 Dgr	H331 H311 H301 H314 H400			
607-066-00-5	dichloroacetic acid	201-207-0	79-43-6	Skin Corr. 1A Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400			
607-067-00-0	dichloroacetyl chloride	201-199-9	79-36-7	Skin Corr. 1A Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400			
607-068-00-6	iodoacetic acid	200-590-1	64-69-7	Acute Tox. 3 * Skin Corr. 1A	H301 H314	GHS06 GHS05 Dgr	H301 H314			
607-069-00-1	ethyl bromoacetate	203-290-9	105-36-2	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 *	H330 H310 H300	GHS06 Dgr	H330 H310 H300			
607-070-00-7	ethyl chloroacetate	203-294-0	105-39-5	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1	H331 H311 H301 H400	GHS06 GHS09 Dgr	H331 H311 H301 H400			
607-071-00-2	ethyl methacrylate	202-597-5	97-63-2	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H225 H319 H335 H315 H317	GHS02 GHS07 Dgr	H225 H319 H335 H315 H317			D
607-072-00-8	2-hydroxyethyl acrylate	212-454-9	818-61-1	Acute Tox. 3 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1	H311 H314 H317 H400	GHS06 GHS05 GHS09 Dgr	H311 H314 H317 H400		* Skin Sens. 1; H317: C ≥ 0,2 %	D

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-073-00-3	4-CPA (ISO); 4-chlorophenoxyacetic acid	204-581-3	122-88-3	Acute Tox. 4 *	H302	GHS07 Wng	H302			
607-074-00-9	chlorfenac(ISO); 2,3,6-trichlorophenylacetic acid	201-599-3	85-34-7	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-075-00-4	chlorfenprop-methyl; methyl 2-chloro-3-(4-chlorophenyl)propionate	238-413-5	14437-17-3	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
607-076-00-X	dodine(ISO); dodecylguanidinium acetate	219-459-5	2439-10-3	Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H315 H410			
607-077-00-5	erbon (ISO); 2-(2,4,5-trichlorophenoxy)ethyl 2,2-dichloropropionate	—	136-25-4	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-078-00-0	fluenetil (ISO); 2-fluoroethyl biphenyl-4-ylacetate	—	4301-50-2	Acute Tox. 1 Acute Tox. 2 *	H310 H300	GHS06 Dgr	H310 H300			
607-079-00-6	kelevan (ISO); ethyl 5-(perchloro-5-hydroxypentacyclo [5,3,0,0 ^{2,6} ,0 ^{3,9} ,0 ^{4,8}]decan-5-yl)-4-oxopentanoate; ethyl 5-(1,2,3,5,6,7,8,9,10,10-decachloro-4-hydroxypentacyclo(5,2,1,0 ^{2,6} ,0 ^{3,9} ,0 ^{5,8})dec-4-yl)-4-oxovalerate	—	4234-79-1	Acute Tox. 3 * Acute Tox. 4 * Aquatic Chronic 2	H311 H302 H411	GHS06 GHS09 Dgr	H311 H302 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-080-00-1	chloroacetyl chloride	201-171-6	79-04-9	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 1 Skin Corr. 1A Aquatic Acute 1	H331 H311 H301 H372 (**) H314 H400	GHS06 GHS08 GHS05 GHS09 Dgr	H331 H311 H301 H372 ** H314 H400	EUH014 EUH029		
607-081-00-7	fluoroacetic acid	205-631-7	144-49-0	Acute Tox. 2 * Aquatic Acute 1	H300 H400	GHS06 GHS09 Dgr	H300 H400			
607-082-00-2	fluoroacetates, soluble	—	—	Acute Tox. 2 * Aquatic Acute 1	H300 H400	GHS06 GHS09 Dgr	H300 H400			A
607-083-00-8	2,4-DB (ISO); 4-(2,4-dichlorophenoxy)butyric acid	202-366-9	94-82-6	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-084-00-3	salts of 2,4-DB	—	—	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			A
607-085-00-9	benzyl benzoate	204-402-9	120-51-4	Acute Tox. 4 *	H302	GHS07 Wng	H302			
607-086-00-4	diallyl phthalate	205-016-3	131-17-9	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
607-088-00-5	methacrylic acid; 2-methylpropenoic acid	201-204-4	79-41-4	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314		STOT SE 3; H335: C ≥ 1 %	D

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-089-00-0	propionic acid ... %	201-176-3	79-09-4	Skin Corr. 1B	H314	GHS05 Dgr	H314		Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H319: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 % STOT SE 3; H335: C ≥ 10 %	B
607-090-00-6	thioglycolic acid	200-677-4	68-11-1	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B	H331 H311 H301 H314	GHS06 GHS05 Dgr	H331 H311 H301 H314		*	
607-091-00-1	trifluoroacetic acid . . . %	200-929-3	76-05-1	Acute Tox. 4 *	H332	GHS05	H332		*	B
				Skin Corr. 1A Aquatic Chronic 3	H314 H412	GHS07 Dgr	H314 H412			
607-092-00-7	methyl lactate; [1] methyl (±)-lactate; [2] methyl (R)-lactate; [3] methyl (S)-(-)-lactate [4]	208-930-0 [1] 218-449-8 [2] 241-420-6 [3] 248-704-9 [4]	547-64-8 [1] 2155-30-8 [2] 17392-83-5 [3] 27871-49-4 [4]	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3	H226 H319 H335	GHS02 GHS07 Wng	H226 H319 H335			C
607-093-00-2	propionyl chloride	201-170-0	79-03-8	Flam. Liq. 2 Skin Corr. 1B	H225 H314	GHS02 GHS05 Dgr	H225 H314	EUH014		B D

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-094-00-8	peracetic acid . . . %	201-186-8	79-21-0	Flam. Liq. 3 Org. Perox. D (***) Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A Aquatic Acute 1	H226 H242 H332 H312 H302 H314 H400	GHS02 GHS05 GHS07 GHS09 Dgr	H226 H242 H332 H312 H302 H314 H400		* STOT SE 3; H335: C ≥ 1 %	B D
607-095-00-3	maleic acid	203-742-5	110-16-7	Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H302 H319 H335 H315	GHS07 Wng	H302 H319 H335 H315			
607-096-00-9	maleic anhydride	203-571-6	108-31-6	Acute Tox. 4 * Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1	H302 H314 H334 H317	GHS08 GHS05 GHS07 Dgr	H302 H314 H334 H317			
607-097-00-4	benzene-1,2,4-tricarboxylic acid 1,2-anhydride; trimellitic anhydride	209-008-0	552-30-7	STOT SE 3 Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H335 H318 H334 H317	GHS08 GHS05 GHS07 Dgr	H335 H318 H334 H317			
607-098-00-X	benzene-1,2:4,5-tetracarboxylic dianhydride; benzene-1,2:4,5-tetracarboxylic dianhydride; pyromellitic dianhydride	201-898-9	89-32-7	Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H318 H334 H317	GHS08 GHS05 Dgr	H318 H334 H317			
607-099-00-5	1,2,3,6-tetrahydrophthalic anhydride; [1] cis-1,2,3,6-tetrahydrophthalic anhydride; [2] 3,4,5,6-tetrahydrophthalic anhydride; [3] tetrahydrophthalic anhydride [4]	201-605-4 [1] 213-308-7 [2] 219-374-3 [3] 247-570-9 [4]	85-43-8 [1] 935-79-5 [2] 2426-02-0 [3] 26266-63-7 [4]	Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H334 H317 H412	GHS08 GHS05 Dgr	H318 H334 H317 H412			C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-100-00-9	benzophenone-3,3',4,4'-tetracarboxylic dianhydride; 4,4'-carbonyldi(phthalic anhydride)	219-348-1	2421-28-5	Eye Irrit. 2 STOT SE 3	H319 H335	GHS07 Wng	H319 H335		Eye Irrit. 2; H319: C ≥ 1 % STOT SE 3; H335: C ≥ 1 %	
607-101-00-4	1,4,5,6,7,7-hexachlorobicyclo [2,2,1]hept-5-ene-2,3-dicarboxylic anhydride chlorendic anhydride	204-077-3	115-27-5	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315		Skin Irrit. 2; H315: C ≥ 1 % Eye Irrit. 2; H319: C ≥ 1 % STOT SE 3; H335: C ≥ 1 %	
607-102-00-X	cyclohexane-1,2-dicarboxylic anhydride; [1] <i>cis</i> -cyclohexane-1,2-dicarboxylic anhydride; [2] <i>trans</i> -cyclohexane-1,2-dicarboxylic anhydride [3]	201-604-9 [1] 236-086-3 [2] 238-009-9 [3]	85-42-7 [1] 13149-00-3 [2] 14166-21-3 [3]	Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H318 H334 H317	GHS08 GHS05 Dgr	H318 H334 H317			C
607-103-00-5	succinic anhydride	203-570-0	108-30-5	Eye Irrit. 2 STOT SE 3	H319 H335	GHS07 Wng	H319 H335		Eye Irrit. 2; H319: C ≥ 1 % STOT SE 3; H335: C ≥ 1 %	
607-104-00-0	cyclopentane-1,2,3,4-tetracarboxylic dianhydride	227-964-7	6053-68-5	Eye Irrit. 2 STOT SE 3	H319 H335	GHS07 Wng	H319 H335		Eye Irrit. 2; H319: C ≥ 1 % STOT SE 3; H335: C ≥ 1 %	
607-105-00-6	8,9,10-trinorborn-5-ene-2,3-dicarboxylic anhydride; [1] 1,2,3,6-tetrahydro-3,6-methanophthalic anhydride; [2] (1α,2α,3β,6β)-1,2,3,6-tetrahydro-3,6-methanophthalic anhydride [3]	204-957-7 [1] 212-557-9 [2] 220-384-5 [3]	129-64-6 [1] 826-62-0 [2] 2746-19-2 [3]	Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H318 H334 H317	GHS08 GHS05 Dgr	H318 H334 H317			C
607-106-00-1	8,9-dinorborn-5-ene-2,3-dicarboxylic anhydride	—	123748-85-6	Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H302 H319 H335 H315 H334	GHS08 GHS07 Dgr	H302 H319 H335 H315 H334		STOT SE 3; H335: C ≥ 10 %	C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-107-00-7	2-ethylhexyl acrylate	203-080-7	103-11-7	STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H335 H315 H317	GHS07 Wng	H335 H315 H317			D
607-108-00-2	2-hydroxy-1-methylethylacrylate; [1] 2-hydroxypropylacrylate; [2] acrylic acid, monoester with propane-1,2-diol [3]	220-852-9 [1] 213-663-8 [2] 247-118-0 [3]	2918-23-2 [1] 999-61-1 [2] 25584-83-2 [3]	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B Skin Sens. 1	H331 H311 H301 H314 H317	GHS06 GHS05 Dgr	H331 H311 H301 H314 H317		* Skin Sens. 1; H317: C ≥ 0,2 %	C D
607-109-00-8	hexamethylene diacrylate; hexane-1,6-diol diacrylate	235-921-9	13048-33-4	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			D
607-110-00-3	pentaerythritol triacrylate	222-540-8	3524-68-3	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			D
607-111-00-9	2,2-bis(acryloyloxymethyl)butyl acrylate; trimethylolpropane triacrylate	239-701-3	15625-89-5	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			D
607-112-00-4	2,2-dimethyltrimethylene diacrylate; neopentyl glycol diacrylate	218-741-5	2223-82-7	Acute Tox. 3 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H311 H319 H315 H317	GHS06 Dgr	H311 H319 H315 H317		*	D
607-113-00-X	isobutyl methacrylate	202-613-0	97-86-9	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1	H226 H319 H335 H315 H317 H400	GHS02 GHS07 GHS09 Wng	H226 H319 H335 H315 H317 H400			D
607-114-00-5	ethylene dimethacrylate	202-617-2	97-90-5	STOT SE 3 Skin Sens. 1	H335 H317	GHS07 Wng	H335 H317		STOT SE 3; H335: C ≥ 10 %	D

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-115-00-0	isobutyl acrylate	203-417-8	106-63-8	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Skin Irrit. 2 Skin Sens. 1	H226 H332 H312 H315 H317	GHS02 GHS07 Wng	H226 H332 H312 H315 H317			D
607-116-00-6	cyclohexyl acrylate	221-319-3	3066-71-5	STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H335 H315 H411	GHS07 GHS09 Wng	H335 H315 H411		STOT SE 3; H335: C ≥ 10 %	D
607-117-00-1	2,3-epoxypropyl acrylate; glycidyl acrylate	203-440-3	106-90-1	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B Skin Sens. 1	H331 H311 H301 H314 H317	GHS06 GHS05 Dgr	H331 H311 H301 H314 H317		* Skin Sens. 1; H317: C ≥ 0,2 %	D
607-118-00-7	1-methyltrimethylene diacrylate; 1,3-butylene glycol diacrylate	243-105-9	19485-03-1	Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1	H312 H314 H317	GHS05 GHS07 Dgr	H312 H314 H317			D
607-119-00-2	tetramethylene diacrylate; 1,4-butyleneglycol diacrylate	213-979-6	1070-70-8	Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1	H312 H314 H317	GHS05 GHS07 Dgr	H312 H314 H317			D
607-120-00-8	2,2'-oxydiethyl diacrylate; diethylene glycol diacrylate	223-791-6	4074-88-8	Acute Tox. 3 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H311 H319 H315 H317	GHS06 Dgr	H311 H319 H315 H317		* Skin Sens. 1; H317: C ≥ 0,2 %	D
607-121-00-3	8,9,10-trinorborn-2-yl acrylate	—	10027-06-2	Acute Tox. 4 * Skin Irrit. 2 Skin Sens. 1	H312 H315 H317	GHS07 Wng	H312 H315 H317			D
607-122-00-9	pentaerythritol tetraacrylate	225-644-1	4986-89-4	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			D

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-123-00-4	2,3-epoxypropyl methacrylate; glycidyl methacrylate	203-441-9	106-91-2	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H332 H312 H302 H319 H315 H317	GHS07 Wng	H332 H312 H302 H319 H315 H317			D
607-124-00-X	2-hydroxyethyl methacrylate	212-782-2	868-77-9	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			D
607-125-00-5	2-hydroxypropyl methacrylate; [1] 3-hydroxypropyl methacrylate [2]	213-090-3 [1] 220-426-2 [2]	923-26-2 [1] 2761-09-3 [2]	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			C D
607-126-00-0	2,2'-(ethylenedioxy)diethyl diacrylate; triethylene glycol diacrylate	216-853-9	1680-21-3	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			D
607-127-00-6	2-diethylaminoethyl methacrylate	203-275-7	105-16-8	Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H332 H319 H315 H317	GHS07 Wng	H332 H319 H315 H317			D
607-128-00-1	2-tert-butylaminoethyl methacrylate	223-228-4	3775-90-4	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			D
607-129-00-7	ethyl lactate; ethyl DL-lactate; [1] ethyl (S)-2-hydroxypropionate; ethyl L-lactate; ethyl-(S)-lactate [2]	202-598-0 [1] 211-694-1 [2]	97-64-3 [1] 687-47-8 [2]	Flam. Liq. 3 STOT SE 3 Eye Dam. 1	H226 H335 H318	GHS02 GHS05 GHS07 Dgr	H226 H335 H318			C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-130-00-2	pentyl acetate; [1] isopentyl acetate; [2] 1-methylbutyl acetate; [3] 2-methylbutyl acetat; [4] 2(or 3)-methylbutyl acetate [5]	211-047-3 [1] 204-662-3 [2] 210-946-8 [3] 210-843-8 [4] 282-263-3 [5]	628-63-7 [1] 123-92-2 [2] 626-38-0 [3] 624-41-9 [4] 84145-37-9 [5]	Flam. Liq. 3	H226	GHS02 Wng	H226	EUH066		C
607-131-00-8	isopentyl propionate; [1] pentyl propionate; [2] 2-methylbutyl propionate [3]	203-322-1 [1] 210-852-7 [2] 219-449-0 [3]	105-68-0 [1] 624-54-4 [2] 2438-20-2 [3]	Flam. Liq. 3	H226	GHS02 Wng	H226			C
607-132-00-3	2-dimethylaminoethyl methacrylate	220-688-8	2867-47-2	Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H312 H302 H319 H315 H317	GHS07 Wng	H312 H302 H319 H315 H317			D
607-133-00-9	monoalkyl or monoaryl or monoalkylaryl esters of acrylic acid with the exception of those specified elsewhere in this Annex	—	—	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H319 H335 H315 H411	GHS07 GHS09 Wng	H319 H335 H315 H411		STOT SE 3; H335: C ≥ 10 %	A
607-134-00-4	monoalkyl or monoaryl or monoalkylaryl esters of methacrylic acid with the exception of those specified elsewhere in this Annex	—	—	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315		STOT SE 3; H335: C ≥ 10 %	A
607-135-00-X	butyric acid	203-532-3	107-92-6	Skin Corr. 1B	H314	GHS05 Dgr	H314			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-136-00-5	butyryl chloride	205-498-5	141-75-3	Flam. Liq. 2 Skin Corr. 1B	H225 H314	GHS02 GHS05 Dgr	H225 H314			
607-137-00-0	methyl acetoacetate	203-299-8	105-45-3	Eye Irrit. 2	H319	GHS07 Wng	H319			
607-138-00-6	butyl chloroformate; chloroformic acid butyl ester	209-750-5	592-34-7	Flam. Liq. 3 Acute Tox. 3 * Skin Corr. 1B	H226 H331 H314	GHS02 GHS06 GHS05 Dgr	H226 H331 H314			
607-139-00-1	2-chloropropionic acid	209-952-3	598-78-7	Acute Tox. 4 * Skin Corr. 1A	H302 H314	GHS05 GHS07 Dgr	H302 H314			
607-140-00-7	isobutyryl chloride	201-194-1	79-30-1	Flam. Liq. 2 Skin Corr. 1A	H225 H314	GHS02 GHS05 Dgr	H225 H314			
607-141-00-2	oxydiethylene bis(chloroformate)	203-430-9	106-75-2	Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H302 H315 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H315 H318 H411			
607-142-00-8	propyl chloroformate; chloroformic acid propylester; <i>n</i> -propyl chloroformate	203-687-7	109-61-5	Flam. Liq. 2 Acute Tox. 3 * Skin Corr. 1B	H225 H331 H314	GHS02 GHS06 GHS05 Dgr	H225 H331 H314			
607-143-00-3	valeric acid	203-677-2	109-52-4	Skin Corr. 1B Aquatic Chronic 3	H314 H412	GHS05 Dgr	H314 H412			
607-144-00-9	adipic acid	204-673-3	124-04-9	Eye Irrit. 2	H319	GHS07 Wng	H319			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-145-00-4	methanesulphonic acid	200-898-6	75-75-2	Skin Corr. 1B	H314	GHS05 Dgr	H314			
607-146-00-X	fumaric acid	203-743-0	110-17-8	Eye Irrit. 2	H319	GHS07 Wng	H319			
607-147-00-5	oxalic acid diethylester; diethyl oxalate	202-464-1	95-92-1	Acute Tox. 4 * Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			
607-148-00-0	guanidinium chloride; guanadine hydrochloride	200-002-3	50-01-1	Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2	H302 H319 H315	GHS07 Wng	H302 H319 H315			
607-149-00-6	urethane (INN); ethyl carbamate	200-123-1	51-79-6	Carc. 1B	H350	GHS08 Dgr	H350			
607-150-00-1	endothal (ISO); 7-oxabicyclo(2,2,1)heptane-2,3-dicarboxylic acid	205-660-5	145-73-3	Acute Tox. 3 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H301 H312 H319 H335 H315	GHS06 Dgr	H301 H312 H319 H335 H315			
607-151-00-7	propargite (ISO); 2-(4- <i>tert</i> -butylphenoxy) cyclohexyl prop-2-ynyl sulphite	219-006-1	2312-35-8	Carc. 2 Acute Tox. 3 * Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H331 H315 H318 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H331 H315 H318 H410		M=10	
607-152-00-2	2,3,6-TBA (ISO); 2,3,6-trichlorobenzoic acid	200-026-4	50-31-7	Acute Tox. 4 (*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-153-00-8	benazolin (ISO); 4-chloro-2,3-dihydro-2-oxo-1,3-benzothiazol-3-ylacetic acid	223-297-0	3813-05-6	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 3	H319 H315 H412	GHS07 Wng	H319 H315 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-154-00-3	ethyl N-benzoyl-N-(3,4-dichlorophenyl)-DL-alaninate; benzoylprop-ethyl (ISO)	244-845-5	22212-55-1	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
607-155-00-9	3-(3-amino-5-(1-methylguanidino)-1-oxopentylamino-6-(4-amino-2-oxo-2,3-dihydro-pyrimidin-1-yl)-2,3-dihydro-(6H)-pyran-2-carboxylic acid; blasticidin-s	—	2079-00-7	Acute Tox. 2 *	H300	GHS06 Dgr	H300			
607-156-00-4	chlorfenson (ISO); 4-chlorophenyl 4-chlorobenzenesulfonate	201-270-4	80-33-1	Acute Tox. 4 * Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H400 H410	GHS07 GHS09 Wng	H302 H315 H410			
607-157-00-X	3-(3-biphenyl-4-yl-1,2,3,4-tetrahydro-1-naphthyl)-4-hydroxycoumarin; difenacoum	259-978-4	56073-07-5	Acute Tox. 2 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H300 H372 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H300 H372 (**) H410			
607-158-00-5	sodium salt of chloroacetic acid; sodium chloroacetate	223-498-3	3926-62-3	Acute Tox. 3 * Skin Irrit. 2 Aquatic Acute 1	H301 H315 H400					
607-159-00-0	chlorobenzilate (ISO); ethyl 2,2-di(4-chlorophenyl)-2-hydroxyacetate; ethyl 4,4'-dichlorobenzilate	208-110-2	510-15-6	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
607-160-00-6	isobutyl 2-(4-(4-chlorophenoxy)phenoxy)propionate; clofop-isobutyl (ISO)	—	51337-71-4	Acute Tox. 4 *	H302	GHS07 Wng	H302			
607-161-00-1	diethanolamine salt of 4-CPA	—	—	Acute Tox. 4 *	H302	GHS07 Wng	H302			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-162-00-7	2,2-dichloropropionic acid; dalapon	200-923-0	75-99-0	Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 3	H302 H315 H318 H412	GHS05 GHS07 Dgr	H302 H315 H318 H412			
607-163-00-2	3-acetyl-6-methyl-2H-pyran-2,4(3H)-dione; dehydracetic acid	208-293-9	520-45-6	Acute Tox. 4 *	H302	GHS07 Wng	H302			
607-164-00-8	sodium 1-(3,4-dihydro-6-methyl-2,4-dioxo-2H-pyran-3-ylidene)ethonolate; sodium dehydracetate	224-580-1	4418-26-2	Acute Tox. 4 *	H302	GHS07 Wng	H302			
607-165-00-3	diclofop-methyl (ISO) methyl 2-(4-(2,4-dichlorophenoxy)phenoxy)propionate; methyl (RS)-2-[4-(2,4-dichlorophenoxy)phenoxy]propionate;	257-141-8	51338-27-3	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
607-166-00-9	medinoterb acetate (ISO); 6-tert-butyl-3-methyl-2,4-dinitrophenyl acetate	219-634-6	2487-01-6	Acute Tox. 3 * Acute Tox. 4 *	H301 H312	GHS06 Dgr	H301 H312			
607-167-00-4	sodium 3-chloroacrylate	—	4312-97-4	Acute Tox. 4 * Acute Tox. 4 *	H312 H302	GHS07 Wng	H312 H302			
607-168-00-X	dipropyl 6,7-methylenedioxy-1,2,3,4-tetrahydro-3-methylnaphthalene-1,2-dicarboxylate; propylisome	—	83-59-0	Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H311 H302 H400 H410	GHS06 GHS09 Dgr	H311 H302 H410			
607-169-00-5	sodium fluoroacetate	200-548-2	62-74-8	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1	H330 H310 H300 H400	GHS06 GHS09 Dgr	H330 H310 H300 H400			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-170-00-0	bis(1,2,3-trithiacyclohexyldimethylammonium) oxalate; thiocyclam-oxalate	250-859-2	31895-22-4	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
607-172-00-1	4-hydroxy-3-(3-(4'-bromo-4-biphenyl)-1,2,3,4-tetrahydro-1-naphthyl)coumarin; brodifacoum	259-980-5	56073-10-0	Acute Tox. 1 Acute Tox. 2 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H372 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H310 H300 H372 (**) H410			
607-173-00-7	dimethyl (3-methyl-4-(5-nitro-3-ethoxycarbonyl-2-thienyl)azo)phenylnitrilodipropionate	400-460-6	—	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
607-174-00-2	reaction mass of dodecyl 3-(2,2,4,4-tetramethyl-21-oxo-7-oxa-3,20-diazadispiro(5,1,1,1,2)henicosan-20-yl)propionate and tetradecyl 3-(2,2,4,4-tetramethyl-21-oxo-7-oxa-3,20-diazadispiro(5,1,1,1,2)henicosan-20-yl)propionate	400-580-9	—	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
607-175-00-8	methyl 2-(2-nitrobenzylidene)acetoacetate	400-650-9	39562-27-1	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-176-00-3	reaction mass of α -3-(3-(2H-benzotriazol-2-yl)-5-tert-butyl-4-hydroxyphenyl)propionyl- ω -hydroxypoly(oxyethylene) and α -3-(3-(2H-benzotriazol-2-yl)-5-tert-butyl-4-hydroxyphenyl)propionyl- ω -3-(3-(2H-benzotriazol-2-yl)-5-tert-butyl-4-hydroxyphenyl)propionyloxypoly(oxyethylene)	400-830-7	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-177-00-9	methyl 2-(3-(4-methoxy-6-methyl-1,3,5-triazin-2-yl) 3-methylureidosulphonyl)benzoate	401-190-1	101200-48-0	Skin Sens. 1	H317	GHS07 Wng	H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-178-00-4	methyl α -((4,6-dimethoxypyrimidin-2-yl)ureidosulphonyl)-o-toluate	401-340-6	83055-99-6	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-179-00-X	(benzothiazol-2-ylthio)succinic acid	401-450-4	95154-01-1	Skin Sens. 1	H317	GHS07 Wng	H317			
607-180-00-5	potassium 2-hydroxycarbazole-1-carboxylate	401-630-2	96566-70-0	Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Aquatic Chronic 3	H302 H319 H335 H412	GHS07 Wng	H302 H319 H335 H412			
607-181-00-0	3,5-dichloro-2,4-difluorobenzoyl fluoride	401-800-6	101513-70-6	Acute Tox. 3 * Skin Corr. 1B Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 3	H331 H314 H302 H317 H412	GHS06 GHS05 Dgr	H331 H314 H302 H317 H412	EUH029		
607-182-00-6	methyl 3-sulphamoyl-2-thenoate	402-050-2	—	Skin Sens. 1	H317	GHS07 Wng	H317			
607-183-00-1	zinc 2-hydroxy-5-C ₁₃₋₁₈ alkylbenzoate	402-280-3	—	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H319 H315 H411	GHS07 GHS09 Wng	H319 H315 H411			
607-184-00-7	S-(3-trimethoxysilyl)propyl 19-isocyanato-11-(6-isocyanatohexyl)-10,12-dioxo-2,9,11,13-tetraazanonadecanethioate	402-290-8	85702-90-5	Flam. Liq. 3 Resp. Sens. 1 Skin Sens. 1	H226 H334 H317	GHS02 GHS08 Dgr	H226 H334 H317			
607-185-00-2	ethyl <i>trans</i> -3-dimethylaminoacrylate	402-650-4	1117-37-9	Skin Sens. 1	H317	GHS07 Wng	H317			
607-186-00-8	quinclorac (ISO); 3,7-dichloroquinoline-8-carboxylic acid	402-780-1	84087-01-4	Skin Sens. 1	H317	GHS07 Wng	H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-187-00-3	bis(2,2,6,6-tetramethyl-4-piperidyl) succinate	402-940-0	62782-03-0	Eye Irrit. 2 Aquatic Chronic 3	H319 H412	GHS07 Wng	H319 H412			
607-188-00-9	hydrogen sodium <i>N</i> -carboxylatoethyl- <i>N</i> -octadec-9-enylmaleamate	402-970-4	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-189-00-4	trimethylenediaminetetraacetic acid	400-400-9	1939-36-2	Acute Tox. 4 * Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H318 H410			
607-190-00-X	methyl acrylamidomethoxyacetate (containing ≥ 0,1 % acrylamid)	401-890-7	77402-03-0	Carc. 1B Muta. 1B Acute Tox. 4 * Eye Irrit. 2	H350 H340 H302 H319	GHS08 GHS07 Dgr	H350 H340 H302 H319			
607-191-00-5	isobutyl 3,4-epoxybutyrate	401-920-9	100181-71-3	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
607-192-00-0	disodium <i>N</i> -carboxymethyl- <i>N</i> -(2-(2-hydroxyethoxy)ethyl)glycinate	402-360-8	92511-22-3	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-194-00-1	propylene carbonate	203-572-1	108-32-7	Eye Irrit. 2	H319	GHS07 Wng	H319			
607-195-00-7	2-methoxy-1-methylethyl acetate	203-603-9	108-65-6	Flam. Liq. 3 Eye Irrit. 2	H226 H319	GHS02 GHS07 Wng	H226 H319			
607-196-00-2	heptanoic acid	203-838-7	111-14-8	Skin Corr. 1B	H314	GHS05 Dgr	H314			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-197-00-8	nonanoic acid	203-931-2	112-05-0	Skin Corr. 1B	H314	GHS05 Dgr	H314			
607-198-00-3	propyl 3,4,5-trihydroxybenzoate	204-498-2	121-79-9	Acute Tox. 4 * Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			
607-199-00-9	octyl 3,4,5-trihydroxybenzoate	213-853-0	1034-01-1	Acute Tox. 4 * Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			
607-200-00-2	dodecyl 3,4,5-trihydroxybenzoate	214-620-6	1166-52-5	Skin Sens. 1	H317	GHS07 Wng	H317			
607-201-00-8	thiocarbonyl chloride	207-341-6	463-71-8	Acute Tox. 3 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H331 H302 H319 H335 H315	GHS06 Dgr	H331 H302 H319 H335 H315			
607-203-00-9	2-ethylhexyl[[[3,5-bis(1,1-dimethylethyl)-4-hydroxyphenyl]methyl]thio]acetate	279-452-8	80387-97-9	Repr. 1B Skin Sens. 1 Aquatic Chronic 3	H360D (***) H317 H412	GHS08 GHS07 Dgr	H360D (***) H317 H412			
607-204-00-4	(chlorophenyl)(chlorotolyl)methane, mixed isomers	400-140-6	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-205-00-X	methyl chloroacetate	202-501-1	96-34-4	Flam. Liq. 3 Acute Tox. 3(*) Acute Tox. 3(*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1	H226 H331 H301 H335 H315 H318	GHS02 GHS06 GHS05 Dgr	H226 H331 H301 H335 H315 H318			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-206-00-5	isopropyl chloroacetate	203-301-7	105-48-6	Flam. Liq. 3 Acute Tox. 3(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H226 H301 H319 H335 H315	GHS02 GHS06 Dgr	H226 H301 H319 H335 H315			
607-207-00-0	haloxyfop-etotyl (ISO); 2-ethoxyethyl 2-(4-(3-chloro-5-trifluoromethyl-2-pyridyloxy)phenoxy)propionate; haloxyfop-(2-ethoxyethyl)	402-560-5	87237-48-7	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
607-208-00-6	4,8,12-trimethyltrideca-3,7,11-trienoic acid, mixed isomers	403-000-2	91853-67-7	Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H315 H400 H410	GHS07 GHS09 Wng	H315 H410			
607-209-00-1	reaction mass of O,O'-diisopropyl (pentathio)dithioformate and O,O'-diisopropyl (trithio)dithioformate and O,O'-diisopropyl (tetrathio)dithioformate	403-030-6	—	Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
607-210-00-7	methyl acrylamidoglycolate (containing ≥ 0,1 % acrylamide)	403-230-3	77402-05-2	Carc. 1B Muta. 1B Skin Corr. 1B Skin Sens. 1	H350 H340 H314 H317	GHS08 GHS05 GHS07 Dgr	H350 H340 H314 H317			
607-211-00-2	methyl 3-(3-tert-butyl-4-hydroxy-5-methylphenyl)propionate	403-270-1	6386-39-6	Acute Tox. 4(*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-212-00-8	poly(oxypropylenecarbonyl-co-oxy(ethylene)carbonyl), containing 27 % hydroxyvalerate	403-300-3	—	Skin Sens. 1	H317	GHS07 Wng	H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-213-00-3	ethyl 3,3-bis(<i>tert</i> -pentylperoxy)butyrate	403-320-2	67567-23-1	Org. Perox. D (***) Flam. Liq. 3 Aquatic Chronic 2	H242 H226 H411	GHS02 GHS09 Dgr	H242 H226 H411			
607-214-00-9	N,N-hydrazinodiacetic acid	403-510-5	19247-05-3	Acute Tox. 3(*) STOT RE 2(*) Skin Sens. 1 Aquatic Chronic 3	H301 H373 (**) H317 H412	GHS06 GHS08 Dgr	H301 H373 (**) H317 H412			
607-215-00-4	3-(3- <i>tert</i> -butyl-4-hydroxyphenyl)propionic acid	403-920-4	107551-67-7	Acute Tox. 4(*) Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			
607-216-00-X	glutamic acid, reaction products with N-(C ₁₂₋₁₄ alkyl)propylenediamine	403-950-8	—	Acute Tox. 2(*) Acute Tox. 4(*) Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H330 H302 H314 H400 H410	GHS06 GHS05 GHS09 Dgr	H330 H302 H314 H410			
607-217-00-5	2-ethoxyethyl 2-(4-(2,6-dihydro-2,6-dioxo-7-phenyl-1,5-dioxaindacen-3-yl)phenoxy)acetate	403-960-2	—	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
607-218-00-0	dichlorprop-P (ISO); (+)-R-2-(2,4-dichlorophenoxy)propionic acid	403-980-1	15165-67-0	Acute Tox. 4(*) Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H302 H315 H318 H317	GHS05 GHS07 Dgr	H302 H315 H318 H317			
607-219-00-6	bis(2-ethylhexyl) dithiodiacetate	404-510-8	62268-47-7	Acute Tox. 4(*) Skin Sens. 1 Aquatic Chronic 2	H302 H317 H411	GHS07 GHS09 Wng	H302 H317 H411			
607-221-00-7	6-docosyloxy-1-hydroxy-4-(1-(4-hydroxy-3-methylphenanthren-1-yl)-3-oxo-2-oxaphenalen-1-yl)naphthalene-2-carboxylic acid	404-550-6	—	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-222-00-2	6-(2,3-dimethylmaleimido)hexyl methacrylate	404-870-6	63740-41-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-223-00-8	transfluthrin (ISO); 2,3,5,6-tetrafluorobenzyl trans-2-(2,2-dichlorovinyl)-3,3-dimethylcyclopropanecarboxylate	405-060-5	118712-89-3	Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H315 H400 H410	GHS07 GHS09 Wng	H315 H410			
607-224-00-3	methyl 2-(3-nitrobenzylidene)acetoacetate	405-270-7	39562-17-9	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
607-225-00-9	3-azidosulfonylbenzoic acid	405-310-3	15980-11-7	Self-React. C (****) STOT RE 2(*) Eye Dam. 1 Skin Sens. 1	H241 H373 (**) H318 H317	GHS02 GHS08 GHS05 GHS07 Dgr	H241 H373 (**) H318 H317			
607-226-00-4	reaction mass of 2-acryloyloxyethyl hydrogen cyclohexane-1,2-dicarboxylate and 2-methacryloyloxyethyl hydrogen cyclohexane-1,2-dicarboxylate	405-360-6	—	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H315 H318 H317 H412	GHS05 GHS07 Dgr	H315 H318 H317 H412			
607-227-00-X	potassium 2-amino-2-methylpropionate octahydrate	405-560-3	120447-91-8	Acute Tox. 4(*) Skin Corr. 1A	H302 H314	GHS05 GHS07 Dgr	H302 H314			
607-228-00-5	bis(2-methoxyethyl) phthalate	204-212-6	117-82-8	Repr. 1B	H360- Df	GHS08 Dgr	H360Df			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-229-00-0	diethylcarbamoyl chloride	201-798-5	88-10-8	Carc. 2 Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H351 H332 H302 H319 H335 H315	GHS08 GHS07 Wng	H351 H332 H302 H319 H335 H315			
607-230-00-6	2-ethylhexanoic acid	205-743-6	149-57-5	Repr. 2	H361d (***)	GHS08 Wng	H361d (***)			
607-231-00-1	3,6-dichloropyridine-2-carboxylic acid; clopyralid	216-935-4	1702-17-6	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
607-232-00-7	pyridate (ISO); O-(6-chloro-3-phenylpyridazin-4-yl) S-octyl thiocarbonate	259-686-7	55512-33-9	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
607-233-00-2	hexyl acrylate	219-698-5	2499-95-8	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H319 H335 H315 H317 H411	GHS07 GHS09 Wng	H319 H335 H315 H317 H411			
607-234-00-8	flurenol (ISO); 9-hydroxy-9H-fluorene-9-carboxylic acid	207-397-1	467-69-6	Aquatic Chronic 2	H411	GHS09	H411			
607-235-00-3	mecrilate; methyl 2-cyanoacrylate	205-275-2	137-05-3	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315		STOT SE 3; H335: C ≥ 10 %	
607-236-00-9	ethyl 2-cyanoacrylate	230-391-5	7085-85-0	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315		STOT SE 3; H335: C ≥ 10 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-237-00-4	benzyl 2-chloro-4-(trifluoromethyl)thiazole-5-carboxylate; flurazole	276-942-3	72850-64-7	Aquatic Chronic 2	H411	GHS09	H411			
607-238-00-X	tau-fluvalinate (ISO); cyano-(3-phenoxyphenyl)methyl N-[2-chloro-4-(trifluoromethyl)phenyl]-D-valinate	—	102851-06-9	Acute Tox. 4(*) Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H400 H410	GHS07 GHS09 Wng	H302 H315 H410			
607-239-00-5	fenpropathrin (ISO); α-cyano-3-phenoxybenzyl 2,2,3,3-tetramethylcyclopropanecarboxylate	254-485-0	39515-41-8	Acute Tox. 2(*) Acute Tox. 3(*) Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H330 H301 H312 H400 H410	GHS06 GHS09 Dgr	H330 H301 H312 H410			
607-240-00-0	cis-1,2,3,6-tetrahydro-4-methylphthalic anhydride; [1] 1,2,3,6-tetrahydro-4-methylphthalic anhydride; [2] 1,2,3,6-tetrahydro-3-methylphthalic anhydride; [3] tetrahydromethylphthalic anhydride; [4] 1,2,3,6-tetrahydromethylphthalic anhydride; [5] tetrahydro-4-methylphthalic anhydride; [6] 2,3,5,6-tetrahydro-2-methylphthalic anhydride [7]	216-906-6 [1] 222-323-8 [2] 226-247-6 [3] 234-290-7 [4] 247-830-1 [5] 251-823-9 [6] 255-853-3 [7]	1694-82-2 [1] 3425-89-6 [2] 5333-84-6 [3] 11070-44-3 [4] 26590-20-5 [5] 34090-76-1 [6] 42498-58-8 [7]	Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H318 H334 H317	GHS08 GHS05 Dgr	H318 H334 H317			C
607-241-00-6	hexahydro-4-methylphthalic anhydride; [1] hexahydromethylphthalic anhydride; [2] hexahydro-1-methylphthalic anhydride; [3] hexahydro-3-methylphthalic anhydride [4]	243-072-0 [1] 247-094-1 [2] 256-356-4 [3] 260-566-1 [4]	19438-60-9 [1] 25550-51-0 [2] 48122-14-1 [3] 57110-29-9 [4]	Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H318 H334 H317	GHS08 GHS05 Dgr	H318 H334 H317			C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-242-00-1	tetrachlorophthalic anhydride	204-171-4	117-08-8	Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H334 H317 H400 H410	GHS08 GHS05 GHS09 Dgr	H318 H334 H317 H410			
607-243-00-7	sodium 3,6-dichloro- <i>o</i> -anisate; [1] 3,6-dichloro- <i>o</i> -anisic acid, compound with 2,2'-iminodiethanol (1:1); [2] 3,6-dichloro- <i>o</i> -anisic acid, compound with 2-aminoethanol (1:1) [3]	217-846-3 [1] 246-590-5 [2] 258-527-9 [3]	1982-69-0 [1] 25059-78-3 [2] 53404-28-7 [3]	Aquatic Chronic 3	H412	—	H412			
607-244-00-2	isooctyl acrylate	249-707-8	29590-42-9	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H319 H335 H315 H410		STOT SE 3; H335: C ≥ 10 %	
607-245-00-8	<i>tert</i> -butyl acrylate	216-768-7	1663-39-4	Flam. Liq. 2 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H225 H332 H312 H302 H335 H315 H317 H412	GHS02 GHS07 Dgr	H225 H332 H312 H302 H335 H315 H317 H412			D
607-246-00-3	allyl methacrylate; 2-methyl-2-propenoic acid 2-propenyl ester	202-473-0	96-05-9	Flam. Liq. 3 Acute Tox. 3(*) Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Acute 1	H226 H331 H312 H302 H400	GHS02 GHS06 GHS09 Dgr	H226 H331 H312 H302 H400			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-247-00-9	dodecyl methacrylate	205-570-6	142-90-5	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H319 H335 H315 H410		STOT SE 3; H335: C ≥ 10 %	
607-248-00-4	naptalam-sodium (ISO); sodium N-naphth-1-ylphthalamate	205-073-4	132-67-2	Acute Tox. 4(*)	H302	GHS07 Wng	H302			
607-249-00-X	(1-methyl-1,2-ethanediyl)bis[oxy(methyl-2,1-ethanediyl)] diacrylate	256-032-2	42978-66-5	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H319 H335 H315 H317 H411	GHS07 GHS09 Wng	H319 H335 H315 H317 H411		STOT SE 3; H335: C ≥ 10 %	
607-250-00-5	4H-3,1-benzoxazine-2,4(1H)-dione	204-255-0	118-48-9	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			
607-251-00-0	2-methoxypropyl acetate	274-724-2	70657-70-4	Flam. Liq. 3 Repr. 1B STOT SE 3	H226 H360D (***) H335	GHS02 GHS08 GHS07 Dgr	H226 H360D (***) H335			
607-252-00-6	lambda-cyhalothrin (ISO); reaction mass of (S)-α-cyano-3-phenoxybenzyl(Z)-(1R)-cis-3-(2-chloro-3,3,3-trifluoropropenyl)-2,2-dimethylcyclopropanecarboxylate and (R)-α-cyano-3-phenoxybenzyl (Z)-(1S)-cis-3-(2-chloro-3,3,3-trifluoropropenyl)-2,2-dimethylcyclopropanecarboxylate (1:1)	415-130-7	91465-08-6	Acute Tox. 2(*) Acute Tox. 3(*) Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H330 H301 H312 H400 H410	GHS06 GHS09 Dgr	H330 H301 H312 H410			
607-253-00-1	α-cyano-4-fluoro-3-phenoxybenzyl-3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate; cyfluthrin	269-855-7	68359-37-5	Acute Tox. 2(*) Acute Tox. 3(*) Aquatic Acute 1 Aquatic Chronic 1	H300 H331 H400 H410	GHS06 GHS09 Dgr	H300 H331 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-254-00-7	α -cyano-4-fluoro-3-phenoxybenzyl-3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate; beta-cyfluthrin	269-855-7	68359-37-5	Acute Tox. 2(*) Acute Tox. 2(*) Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H400 H410	GHS06 GHS09 Dgr	H330 H300 H410			
607-255-00-2	fluroxypyr (ISO); 4-amino-3,5-dichloro-6-fluoro-2-pyridyloxyacetic acid	—	69377-81-7	Aquatic Chronic 3	H412	—	H412			
607-256-00-8	azoxystrobin (ISO); methyl (E)-2-{2-[6-(2-cyanophenoxy)pyrimidin-4-yloxy]phenyl}-3-methoxyacrylate	—	131860-33-8	Acute Tox. 3(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H400 H410	GHS06 GHS09 Dgr	H331 H410			
607-257-00-3	isopropyl propionate	211-300-8	637-78-5	Flam. Liq. 2	H225	GHS02 Dgr	H225			
607-258-00-9	dodecyl 3-(2-(3-benzyl-4-ethoxy-2,5-dioximidazolidin-1-yl)-3-(4-methoxybenzoyl)acetamido)-4-chlorobenzoate	403-990-6	70950-45-7	Aquatic Chronic 4	H413	—	H413			
607-259-00-4	methyl 2R,3S-(-)-3-(4-methoxyphenyl)oxiranecarboxylate	404-130-2	105560-93-8	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			
607-260-00-X	ethyl 2-(3-nitrobenzylidene)acetoacetate	404-490-0	39562-16-8	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			
607-261-00-5	iso(C ₁₀ -C ₁₄)alkyl (3,5-di-tert-butyl-4-hydroxyphenyl)methylthioacetate	404-800-4	118832-72-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-262-00-0	7-chloro-1-cyclopropyl-6-fluoro-1,4-dihydro-4-oxoquinoline-3-carboxylic acid	405-050-0	86393-33-1	Acute Tox. 4(*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-263-00-6	potassium iron(III) 1,3-propanediamine-N, N,N',N'-tetraacetate hemihydrate	405-680-6	—	Self-heat. 2 (****) Aquatic Chronic 2	H252 H411	GHS02 GHS09 Wng	H252 H411			
607-264-00-1	2-chloro-4-(methylsulfonyl)benzoic acid	406-520-8	53250-83-2	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-265-00-7	ethyl-2-chloro-2,2-diphenylacetate	406-580-5	52460-86-3	Skin Irrit. 2 Aquatic Chronic 3	H315 H412	GHS07 Wng	H315 H412			
607-266-00-2	reaction mass of: hydroxyaluminium bis[2-hydroxy-3,5-di- <i>tert</i> -butylbenzoate]; 3,5-di- <i>tert</i> -butyl-salicylic acid	406-890-0	130296-87-6	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
607-267-00-8	<i>tert</i> -butyl (5S,6R,7R)-3-bromomethyl-5,8-dioxo-7-(2-(2-phenylacetamido)-5-thia-1-azabicyclo[4.2.0] oct-2-ene-2-carboxylate	407-620-4	33610-13-8	Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 3	H334 H317 H412	GHS08 Dgr	H334 H317 H412			
607-268-00-3	2-methylpropyl (R)-2-hydroxypropanoate	407-770-0	61597-96-4	Eye Irrit. 2	H319	GHS07 Wng	H319			
607-269-00-9	(R)-2-(4-hydroxyphenoxy)propanoic acid	407-960-3	94050-90-5	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-270-00-4	3,9-bis(2-(3-(3- <i>tert</i> -butyl-4-hydroxy-5-methylphenyl)propionyloxy-1,1-dimethylethyl)-2,4,8,10- tetraoxaspiro[5.5]undecane	410-730-5	90498-90-1	Acute Tox. 4(*)	H312	GHS07 Wng	H312			
607-271-00-X	2-isopropyl-5-methylcyclohexyloxycarbonyloxy-2-hydroxypropane	417-420-9	156324-82-2	Eye Irrit. 2 Aquatic Chronic 2	H319 H411	GHS07 GHS09 Wng	H319 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-272-00-5	fluroxypyr-meptyl (ISO); methylheptyl, O-(4-amino-3,5-dichloro-6-fluoro-2-pyridyloxy) acetate; [1] fluroxypyr-butometyl (ISO); 2-butoxy-1-methylethyl, O-(4-amino-3,5-dichloro-6-fluoro-2-pyridyloxy) acetate [2]	279-752-9 [1] - [2]	81406-37-3 [1] 154486-27-8 [2]	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-273-00-0	ammonium 7-(2,6-dimethyl-8-(2,2-dimethylbutyryloxy)-1,2,6,7,8,8a-hexahydro-1-naphthyl)-3,5-dihydroxyheptanoate	404-520-2	—	Aquatic Chronic 3	H412	—	H412			
607-274-00-6	2-(N-benzyl-N-methylamino)ethyl 3-amino-2-butenate	405-350-1	54527-73-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-275-00-1	sodium benzoxyloxybenzene-4-sulfonate	405-450-5	66531-87-1	Skin Sens. 1	H317	GHS07 Wng	H317			
607-276-00-7	bis[(1-methylimidazol)-(2-ethyl-hexanoate)], zinc complex	405-635-0	—	Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H400 H410	GHS05 GHS09 Dgr	H315 H318 H410			
607-277-00-2	reaction mass of: 2-(hexylthio)ethylamine hydrochloride; sodium propionate	405-720-2	—	Acute Tox. 4(*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H317 H411			
607-278-00-8	reaction mass of isomers of: sodium phenethylnaphthalenesulfonate; sodium naphthylethylbenzenesulfonate	405-760-0	—	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			
607-279-00-3	reaction mass of n-octadecylaminodiethyl bis(hydrogen maleate); n-octadecylaminodiethyl hydrogen maleate hydrogenphthalate	405-960-8	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-280-00-9	sodium 4-chloro-1-hydroxybutane-1-sulfonate	406-190-5	54322-20-2	Acute Tox. 4(*) Eye Irrit. 2 Skin Sens. 1	H302 H319 H317	GHS07 Wng	H302 H319 H317			
607-281-00-4	reaction mass of branched and linear C ₇ -C ₉ alkyl 3-[3-(2H-benzotriazol-2-yl)-5-(1,1-dimethylethyl)-4-hydroxyphenyl]propionates	407-000-3	127519-17-9	Aquatic Chronic 2	H411	GHS09	H411			
607-282-00-X	2-acetoxymethyl-4-benzyloxybut-1-yl acetate	407-140-5	131266-10-9	Aquatic Chronic 3	H412	—	H412			
607-283-00-5	E-ethyl-4-oxo-4-phenylcrotonate	408-040-4	15121-89-8	Acute Tox. 4(*) Acute Tox. 4(*) Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H315 H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H312 H302 H315 H318 H317 H410			
607-284-00-0	reaction mass of: sodium 3,3'-(1,4-phenylenebis(carbonylimino-3,1-propanediylimino))bis(10-amino-6,13-dichloro-4,11-triphenodioxazinedisulfonate); lithium 3,3'-(1,4-phenylenebis-(carbonylimino-3,1-propanediylimino))bis(10-amino-6,13-dichloro-4,11-triphenodioxazinedisulfonate (9:1)	410-040-4	136213-76-8	Aquatic Chronic 2	H411	GHS09	H411			
607-285-00-6	reaction mass of: 7-(((3-aminophenyl)sulfonyl)amino)-naphthalene-1,3-disulfonic acid; sodium 7-(((3-aminophenyl)sulfonyl)amino)-naphthalene-1,3-disulfonate; potassium 7-(((3-aminophenyl)sulfonyl)amino)-naphthalene-1,3-disulfonate	410-065-0	—	Skin Sens. 1	H317	GHS07 Wng				
607-286-00-1	reaction mass of: sodium/potassium 7-[[[3-[4-((2-hydroxy-naphthyl)azo)phenyl]sulfonyl]amino]-naphthalene-1,3-disulfonate	410-070-8	141880-36-6	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-287-00-7	O'-methyl O-(1-methyl-2-methacryloyloxyethyl)-1,2,3,6-tetrahydrophthalate	410-140-8	—	Aquatic Chronic 3	H412	—	H412			
607-288-00-2	tetrasodium (c-(3-(1-(3-(e-6-dichloro-5-cyanopyrimidin-f-yl(methyl)amino)propyl)-1,6-dihydro-2-hydroxy-4-methyl-6-oxo-3-pyridylazo)-4-sulfonatophenylsulfamoyl)phthalocyanine-a,b,d-trisulfonato(6-))nickelato II, where a is 1 or 2 or 3 or 4, b is 8 or 9 or 10 or 11, c is 15 or 16 or 17 or 18, d is 22 or 23 or 24 or 25 and where e and f together are 2 and 4 or 4 and 2 respectively	410-160-7	148732-74-5	Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H319 H317 H412	GHS07 Wng	H319 H317 H412			
607-289-00-8	3-(3-(4-(2,4-bis(1,1-dimethylpropyl)phenoxy)butylaminocarbonyl-4-hydroxy-1-naphthalenyl)thio)propanoic acid	410-370-9	105488-33-3	Aquatic Chronic 4	H413	—	H413			
607-290-00-3	reaction mass (ratio not known) of: ammonium 1-C ₁₄ -C ₁₈ -alkyloxycarbonyl-2-(3-allyloxy-2-hydroxypropoxycarbonyl)ethane-1-sulfonate; ammonium 2-C ₁₄ -C ₁₈ -alkyloxycarbonyl-1-(3-allyloxy-2-hydroxypropoxycarbonyl)ethane-1-sulfonate	410-540-2	—	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
607-291-00-9	dodecyl-ω-(C ₅ /C ₆ -cycloalkyl)alkyl carboxylate	410-630-1	104051-92-5	Aquatic Chronic 4	H413	—	H413			
607-292-00-4	reaction mass of: [1-(methoxymethyl)-2-(C ₁₂ -alkoxy)-ethoxy]acetic acid; [1-(methoxymethyl)-2-(C ₁₄ -alkoxy)-ethoxy]acetic acid	410-640-6	—	Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H400 H410	GHS05 GHS09 Dgr	H315 H318 H410			
607-293-00-X	reaction mass of: N-aminoethylpiperazonium mono-2,4,6-trimethylnonyldiphenyl ether di-sulfonate; N-aminoethylpiperazonium di-2,4,6-trimethylnonyldiphenyl ether di-sulfonate	410-650-0	—	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			
607-294-00-5	sodium 2-benzoyloxy-1-hydroxyethane-sulfonate	410-680-4	—	Skin Sens. 1	H317	GHS07 Wng	H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-295-00-0	reaction mass of: tetrasodium phosphonothane-1,2-dicarboxylate; hexasodium phosphonobutane-1,2,3,4-tetracarboxylate	410-800-5	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-296-00-6	reaction mass of: pentaerythriol tetraesters with heptanoic acid and 2-ethylhexanoic acid	410-830-9	—	Aquatic Chronic 4	H413	—	H413			
607-297-00-1	(E—E)-3,3'-(1,4-phenylenedimethylidene)bis (2-oxobornane-10-sulfonic acid)	410-960-6	92761-26-7	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-298-00-7	2-(trimethylammonium)ethoxycarboxybenzene-4-sulfonate	411-010-3	—	Skin Sens. 1	H317	GHS07 Wng	H317			
607-299-00-2	methyl 3-(acetylthio)-2-methyl-propanoate	411-040-7	97101-46-7	Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
607-300-00-6	trisodium [2-(5-chloro-2,6-difluoropyrimidin-4-ylamino)-5-(b-sulfamoyl-c, d-sulfonatophthalocyanin-a-yl-K4,N29,N30,N31, N32-sulfonylamino)benzoato(5-)]cuprate(II) where a=1,2,3,4 b=8,9,10,11 c=15,16,17,18 d=22,23,24,25	411-430-7	—	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
607-301-00-1	reaction mass of: dodecanoic acid; poly(1-7)lactate esters of dodecanoic acid	411-860-5	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-302-00-7	reaction mass of: tetradecanoic acid; poly(1-7)lactate esters of tetradecanoic acid	411-910-6	—	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H315 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-303-00-2	1-cyclopropyl-6,7-difluoro-1,4-dihydro-4-oxoquinoline-3-carboxylic acid	413-760-7	93107-30-3	Repr. 2 Aquatic Chronic 3	H361f (***) H412	GHS08 Wng	H361f (***) H412			
607-304-00-8	fluazifop-butyl (ISO); butyl (RS)-2-[4-(5-trifluoromethyl-2-pyridyloxy)phenoxy]propionate	274-125-6	69806-50-4	Repr. 1B Aquatic Acute 1 Aquatic Chronic 1	H360D (***) H400 H410	GHS08 GHS09 Dgr	H360D (***) H410			
607-305-00-3	fluazifop-P-butyl (ISO); butyl (R)-2-[4-(5-trifluoromethyl-2-pyridyloxy)phenoxy]propionate	—	79241-46-6	Repr. 2 Aquatic Acute 1 Aquatic Chronic 1	H361d (***) H400 H410	GHS08 GHS09 Wng	H361d (***) H410			
607-306-00-9	chlozolate (ISO); ethyl (RS)-3-(3,5-dichlorophenyl)-5-methyl-2,4-dioxo-oxazolidine-5-carboxylate	282-714-4	84332-86-5	Carc. 2 Aquatic Chronic 2	H351 H411	GHS08 GHS09 Wng	H351 H411			
607-307-00-4	vinclazolin (ISO); N-3,5-dichlorophenyl-5-methyl-5-vinyl-1,3-oxazolidine-2,4-dione	256-599-6	50471-44-8	Carc. 2 Repr. 1B Skin Sens. 1 Aquatic Chronic 2	H351 H360FD H317 H411	GHS08 GHS07 GHS09 Dgr	H351 H360FD H317 H411			
607-308-00-X	esters of 2,4-D	—	—	Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			A
607-309-00-5	carfentrazone-ethyl (ISO); ethyl (RS)-2-chloro-3-[2-chloro-4-fluoro-5-[4-difluoromethyl-4,5-dihydro-3-methyl-5-oxo-1H-1,2,4-triazol-1-yl]phenyl]propionate	—	128639-02-1	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-310-00-0	kresoxim-methyl (ISO); methyl (E)-2-methoxyimino-[2-(o-tolyloxy-methyl)phenyl]acetate	—	143390-89-0	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			
607-311-00-6	benazolin-ethyl; ethyl 4-chloro-2-oxo-2H-benzothiazole-3-acetate	246-591-0	25059-80-7	Aquatic Chronic 2	H411	GHS09	H411			
607-312-00-1	methoxyacetic acid	210-894-6	625-45-6	Repr. 1B Acute Tox. 4(*) Skin Corr. 1B	H360-FD H302 H314	GHS08 GHS05 GHS07 Dgr	H360FD H302 H314		STOT SE 3; H335: C ≥ 5 %	
607-313-00-7	neodecanoyl chloride	254-875-0	40292-82-8	Acute Tox. 2(*) Acute Tox. 4(*) Skin Corr. 1B	H330 H302 H314	GHS06 GHS06 Dgr	H330 H302 H314		STOT SE 3; H335: C ≥ 5 %	
607-314-00-2	ethofumesate (ISO); (±)-2-ethoxy-2,3-dihydro-3,3-dimethylbenzofuran-5-yl methanesulfonate	247-525-3	26225-79-6	Aquatic Chronic 2	H411	GHS09	H411			
607-315-00-8	glyphosate (ISO); N-(phosphonomethyl)glycine	213-997-4	1071-83-6	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
607-316-00-3	glyphosate-trimesium; glyphosate-trimethylsulfonium	—	81591-81-3	Acute Tox. 4(*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-317-00-9	bis(2-ethylhexyl) phthalate; di-(2-ethylhexyl) phthalate; DEHP	204-211-0	117-81-7	Repr. 1B	H360-FD	GHS08 Dgr	H360FD			
607-318-00-4	dibutyl phthalate; DBP	201-557-4	84-74-2	Repr. 1B Aquatic Acute 1	H360-Df H400	GHS08 GHS09 Dgr	H360Df H400			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-319-00-X	deltamethrin (ISO); (S)- α -cyano-3-phenoxybenzyl (1R, 3R)-3-(2,2-dibromovinyl)-2,2-dimethylcyclopropanecarboxylate	258-256-6	52918-63-5	Acute Tox. 3(*) Acute Tox. 3(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H400 H410	GHS06 GHS09 Dgr	H331 H301 H410			
607-320-00-5	bis[4-(ethenyloxy)butyl] 1,3-benzenedicarboxylate	413-930-0	130066-57-8	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
607-321-00-0	(S)-methyl-2-chloropropionate	412-470-8	73246-45-4	Flam. Liq. 3 STOT RE 2(*) Eye Irrit. 2	H226 H373 (**) H319	GHS02 GHS08 Wng	H226 H373 (**) H319			
607-322-00-6	4-(4,4-dimethyl-3-oxo-pyrazolidin-1-yl)-benzoic acid	413-120-7	107144-30-9	Acute Tox. 4(*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-323-00-1	2-(1-(2-hydroxy-3,5-di- <i>tert</i> -pentyl-phenyl)ethyl)-4,6-di- <i>tert</i> -pentylphenyl acrylate	413-850-6	123968-25-2	Aquatic Chronic 4	H413	—	H413			
607-324-00-7	reaction mass of: N,N-di(hydrogenated alkyl C ₁₄ -C ₁₈)phtalamic acid; dihydrogenated alkyl (C ₁₄ -C ₁₈)amine	413-800-3	—	Aquatic Chronic 4	H413	—	H413			
607-325-00-2	(S)-2-chloropropionic acid	411-150-5	29617-66-1	Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1A	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314			
607-326-00-8	reaction mass of: isobutyl hydrogen 2-(α -2,4,6-trimethylnon-2-enyl)succinate; isobutyl hydrogen 2-(β -2,4,6-trimetyhlnon-2-enyl)succinate	410-720-0	141847-13-4	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
607-327-00-3	2-(2-iodoethyl)-1,3-propanediol diacetate	411-780-0	127047-77-2	Acute Tox. 4(*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-328-00-9	methyl 4-bromomethyl-3-methoxybenzoate	410-310-1	70264-94-7	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H410			
607-329-00-4	reaction mass of: sodium 2-(C ₁₂₋₁₈ — <i>n</i> -alkyl) amino-1,4-butandioate; sodium 2-octadecenyl-amino-1,4-butan-dioate	411-250-9	—	Skin Sens. 1	H317	GHS07 Wng	H317			
607-330-00-X	(S)-2,3-dihydro-1 <i>H</i> -indole-2-carboxylic acid	410-860-2	79815-20-6	Repr. 2 STOT RE 2(*) Skin Sens. 1	H361f (***) H373 (**) H317	GHS08 GHS07 Wng	H361f (***) H373 (**) H317			
607-331-00-5	reaction mass of: bis(2,2,6,6-tetramethyl-1-octyloxypiperidin-4-yl)-1,10-decanedioate; 1,8-bis[(2,2,6,6-tetramethyl-4-((2,2,6,6-tetramethyl-1-octyloxypiperidin-4-yl)-decan-1,10-diyl)piperidin-1-yl)oxy]octane	406-750-9	—	Aquatic Chronic 4	H413	—	H413			
607-332-00-0	cyclopentyl chloroformate	411-460-0	50715-28-1	Flam. Liq. 3 Acute Tox. 3(*) Acute Tox. 4(*) STOT RE 2(*) Eye Dam. 1 Skin Sens. 1	H226 H331 H302 H373 (**) H318 H317	GHS02 GHS06 GHS08 GHS05 Dgr	H226 H331 H302 H373 (**) H318 H317			
607-333-00-6	reaction mass of: dodecyl N-(2,2,6,6-tetramethylpiperidin-4-yl)-β-alaninate; tetradecyl N-(2,2,6,6-tetramethylpiperidin-4-yl)-β-alaninate	405-670-1	—	Acute Tox. 4(*) STOT RE 2(*) Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H302 H373 (**) H314 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H302 H373 (**) H314 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-334-00-1	ethyl 1-ethyl-6,7,8-trifluoro-1,4-dihydro-4-oxoquinoline-3-carboxylate	405-880-3	100501-62-0	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
607-335-00-7	methyl (R)-2-(4-(3-chloro-5-trifluoromethyl-2-pyridyloxy)phenoxy)propionate	406-250-0	72619-32-0	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
607-336-00-2	4-methyl-8-methylenetricyclo[3.3.1.1 ^{3,7}]dec-2-yl acetate	406-560-6	122760-85-4	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H315 H317 H411	GHS07 GHS09 Wng	H315 H317 H411			
607-337-00-8	di-tert-(C ₁₂₋₁₄)-alkylammonium 2-benzothiazolylthiosuccinate	406-052-4	125078-60-6	Flam. Liq. 3 Acute Tox. 4(*) Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H226 H302 H315 H318 H411	GHS02 GHS05 GHS07 GHS09 Dgr	H226 H302 H315 H318 H411			
607-338-00-3	2-methylpropyl 2-hydroxy-2-methylbut-3-enoate	406-235-9	72531-53-4	Eye Irrit. 2 Skin Irrit. 2	H319 H315	GHS07 Wng	H319 H315			
607-339-00-9	2,3,4,5-tetrachlorobenzoylchloride	406-760-3	42221-52-3	Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1	H302 H314 H317	GHS05 GHS07 Dgr	H302 H314 H317			
607-340-00-4	1,3-bis(4-benzoyl-3-hydroxyphenoxy)prop-2-yl acetate	406-990-4	—	Aquatic Chronic 2	H411	GHS09	H411			
607-341-00-X	(9S)-9-amino-9-deoxyerythromycin	406-790-7	26116-56-3	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
607-342-00-5	4-chlorobutyl veratrate	410-950-1	69788-75-6	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-343-00-0	4,7-methanooctahydro-1H-indene-diyl-dimethyl bis(2-carboxybenzoate)	407-410-2	—	Aquatic Chronic 4	H413	—	H413			
607-344-00-6	reaction mass of: 3-(N-(3-dimethylamino-propyl)-(C ₄₋₈)perfluoroalkylsulfonamido) propionic acid; N-[dimethyl-3-(C ₄₋₈ -perfluoroalkylsulfonamido)propylammonium propionate; 3-(N-(3-dimethyl-propylammonium)-(C ₄₋₈)perfluoroalkylsulfonamido)propionic acid propionate	407-810-7	—	STOT RE 2(*)	H373 (**)	GHS08 Wng	H373 (**)			
607-345-00-1	potassium 2-(2,4-dichlorophenoxy)-(R)-propionate	413-580-9	113963-87-4	Acute Tox. 4(*) Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H302 H315 H318 H317	GHS05 GHS07 Dgr	H302 H315 H318 H317			
607-346-00-7	3-icosyl-4-henicosylidene-2-oxetanone	401-210-9	83708-14-9	Aquatic Chronic 4	H413	—	H413			
607-347-00-2	sodium (R)-2-(2,4-dichlorophenoxy)propionate	413-340-3	119299-10-4	Acute Tox. 4(*) Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H302 H315 H318 H317	GHS05 GHS07 Dgr	H302 H315 H318 H317			
607-348-00-8	magnesium bis((R)-2-(2,4-dichlorophenoxy) propionate)	413-360-2	—	Acute Tox. 4(*) Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H302 H315 H318 H317	GHS05 GHS07 Dgr	H302 H315 H318 H317			
607-349-00-3	mono-(tetrapropylammonium) hydrogen 2,2'-dithiobisbenzoate	411-270-8	—	Aquatic Chronic 3	H412		H412			
607-350-00-9	bis(4-(1,2-bis(ethoxycarbonyl)ethylamino)-3-methylcyclohexyl)methane	412-060-9	136210-32-7	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
607-351-00-4	methyl O-(4-amino-3,5-dichloro-6-fluoropyridin-2-yloxy)acetate	407-550-4	69184-17-4	Aquatic Chronic 2	H411	GHS09	H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-352-00-X	4,4'-oxydiphthalic anhydride	412-830-4	1823-59-2	Aquatic Chronic 3	H412	—	H412			
607-353-00-5	reaction mass of: ethyl <i>exo</i> -tricyclo[5.2.1.0 ^{2,6}]decane- <i>endo</i> -2-carboxylate; ethyl <i>endo</i> -tricyclo[5.2.1.0 ^{2,6}]decane- <i>exo</i> -2-carboxylate	407-520-0	80657-64-3	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
607-354-00-0	ethyl 2-cyclohexylpropionate	412-280-5	2511-00-4	Aquatic Chronic 2	H411	GHS09	H411			
607-355-00-6	<i>p</i> -tolyl 4-chlorobenzoate	411-530-0	15024-10-9	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
607-356-00-1	ethyl <i>trans</i> -2,2,6-trimethylcyclohexanecarboxylate	412-540-8	—	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
607-357-00-7	reaction mass of: <i>trans</i> -4-acetoxy-4-methyl-2-propyl-tetrahydro-2 <i>H</i> -pyran; <i>cis</i> -4-acetoxy-4-methyl-2-propyl-tetrahydro-2 <i>H</i> -pyran	412-450-9	131766-73-9	Skin Sens. 1	H317	GHS07 Wng	H317			
607-358-00-2	(1 <i>S</i> ,3 <i>S</i> ,5 <i>R</i> ,6 <i>R</i>)-(4-nitrophenylmethyl)-1-dioxo-6-phenylacetamido-penam-3-carboxylate	412-670-5	54275-93-3	Resp. Sens. 1	H334	GHS08 Dgr	H334			
607-359-00-8	(1 <i>S</i> ,4 <i>R</i> ,6 <i>R</i> ,7 <i>R</i>)-(4-nitrophenylmethyl) 3-methylene-1-oxo-7-phenylacetamido-cepham-4-carboxylateido-penam-3-carboxylate	412-800-0	76109-32-5	Resp. Sens. 1	H334	GHS08 Dgr	H334			
607-360-00-3	sodium 3-acetoacetylamino-4-methoxytolyl-6-sulfonate	411-680-7	133167-77-8	Skin Sens. 1	H317	GHS07 Wng	H317			
607-361-00-9	methyl (<i>R</i>)-2-(4-hydroxyphenoxy)propionate	411-950-4	96562-58-2	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-362-00-4	reaction mass of: (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(2-(bis(2-hydroxyethyl)amino)ethoxycarbonylmethyl)hexadec-4-enoate; (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(2-(bis(2-hydroxyethyl)amino)ethoxycarbonylmethyl)tetradec-4-enoate; (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(3-methoxypropylcarbamoylmethyl)hexadec-4-enoate; (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(3-methoxypropylcarbamoylmethyl)tetradec-4-enoate	413-500-2	—	Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H315 H318 H411	GHS05 GHS09 Dgr	H315 H318 H411			
607-363-00-X	methyl-3-methoxyacrylate	412-900-4	5788-17-0	Skin Sens. 1	H317	GHS07 Wng	H317			
607-364-00-5	3-phenyl-7-[4-(tetrahydrofurfuryloxy)phenyl]-1,5-dioxas-indacen-2,6-dione	413-330-9	134724-55-3	Aquatic Chronic 4	H413		H413			
607-365-00-0	2-(2-amino-1,3-thiazol-4-yl)-(Z)-2-methoxyiminoacetyl chloride hydrochloride	410-620-7	119154-86-8	Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1	H302 H314 H317	GHS05 GHS07 Dgr	H302 H314 H317			
607-366-00-6	3,5-dimethylbenzoyl chloride	413-010-9	6613-44-1	Skin Corr. 1B Skin Sens. 1	H314 H317	GHS05 GHS07 Dgr	H314 H317			
607-367-00-1	potassium bis(N-carboxymethyl)-N-methylglycinato-(2-)N,O,O,N)-ferrate-(1-) monohydrate	411-640-9	153352-59-1	Acute Tox. 4(*)	H302	GHS07 Wng	H302			
607-368-00-7	1-(N,N-dimethylcarbamoyl)-3-tert-butyl-5-carbethoxymethylthio-1H-1,2,4-triazole	411-650-3	110895-43-7	Acute Tox. 3(*) Acute Tox. 3(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H400 H410	GHS06 GHS09 Dgr	H331 H301 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-369-00-2	reaction mass of: <i>trans</i> -(2 <i>R</i>)-5-acetoxy-1,3-oxathiolane-2-carboxylic acid; <i>cis</i> -(2 <i>R</i>)-5-acetoxy-1,3-oxathiolane-2-carboxylic acid	411-660-8	147027-04-1	Acute Tox. 4(*) Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H302 H315 H318 H317	GHS05 GHS07 Dgr	H302 H315 H318 H317			
607-370-00-8	2-[[2-(acetyloxy)-3-(1,1-dimethyl-ethyl)-5-methylphenyl]methyl]-6-(1,1-dimethylethyl)-4-methylphenol	412-210-3	41620-33-1	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-371-00-3	3-ethyl 5-methyl 4-(2-chlorophenyl)-1,4-dihydro-2-[2-(1,3-dihydro-1,3-dioxo-(2 <i>H</i>)isoindol-2-yl)-ethoxymethyl]-6-methyl-3,5-pyridinedicarboxylate	413-410-3	88150-62-3	Aquatic Chronic 4	H413	—	H413			
607-372-00-9	ethoxylated bis phenol A di-(norbornene carboxylate)	412-410-0	—	Aquatic Chronic 3	H412	—	H412			
607-373-00-4	(±) tetrahydrofurfuryl (i>R)-2-[4-(6-chloroquinoxalin-2-yloxy)phenyloxy]propionate	414-200-4	119738-06-6	Muta. 2 Repr. 1B Acute Tox. 4(*) STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H341 H360Df H302 H373 (**) H400 H410	GHS08 GHS07 GHS09 Dgr	H341 H360Df H302 H373 (**) H410			
607-374-00-X	5-amino-2,4,6-triiodo-1,3-benzenedicarbonyldichloride	417-220-1	37441-29-5	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-375-00-5	reaction mass of: <i>cis</i> -4-hydroxy-3-(1,2,3,4-tetrahydro-3-(4-(4-trifluoromethylbenzyloxy)phenyl)-1-naphthyl)coumarin; <i>trans</i> -4-hydroxy-3-(1,2,3,4-tetrahydro-3-(4-(4-trifluoromethylbenzyloxy)phenyl)-1-naphthyl)coumarin	421-960-0	90035-08-8	Acute Tox. 2(*) Acute Tox. 1 Acute Tox. 2(*) STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H372 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H372 (**) H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-376-00-0	benzyl 2,4-dibromobutanoate	420-710-8	23085-60-1	Repr. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361f (***) H315 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H361f (***) H315 H317 H410			
607-377-00-6	<i>trans</i> -4-cyclohexyl-L-proline monohydrochloride	419-160-1	90657-55-9	Repr. 2 Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H361f (***) H302 H315 H318 H317	GHS08 GHS05 GHS07 Dgr	H361f (***) H302 H315 H318 H317			
607-378-00-1	ammonium (Z)- α -methoxyimino-2-furylacetate	405-990-1	97148-39-5	Flam. Sol. 2	H228	GHS02 Dgr	H228			T
607-379-00-7	reaction mass of: 2-[N-(2-hydroxyethyl)stearamido]ethyl stearate; sodium [bis[2-(stearoyloxy)ethyl]amino]methylsulfonate; sodium [bis(2-hydroxyethyl)amino]methylsulfonate; N,N-bis(2-hydroxyethyl)stearamide	401-230-8		Aquatic Chronic 3	H412	—	H412			
607-380-00-2	reaction mass of: ammonium-1,2-bis(hexyloxycarbonyl)ethanesulfonate; ammonium-1-hexyloxycarbonyl-2-octyloxycarbonyl-ethanesulfonate; ammonium-2-hexyloxycarbonyl-1-octyloxycarbonyl-ethanesulfonate	407-320-3	—	Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 3	H315 H318 H412	GHS05 Dgr	H315 H318 H412			
607-381-00-8	reaction mass of triesters of 2,2-bis(hydroxymethyl)butanol with C ₇ -alkanoic acids and 2-ethylhexanoic acid	413-710-4	—	Aquatic Chronic 4	H413	—	H413			
607-382-00-3	2-((4-amino-2-nitrophenyl)amino)benzoic acid	411-260-3	117907-43-4	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-383-00-9	reaction mass of: 2,2,6,6-tetramethylpiperidin-4-yl-hexadecanoate; 2,2,6,6-tetramethylpiperidin-4-yl-octadecanoate	415-430-8	86403-32-9	Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H318 H317 H410			
607-384-00-4	reaction mass of: esters of C ₁₄ -C ₁₅ branched alcohols with 3,5-di-t-butyl-4-hydroxyphenyl propionic acid; C ₁₅ branched and linear alkyl 3,5-bis(1,1-dimethylethyl)-4-hydroxybenzenepropionate; C ₁₃ branched and linear alkyl 3,5-bis(1,1-dimethylethyl)-4-hydroxybenzenepropionate	413-750-2	171090-93-0	Aquatic Chronic 4	H413	—	H413			
607-385-00-X	Copolymer of vinyl-alcohol and vinyl acetate partially acetylated with 4-(2-(4-formylphenyl)ethenyl)-1-methylpyridinium methylsulfate	414-590-6	125229-74-5	Aquatic Chronic 2	H411	GHS09	H411			
607-386-00-5	reaction mass of: tetradecanoic acid (42,5-47,5 %); poly(1-7)lactate esters of tetradecanoic acid (52,5-57,5 %)	412-580-6	174591-51-6	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H410			
607-387-00-0	reaction mass of: dodecanoic acid (35-40 %); poly(1-7)lactate esters of dodecanoic acid (60-65 %)	412-590-0	58856-63-6	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H410			
607-388-00-6	4-ethylamino-3-nitrobenzoic acid	412-090-2	2788-74-1	Acute Tox. 4(*) Skin Sens. 1 Aquatic Chronic 3	H302 H317 H412	GHS07 Wng	H302 H317 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-389-00-1	trisodium N,N-bis(carboxymethyl)-3-amino-2-hydroxypropionate	414-130-4	119710-96-2	Acute Tox. 4(*)	H302	GHS07 Wng	H302			
607-390-00-7	1,2,3,4-tetrahydro-6-nitro-quinoxaline	414-270-6	41959-35-7	Acute Tox. 4(*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-391-00-2	dimethylcyclopropane-1,1-dicarboxylate	414-240-2	6914-71-2	Aquatic Chronic 3	H412	—	H412			
607-392-00-8	2-phenoxyethyl 4-((5-cyano-1,6-dihydro-2-hydroxy-1,4-dimethyl-6-oxo-3-pyridinyl)azo)benzoate	414-260-1	88938-37-8	Aquatic Chronic 4	H413	—	H413			
607-393-00-3	3-(cis-1-propenyl)-7-amino-8-oxo-5-thia-1-azabicyclo[4.2.0]oct-2-ene-2-carboxylic acid	415-750-8	106447-44-3	Skin Sens. 1	H317	GHS07 Wng	H317			
607-394-00-9	5-methylpyrazine-2-carboxylic acid	413-260-9	5521-55-1	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-395-00-4	reaction mass of: sodium 1-tridecyl-4-allyl-(2 or 3)-sulfobutanedioate; sodium 1-dodecyl-4-allyl-(2 or 3)-sulfobutanedioate	410-230-7	—	Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H314 H317 H411	GHS05 GHS07 GHS09 Dgr	H314 H317 H411			
607-396-00-X	bis(1,2,2,6,6-pentamethyl-4-piperidinyl) 2-(4-methoxybenzylidene)malonate	414-840-4	147783-69-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-397-00-5	reaction mass of: Ca salicylates (branched C ₁₀₋₁₄ and C ₁₈₋₃₀ alkylated); Ca phenates (branched C ₁₀₋₁₄ and C ₁₈₋₃₀ alkylated); Ca sulfurized phenates (branched C ₁₀₋₁₄ and C ₁₈₋₃₀ alkylated)	415-930-6	—	Skin Sens. 1	H317	GHS07 Wng	H317			
607-398-00-0	ethyl N-(5-chloro-3-(4-(diethylamino)-2-methylphenylimino)-4-methyl-6-oxo-1,4-cyclohexadienyl)carbamate	414-820-5	125630-94-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-399-00-6	2,2-dimethyl 3-methyl-3-butenyl propanoate	415-610-6	104468-21-5	Skin Irrit. 2 Aquatic Chronic 3	H315 H412	GHS07 Wng	H315 H412			
607-400-00-X	methyl 3-[[[dibutylamino]thioxomethyl]thio]propanoate	414-400-1	32750-89-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-401-00-5	ethyl 3-hydroxy-5-oxo-3-cyclohexene-1-carboxylate	414-450-4	88805-65-6	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H315 H318 H317	GHS05 GHS07 Dgr	H315 H318 H317			
607-402-00-0	methyl N-(phenoxycarbonyl)-L-valinate	414-500-5	153441-77-1	Aquatic Chronic 3	H412	—	H412			
607-403-00-6	reaction mass of: bis(1S,2S,4S)-(1-benzyl-4-tert-butoxycarboxamido-2-hydroxy-5-phenyl)pentylammonium succinate; isopropyl alcohol	414-810-0	—	STOT RE 2(*) Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H318 H400 H410	GHS08 GHS05 GHS09 Dgr	H373 (**) H318 H410			
607-404-00-1	reaction mass of: ((Z)-3,7-dimethyl-2,6-octadienyl)oxycarbonylpropanoic acid; di-((E)-3,7-dimethyl-2,6-octadienyl) butanedioate; di-((Z)-3,7-dimethyl-2,6-octadienyl) butanedioate; (Z)-3,7-dimethyl-2,6-octadienyl butanedioate; ((E)-3,7-dimethyl-2,6-octadienyl)oxycarbonylpropanoic acid	415-190-4	—	Skin Sens. 1	H317	GHS07 Wng	H317			
607-405-00-7	2-hexyldecyl-p-hydroxybenzoate	415-380-7	148348-12-3	Aquatic Chronic 2	H411	GHS09	H411			
607-406-00-2	potassium 2,5-dichlorobenzoate	415-700-5	184637-62-5	Acute Tox. 4(*) Eye Dam. 1	H302 H318	GHS05 GHS07 Dgr	H302 H318			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-407-00-8	ethyl 2-carboxy-3-(2-thienyl)propionate	415-680-8	143468-96-6	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H315 H318 H317	GHS05 GHS07 Dgr	H315 H318 H317			
607-408-00-3	potassium N-(4-fluorophenyl)glycinate	415-710-1	184637-63-6	STOT RE 2(*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H373 (**) H318 H317 H412	GHS08 GHS05 GHS07 Dgr	H373 (**) H318 H317 H412			
607-409-00-9	reaction mass of: (3R)-[1S-(1α, 2α, 6β-((2S)-2-methyl-1-oxo-butoxy)-8α)]hexahydro-2,6-dimethyl-1-naphthalene]-3,5-dihydroxyheptanoic acid; inert biomass from <i>Aspergillus terreus</i>	415-840-7	—	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
607-410-00-4	mono[2-(dimethylamino)ethyl]monohydrogen-2-(hexadec-2-enyl)butanedioate and/or mono[2-(dimethylamino)ethyl]monohydrogen-3-(hexadec-2-enyl)butanedioate	415-880-5	779343-34-9	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H410			
607-411-00-X	oxiranemethanol, 4-methylbenzene-sulfonate, (S)-	417-210-7	70987-78-9	Carc. 1B Muta. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H350 H341 H318 H317 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H350 H341 H318 H317 H411			
607-412-00-5	ethyl 2-(1-cyanocyclohexyl)acetate	415-970-4	133481-10-4	Acute Tox. 4(*) STOT RE 2(*) Aquatic Chronic 3	H302 H373 (**) H412	GHS08 GHS07 Wng	H302 H373 (**) H412			
607-413-00-0	trans-4-phenyl-L-proline	416-020-1	96314-26-0	Repr. 2 Skin Sens. 1	H361f (***) H317	GHS08 GHS07 Wng	H361f (***) H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-414-00-6	tris(2-ethylhexyl)-4,4',4''-(1,3,5-triazine-2,4,6-triyltriimino)tribenzoate	402-070-1	88122-99-0	Aquatic Chronic 4	H413	—	H413			
607-415-00-1	poly-(methyl methacrylate)-co-(butylmethacrylate)-co-(4-acryloxybutyl-isopropenyl- α , α -dimethylbenzyl carbamate)-co-(maleicanhydride)	419-590-1	—	Flam. Sol. 1 Skin Sens. 1	H228 H317	GHS02 GHS07 Dgr	H228 H317			T
607-416-00-7	4-(2-carboxymethylthio)ethoxy-1-hydroxy-5-isobutyloxycarbonylamino- <i>N</i> -(3-dodecylloxypropyl)-2-naphthamide	420-730-7	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-418-00-8	2-ethylhexyl 4-aminobenzoate	420-170-3	26218-04-2	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-419-00-3	(3'-carboxymethyl-5-(2-(3-ethyl-3 <i>H</i> -benzothiazol-2-ylidene)-1-methyl-ethylidene)-4,4'-dioxo-2'-thioxo-(2,5')bithiazolidinyliden-3-yl)-acetic acid	422-240-9	166596-68-5	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
607-420-00-9	2,2-bis(hydroxymethyl)butanoic acid	424-090-1	10097-02-6	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
607-421-00-4	cypermethrin <i>cis/trans</i> +/- 40/60; (RS)- α -cyano-3-phenoxybenzyl (1RS,3RS;1RS,3SR)-3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate	257-842-9	52315-07-8	Acute Tox. 4(*) Acute Tox. 4(*) STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H335 H400 H410	GHS07 GHS09 Wng	H332 H302 H335 H410			
607-422-00-X	α -cypermethrin	257-842-9	67375-30-8	Acute Tox. 3(*) STOT RE 2(*) STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H301 H373 (**) H335 H400 H410	GHS06 GHS08 GHS09 Dgr	H301 H373 (**) H335 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-423-00-5	esters of mecoprop and of mecoprop-P	—	—	Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			A
607-424-00-0	trifloxystrobin (ISO); (E,E)-α-methoxyimino-[2-[[[1-[3-(trifluoromethyl)phenyl]ethylidene]amino]oxy]methyl]benzeneacetic acid methyl ester	—	141517-21-7	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
607-425-00-6	metalaxyl (ISO); methyl-N-(2,6-dimethylphenyl)-N-(methoxyacetyl)-DL-alaninate	260-979-7	57837-19-1	Acute Tox. 4(*) Skin Sens. 1 Aquatic Chronic 3	H302 H317 H412	GHS07 Wng	H302 H317 H412			
607-426-00-1	1,2-benzenedicarboxylic acid, dipentylester, branched and linear; [1] n-pentyl-isopentylphthalate; [2] di-n-pentyl phthalate; [3] diisopentylphthalate [4]	284-032-2 [1] - [2] 205-017-9 [3] 210-088-4 [4]	84777-06-0 [1] - [2] 131-18-0 [3] 605-50-5 [4]	Repr. 1B Aquatic Acute 1	H360-FD H400	GHS08 GHS09 Dgr	H360FD H400			
607-427-00-7	bromoxynil heptanoate (ISO); 2,6-dibromo-4-cyanophenyl heptanoate	260-300-4	56634-95-8	Repr. 2 Acute Tox. 4(*) Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361d (***) H332 H302 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H361d (***) H332 H302 H317 H410			
607-430-00-3	BBP; benzyl butyl phthalate e	201-622-7	85-68-7	Repr. 1B Aquatic Acute 1 Aquatic Chronic 1	H360-Df H400 H410	GHS08 GHS09 Dgr	H360Df H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-431-00-9	prallethrin (ISO); ETOC; 2-methyl-4-oxo-3-(prop-2-ynyl)cyclopent-2-en-1-yl 2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate	245-387-9	23031-36-9	Acute Tox. 3(*) Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H302 H400 H410	GHS06 GHS09 Dgr	H331 H302 H410			
607-432-00-4	S-metolachlor; reaction mass of (S)-2-chloro-N-(2-ethyl-6-methyl-phenyl)-N-(2-methoxy-1-methyl-ethyl)-acetamide (80-100 %); [1] (R)-2-chloro-N-(2-ethyl-6-methyl-phenyl)-N-(2-methoxy-1-methyl-ethyl)-acetamide (0-20 %) [2]	- [1] [2]	87392-12-9 [1] 178961-20-1 [2]	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
607-433-00-X	cypermethrin <i>cis/trans</i> +/- 80/20; (RS)- <i>a</i> -cyano-3-phenoxybenzyl (1RS; 3RS; 1RS, 3SR)-3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate	257-842-9	52315-07-8	Acute Tox. 4(*) STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H335 H315 H317 H400 H410	GHS07 GHS09 Wng	H302 H335 H315 H317 H410			
607-434-00-5	mecoprop-P [1] and its salts; (R)-2-(4-chloro-2-methylphenoxy)propionic acid	240-539-0	16484-77-8	Acute Tox. 4(*) Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			
607-435-00-0	2S-isopropyl-5R-methyl-1R-cyclohexyl 2,2-dihydroxyacetate	416-810-6	111969-64-3	STOT RE 2(*) Eye Dam. 1 Aquatic Chronic 2	H373 (**) H318 H411	GHS08 GHS05 GHS09 Dgr	H373 (**) H318 H411			
607-436-00-6	2-hydroxy-3-(2-ethyl-4-methylimidazolyl)propyl neodecanoate	417-350-9	—	Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H400 H410	GHS05 GHS09 Dgr	H315 H318 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-437-00-1	3-(4-aminophenyl)-2-cyano-2-propenoic acid	417-480-6	252977-62-1	Skin Sens. 1	H317	GHS07 Wng	H317			
607-438-00-7	methyl-2-[(aminosulfonyl)methyl]benzoate	419-010-5	112941-26-1	Acute Tox. 4(*) Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			
607-439-00-2	methyl tetrahydro-2-furancarboxylate	420-670-1	37443-42-8	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-440-00-8	methyl 2-aminosulfonyl-6-(trifluoromethyl)pyridine-3-carboxylate	421-220-7	144740-59-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-441-00-3	3-[3-(2-dodecyloxy-5-methylphenylcarbamoyl)-4-hydroxy-1-naphthylthio]propionic acid	421-490-6	167684-63-1	Aquatic Chronic 4	H413	—	H413			
607-442-00-9	benzyl [hydroxy-(4-phenylbutyl)phosphinyl]acetate	416-050-5	87460-09-1	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-443-00-4	bis(2,4-di- <i>tert</i> -butyl-6-methylphenyl)ethyl phosphate	416-140-4	145650-60-8	Aquatic Chronic 4	H413	—	H413			
607-444-00-X	reaction mass of: <i>cis</i> -1,4-dimethylcyclohexyl dibenzoate; <i>trans</i> -1,4-dimethylcyclohexyl dibenzoate	416-230-3	35541-81-2	Aquatic Chronic 4	H413	—	H413			
607-445-00-5	Iron (III) tris(4-methylbenzenesulfonate)	420-960-8	77214-82-5	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-446-00-0	methyl 2-[4-(2-chloro-4-nitrophenylazo)-3-(1-oxopropyl)amino]phenylaminopropionate	416-240-8	155522-12-6	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
607-447-00-6	sodium 4-[4-(4-hydroxyphenylazo)phenylamino]-3-nitrobenzenesulfonate	416-370-5	156738-27-1	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-448-00-1	2,3,5,6-tetrafluorobenzoic acid	416-800-1	652-18-6	Skin Irrit. 2 Eye Dam. 1	H315 H318	GHS05 Dgr	H315 H318			
607-449-00-7	reaction mass of: 4,4',4''-[(2,4,6-trioxo-1,3,5 (2H,4H,6H)-triazine-1,3,5-triyl)tris[methylene(3,5,5-trimethyl-3,1-cyclohexanediyl)iminocarbonyloxy-2,1-ethanediyl(ethyl)amino]]trisbenzenediazoniumtri[bis(2-methylpropyl)naphthalenesulfonate]; 4,4',4'',4'''-[[[5,5'-[carbonylbis(imino(1,5,5-trimethyl-3,1-cyclohexanediyl)methylene]]-2,4,6-trioxo-1,3,5(2H,4H,6H)-triazine-1,1',3,3'-tetrayl]tetrakis[methylene(3,5,5-trimethyl-3,1-cyclohexanediyl)iminocarbonyloxy-2,1-ethanediyl(ethyl)amino]]tetrakisbenzenediazoniumtetra[bis(2-methylpropyl)naphthalenesulfonate]	417-080-1	—	Self-react. D (****) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H242 H317 H400 H410	GHS02 GHS07 GHS09 Dgr	H242 H317 H410			
607-450-00-2	2-mercaptobenzothiazolyl-(Z)-(2-aminothiazol-4-yl)-2-(tert-butoxycarbonyl) isopropoxyiminoacetate	419-040-9	89604-92-2	Aquatic Chronic 4	H413	—	H413			
607-451-00-8	4-[4-amino-5-hydroxy-3-(4-(2-sulfoxyethylsulfonyl)phenylazo)-2,7-disulfonaphth-6-ylazo]-6-[3-(4-amino-5-hydroxy-3-(4-(2-sulfoxyethylsulfonyl)phenylazo)-2,7-disulfonaphth-6-ylazo]phenylcarbonylamino]benzenesulfonic acid, sodium salt	417-640-5	161935-19-9	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
607-453-00-9	4-benzyl-2,6-dihydroxy-4-aza-heptylene bis (2,2-dimethyloctanoate)	418-100-1	172964-15-7	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
607-454-00-4	reaction mass of: <i>trans</i> -2-(1-methylethyl)-1,3-dioxane-5-carboxylic acid; <i>cis</i> -2-(1-methylethyl)-1,3-dioxane-5-carboxylic acid	418-170-3	116193-72-7	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
607-455-00-X	1-amino-4-(3-[4-chloro-6-(2,5-di-sulfophenylamino)-1,3,5-triazin-2-ylamino]-2,2-dimethyl-propylamino)-anthraquinone-2-sulfonic acid, sodium/lithium salt	419-520-8	172890-93-6	Skin Sens. 1	H317	GHS07 Wng	H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-456-00-5	3-amino-4-chlorobenzoic acid, hexadecyl ester	419-700-6	143269-74-3	Aquatic Chronic 2	H411	GHS09	H411			
607-457-00-0	tetrasodium dihydrogen 1,1"-dihydroxy-8,8"-[p-phenylbis(imino-{6-[4-(2-aminoethyl)piperazin-1-yl]}-1,3,5-triazine-4,2-diylimino)]bis(2,2'-azonaphthalene-1',3,6-trisulfonate)	420-350-1	172277-97-3	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
607-458-00-6	reaction mass of: 2-ethyl-[2,6-dibromo-4-[1-[3,5-dibromo-4-(2-hydroxyethoxy)phenyl]-1-methylethyl]phenoxy]propenoate; 2,2'-diethyl-[4,4'-bis(2,6-dibromophenoxy)-1-methylethylidene] dipropenoate; 2,2'-[(1-methylethylidene)bis[[2,6-dibromo-4,1-phenylene)oxy]ethanol]]	420-850-1	—	Aquatic Chronic 2	H411	GHS09	H411			
607-459-00-1	isopentyl 4-{2-[5-cyano-1,2,3,6-tetrahydro-1-(2-isopropoxyethoxy-carbonylmethyl)-4-methyl-2,6-dioxo-3-pyridylidene]hydrazino} benzoate	418-930-4	—	Aquatic Chronic 4	H413	—	H413			
607-460-00-7	3-tridecyloxy-propyl-ammonium 9-octadecenoate	418-990-1	778577-53-0	STOT RE 2(*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H319 H315 H400 H410	GHS08 GHS07 GHS09 Wng	H373 (**) H319 H315 H410			
607-461-00-2	reaction mass of: pentasodium 2-{4-{3-methyl-4-[6-sulfonato-4-(2-sulfonato-phenylazo)-naphthalen-1-ylazo]-phenylamino}-6-[3-(2-sulfato-ethanesulfonyl)-phenylamino]-1,3,5-triazin-2-ylamino}-benzene-1,4-disulfonate; pentasodium 2-{4-{3-methyl-4-[7-sulfonato-4-(2-sulfonato-phenylazo)-naphthalen-1-ylazo]-phenylamino}-6-[3-(2-sulfato-ethanesulfonyl)-phenylamino]-1,3,5-triazin-2-ylamino}-benzene-1,4-disulfonate	421-160-1	—	Aquatic Chronic 3	H412	—	H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-462-00-8	reaction mass of: 1-hexyl acetate; 2-methyl-1-pentyl acetate; 3-methyl-1-pentyl acetate; 4-methyl-1-pentyl acetate; other mixed linear and branched C ₆ -alkyl acetates	421-230-1	88230-35-7	Aquatic Chronic 2	H411	GHS09	H411			
607-463-00-3	3-(phenothiazin-10-yl)propionic acid	421-260-5	362-03-8	Aquatic Chronic 2	H411	GHS09	H411			
607-464-00-9	reaction mass of: 7-chloro-1-ethyl-6-fluoro-1,4-dihydro-4-oxo-quinoline-3-carboxylic acid; 5-chloro-1-ethyl-6-fluoro-1,4-dihydro-4-oxo-quinoline-3-carboxylic acid	421-280-4		Aquatic Chronic 3	H412	—	H412			
607-465-00-4	tris(2-hydroxyethyl)ammonium 7-{4-[4-(2-cyanoamino-4-hydroxy-6-oxidopyrimidin-5-ylazo)benzamido]-2-ethoxy-phenylazo} naphthalene-1,3-disulfonate	421-440-3	778583-04-3	Aquatic Chronic 3	H412	—	H412			
607-466-00-X	reaction mass of: phenyl 1-(1-[2-chloro-5-(hexadecyloxy carbonyl)phenyl carbamoyl]-3,3-dimethyl-2-oxobutyl)-1H-2,3,3a,7a-tetrahydrobenzotriazole-5-carboxylate; phenyl 2-(1-(2-chloro-5-(hexadecyloxy carbonyl)phenyl carbamoyl)-3,3-dimethyl-2-oxobutyl)-1H-2,3,3a,7a-tetrahydrobenzotriazole-5-carboxylate; phenyl 3-(1-(2-chloro-5-(hexadecyloxy carbonyl)phenyl carbamoyl)-3,3-dimethyl-2-oxobutyl)-1H-2,3,3a,7a-tetrahydrobenzotriazole-5-carboxylate	421-480-1	—	Aquatic Chronic 2	H411	GHS09	H411			
607-467-00-5	1,1,3,3-tetrabutyl-1,3-dinitoxydicaprylate	419-430-9	56533-00-7	Acute Tox. 4(*) Acute Tox. 4(*) STOT RE 2(*) Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H373 (**) H314 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H312 H302 H373 (**) H314 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-468-00-0	reaction mass of: monosodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate; disodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate; trisodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate; tetrasodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate	419-450-8	—	Skin Sens. 1	H317	GHS07 Wng	H317			
607-469-00-6	disodium 7-((4,6-bis(3-diethylaminopropylamino)-1,3,5-triazine-2-yl)amino)-4-hydroxy-3-(4-(4-sulfonatophenylazo)phenylazo)-2-naphthalene sulfonate	419-460-2	120029-06-3	Aquatic Chronic 3	H412	—	H412			
607-470-00-1	potassium sodium 6,13-dichloro-3,10-bis{2-[4-[3-(2-hydroxysulphonyloxyethanesulfonyl)phenylamino]-6-(2,5-disulfonatophenylamino)-1,3,5-triazin-2-ylamino]ethylamino}benzo[5,6][1,4]oxazino[2,3-b]pheno-xazine-4,11-disulfonate	414-100-0	154336-20-6	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
607-472-00-2	ammonium iron(III) trimethylenediaminetetraacetate hemihydrate	400-660-3	111687-36-6	Aquatic Chronic 2	H411	GHS09	H411			
607-474-00-3	(4-(4-(4-dimethylaminobenzyliden-1-yl)-3-methyl-5-oxo-2-pyrazolin-1-yl)benzoic acid	410-430-4	117573-89-4	Aquatic Chronic 4	H413	—	H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-475-00-9	reaction mass of: tetrasodium 7-(4-[4-chloro-6-[methyl-(3-sulfonatophenyl)amino]-1,3,5-triazin-2-ylamino]-2-ureidophenylazo)naphthalene-1,3,6-trisulfonate; tetrasodium 7-(4-[4-chloro-6-[methyl-(4-sulfonatophenyl)amino]-1,3,5-triazin-2-ylamino]-2-ureidophenylazo)naphthalene-1,3,6-trisulfonate (1:1)	412-940-2	148878-18-6	Skin Sens. 1	H317	GHS07 Wng	H317			
607-476-00-4	trisodium N,N-bis(carboxymethyl)-β-alanine	414-070-9	129050-62-0	Skin Corr. 1B Aquatic Chronic 3	H314 H412	GHS05 Dgr	H314 H412			
607-478-00-5	tetramethylammonium hydrogen phthalate	416-900-5	79723-02-7	Acute Tox. 3(*) STOT RE 2(*) Aquatic Acute 1	H301 H373 (**) H400	GHS06 GHS08 GHS09 Dgr	H301 H373 (**) H400			
607-479-00-0	hexadecyl 4-chloro-3-[2-(5,5-dimethyl-2,4-dioxo-1,3-oxazolidin-3-yl)-4,4-dimethyl-3-oxopentamido]benzoate	418-550-9	168689-49-4	Aquatic Chronic 4	H413	—	H413			
607-480-00-6	1,2-benzenedicarboxylic acid; di-C ₇₋₁₁ -branched and linear alkylesters	271-084-6	68515-42-4	Repr. 1B	H360-Df	GHS08 Dgr	H360Df			
607-487-00-4	reaction mass of: disodium 4-(3-ethoxycarbonyl-4-(5-(3-ethoxycarbonyl-5-hydroxy-1-(4-sulfonatophenyl)pyrazol-4-yl)penta-2,4-dienylidene)-4,5-dihydro-5-oxopyrazol-1-yl) benzenesulfonate; trisodium 4-(3-ethoxycarbonyl-4-(5-(3-ethoxycarbonyl-5-oxido-1-(4-sulfonatophenyl)pyrazol-4-yl)penta-2,4-dienylidene)-4,5-dihydro-5-oxopyrazol-1-yl)benzenesulfonate	402-660-9	—	Repr. 1B Aquatic Chronic 3	H360-D (***) H412	GHS08 Dgr	H360D (***) H412			
607-488-00-X	ethyl (2-acetyl-amino-5-fluoro-4-isothiocyanatophenoxy)acetate	414-210-9	147379-38-2	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-489-00-5	reaction mass of: 2-ethylhexyl linolenate, linoleate and oleate; 2-ethylhexyl epoxyoleate; 2-ethylhexyl diepoxylinoleate; 2-ethylhexyl triepoxylinolenate	414-890-7	71302-79-9	Skin Sens. 1	H317	GHS07 Wng	H317			
607-490-00-0	N-[2-hydroxy-3-(C ₁₂₋₁₆ -alkyloxy)propyl]-N-methyl glycinate	415-060-7	—	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
607-492-00-1	2-(1-(3',3'-dimethyl-1'-cyclohexyl)ethoxy)-2-methyl propyl propanoate	415-490-5	141773-73-1	Aquatic Chronic 2	H411	GHS09	H411			
607-493-00-7	methyl (3aR,4R,7aR)-2-methyl-4-(1S,2R,3-triacetoxypentyl)-3a,7a-dihydro-4H-pyrano [3,4-d]oxazole-6-carboxylate	415-670-3	78850-37-0	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-494-00-2	bis(2-ethylhexyl)octylphosphonate	417-170-0	52894-02-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-495-00-8	sodium 4-sulfophenyl-6-((1-oxononyl) amino)hexanoate	417-550-6	168151-92-6	Skin Sens. 1	H317	GHS07 Wng	H317			
607-496-00-3	2,2'-methylenbis(4,6-di-tert-butyl-phenyl)-2-ethylhexyl phosphite	418-310-3	126050-54-2	Aquatic Chronic 4	H413	—	H413			
607-497-00-9	cerium oxide isostearate	419-760-3	—	Aquatic Chronic 4	H413	—	H413			
607-498-00-4	(E)-3,7-dimethyl-2,6-octadienylhexadecanoate	421-370-3	3681-73-0	Skin Irrit. 2 Aquatic Chronic 4	H315 H413	GHS07 Wng	H315 H413			
607-499-00-X	bis(dimethyl-(2-hydroxyethyl)ammonium) 1,2-ethanediyl-bis(2-hexadecenylsuccinate)	421-660-1	—	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-500-00-3	calcium 2,2,bis[(5-tetrapropylene-2-hydroxy)phenyl]ethanoate	421-670-4	—	Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H315 H400 H410	GHS07 GHS09 Wng	H315 H410			
607-501-00-9	reaction mass of: triphenylthiophosphate and tertiary butylated phenyl derivatives	421-820-9	192268-65-8	Aquatic Chronic 4	H413	—	H413			
607-502-00-4	(N-benzyl-N,N,N-tributyl)ammonium 4-dodecylbenzenesulfonate	422-200-0	178277-55-9	Skin Corr. 1B Acute Tox. 4(*) Aquatic Chronic 2	H314 H302 H411	GHS05 GHS07 GHS09 Dgr	H314 H302 H411			
607-503-00-X	2,4,6-tri- <i>n</i> -propyl-2,4,6-trioxo-1,3,5,2,4,6-trioxatriphosphorinane	422-210-5	68957-94-8	Skin Corr. 1B	H314	GHS05 Dgr	H314			
607-505-00-0	pentasodium 7-(4-(4-(5-amino-4-sulfonato-2-(4-((2-(sulfonatoethoxy)sulfonyl)phenylazo)phenylamino)-6-chloro-1,3,5-triazin-2-yl)amino-2-ureidophenylazo)naphtalene-1,3,6-trisulfonate	422-930-1		Aquatic Chronic 3	H412	—	H412			
607-506-00-6	reaction mass of: strontium (4-chloro-2-((4,5-dihydro-3-methyl-5-oxo-1-(3-sulfonatophenyl)-1H-pyrazol-4-yl)azo)-5-methyl)benzenesulfonate; disodium (4-chloro-2-((4,5-dihydro-3-methyl-5-oxo-1-(3-sulfonatophenyl)-1H-pyrazol-4-yl)azo)-5-methyl)benzenesulfonate	422-970-8		Aquatic Chronic 2	H411	GHS09	H411			
607-507-00-1	potassium, sodium 2,4-diamino-3-[4-(2-sulfonatoethoxysulfonyl)phenylazo]-5-[4-(2-sulfonatoethoxysulfonyl)-2-sulfonatophenylazo]-benzenesulfonate	422-980-2	187026-95-5	Eye Dam. 1	H318	GHS05 Dgr	H318			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-508-00-7	disodium 3,3'-[iminobis(sulfonyl-4,1-phenylene-(5-hydroxy-3-methylpyrazole-1,4-diyl)azo-4,1-phenylenesulfonylimino-(4-amino-6-hydroxypyrimidine-2,5-diyl)azo-4,1-phenylenesulfonylimino(4-amino-6-hydroxypyrimidine-2,5-diyl)azo]bis(benzenesulfonate)]	423-110-4	—	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-512-00-9	trisodium 2,4-diamino-3,5-bis-[4-(2-sulfonatoethoxy)sulfonyl]phenylazo]benzenesulfonate	423-970-0	182926-43-8	Aquatic Chronic 3	H412	—	H412			
607-513-00-4	reaction mass of: trisodium 4-benzoylamino-6-(6-ethenesulfonyl-1-sulfatophthalene-2-ylazo)-5-hydroxynaphthalene-2,7-disulfonate; 5-(benzoylamino)-4-hydroxy-3-((1-sulfo-6-((2-(sulfooxy)ethyl)sulfonyl)-2-naphthyl)azo)naphthalene-2,7-disulfonic acid sodium salt; 5-(benzoylamino)-4-hydroxy-3-((1-sulfo-6-((2-(sulfooxy)ethyl)sulfonyl)-2-naphthyl)azo)naphthalene-2,7-disulfonic acid	423-200-3	—	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			
607-515-00-5	reaction mass of: disodium hexyldiphenyl ether disulphonate; disodium dihexyldiphenyl ether disulphonate	429-650-7	147732-60-3	Eye Irrit. 2 Aquatic Chronic 2	H319 H411	GHS07 GHS09 Wng	H319 H411			
607-516-00-0	N,N'-bis(trifluoroacetyl)-S,S'-bis-L-homocysteine	429-670-6	105996-54-1	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
607-517-00-6	(S)-α-(acetylthio)benzenepropanoic acid	430-300-0	76932-17-7	Acute Tox. 4(*) Eye Dam. 1 Skin Sens. 1	H302 H318 H317	GHS05 GHS07 Dgr	H302 H318 H317			
607-526-00-5	cartap (ISO); 1,3-bis(carbamoylthio)-2-(dimethylamino)propane	—	15263-53-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
607-527-00-0	reaction mass of: 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1"H,1"H,2"H,2"H-tridecafluorooctyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1"H,1"H,2"H,2"H-heptadecafluorodecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1"H,1"H,2"H,2"H-heneicosafuorododecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1"H,1"H,2"H,2"H-pentacosafuorotetradecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-heptadecafluorodecyl)-12-(1"H,1"H,2"H,2"H-heptadecafluorodecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-heptadecafluorodecyl)-12-(1"H,1"H,2"H,2"H-heneicosafuorododecyl)dodecanedioate	423-180-6	—	STOT RE 2(*)	H373 (**)	GHS08 Wng	H373 (**)			
607-696-00-0	pentyl formate	211-340-6	638-49-3	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3	H226 H319 H335	GHS02 GHS07 Dgr	H226 H319 H335			C
607-697-00-6	tert-butyl propionate	—	20487-40-5	Flam. Liq. 2	H225	GHS02 Dgr	H225			C
608-001-00-3	acetonitrile; cyanomethane	200-835-2	75-05-8	Flam. Liq. 2 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2	H225 H332 H312 H302 H319	GHS02 GHS07 Dgr	H225 H332 H312 H302 H319			
608-002-00-9	trichloroacetonitrile	208-885-7	545-06-2	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Aquatic Chronic 2	H331 H311 H301 H411	GHS06 GHS09 Dgr	H331 H311 H301 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
608-003-00-4	acrylonitrile	203-466-5	107-13-1	Flam. Liq. 2 Carc. 1B Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H225 H350 H331 H311 H301 H335 H315 H318 H317 H411	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H225 H350 H331 H311 H301 H335 H315 H318 H317 H411		*	D
608-004-00-X	2-hydroxy-2-methylpropionitrile; 2-cyanopropan-2-ol; acetone cyanohydrin	200-909-4	75-86-5	Acute Tox. 2(*) Acute Tox. 1 Acute Tox. 2(*) Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H400 H410	GHS06 GHS09 Dgr	H330 H310 H300 H410			
608-005-00-5	n-butyronitrile	203-700-6	109-74-0	Flam. Liq. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*)	H225 H331 H311 H301	GHS02 GHS06 Dgr	H225 H331 H311 H301			
608-006-00-0	bromoxynil (ISO) 3,5-dibromo-4-hydroxybenzonitrile; bromoxynil phenol	216-882-7	1689-84-5	Repr. 2 Acute Tox. 2(*) Acute Tox. 3(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361d (***) H330 H301 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H361d (***) H330 H301 H317 H410		M=10	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
608-007-00-6	ioxynil (ISO) 4-hydroxy-3,5-diiodobenzonitrile	216-881-1	1689-83-4	Repr. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 4(*) STOT RE 2(*) Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H361d (***) H331 H301 H312 H373 (**) H319 H400 H410	GHS06 GHS08 GHS09 Dgr	H361d (***) H331 H301 H312 H373 (**) H319 H410		M=10	
608-008-00-1	chloroacetonitrile	203-467-0	107-14-2	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Aquatic Chronic 2	H331 H311 H301 H411	GHS06 GHS09 Dgr	H331 H311 H301 H411			
608-009-00-7	malononitrile	203-703-2	109-77-3	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410			
608-010-00-2	methacrylonitrile; 2-methyl-2-propene nitrile	204-817-5	126-98-7	Flam. Liq. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Skin Sens. 1	H225 H331 H311 H301 H317	GHS02 GHS06 Dgr	H225 H331 H311 H301 H317		(*) Skin Sens. 1; H317: C ≥ 0,2 %	D
608-011-00-8	oxalonitrile; cyanogen	207-306-5	460-19-5	Flam. Gas 1 Press. Gas Acute Tox. 3(*) Aquatic Acute 1 Aquatic Chronic 1	H220 H331 H400 H410	GHS02 GHS04 GHS06 GHS09 Dgr	H220 H331 H410			U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
608-012-00-3	benzonitrile	202-855-7	100-47-0	Acute Tox. 4(*) Acute Tox. 4(*)	H312 H302	GHS07 Wng	H312 H302			
608-013-00-9	2-chlorobenzonitrile	212-836-5	873-32-5	Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2	H312 H302 H319	GHS07 Wng	H312 H302 H319			
608-014-00-4	chlorothalonil (ISO); tetrachloroisophthalonitrile	217-588-1	1897-45-6	Carc. 2 Acute Tox. 2(*) Eye Dam. 1 STOT SE 3 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H330 H318 H335 H317 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H330 H318 H335 H317 H410		M=10	
608-015-00-X	dichlobenil (ISO); 2,6-dichlorobenzonitrile	214-787-5	1194-65-6	Acute Tox. 4(*) Aquatic Chronic 2	H312 H411	GHS07 GHS09 Wng	H312 H411			
608-016-00-5	1,4-Dicyano-2,3,5,6-tetra-chloro-benzene	401-550-8	1897-41-2	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
608-017-00-0	bromoxynil octanoate (ISO); 2,6-dibromo-4-cyanophenyl octanoate	216-885-3	1689-99-2	Repr. 2 Acute Tox. 3(*) Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361d (***) H331 H302 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H361d (***) H331 H302 H317 H410		M=10	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
608-018-00-6	ioxynil octanoate (ISO); 4-cyano-2,6-diiodophenyl octanoate	223-375-4	3861-47-0	Repr. 2 Acute Tox. 3 * Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361d (***) H301 H319 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H361d (***) H301 H319 H317 H410		M=10	
608-019-00-1	2,2'-dimethyl-2,2'-azodipropionitrile; ADZN	201-132-3	78-67-1	Self-react. C Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Chronic 3	H242 H332 H302 H412	GHS02 GHS07 Dgr	H242 H332 H302 H412			T
608-021-00-2	3-(2-(diaminomethyleneamino)thiazol-4-ylmethylthio)propionitrile	403-710-2	76823-93-3	Acute Tox. 4(*) Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			
608-022-00-8	3,7-dimethyloctanenitrile	403-620-3	40188-41-8	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H315 H317 H411	GHS07 GHS09 Wng	H315 H317 H411			
608-023-00-3	fenbuconazole (ISO); 4-(4-chlorophenyl)-2-phenyl-2-[[1H-1,2,4-triazol-1-yl)methyl]butanenitrile	406-140-2	114369-43-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
608-024-00-9	2-(4-(N-butyl-N-phenethylamino)phenyl)ethylene-1,1,2-tricarbonitrile	407-650-8	97460-76-9	Aquatic Chronic 4	H413	—	H413			
608-025-00-4	2-nitro-4,5-bis(benzyloxy)phenylacetonitrile	410-970-0	117568-27-1	Aquatic Chronic 4	H413	—	H413			
608-026-00-X	3-cyano-3,5,5-trimethylcyclohexanone	411-490-4	7027-11-4	Acute Tox. 4(*) STOT RE 2(*) Skin Sens. 1 Aquatic Chronic 3	H302 H373 (**) H317 H412	GHS08 GHS07 Wng	H302 H373 (**) H317 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
608-027-00-5	reaction mass of: 3-(4-ethylphenyl)-2,2-dimethylpropanenitrile; 3-(2-ethylphenyl)-2,2-dimethylpropanenitrile; 3-(3-ethylphenyl)-2,2-dimethylpropanenitrile	412-660-0	—	Aquatic Chronic 2	H411	GHS09	H411			
608-028-00-0	4-(2-cyano-3-phenylamino acryloyloxymethyl)-cyclohexyl-methyl 2-cyano-3-phenylamino)-acrylate	413-510-7	147374-67-2	STOT RE 2(*) Skin Sens. 1 Aquatic Chronic 2	H373 (**) H317 H411	GHS08 GHS09 Wng	H373 (**) H317 H411			
608-029-00-6	1,2-dihydro-6-hydroxy-4-methyl-1-[3-(1-methylethoxy)propyl]-2-oxo-3-pyridinecarboxonitrile	411-990-2	68612-94-2	Skin Sens. 1	H317	GHS07 Wng	H317			
608-030-00-1	N-acetyl-N-[5-cyano-3-(2-dibutylamino-4-phenylthiazol-5-yl-methylene)-4-methyl-2,6-dioxo-1,2,3,6-tetrahydropyridin-1-yl] benzamide	412-340-0	147741-93-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
608-031-00-7	2-benzyl-2-methyl-3-butenitrile	407-870-4	97384-48-0	Acute Tox. 4(*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
608-033-00-8	N-butyl-3-(2-chloro-4-nitrophenylhydrazono)-1-cyano-2-methylprop-1-ene-1,3-dicarboximide	407-970-8	75511-91-0	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
608-034-00-3	chlorfenapyr; 4-bromo-2-(4-chlorophenyl)-1-ethoxymethyl-5-trifluoromethylpyrrole-3-carbonitrile	—	122453-73-0	Acute Tox. 3(*) Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H302 H400 H410	GHS06 GHS09 Dgr	H331 H302 H410			
608-035-00-9	(±)-α-[(2-acetyl-5-methylphenyl)-amino]-2,6-dichlorobenzene-aceto-nitrile	419-290-9	—	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
608-036-00-4	3-(2-{4-[2-(4-cyanophenyl)vinyl]phenyl}vinyl)benzonitrile	419-060-8	79026-02-1	Aquatic Chronic 4	H413	—	H413			
608-037-00-X	reaction mass of: (E)-2,12-tridecadiennitrile; (E)-3,12-tridecadiennitrile; (Z)-3,12-tridecadiennitrile	422-190-8		Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
608-038-00-5	2,2,4-trimethyl-4-phenyl-butane-nitrile	422-580-8	75490-39-0	Acute Tox. 4(*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
608-039-00-0	2-phenylhexanenitrile	423-460-8	3508-98-3	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
608-040-00-6	4,4'-dithiobis(5-amino-1-(2,6-dichloro-4-(trifluoromethyl)phenyl)-1H-pyrazole-3-carbonitrile)	423-490-1	130755-46-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
608-041-00-1	4'-((2-butyl-4-oxo-1,3-diazaspiro[4.4]non-1-ene-3-yl)methyl)(1,1'-biphenyl)-2-carbonitrile	423-500-4	138401-24-8	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
608-043-00-2	3-(cis-3-hexenyloxy)propanenitril	415-220-6	142653-61-0	Acute Tox. 3(*) Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H302 H400 H410	GHS06 GHS09 Dgr	H331 H302 H410			
608-065-00-2	salts of bromoxynil with the exception of those specified elsewhere in this Annex	—	—	Repr. 2 Acute Tox. 2 * Acute Tox. 3 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361d (***) H330 H301 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H361d (***) H330 H301 H317 H410		M=10	A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
608-066-00-8	salts of ioxynil with the exception of those specified elsewhere in this Annex	—	—	Repr. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 4(*) STOT RE 2(*) Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H361d (***) H331 H301 H312 H373 (**) H319 H400 H410	GHS06 GHS08 GHS09 Dgr	H361d (***) H331 H301 H312 H373 (**) H319 H410		M=10	A
609-001-00-6	1-nitropropane	203-544-9	108-03-2	Flam. Liq. 3 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*)	H226 H332 H312 H302	GHS02 GHS07 Wng	H226 H332 H312 H302		(*)	
609-002-00-1	2-nitropropane	201-209-1	79-46-9	Flam. Liq. 3 Carc. 1B Acute Tox. 4(*) Acute Tox. 4(*)	H226 H350 H332 H302	GHS02 GHS08 GHS07 Dgr	H226 H350 H332 H302			
609-003-00-7	nitrobenzene	202-716-0	98-95-3	Carc. 2 Repr. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 1 Aquatic Chronic 2	H351 H361f (***) H331 H311 H301 H372 (**) H411	GHS06 GHS08 GHS09 Dgr	H351 H361f (***) H331 H311 H301 H372 (**) H411			
609-004-00-2	dinitrobenzene; [1] 1,4-dinitrobenzene; [2] 1,3-dinitrobenzene; [3] 1,2-dinitrobenzene [4]	246-673-6 [1] 202-833-7 [2] 202-776-8 [3] 208-431-8 [4]	25154-54-5 [1] 100-25-4 [2] 99-65-0 [3] 528-29-0 [4]	Acute Tox. 2(*) Acute Tox. 1 Acute Tox. 2(*) STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 (**) H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
609-005-00-8	1,3,5-trinitrobenzene	202-752-7	99-35-4	Expl. 1.1 Acute Tox. 2(*) Acute Tox. 1 Acute Tox. 2(*) STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H201 H330 H310 H300 H373 (**) H400 H410	GHS01 GHS06 GHS08 GHS09 Dgr	H201 H330 H310 H300 H373 (**) H410			
609-006-00-3	4-nitrotoluene	202-808-0	99-99-0	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Chronic 2	H331 H311 H301 H373 (**) H411	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 (**) H411			
609-007-00-9	2,4-dinitrotoluene; dinitrotoluene, technical grade; [1] dinitrotoluene [2]	204-450-0 [1] 246-836-1 [2]	121-14-2 [1] 25321-14-6 [2]	Carc. 1B Muta. 2 Repr. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Chronic 2	H350 H341 H361f (***) H331 H311 H301 H373 (**) H411	GHS06 GHS08 GHS09 Dgr	H350 H341 H361f (***) H331 H311 H301 H373 (**) H411			
609-008-00-4	2,4,6-trinitrotoluene; TNT	204-289-6	118-96-7	Expl. 1.1 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Chronic 2	H201 H331 H311 H301 H373 (**) H411	GHS01 GHS06 GHS08 GHS09 Dgr	H201 H331 H311 H301 H373 (**) H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
609-009-00-X	2,4,6-trinitrophenol; picric acid	201-865-9	88-89-1	Expl. 1.1 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*)	H201 H331 H311 H301	GHS01 GHS06 Dgr	H201 H331 H311 H301			
609-010-00-5	salts of picric acid	—	—	Unst. Expl Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*)	H201 H331 H311 H301	GHS01 GHS06 Dgr	H201 H331 H311 H301			T
609-011-00-0	2,4,6-trinitroanisoole	—	606-35-9	Expl. 1.1 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Chronic 2	H201 H332 H312 H302 H411	GHS01 GHS07 GHS09 Wng	H201 H332 H312 H302 H411			
609-012-00-6	2,4,6-trinitro- <i>m</i> -cresol	210-027-1	602-99-3	Expl. 1.1 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*)	H201 H332 H312 H302	GHS01 GHS07 Wng	H201 H332 H312 H302			
609-013-00-1	2,4,6-trinitro- <i>m</i> -xylene	211-187-5	632-92-8	Expl. 1.1 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) STOT RE 2(*)	H201 H332 H312 H302 H373 (**)	GHS01 GHS08 GHS07 Wng	H201 H332 H312 H302 H373 (**)			
609-015-00-2	4-nitrophenol; <i>p</i> -nitrophenol	202-811-7	100-02-7	Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) STOT RE 2(*)	H332 H312 H302 H373 (**)	GHS08 GHS07 Wng	H332 H312 H302 H373 (**)			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
609-016-00-8	dinitrophenol (reaction mass of isomers); [1] 2,4(or 2,6)-dinitrophenol [2]	247-096-2 [1] 275-732-9 [2]	25550-58-7 [1] 71629-74-8 [2]	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 (**) H410			
609-018-00-9	2,4,6-trinitroresorcinol; styphnic acid	201-436-6	82-71-3	Expl. 1.1 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*)	H201 H332 H312 H302	GHS01 GHS07 Wng	H201 H332 H312 H302			T
609-019-00-4	lead 2,4,6-trinitro- <i>m</i> -phenylene dioxide; lead 2,4,6-trinitroresorcinoxide; lead styphnate	239-290-0	15245-44-0	Unst. Expl Repr. 1A Acute Tox. 4(*) Acute Tox. 4(*) STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H200 H360-Df H332 H302 H373 (**) H400 H410	GHS01 GHS08 GHS07 GHS09 Dgr	H200 H360Df H332 H302 H373 (**) H410			1
609-019-01-1	lead 2,4,6-trinitro- <i>m</i> -phenylene dioxide; lead 2,4,6-trinitroresorcinoxide; lead styphnate (≥ 20 % phlegmatiser)	239-290-0	15245-44-0	Expl. 1.1 Repr. 1A Acute Tox. 4(*) Acute Tox. 4(*) STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H201 H360-Df H332 H302 H373 (**) H400 H410	GHS01 GHS08 GHS07 GHS09 Dgr	H201 H360Df H332 H302 H373 (**) H410			1

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
609-020-00-X	DNOC (ISO); 4,6-dinitro- <i>o</i> -cresol	208-601-1	534-52-1	Muta. 2 Acute Tox. 2(*) Acute Tox. 1 Acute Tox. 2(*) Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H341 H330 H310 H300 H315 H318 H317 H400 H410	GHS06 GHS08 GHS05 GHS07 GHS09 Dgr	H341 H330 H310 H300 H315 H318 H317 H410	EUH044		
609-021-00-5	sodium salt of DNOC; sodium 4,6-dinitro- <i>o</i> -cresolate; [1] potassium salt of DNOC; potassium 4,6-dinitro- <i>o</i> -cresolate [2]	219-007-7 [1] - [2]	2312-76-7 [1] 5787-96-2 [2]	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 (**) H410			
609-022-00-0	ammonium salt of DNOC; ammonium 4,6-dinitro- <i>o</i> -tolyl oxide	221-037-0	2980-64-5	Acute Tox. 2(*) Acute Tox. 1 Acute Tox. 2(*) STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 (**) H410			
609-023-00-6	dinocap (ISO)	254-408-0	39300-45-3	Repr. 1B Acute Tox. 4 * STOT RE 2 * Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H360D (***) H332 H373 (**) H315 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H360D (***) H332 H373 (**) H315 H317 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
609-024-00-1	binapacryl (ISO); 2-sec-butyl-4,6-dinitrophenyl-3-methylcrotonate	207-612-9	485-31-4	Repr. 1B Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H360-D (***) H312 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H360D (***) H312 H302 H410			
609-025-00-7	dinoseb(ISO); 6-sec-butyl-2,4-dinitrophenol	201-861-7	88-85-7	Repr. 1B Acute Tox. 3(*) Acute Tox. 3(*) Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H360-Df H311 H301 H319 H400 H410	GHS06 GHS08 GHS09 Dgr	H360Df H311 H301 H319 H410	EUH044		
609-026-00-2	salts and esters of dinoseb, with the exception of those specified elsewhere in this Annex	—	—	Repr. 1B Acute Tox. 3(*) Acute Tox. 3(*) Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H360-Df H311 H301 H319 H400 H410	GHS06 GHS08 GHS09 Dgr	H360Df H311 H301 H319 H410	EUH044		A
609-027-00-8	dinocton; reaction mass of isomers: methyl 2-octyl-4,6-dinitrophenyl carbonate, methyl 4-octyl-2,6-dinitrophenyl carbonate	—	63919-26-6	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
609-028-00-3	dinex (ISO); 2-cyclohexyl-4,6-dinitrophenol	205-042-5	131-89-5	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
609-029-00-9	salts and esters of dinex	—	—	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410			A
609-030-00-4	dinoterb (ISO); 2- <i>tert</i> -butyl-4,6-dinitrophenol	215-813-8	1420-07-1	Repr. 1B Acute Tox. 2(*) Acute Tox. 3(*) Aquatic Acute 1 Aquatic Chronic 1	H360D (***) H300 H311 H400 H410	GHS06 GHS08 GHS09 Dgr	H360D (***) H300 H311 H410	EUH044		
609-031-00-X	salts and esters of dinoterb	—	—	Repr. 1B Acute Tox. 2(*) Acute Tox. 3(*) Aquatic Acute 1 Aquatic Chronic 1	H360D (***) H300 H311 H400 H410	GHS06 GHS08 GHS09 Dgr	H360D (***) H300 H311 H410			A
609-032-00-5	bromofenoxim (ISO); 3,5-dibromo-4-hydroxybenzaldehyde-O-(2,4-dinitrophenyl)-oxime	236-129-6	13181-17-4	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
609-033-00-0	dinosam (ISO); 2-(1-methylbutyl)-4,6-dinitrophenol	—	4097-36-3	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
609-034-00-6	salts and esters of dinosam	—	—	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410			A
609-035-00-1	nitroethane	201-188-9	79-24-3	Flam. Liq. 3 Acute Tox. 4(*) Acute Tox. 4(*)	H226 H332 H302	GHS02 GHS07 Wng	H226 H332 H302		(*)	
609-036-00-7	nitromethane	200-876-6	75-52-5	Flam. Liq. 3 Acute Tox. 4(*)	H226 H302	GHS02 GHS07 Wng	H226 H302		(*)	
609-037-00-2	5-nitroacenaphthene	210-025-0	602-87-9	Carc. 1B	H350	GHS08 Dgr	H350			
609-038-00-8	2-nitronaphthalene	209-474-5	581-89-5	Carc. 1B Aquatic Chronic 2	H350 H411	GHS08 GHS09 Dgr	H350 H411			
609-039-00-3	4-nitrobiphenyl	202-204-7	92-93-3	Carc. 1B Aquatic Chronic 2	H350 H411	GHS08 GHS09 Dgr	H350 H411			
609-040-00-9	nitrofen (ISO); 2,4-dichlorophenyl 4-nitrophenyl ether	217-406-0	1836-75-5	Carc. 1B Repr. 1B Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H350 H360D (***) H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H360D (***) H302 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
609-041-00-4	2,4-dinitrophenol	200-087-7	51-28-5	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Acute 1	H331 H311 H301 H373 (**) H400	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 (**) H400			
609-042-00-X	pendimethalin (ISO); N-(1-ethylpropyl)-2,6-dinitro-3,4-xylidine	254-938-2	40487-42-1	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
609-043-00-5	quintozene (ISO); pentachloronitrobenzene	201-435-0	82-68-8	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
609-044-00-0	tecnazene (ISO); 1,2,4,5-tetrachloro-3-nitrobenzene	204-178-2	117-18-0	Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
609-045-00-6	reaction mass of: 4,6-dinitro-2-(3-octyl)phenyl methyl carbonate and 4,6-dinitro-2-(4-octyl)phenyl methyl carbonate; dinocron-6	—	8069-76-9	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
609-046-00-1	trifluralin (ISO) (containing < 0.5 ppm NPDA); α, α,α-trifluoro-2,6-dinitro-N,N-dipropyl-p-toluidine (containing < 0.5 ppm NPDA); 2,6-dinitro-N,N-dipropyl-4-trifluoromethylaniline (containing < 0.5 ppm NPDA); N,N-dipropyl-2,6-dinitro-4-trifluoromethylaniline (containing < 0.5 ppm NPDA)	216-428-8	1582-09-8	Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H319 H317 H400 H410	GHS07 GHS09 Wng	H319 H317 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
609-047-00-7	2-nitroanisolet	202-052-1	91-23-6	Carc. 1B Acute Tox. 4(*)	H350 H302	GHS08 GHS07 Dgr	H350 H302			
609-048-00-2	sodium 3-nitrobenzenesulphonate	204-857-3	127-68-4	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			
609-049-00-8	2,6-dinitrotoluene	210-106-0	606-20-2	Carc. 1B Muta. 2 Repr. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Chronic 3	H350 H341 H361f (***) H331 H311 H301 H373 (**) H412	GHS06 GHS08 Dgr	H350 H341 H361f (***) H331 H311 H301 H373 (**) H412			
609-050-00-3	2,3-dinitrotoluene	210-013-5	602-01-7	Carc. 1B Muta. 2 Repr. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H350 H341 H361f (***) H331 H311 H301 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H341 H361f (***) H331 H311 H301 H373 (**) H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
609-051-00-9	3,4-dinitrotoluene	210-222-1	610-39-9	Carc. 1B Muta. 2 Repr. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Chronic 2	H350 H341 H361f (***) H331 H311 H301 H373 (**) H411	GHS06 GHS08 GHS09 Dgr	H350 H341 H361f (***) H331 H311 H301 H373 (**) H411			
609-052-00-4	3,5-dinitrotoluene	210-566-2	618-85-9	Carc. 1B Muta. 2 Repr. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Chronic 3	H350 H341 H361f (***) H331 H311 H301 H373 (**) H412	GHS06 GHS08 Dgr	H350 H341 H361f (***) H331 H311 H301 H373 (**) H412			
609-053-00-X	hydrazine-trinitromethane	414-850-9	—	Expl. 1.1 (****) Self-react. A Carc. 1B Acute Tox. 3(*) Acute Tox. 3(*) Skin Sens. 1	H201 H240 H350 H331 H301 H317	GHS01 GHS06 GHS08 Dgr	H201 H240 H350 H331 H301 H317			
609-054-00-5	2,3-dinitrophenol; [1] 2,5-dinitrophenol; [2] 2,6-dinitrophenol; [3] 3,4-dinitrophenol; [4] salts of dinitrophenol [5]	200-628-7 [1] 206-348-1 [2] 209-357-9 [3] 209-415-3 [4] - [5]	66-56-8 [1] 329-71-5 [2] 573-56-8 [3] 577-71-9 [4] [5]	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Chronic 2	H331 H311 H301 H373 (**) H411	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 (**) H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
609-055-00-0	2,5-dinitrotoluene	210-581-4	619-15-8	Carc. 1B Muta. 2 Repr. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Chronic 2	H350 H341 H361f (***) H331 H311 H301 H373 (**) H411	GHS06 GHS08 GHS09 Dgr	H350 H341 H361f (***) H331 H311 H301 H373 (**) H411			
609-056-00-6	2,2-dibromo-2-nitroethanol	412-380-9	69094-18-4	Expl. 1.1 Carc. 2 Acute Tox. 4(*) STOT RE 2(*) Skin Corr. 1A Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H201 H351 H302 H373 (**) H314 H317 H400 H410	GHS01 GHS08 GHS05 GHS07 GHS09 Dgr	H201 H351 H302 H373 (**) H314 H317 H410		(*) STOT SE 3; H335: C ≥ 1 %	T
609-057-00-1	3-chloro-2,4-difluoronitrobenzene	411-980-8	3847-58-3	Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H314 H317 H410			
609-058-00-7	2-nitro-2-phenyl-1,3-propanediol	410-360-4	5428-02-4	STOT RE 1 Acute Tox. 4(*) Acute Tox. 4(*) Skin Sens. 1 Aquatic Chronic 2	H372 (**) H312 H302 H317 H411	GHS08 GHS07 GHS09 Dgr	H372 (**) H312 H302 H317 H411	EUH070		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
609-059-00-2	2-chloro-6-(ethylamino)-4-nitrophenol	411-440-1	131657-78-8	Acute Tox. 4(*) Skin Sens. 1 Aquatic Chronic 2	H302 H317 H411	GHS07 GHS09 Wng	H302 H317 H411			
609-060-00-8	4-[(3-hydroxypropyl)amino]-3-nitrophenol	406-305-9	92952-81-3	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
609-061-00-3	(E,Z)-4-chlorophenyl(cyclopropyl)ketone O-(4-nitrophenylmethyl)oxime	406-100-4	94097-88-8	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
609-062-00-9	2-bromo-2-nitropropanol	407-030-7	24403-04-1	Acute Tox. 3(*) Acute Tox. 4(*) STOT RE 2(*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H311 H302 H373 (**) H314 H317 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H311 H302 H373 (**) H314 H317 H410			
609-063-00-4	2-[(4-chloro-2-nitrophenyl)amino]ethanol	413-280-8	59320-13-7	Acute Tox. 4(*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
609-064-00-X	mesotrione(ISO); 2-[4-(methylsulfonyl)-2-nitrobenzoyl]-1,3-cyclohexanedione	—	104206-82-8	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
609-065-00-5	2-nitrotoluene	201-853-3	88-72-2	Carc. 1B Muta. 1B Repr. 2 Acute Tox. 4(*) Aquatic Chronic 2	H350 H340 H361f (***) H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H340 H361f (***) H302 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
609-066-00-0	lithium sodium 3-amino-10-{4-(10-amino-6,13-dichloro-4,11-disulfonatobenzo[5,6][1,4]oxazino[2,3-b]phenoxazine-3-ylamino)-6-[methyl(2-sulfonato-ethyl)amino]-1,3,5-triazin-2-ylamino)-6,13-dichlorobenzo[5,6][1,4]oxazino[2,3-b]phenoxazine-4,11-disulfonate	418-870-9	154212-58-5	Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) STOT SE 2(*) (*)	H332 H312 H302 H371 (**)	GHS08 GHS07 Dgr	H332 H312 H302 H371 (**)			
609-067-00-6	sodium and potassium 4-(3-aminopropylamino)-2,6-bis[3-(4-methoxy-2-sulfophenylazo)-4-hydroxy-2-sulfo-7-naphthylamino]-1,3,5-triazine	416-280-6	156769-97-0	Skin Sens. 1	H317	GHS07 Wng	H317			
609-068-00-1	musk xylene; 5-tert-butyl-2,4,6-trinitro- <i>m</i> -xylene	201-329-4	81-15-2	Expl. 1.1 Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H201 H351 H400 H410	GHS01 GHS08 GHS09 Wng	H201 H351 H410			T
609-070-00-2	1,4-dichloro-2-(1,1,2,3,3,3-hexafluoropropoxy)-5-nitrobenzene	415-580-4	130841-23-5	Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
609-071-00-8	reaction mass of: 2-methylsulfanyl-4,6-bis-(2-hydroxy-4-methoxy-phenyl)-1,3,5-triazine; 2-(4,6-bis-methylsulfanyl-1,3,5-triazin-2-yl)-5-methoxy-phenol	423-520-3	156137-33-6	Skin Sens. 1	H317	GHS07 Wng	H317			
610-001-00-3	trichloronitromethane; chloropicrin	200-930-9	76-06-2	Acute Tox. 2(*) Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H330 H302 H319 H335 H315	GHS06 Dgr	H330 H302 H319 H335 H315			
610-002-00-9	1,1-dichloro-1-nitroethane	209-854-0	594-72-9	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*)	H331 H311 H301	GHS06 Dgr	H331 H311 H301			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
610-003-00-4	chlorodinitrobenzene	—	—	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 (**) H410			C
610-004-00-X	2-chloro-1,3,5-trinitrobenzene	201-864-3	88-88-0	Expl. 1.1 Acute Tox. 2(*) Acute Tox. 1 Acute Tox. 2(*) Aquatic Acute 1 Aquatic Chronic 1	H201 H330 H310 H300 H400 H410	GHS01 GHS06 GHS09 Dgr	H201 H330 H310 H300 H410			
610-005-00-5	1-chloro-4-nitrobenzene	202-809-6	100-00-5	Carc. 2 Muta. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Chronic 2	H351 H341 H331 H311 H301 H373 (**) H411	GHS06 GHS08 GHS09 Dgr	H351 H341 H331 H311 H301 H373 (**) H411			
610-006-00-0	chloronitroanilines with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 2(*) Acute Tox. 1 Acute Tox. 2(*) STOT RE 2(*) Aquatic Chronic 2	H330 H310 H300 H373 (**) H411	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 (**) H411			A C
610-007-00-6	1-chloro-1-nitropropane	209-990-0	600-25-9	Acute Tox. 4(*) Acute Tox. 4(*)	H332 H302	GHS07 Wng	H332 H302		(*)	
610-008-00-1	2,6-dichloro-4-nitroanisole	403-350-6	17742-69-7	Acute Tox. 3(*) Aquatic Chronic 2	H301 H411	GHS06 GHS09 Dgr	H301 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
610-009-00-7	2-chloro-4-nitroaniline	204-502-2	121-87-9	Acute Tox. 4(*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
610-010-00-2	2-bromo-1-(2-furyl)-2-nitroethylene	406-110-9	35950-52-8	Acute Tox. 4(*) STOT RE 2(*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H373 (**) H314 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H302 H373 (**) H314 H317 H410			
611-001-00-6	azobenzene	203-102-5	103-33-3	Carc. 1B Muta. 2 Acute Tox. 4(*) Acute Tox. 4(*) STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H350 H341 H332 H302 H373 (**) H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H341 H332 H302 H373 (**) H410			
611-002-00-1	azoxybenzene	207-802-1	495-48-7	Acute Tox. 4(*) Acute Tox. 4(*)	H332 H302	GHS07 Wng	H332 H302			
611-003-00-7	fenaminosulf (ISO); sodium 4-dimethylaminobenzenediazosulphonate	205-419-4	140-56-7	Acute Tox. 3(*) Acute Tox. 4(*) Aquatic Chronic 3	H301 H312 H412	GHS06 Dgr	H301 H312 H412			
611-004-00-2	methyl-ONN-azoxymethyl acetate; methyl azoxy methyl acetate	209-765-7	592-62-1	Carc. 1B Repr. 1B	H350 H360D (***)	GHS08 Dgr	H350 H360D (***)			
611-005-00-8	disodium {5-[(4'-((2,6-hydroxy-3-((2-hydroxy-5-sulphophenyl)azo)phenyl)azo)(1,1'-biphenyl)-4-yl)azo]salicylato(4-)} cuprate(2-); CI Direct Brown 95	240-221-1	16071-86-6	Carc. 1B	H350	GHS08 Dgr	H350			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-006-00-3	4- <i>o</i> -tolylazo- <i>o</i> -toluidine; 4-amino-2',3-dimethylazobenzene; fast garnet GBC base; AAT; <i>o</i> -aminoazotoluene	202-591-2	97-56-3	Carc. 1B Skin Sens. 1	H350 H317	GHS08 Dgr	H350 H317			
611-007-00-9	tricyclazole (ISO); 5-methyl-1,2,4-triazolo(3,4- <i>b</i>)benzo-1,3-thiazole;	255-559-5	41814-78-2	Acute Tox. 4(*)	H302	GHS07 Wng	H302			
611-008-00-4	4-aminoazobenzene; 4-phenylazoaniline	200-453-6	60-09-3	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410			
611-009-00-X	sodium (1-(5-(4-(4-anilino-3-sulphophenylazo)-2-methyl-5-methylsulphonamidophenylazo)-4-hydroxy-2-oxido-3-(phenylazo)phenylazo)-5-nitro-4-sulphonato-2-naphtholato)iron(II)	401-220-3	—	Acute Tox. 4(*) Aquatic Chronic 3	H332 H412	GHS07 Wng	H332 H412			
611-010-00-5	2'-(2-cyano-4,6-dinitrophenylazo)-5'-(<i>N,N</i> -dipropylamino)propionanilide	403-010-7	106359-94-8	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
611-011-00-0	<i>N,N,N,N'</i> -tetramethyl-3,3'-(propylenebis(iminocarbonyl-4,1-phenylenazo(1,6-dihydro-2-hydroxy-4-methyl-6-oxopyridine-3,1-diyl)))di(propylammonium) dilactate	403-340-1	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dg	H318 H411			
611-012-00-6	reaction mass of 2,2-iminodiethanol 6-methyl-2-(4-(2,4,6-triaminopyrimidin-5-ylazo)phenyl)benzothiazole-7-sulfonate and 2-methylaminoethanol 6-methyl-2-(4-(2,4,6-triaminopyrimidin-5-ylazo)phenyl)benzothiazole-7-sulfonate and <i>N,N</i> -diethylpropane-1,3-diamine 6-methyl-2-(4-(2,4,6-triaminopyrimidin-5-ylazo)phenyl)benzothiazole-7-sulfonate	403-410-1	114565-65-0	Skin Sens. 1	H317	GHS07 Wng	H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-013-00-1	trilithium-1-hydroxy-7-(3-sulfonatoanilino)-2-(3-methyl-4-(2-methoxy-4-(3-sulfonatophenylazo)phenylazo)phenylazo)naphthalene-3-sulfonate	403-650-7	117409-78-6	Expl. 1.3 (****) Aquatic Chronic 2	H203 H411	GHS01 GHS09 Dgr	H203 H411			
611-014-00-7	(tetrasodium 1-(4-(3-acetamido-4-(4'-nitro-2,2'-disulfonatostilben-4-ylazo)anilino)-6-(2,5-disulfonatoanilino)-1,3,5-triazin-2-yl)-3-carboxypyridinium) hydroxide	404-250-5	115099-55-3	Skin Sens. 1	H317	GHS07 Wng	H317			
611-015-00-2	tetrasodium 4-amino-5-hydroxy-6-(4-(2-(2-(sulfonatooxy)ethylsulfonyl)ethylcarbamoyl)phenylazo)-3-(4-(2-(sulfonatooxy)ethylsulfonyl)phenylazo)naphthalene-2,7-disulfonate	404-320-5	116889-78-2	Skin Sens. 1	H317	GHS07 Wng	H317			
611-016-00-8	reaction mass of 1,1'-((dihydroxyphenylene) bis(azo-3,1-phenylenazo(1-(3-dimethylaminopropyl)-1,2-dihydro-6-hydroxy-4-methyl-2-oxopyridine-5,3-diyl)))dipyridinium dichloride dihydrochloride, mixed isomers and 1-(1-(3-dimethylaminopropyl)-5-(3-((4-(1-(3-dimethylaminopropyl)-1,6-dihydro-2-hydroxy-4-methyl-6-oxo-5-pyridinio-3-pyridylazo)phenylazo)-2,4(or 2,6 or 3,5)-dihydroxyphenylazo)phenylazo)-1,2-dihydro-6-hydroxy-4-methyl-2-oxo-3-pyridyl)pyridinium dichloride	404-540-1	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-017-00-3	2-(4-(diethylaminopropylcarbamoyl)phenylazo)-3-oxo-N-(2,3-dihydro-2-oxobenzimidazol-5-yl)butyramide	404-910-2	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
611-018-00-9	tetraammonium 5-(4-(7-amino-1-hydroxy-3-sulfonato-2-naphthylazo)-6-sulfonato-1-naphthylazo)isophthalate	405-130-5	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-019-00-4	tetalithium 6-amino-4-hydroxy-3-(7-sulfonato-4-(4-sulfonatophenylazo)-1-naphthylazo)naphthalene-2,7-disulfonate	405-150-4	106028-58-4	Skin Sens. 1	H317	GHS07 Wng	H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-020-00-X	tetrakis(tetramethylammonium) 6-amino-4-hydroxy-3-(7-sulfonato-4-(4-sulfonatophenylazo)-1-naphthylazo)naphthalene-2,7-disulfonate	405-170-3	116340-05-7	Acute Tox. 3(*) Skin Sens. 1 Aquatic Chronic 3	H301 H317 H412	GHS06 Dgr	H301 H317 H412			
611-021-00-5	2-(4-(4-cyano-3-methylisothiazol-5-ylazo)-N-ethyl-3-methylanilino)ethyl acetate	405-480-9	—	Acute Tox. 4(*) STOT RE 2(*) Skin Irrit. 2 Aquatic Chronic 4	H302 H373 (**) H315 H413	GHS08 GHS07 Wng	H302 H373 (**) H315 H413			
611-022-00-0	4-dimethylaminobenzenediazonium 3-carboxy-4-hydroxybenzenesulfonate	404-980-4	—	Self-react. C Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 4(*) STOT RE 2(*) Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H242 H331 H301 H312 H373 (**) H318 H317 H400 H410	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H242 H331 H301 H312 H373 (**) H318 H317 H410			T
611-023-00-6	disodium 7-(4,6-dichloro-1,3,5-triazin-2-ylamino)-4-hydroxy-3-(4-(2-(sulfonatooxy)ethylsulfonyl)phenylazo) naphthalene-2-sulfonate	404-600-7	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-024-00-1	Benzidine based azo dyes; 4,4'-diarylazobiphenyl dyes, with the exception of those specified elsewhere in this Annex	—	—	Carc. 1B	H350	GHS08 Dgr	H350			A
611-025-00-7	disodium 4-amino-3-[[4'-[(2,4-diaminophenyl)azo][1,1'-biphenyl]-4-yl]azo]-5-hydroxy-6-(phenylazo)naphthalene-2,7-disulphonate; C.I. Direct Black 38	217-710-3	1937-37-7	Carc. 1B Repr. 2	H350 H361d (***)	GHS08 Dgr	H350 H361d (***)			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-026-00-2	tetrasodium 3,3'-[[1,1'-biphenyl]-4,4'-diylbis(azo)]bis[5-amino-4-hydroxynaphthalene-2,7-disulphonate]; C.I. Direct Blue 6	220-012-1	2602-46-2	Carc. 1B Repr. 2	H350 H361d (***)	GHS08 Dgr	H350 H361d (***)			
611-027-00-8	disodium 3,3'-[[1,1'-biphenyl]-4,4'-diylbis(azo)]bis(4-aminonaphthalene-1-sulphonate); C.I. Direct Red 28	209-358-4	573-58-0	Carc. 1B Repr. 2	H350 H361d (***)	GHS08 Dgr	H350 H361d (***)			
611-028-00-3	C,C'-azodi(formamide)	204-650-8	123-77-3	Resp. Sens. 1	H334	GHS08 Dgr	H334			G
611-029-00-9	<i>o</i> -dianisidine based azo dyes; 4,4'-diarylaazo-3,3'-dimethoxybiphenyl dyes with the exception of those mentioned elsewhere in this Annex	—	—	Carc. 1B	H350	GHS08 Dgr	H350			A H
611-030-00-4	<i>o</i> -tolidine based dyes; 4,4'-diarylaazo-3,3'-dimethylbiphenyl dyes, with the exception of those mentioned elsewhere in this Annex	—	—	Carc. 1B	H350	GHS08 Dgr	H350			A H
611-031-00-X	4,4'-(4-iminocyclohexa-2,5-dienylidenemethylene)dianiline hydrochloride; C.I. Basic Red 9	209-321-2	569-61-9	Carc. 1B	H350	GHS08 Dgr	H350			
611-032-00-5	1,4,5,8-tetraaminoanthraquinone; C.I. Disperse Blue 1	219-603-7	2475-45-8	Carc. 1B Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H350 H315 H318 H317	GHS08 GHS05 GHS07 Dgr	H350 H315 H318 H317			
611-033-00-0	hexasodium [4,4'-azoxybis(2,2'-disulfonatostilbene-4,4'-diylazo)]-bis[5'-sulfonatobenzene-2,2'-diolato-O(2),O(2),N(1)]-copper(II)	400-020-3	82027-60-9	Aquatic Chronic 2	H411	GHS09	H411			
611-034-00-6	N-(5-(bis(2-methoxyethyl)amino)-2-((5-nitro-2,1-benzisothiazol-3-yl)azo)phenyl)acetamide	402-430-8	105076-77-5	Aquatic Chronic 4	H413	—	H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-035-00-1	tetralithium 6-amino-4-hydroxy-3-[7-sulfonato-4-(5-sulfonato-2-naphthylazo)-1-naphthylazo]naphthalene-2,7-disulfonate	403-660-1	107246-80-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
611-036-00-7	2-(4-(5,6(or 6,7)-dichloro-1,3-benzothiazol-2-ylazo)-N-methyl-m-toluidino)ethyl acetate	405-440-0	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-037-00-2	3(or 5)-(4-(N-benzyl-N-ethylamino)-2-methylphenylazo)-1,4-dimethyl-1,2,4-triazolium methylsulphate	406-055-0	124584-00-5	Acute Tox. 4(*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H317 H411			
611-038-00-8	trisodium 1-hydroxynaphthalene-2-azo-4'(5',5"-dimethylbiphenyl)-4"-azo(4"-phenylsulfonyloxybenzene)-2',2",4-trisulfonate	406-820-9	—	Eye Irrit. 2	H319	GHS07 Wng	H319			
611-039-00-3	7-[[[(4,6-dichloro-1,3,5-triazin-2-yl)amino]-4-hydroxy-3-(4-((2-sulfoxyethyl)sulfonyl)phenylazo)naphthalene-2-sulfonic acid]	407-050-6	117715-57-8	Skin Sens. 1	H317	GHS07 Wng	H317			
611-040-00-9	3-(5-acetylamino-4-(4-[4,6-bis(3-diethylaminopropylamino)-1,3,5-triazin-2-ylamino]phenylazo)-2-(2-methoxyethoxy)phenylazo)-6-amino-4-hydroxy-2-naphthalenesulfonic acid	407-670-7	115099-58-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
611-041-00-4	2-[[[4[[4,6-bis[[3-(diethylamino)propyl]amino]-1,3,5-triazine-2-yl]amino]phenyl]azo]-N-(2,3-dihydro-2-oxo-1H-benzimidazol-5-yl)-3-oxobutanamide	407-680-1	98809-11-1	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			
611-042-00-X	trisodium 5-amino-3-[5-(2-bromoacryloylamino)-2-sulfonatophenylazo]-4-hydroxy-6-(4-vinylsulfonylphenylazo)naphthalene-2,7-disulfonate	411-770-6	136213-71-3	Aquatic Chronic 3	H412	—	H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-043-00-5	reaction mass of: trisodium N(1')-N(2):N(1'')-N(2'')-η-6-[2-amino-4-(or 6)-hydroxy-(or 4-amino-2-hydroxy)phenylazo]-6''-(1-carbaniloyl-2-hydroxyprop-1-enylazo)-5',5'''-disulfamoyl-3,3'''-disulfonatobis(naphthalene-2,1'-azobenzene-1,2'-diolato-O(1),O(2'))-chromate; trisodium N(1')-N(2):N(1'')-N(2'')-η-6,6''-bis(1-carbaniloyl-2-hydroxyprop-1-enylazo)-5',5'''-disulfamoyl-3,3'''-disulfonatobis(naphthalene-2,1'-azobenzene-1,2'-diolato-O(1),O(2'))-chromate; trisodium N(1')-N(2):N(1'')-N(2'')-η-6,6''-bis[2-amino-4-(or 6)-hydroxy-(or 4-amino-2-hydroxy)phenylazo]5',5'''-disulfamoyl-3,3'''-disulfonatobis(naphthalene-2,1'-azobenzene-1,2'-diolato-O(1),O(2'))-chromate (2:1:1)	402-850-1	—	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
611-044-00-0	reaction mass of: <i>tert</i> -alkyl(C ₁₂ -C ₁₄)ammonium bis[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]-chromate(1-); <i>tert</i> -alkyl(C ₁₂ -C ₁₄)ammonium bis[1-[(2-hydroxy-4-nitrophenyl)azo]-2-naphthalenolato(2-)]-chromate(1-); <i>tert</i> -alkyl(C ₁₂ -C ₁₄)ammonium bis[1-[[5-(1,1-dimethylpropyl)-2-hydroxy-3-nitrophenyl]azo]-2-naphthalenolato(2-)]-chromate(1-); <i>tert</i> -alkyl(C ₁₂ -C ₁₄)ammonium [[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]-[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]]-chromate(1-); <i>tert</i> -alkyl(C ₁₂ -C ₁₄)ammonium [[1-[[5-(1,1-dimethylpropyl)-2-hydroxy-3-nitrophenyl]azo]-2-naphthalenolato(2-)]-[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]]-chromate(1-); <i>tert</i> -alkyl(C ₁₂ -C ₁₄)ammonium ((1-(4(or 5)-nitro-2-oxidophenylazo)-2-naphtholato)(1-(3-nitro-2-oxido-5-pentylphenylazo)-2-naphtholato))chromate(1-)	403-720-7	117527-94-3	Aquatic Chronic 2	H411	GHS09	H411			
611-045-00-6	2-[4-[N-(4-acetoxybutyl)-N-ethyl]amino-2-methylphenylazo]-3-acetyl-5-nitrothiophene	404-830-8	—	Aquatic Chronic 4	H413	—	H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-046-00-1	4,4'-diamino-2-methylazobenzen	407-590-2	43151-99-1	Acute Tox. 3(*) STOT RE 2(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H301 H373 (**) H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H301 H373 (**) H317 H410			
611-047-00-7	reaction mass of: 2-[[4-[N-ethyl-N-(2-acetoxyethyl)amino]phenyl]azo]-5,6-dichlorobenzothiazole; 2-[[4-[N-ethyl-N-(2-acetoxyethyl)amino]phenyl]azo]-6,7-dichlorobenzothiazole (1:1)	407-890-3	111381-11-4	Aquatic Chronic 4	H413	—	H413			
611-048-00-2	reaction mass of: 2-[[4-[bis(2-acetoxyethyl)amino]phenyl]azo]-5,6-dichlorobenzothiazole; 2-[[4-[bis(2-acetoxyethyl)amino]phenyl]azo]-6,7-dichlorobenzothiazole (1:1)	407-900-6	111381-12-5	Aquatic Chronic 4	H413	—	H413			
611-049-00-8	reaction mass of 7-[4-(3-diethylaminopropylamino)-6-(3-diethylammonioethylamino)-1,3,5-triazin-2-ylamino]-4-hydroxy-3-(4-phenylazophenylazo)-naphthalene-2-sulfonate, acetic acid, lactic acid (2:1:1)	408-000-6	118658-98-3	STOT RE 2(*) Skin Sens. 1 Aquatic Chronic 3	H373 (**) H317 H412	GHS08 Wng	H373 (**) H317 H412			
611-051-00-9	2-(4-(N-ethyl-N-(2-hydroxyethyl)amino-2-methylphenyl)azo-6-methoxy-3-methylbenzothiazolium chloride	411-110-7	136213-74-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
611-052-00-4	monosodium aqua-[5-[[2,4-dihydroxy-5-[(2-hydroxy-3,5-dinitrophenyl)azo]phenyl]azo]-2-naphthalensulfonate], iron complex	400-720-9	—	Aquatic Chronic 3	H412	—	H412			
611-053-00-X	2,2'-azobis[2-methylpropionamidine] dihydrochloride	221-070-0	2997-92-4	Acute Tox. 4(*) Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			
611-055-00-0	C.I. Disperse Yellow 3; N-[4-[(2-hydroxy-5-methylphenyl)azo]phenyl]acetamide	220-600-8	2832-40-8	Carc. 2 Skin Sens. 1	H351 H317	GHS08 GHS07 Wng	H351 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-056-00-6	C.I. Solvent Yellow 14; 1-phenylazo-2-naphthol	212-668-2	842-07-9	Carc. 2 Muta. 2 Skin Sens. 1 Aquatic Chronic 4	H351 H341 H317 H413	GHS08 GHS07 Wng	H351 H341 H317 H413			
611-057-00-1	6-hydroxy-1-(3-isopropoxypropyl)-4-methyl-2-oxo-5-[4-(phenylazo)phenylazo]-1,2-dihydro-3-pyridinecarbonitrile	400-340-3	85136-74-9	Carc. 1B Aquatic Chronic 4	H350 H413	GHS08 Wng	H350 H413			
611-058-00-7	(6-(4-hydroxy-3-(2-methoxyphenylazo)-2-sulfonato-7-naphthylamino)-1,3,5-triazin-2,4-diyl)bis[(amino-1-methylethyl)ammonium] formate	402-060-7	108225-03-2	Carc. 1B Eye Dam. 1 Aquatic Chronic 2	H350 H318 H411	GHS08 GHS05 GHS09 Dgr	H350 H318 H411			
611-059-00-2	octasodium 2-(6-(4-chloro-6-(3-(N-methyl-N-(4-chloro-6-(3,5-disulfonato-2-naphthylazo)-1-hydroxy-6-naphthylamino)-1,3,5-triazin-2-yl)aminomethyl)phenylamino)-1,3,5-triazin-2-ylamino)-3,5-disulfonato-1-hydroxy-2-naphthylazo)naphthalene-1,5-disulfonate	412-960-1	148878-21-1	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			
611-060-00-8	reaction mass of: sodium 5-[8-[4-[4-[4-[7-(3,5-dicarboxylatophenylazo)-8-hydroxy-3,6-disulfonatophthalen-1-ylamino]-6-hydroxy-1,3,5-triazin-2-yl]-2,5-dimethylpiperazin-1-yl]-6-hydroxy-1,3,5-triazin-2-ylamino]-1-hydroxy-3,6-disulfonatophthalen-2-ylazo]-isophthalate; ammonium 5-[8-[4-[4-[4-[7-(3,5-dicarboxylatophenylazo)-8-hydroxy-3,6-disulfonatophthalen-1-ylamino]-6-hydroxy-1,3,5-triazin-2-yl]-2,5-dimethylpiperazin-1-yl]-6-hydroxy-1,3,5-triazin-2-ylamino]-1-hydroxy-3,6-disulfonatophthalen-2-ylazo]-isophthalate; 5-[8-[4-[4-[4-[7-(3,5-dicarboxylatophenylazo)-8-hydroxy-3,6-disulfonatophthalen-1-ylamino]-6-hydroxy-1,3,5-triazin-2-yl]-2,5-dimethylpiperazin-1-yl]-6-hydroxy-1,3,5-triazin-2-ylamino]-1-hydroxy-3,6-disulfonatophthalen-2-ylazo]-isophthalic acid	413-180-4	187285-15-0	Eye Dam. 1	H318	GHS05 Dgr	H318			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-061-00-3	disodium 5-[5-[4-(5-chloro-2,6-difluoropyrimidin-4-ylamino)benzamido]-2-sulfonato-phenylazo]-1-ethyl-6-hydroxy-4-methyl-2-oxo-3-pyridylmethylsulfonate	412-530-3	—	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
611-062-00-9	octasodium 2-(8-(4-chloro-6-(3-((4-chloro-6-(3,6-disulfonato-2-(1,5-disulfonatonaphthalen-2-ylazo)-1-hydroxynaphthalen-8-ylamino)-1,3,5-triazin-2-yl)aminomethyl)phenylamino)-1,3,5-triazin-2-ylamino)-3,6-disulfonato-1-hydroxynaphthalen-2-ylazo)naphthalene-1,5-disulfonate	413-550-5	—	Skin Irrit. 2 Eye Dam. 1	H315 H318	GHS05 Dgr	H315 H318			
611-063-00-4	trisodium [4'-(8-acetyl-amino-3,6-disulfonato-2-naphthylazo)-4''-(6-benzoylamino-3-sulfonato-2-naphthylazo)-biphenyl-1,3',3'',1'''-tetraolato-O,O',O'',O''']copper(II)	413-590-3	164058-22-4	Carc. 1B	H350	GHS08 Dgr	H350			
611-064-00-X	4-(3,4-dichlorophenylazo)-2,6-di-sec-butyl-phenol	410-600-8	124719-26-2	STOT RE 2(*) Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H315 H400 H410	GHS08 GHS07 GHS09 Wng	H373 (**) H315 H410			
611-065-00-5	4-(4-nitrophenylazo)-2,6-di-sec-butyl-phenol	410-610-2	111850-24-9	STOT RE 2(*) Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H319 H315 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H373 (**) H319 H315 H317 H410			
611-066-00-0	tetrasodium 5-[4-chloro-6-(N-ethyl-anilino)-1,3,5-triazin-2-ylamino]-4-hydroxy-3-(1,5-disulfonatonaphthalen-2-ylazo)-naphthalene-2,7-disulfonate	411-540-5	130201-57-9	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-067-00-6	reaction mass of: bis(tris(2-(2-hydroxy(1-methyl)ethoxy)ethyl)ammonium) 7-anilino-4-hydroxy-3-(2-methoxy-5-methyl-4-(4-sulfonatophenylazo)phenylazo)naphthalene-2-sulfonate; bis(tris(2-(2-hydroxy(2-methyl)ethoxy)ethyl)ammonium) 7-anilino-4-hydroxy-3-(2-methoxy-5-methyl-4-(4-sulfonatophenylazo)phenylazo)naphthalene-2-sulfonate	406-910-8	—	Acute Tox. 4(*) Eye Dam. 1 Aquatic Chronic 3	H302 H318 H412	GHS05 GHS07 Dgr	H302 H318 H412			
611-068-00-1	tetrasodium 4-amino-3,6-bis(5-[4-chloro-6-(2-hydroxyethylamino)-1,3,5-triazin-2-ylamino]-2-sulfonatophenylazo)-5-hydroxy-naphthalene-2,7-disulfonate	400-690-7	85665-98-1	Aquatic Chronic 2	H411	GHS09	H411			
611-069-00-7	N,N-di-[poly(oxyethylene)-co-poly(oxypropylene)]-4-[(3,5-dicyano-4-methyl-2-thienyl)azo]-3-methylaniline	413-380-1	—	Aquatic Chronic 2	H411	GHS09	H411			
611-070-00-2	reaction mass of: disodium (6-(4-anisidino)-3-sulfonato-2-(3,5-dinitro-2-oxidophenylazo)-1-naphtholato)(1-(5-chloro-2-oxidophenylazo)-2-naphtholato)chromate(1-); trisodium bis(5-(4-anisidino)-3-sulfonato-2-(3,5-dinitro-2-oxidophenylazo)-1-naphtholato)chromate(1-)	405-665-4	—	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
611-071-00-8	tris(tetramethylammonium) 5-hydroxy-1-(4-sulphonatophenyl)-4-(4-sulphonatophenylazo)pyrazole-3-carboxylate	406-073-9	131013-81-5	Acute Tox. 3(*) Aquatic Chronic 3	H301 H412	GHS06 Dgr	H301 H412			
611-072-00-3	2,4-bis[2,2'-(2-(N,N-dimethylamino)ethyloxycarbonyl)phenylazo]-1,3-dihydroxybenzene, dihydrochloride	407-010-8	118208-02-9	Acute Tox. 4(*) Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			
611-073-00-9	dimethyl 3,3'-(N-(4-(4-bromo-2,6-dicyanophenylazo)-3-hydroxyphenyl)imino)dipropionate	407-310-9	122630-55-1	Aquatic Chronic 4	H413	—	H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-074-00-4	reaction mass of: sodium/potassium (3-(4-(5-(5-chloro-2,6-difluoropyrimidin-4-ylamino)-2-methoxy-3-sulfonatophenylazo)-2-oxidophenylazo)-2,5,7-trisulfonato-4-naphtholato)copper(II); sodium/potassium (3-(4-(5-(5-chloro-4,6-difluoropyrimidin-2-ylamino)-2-methoxy-3-sulfonatophenylazo)-2-oxidophenylazo)-2,5,7-trisulfonato-4-naphtholato)copper(II)	407-100-7	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-075-00-X	reaction mass of: tris(3,5,5-trimethylhexylammonium) 4-amino-3-(4-(4-(2-amino-4-hydroxyphenylazo)anilino)-3-sulfonatophenylazo)-5,6-dihydro-5-oxo-6-phenylhydrazononaphthalene-2,7-disulfonate; tris(3,5,5-trimethylhexylammonium) 4-amino-3-(4-(4-(4-amino-2-hydroxyphenylazo)anilino)-3-sulfonatophenylazo)-5,6-dihydro-5-oxo-6-phenylhydrazononaphthalene-2,7-disulfonate (2:1)	406-000-0	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
611-076-00-5	3-(2,6-dichloro-4-nitrophenylazo)-1-methyl-2-phenylindole	406-280-4	117584-16-4	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
611-077-00-0	dilithium disodium (5,5'-diamino-(μ-4,4'-dihydroxy-1:2-κ-2,04,04',-3,3'-[3,3'-dihydroxy-1:2-κ-2-O3,O3'-biphenyl-4,4'-ylenebisazo-1:2-(N3,N4-η:N3',N4'-η)]-dinaphthalene-2,7-disulfonato(8)))dicuprate(2-)	407-230-4	126637-70-5	Acute Tox. 4(*) Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			
611-078-00-6	(2,2'-(3,3'-dioxidobiphenyl-4,4'-diyldiazo)bis(6-(4-(3-(diethylamino)propylamino)-6-(3-(diethylammonio)propylamino)-1,3,5-triazin-2-ylamino)-3-sulfonato-1-naphtholato)) dicopper(II) acetate lactate	407-240-9	159604-94-1	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
611-079-00-1	disodium 7-[4-chloro-6-(N-ethyl-o-toluidino)-1,3,5-triazin-2-ylamino]-4-hydroxy-3-(4-methoxy-2-sulfonatophenylazo)-2-naphthalenesulfonate	410-390-8	147703-64-8	Eye Dam. 1	H318	GHS05 Dgr	H318			
611-080-00-7	sodium 3-(2-acetamido-4-(4-(2-hydroxybutoxy)phenylazo)phenylazo)benzenesulfonate	410-150-2	147703-65-9	Skin Sens. 1	H317	GHS07 Wng	H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-081-00-2	tetrasodium [7-(2,5-dihydroxy-KO2-7-sulfonato-6-[4-(2,5,6-trichloro-pyrimidin-4-ylamino)phenylazo]-(N1,N7-N)-1-naphthylazo)-8-hydroxy-KO8-naphthalene-1,3,5-trisulfonato(6-)]cuprate(II)	411-470-5	141048-13-7	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
611-082-00-8	reaction mass of: pentasodium bis(1-(3(or 5)-(4-anilino-3-sulfonatophenylazo)-4-hydroxy-2-oxidophenylazo)-6-nitro-4-sulfonato-2-naphtholato)ferrate(1-); pentasodium [(1-(3-(4-anilino-3-sulfonatophenylazo)-4-hydroxy-2-oxidophenylazo)-6-nitro-4-sulfonato-2-naphtholato)-(5-(4-anilino-3-sulfonatophenylazo)-4-hydroxy-2-oxidophenylazo)-6-nitro-4-sulfonato-2-naphtholato)ferrate(1-)]	407-570-3	—	Aquatic Chronic 2	H411	GHS09	H411			
611-083-00-3	reaction mass of: 2-[N-ethyl-4-[(5,6-dichlorobenzothiazol-2-yl)azo]-m-toluidino]ethyl acetate; 2-[N-ethyl-4-[(6,7-dichlorobenzothiazol-2-yl)azo]-m-toluidino]ethyl acetate (1:1)	411-560-4	—	STOT RE 1 Skin Sens. 1 Aquatic Chronic 2	H372 (**) H317 H411	GHS08 GHS07 GHS09 Dgr	H372 (**) H317 H411			
611-084-00-9	reaction mass of: N-(4-chlorophenyl)-4-(2,5-dichloro-4-(dimethylsulfamoyl)phenylazo)-3-hydroxy-2-naphthalenecarboxamide; N-(4-chlorophenyl)-4-(2,5-dichloro-4-(methylsulfamoyl)phenylazo)-3-hydroxy-2-naphthalenecarboxamide	412-550-2	—	Aquatic Chronic 4	H413	—	H413			
611-085-00-4	reaction mass of: 3-cyano-5-(2-cyano-4-nitro-phenylazo)-2-(2-hydroxy-ethylamino)-4-methyl-6-[3-(2-phenoxyethoxy)propylamino]pyridine; 3-cyano-5-(2-cyano-4-nitro-phenylazo)-6-(2-hydroxy-ethylamino)-4-methyl-2-[3-(2-phenoxyethoxy)propylamino]pyridine; 3-cyano-5-(2-cyano-4-nitro-phenylazo)-2-amino-4-methyl-6-[3-(3-hydroxypropoxy)propylamino]pyridine; 3-cyano-5-(2-cyano-4-nitro-phenylazo)-6-amino-4-methyl-2-[3-(3-methoxypropoxy)propylamino]pyridine	411-880-4	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-086-00-X	monolithium 5-[[2,4-dihydroxy-5-[(2-hydroxy-3,5-dinitrophenyl)azo]phenyl]azo]-2-naphthalenesulfonate], iron complex, monohydrate	411-360-7	—	Aquatic Chronic 3	H412	—	H412			
611-087-00-5	reaction mass of: 3-((5-cyano-1,6-dihydro-1,4-dimethyl-2-hydroxyl-6-oxo-3-pyridinyl)azo)-benzoyloxy-2-phenoxyethane; 3-((5-cyano-1,6-dihydro-1,4-dimethyl-2-hydroxy-6-oxo-3-pyridinyl)azo)-benzoyloxy-2-ethyloxy-2-(ethylphenol)	411-710-9	—	Aquatic Chronic 4	H413	—	H413			
611-088-00-0	reaction mass of: trilithium 4-amino-3-((4-((4-((2-amino-4-hydroxyphenyl)azo)phenyl)amino)-3-sulfo-phenyl)azo)-5-hydroxy-6-(phenylazo)naphthalene-2,7-disulfonate; trilithium 4-amino-3-((4-((4-((4-amino-2-hydroxyphenyl)azo)phenyl)amino)-3-sulfo-phenyl)azo)-5-hydroxy-6-(phenylazo)naphthalene-2,7-disulfonate	411-890-9	—	Acute Tox. 4(*) Eye Dam. 1 Aquatic Chronic 3	H302 H318 H412	GHS05 GHS07 Dgr	H302 H318 H412			
611-089-00-6	2-((4-(ethyl-(2-hydroxyethyl)amino)-2-methylphenyl)azo)-6-methoxy-3-methyl-benzothiazolium methylsulfate	411-100-2	136213-73-5	STOT RE 2(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H317 H400 H410	GHS08 GHS07 GHS09 Wng	H373 (**) H317 H410			
611-090-00-1	2,5-dibutoxy-4-(morpholin-4-yl)benzene-diazonium 4-methylbenzenesulfonate	413-290-2	93672-52-7	Self-react. C Acute Tox. 4(*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H242 H302 H318 H317 H412	GHS02 GHS05 GHS07 Dgr	H242 H302 H318 H317 H412			T
611-091-00-7	sodium (1,0-1,95)/lithium (0,05-1) 5-((5-((5-chloro-6-fluoro-pyrimidin-4-yl)amino)-2-sulfonatophenyl)azo)-1,2-dihydro-6-hydroxy-1,4-dimethyl-2-oxo-3-pyridinemethylsulfonate	413-470-0	134595-59-8	Skin Sens. 1	H317	GHS07 Wng	H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-092-00-2	<i>tert</i> -(dodecyl/tetradecyl)-ammonium bis(3-(4-((5-(1,1-dimethyl-propyl)-2-hydroxy-3-nitrophenyl)azo)-3-methyl-5-hydroxy-(1H)pyrazol-1-yl)benzenesulfonamido)chromate	413-210-6	—	Aquatic Chronic 2	H411	GHS09	H411			
611-093-00-8	sodium 2-(4-(4-fluoro-6-(2-sulfo-ethylamino)-[1,3,5]triazin-2-ylamino)-2-ureidophenylazo)-5-(4-sulfophenylazo)benzene-1-sulfonate	410-770-3	146177-84-6	Skin Sens. 1	H317	GHS07 Wng	H317			
611-094-00-3	reaction mass of: 2-[2-acetylamino-4-[N,N-bis[2-ethoxy-carbonyloxy]ethyl]amino]phenylazo]-5,6-dichloro-1,3-benzothiazole; 2-[2-acetylamino-4-[N,N-bis[2-ethoxy-carbonyloxy]ethyl]amino]phenylazo]-6,7-dichloro-1,3-benzotriazole (1:1)	411-600-0	143145-93-1	Aquatic Chronic 4	H413	—	H413			
611-095-00-9	hexasodium 1,1'-[(1-amino-8-hydroxy-3,6-disulfonate-2,7-naphthalenediyl)bis(azo(4-sulfonate-1,3-phenyl)imino[6-[(4-chloro-3-sulfonatophenyl)amino]-1,3,5-triazin-2,4-diyl]]]bis[3-carboxypyridinium] dihydroxide	412-240-7	89797-03-5	Aquatic Chronic 2	H411	GHS09	H411			
611-096-00-4	methyl N-[3-acetylamino)-4-(2-cyano-4-nitrophenylazo)phenyl]-N-[(1-methoxy)acetyl]glycinate	413-040-2	149850-30-6	Skin Sens. 1	H317	GHS07 Wng	H317			
611-097-00-X	reaction mass of iron complexes of: 1,3-dihydroxy-4-[(5-phenylaminosulfonyl)-2-hydroxyphenylazo]-n-(5-amino-sulfonyl-2-hydroxyphenylazo)benzene and: 1,3-dihydroxy-4-[(5-phenylaminosulfonyl)-2-hydroxyphenylazo]-n-[4-(4-nitro-2-sulfophenylamino)phenylazo]benzene (n=2,5,6)	414-150-3	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
611-098-00-5	tetrakis(tetramethylammonium)3,3'-(6-(2-hydroxyethylamino)1,3,5-triazine-2,4-diyl-bisimino(2-methyl-4,1-phenyleneazo))bis-naphthalene-1,5-disulfonate	405-950-3	131013-83-7	Acute Tox. 3(*) Aquatic Chronic 3	H301 H412	GHS06 Dgr	H301 H412			
611-099-00-0	(methylenebis(4,1-phenylenazo(1-(3-(dimethylamino)propyl)-1,2-dihydro-6-hydroxy-4-methyl-2-oxopyridine-5,3-diyl)))1,1'-dipyridinium dichloride dihydrochloride	401-500-5	118658-99-4	Carc. 1B Aquatic Chronic 2	H350 H411	GHS08 GHS09 Dgr	H350 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-100-00-4	potassium sodium 3,3'-(3(or4)-methyl-1,2-phenylenebis(imino(6-chloro)-1,3,5-triazine-4,2-diylimino(2-acetamido-5-methoxy)-4,1-phenylenazo)dinaphthalene-1,5-disulfonate	403-810-6	140876-13-7	Eye Dam. 1	H318	GHS05 Dgr	H318			
611-101-00-X	2'-(4-chloro-3-cyano-5-formyl-2-thienyl)azo-5'-diethylaminoacetanilide	405-200-5	104366-25-8	Skin Sens. 1	H317	GHS07 Wng	H317			
611-103-00-0	trisodium (1-(3-carboxylato-2-oxido-5-sulfonatophenylazo)-5-hydroxy-7-sulfonatophthalen-2-amido)nickel(II)	407-110-1	—	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			
611-104-00-6	reaction mass of: trisodium (2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)(2(or 4 or 6)-(3,5-dinitro-2-oxidophenylazo)-5-hydroxy-4(or 2 or 6)-(4-(4-nitro-2-sulfonatoanilino)phenylazo)phenolato)ferrate(1-); trisodium bis(2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)ferrate(1-); trisodium (2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)(2(or 4 or 6)-(3,5-dinitro-2-oxidophenylazo)-5-hydroxy-4(or 2 or 6)-(4-nitro-2-sulfonatophenylazo)phenolato)ferrate(1-); trisodium (2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)(2(or 4 or 6)-(3,5-dinitro-2-oxidophenylazo)-5-hydroxy-4(or 2 or 6)-(3-sulfonatophenylazo)phenolato)ferrate(1-); disodium 3,3'-(2,4-dihydroxy-1,3(or 1,5 or 3,5)-phenylenediazo)dibenzenesulfonate	406-870-1	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
611-105-00-1	sodium 4-(4-chloro-6-(N-ethylanilino)-1,3,5-triazin-2-ylamino)-2-(1-(2-chlorophenyl)-5-hydroxy-3-methyl-1H-pyrazol-4-ylazo)benzenesulfonate	407-800-2	136213-75-7	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-106-00-7	hexasodium 4,4'-dihydroxy-3,3'-bis[2-sulfonato-4-(4-sulfonatophenylazo)phenylazo]-7,7'[p-phenylenebis[imino(6-chloro-1,3,5-triazine-4,2-diyl)imino]]dinaphthalene-2-sulfonate	410-180-6	157627-99-1	Eye Dam. 1	H318	GHS05 Dgr	H318			
611-107-00-2	potassium sodium 4-(4-chloro-6-(3,6-disulfonato-7-(5,8-disulfonato-naphthalen-2-ylazo)-8-hydroxy-naphthalen-1-ylamino)-1,3,5-triazin-2-ylamino)-5-hydroxy-6-(4-(2-sulfatoethanesulfonyl)-phenylazo)-naphthalene-1,7-disulfonate	412-490-7	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-108-00-8	disodium 5-(((4-(4-chloro-3-sulfonatophenyl)azo)-1-naphthyl)azo)-8-(phenylamino)-1-naphthalenesulfonate	413-600-6	6527-62-4	Aquatic Chronic 3	H412	—	H412			
611-109-00-3	reaction products of: copper(II) sulfate and tetrasodium 2,4-bis[6-(2-methoxy-5-sulfonatophenylazo)-5-hydroxy-7-sulfonato-2-naphthylamino]-6-(2-hydroxyethylamino)-1,3,5-triazine (2:1)	407-710-3	—	Aquatic Chronic 2	H411	GHS09	H411			
611-110-00-9	tetra-sodium/lithium 4,4'-bis-(8-amino-3,6-disulfonato-1-naphthol-2-ylazo)-3-methylazobenzene	408-210-8	124605-82-9	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
611-111-00-4	disodium 2-[[4-(2-chloroethylsulfonyl)phenyl]-[(2-hydroxy-5-sulfo-3-[3-[2-(2-sulfooxy)ethylsulfonyl)ethylazo]-4-sulfobenzoato(3-)cuprate(1-)]	414-230-8	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-112-00-X	tetrasodium 4-hydroxy-5-[4-[3-(2-sulfatoethanesulfonyl)phenylamino]-6-morpholin-4-yl-1,3,5-triazin-2-ylamino]-3-(1-sulfonatophthalen-2-ylazo)naphthalene-2,7-disulfonate	413-070-6	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-113-00-5	lithium sodium (2-(((5-((2,5-dichlorophenyl)azo)-2-hydroxyphenyl)methylene)amino)benzoato(2-)))(2-(((4,5-dihydro-3-methyl-5-oxo-1-phenyl-1H-pyrazol-4-yl)azo)-5-sulfo-benzoato(3-)) chromate(2-)	414-280-0	149626-00-6	Aquatic Chronic 2	H411	GHS09	H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-114-00-0	lithium sodium (4-((5-chloro-2-hydroxy-phenyl)azo)-2,4-dihydro-5-methyl-3H-pyrazol-3-onato(2-))(3-((4,5-dihydro-3-methyl-1-(4-methylphenyl)-5-oxo-1H-pyrazol-4-yl)azo)-4-hydroxy-5-nitrobenzenesulfonato(3-)) chromate(2-)	414-250-7	149564-66-9	Acute Tox. 4(*) Eye Dam. 1 Aquatic Chronic 3	H302 H318 H412	GHS05 GHS07 Dgr	H302 H318 H412			
611-115-00-6	trilithium bis(4-((4-(diethylamino)-2-hydroxyphenyl)azo)-3-hydroxy-1-naphthalenesulfonato(3-))chromate(3-)	414-290-5	149564-65-8	Acute Tox. 4(*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
611-116-00-1	reaction mass of: trisodium 5-{4-chloro-6-[2-(2,6-dichloro-5-cyanopyrimidin-4-ylamino)-propylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatophthalene-2-ylazo)-naphthalene-2,7-disulfonate; trisodium 5-{4-chloro-6-[2-(2,6-dichloro-5-cyanopyrimidin-4-ylamino)-1-methyl-ethylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatophthalene-2-ylazo)-naphthalene-2,7-disulfonate; trisodium 5-{4-chloro-6-[2-(4,6-dichloro-5-cyanopyrimidin-2-ylamino)-propylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatophthalene-2-ylazo)-naphthalene-2,7-disulfonate; trisodium 5-{4-chloro-6-[2-(4,6-dichloro-5-cyanopyrimidin-2-ylamino)-1-methyl-ethylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatophthalene-2-ylazo)-naphthalene-2,7-disulfonate	414-620-8	—	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
611-117-00-7	1,3-bis{6-fluoro-4-[1,5-disulfo-4-(3-aminocarbonyl-1-ethyl-6-hydroxy-4-methyl-pyrid-2-on-5-ylazo)-phenyl-2-ylamino]-1,3,5-triazin-2-ylamino}propane lithium-, sodium salt	415-100-3	149850-29-3	Skin Sens. 1	H317	GHS07 Wng	H317			
611-118-00-2	sodium 1,2-bis[4-[4-(4-(4-sulfophenylazo)-2-sulfophenylazo)-2-ureido-phenyl-amino]-6-fluoro-1,3,5-triazin-2-ylamino]-propane, sodium salt	413-990-8		Skin Sens. 1	H317	GHS07 Wng	H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-119-00-8	tetrasodium 4-[4-chloro-6-(4-methyl-2-sulfophenylamino)-1,3,5-triazin-2-ylamino]-6-(4,5-dimethyl-2-sulfophenylazo)-5-hydroxy-naphthalene-2,7-disulfonate	415-400-4	148878-22-2	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
611-120-00-3	5-{4-[5-amino-2-[4-(2-sulfoxyethylsulfonyl)phenylazo]-4-sulfo-phenylamino]-6-chloro-1,3,5-triazin-2-ylamino]-4-hydroxy-3-(1-sulfo-naphthalen-2-ylazo)-naphthalene-2,7-disulfonicacid sodium salt	418-340-7	157707-94-3	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
611-121-00-9	main component 6 (isomer): asym. 1:2 Cr (III)-complex of: A: 3-hydroxy-4-(2-hydroxy-naphthalene-1-ylazo)naphthalene-1-sulfonic acid, Na-salt and B: 1-[2-hydroxy-5-(4-methoxy-phenylazo)phenylazo]naphthalene-2-ol; main component 8 (isomer): asym. 1:2 Cr-complex of: A: 3-hydroxy-4-(2-hydroxy-naphthalene-1-ylazo)-naphthalene-1-sulfonic acid, Na-salt and B: 1-[2-hydroxy-5-(4-methoxy-phenylazo)-phenylazo]-naphthalene-2-ol	417-280-9	30785-74-1	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
611-122-00-4	hexasodium (di[N-(3-(4-[5-(5-amino-3-methyl-1-phenylpyrazol-4-yl-azo)-2,4-disulfo-anilino]-6-chloro-1,3,5-triazin-2-ylamino)phenyl)-sulfamoyl](di-sulfo)-phthalocyaninato)nickel	417-250-5	151436-99-6	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
611-123-00-X	3-(2,4-bis(4-((5-(4,6-bis(2-aminopropylamino)-1,3,5-triazin-2-ylamino)-4-hydroxy-2,7-disulfonaphthalen-3-yl)azo)phenylamino)-1,3,5-triazin-6-ylamino)propyldiethylammonium lactate	424-310-4	178452-66-9	Eye Dam. 1	H318	GHS05 Dgr	H318			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-124-00-5	reaction mass of: pentasodium 5-amino-3-(5-{4-chloro-6-[4-(2-sulfoxyethoxysulfonato)phenylamino]-1,3,5-triazin-2-ylamino}-2-sulfonatophenylazo)-6-[5-(2,3-dibromopropionylamino)-2-sulfonatophenylazo]-4-hydroxynaphthalene-2,7-disulfonate; pentasodium 5-amino-6-[5-(2-bromoacryloylamino)-2-sulfonatophenylazo]-3-(5-{4-chloro-6-[4-(2-sulfoxyethoxysulfonato)phenylamino]-1,3,5-triazin-2-ylamino}-2-sulfonatophenylazo)-4-hydroxynaphthalene-2,7-disulfonate; tetrasodium 5-amino-3-[5-{4-chloro-6-[4-(vinylsulfonyl)phenylamino]-1,3,5-triazin-2-ylamino}-2-sulfonatophenylazo]-6-[5-(2,3-dibromopropionylamino)-2-sulfonatophenylazo]-4-hydroxynaphthalene-2,7-disulfonate	424-320-9		Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
611-125-00-0	reaction mass of: Disodium 6-[3-carboxy-4,5-dihydro-5-oxo-4-sulfonatophenyl]pyrazolin-4-yl-azo]-3-[2-oxido-4-(ethensulfonyl)-5-methoxyphenylazo]-4-oxidonaphthalene-2-sulfonate copper (II) complex; Disodium 6-[3-carboxy-4,5-dihydro-5-oxo-4-sulfonatophenyl]pyrazolin-4-yl-azo]-3-[2-oxido-4-(2-hydroxyethylsulfonyl)-5-methoxyphenylazo]-4-oxidonaphthalene-2-sulfonate copper (II) complex	423-940-7	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
611-126-00-6	2,6-bis-(2-(4-(4-amino-phenylamino)-phenylazo)-1,3-dimethyl-3 <i>H</i> -imidazolium)-4-dimethylamino-1,3,5-triazine, dichloride	424-120-1	174514-06-8	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
611-127-00-1	pentasodium 4-amino-6-(5-(4-(2-ethyl-phenylamino)-6-(2-sulfatoethanesulfonyl)-1,3,5-triazin-2-ylamino)-2-sulfonatophenylazo)-5-hydroxy-3-(4-(2-sulfatoethanesulfonyl)phenylazo)naphthalene-2,7-disulfonate	423-790-2	—	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			G

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-128-00-7	N,N'-bis{6-chloro-4-[6-(4-vinylsulfonylphenylazo)-2,7-disulfonicacid-5-hydroxynaphth-4-ylamino]-1,3,5-triazin-2-yl}-N-(2-hydroxyethyl)ethane-1,2-diamine, sodium salt	419-500-9	171599-85-2	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
611-129-00-2	reaction mass of: 5-[(4-[(7-amino-1-hydroxy-3-sulfo-2-naphthyl)azo]-2,5-die-thoxyphenyl)azo]-2-[(3-phosphonophenyl)azo]benzoic acid; 5-[(4-[(7-amino-1-hydroxy-3-sulfo-2-naphthyl)azo]-2,5-diethoxyphenyl)azo]-3-[(3-phosphonophenyl)azo]benzoic acid	418-230-9	163879-69-4	Expl. 1.3 (****) Repr. 2 STOT RE 2(*) Skin Sens. 1 Aquatic Chronic 2	H203 H361f (***) H373 (**) H317 H411	GHS01 GHS08 GHS07 GHS09 Dgr	H203 H361f (***) H373 (**) H317 H411			
611-130-00-8	tetra-ammonium 2-[6-[7-(2-carboxylato-phenylazo)-8-hydroxy-3,6-disulfonato-1-naphthylamino]-4-hydroxy-1,3,5-triazin-2-ylamino]benzoate	418-520-5	183130-96-3	Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H400 H410	GHS07 GHS09 Wng	H319 H410			
611-131-00-3	2-[2-hydroxy-3-(2-chlorophenyl)carbamoyl-1-naphthylazo]-7-[2-hydroxy-3-(3-methylphenyl)carbamoyl-1-naphthylazo]fluoren-9-one	420-580-2	151798-26-4	Repr. 1B Aquatic Chronic 4	H360D (***) H413	GHS08 Dgr	H360D (***) H413			
611-132-00-9	pentasodium bis{7-[4-(1-butyl-5-cyano-1,2-dihydro-2-hydroxy-4-methyl-6-oxo-3-pyridylazo)phenylsulfonylamino]-5'-nitro-3,3'-disulfonatophthalene-2-azobenzene-1,2'-diolato} chromate (III)	419-210-2	178452-71-6	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
611-133-00-4	Product by process iron complex of azo dyestuffs obtained by coupling a mixture of diazotized 2-amino-1-hydroxybenzene-4-sulfanilide and 2-amino-1-hydroxybenzene-4-sulfonamide with resorcin, the obtained mixture being subsequently submitted to a second coupling reaction with a mixture of diazotized 3-aminobenzene-1-sulfonic acid (metanilic acid) and 4'-amino-4-nitro-1,1'-diphenylamine-2-sulfonic acid and metallization with ferric chloride, sodium salt	419-260-5	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
611-134-00-X	trisodium 2-{α[2-hydroxy-3-[4-chloro-6-[4-(2,3-dibromopropionylamino)-2-sulfonatophenylamino]-1,3,5-triazin-2-ylamino]-5-sulfonatophenylazo]-benzylidenehydrazino}-4-sulfonatobenzoate, copper complex	423-770-3	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
611-135-00-5	reaction product of: 2-[[4-amino-2-ureidophenylazo]-5-[(2-(sulfoxy)ethyl)sulfonyl]] benzenesulfonic acid with 2,4,6-trifluoropyrimidine and partial hydrolysis to the corresponding vinylsulfonyl derivative, mixed potassium/sodium salt	424-250-9	—	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
611-136-00-0	2-{4-(2-ammoniopropylamino)-6-[4-hydroxy-3-(5-methyl-2-methoxy-4-sulfamoylphenylazo)-2-sulfonatophenyl]-7-ylamino}-1,3,5-triazin-2-ylamino}-2-amino-propyl formate	424-260-3	—	Repr. 2 Eye Dam. 1 Aquatic Chronic 2	H361f (***) H318 H411	GHS05 GHS08 GHS09 Dgr	H361f (***) H318 H411			
611-137-00-6	6-tert-butyl-7-chloro-3-tridecyl-7,7a-dihydro-1H-pyrazolo[5,1-c]-1,2,4-triazole	419-870-1	159038-16-1	Aquatic Chronic 4	H413	—	H413			
611-138-00-1	2-(4-aminophenyl)-6-tert-butyl-1H-pyrazolo[1,5-b][1,2,4]triazole	415-910-7	152828-25-6	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
611-140-00-2	azafenidin (ISO); 2-(2,4-dichloro-5-prop-2-ynyloxyphenyl)-5,6,7,8-tetrahydro-1,2,4-triazolo[4,3-a]pyridin-3(2H)-one	—	68049-83-2	Repr. 1B STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H360Df H373 (**) H400 H410	GHS08 GHS09 Dgr	H360Df H373 (**) H410		M=1000	
612-001-00-9	mono-methylamine; [1] di-methylamine; [2] tri-methylamine [3]	200-820-0 [1] 204-697-4 [2] 200-875-0 [3]	74-89-5 [1] 124-40-3 [2] 75-50-3 [3]	Flam. Gas 1 Press. Gas Acute Tox. 4(*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1	H220 H332 H335 H315 H318	GHS02 GHS04 GHS05 GHS07 Dgr	H220 H332 H335 H315 H318		(*) Skin Irrit. 2; H315: C ≥ 5 % Eye Dam. 1; H318: C ≥ 5 % Eye Irrit. 2; H319: 0,5 % ≤ C < 5 % STOT SE 3; H335: C ≥ 5 %	U 5

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-001-01-6	mono-methylamine ...%; [1] di-methylamine ...%; [2] tri-methylamine ...% [3]	200-820-0 [1] 204-697-4 [2] 200-875-0 [3]	74-89-5 [1] 124-40-3 [2] 75-50-3 [3]	Flam. Liq. 1 Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B	H224 H332 H302 H314	GHS02 GHS05 GHS07 Dgr	H224 H332 H302 H314		(*) STOT SE 3; H335: C ≥ 5 %	B
612-002-00-4	ethylamine	200-834-7	75-04-7	Flam. Gas 1 Press. Gas Eye Irrit. 2 STOT SE 3	H220 H319 H335	GHS02 GHS04 GHS07 Dgr	H220 H319 H335			U
612-003-00-X	diethylamine	203-716-3	109-89-7	Flam. Liq. 2 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1A	H225 H332 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H332 H312 H302 H314		STOT SE 3; H335: C ≥ 1 %	
612-004-00-5	triethylamine	204-469-4	121-44-8	Flam. Liq. 2 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1A	H225 H332 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H332 H312 H302 H314		STOT SE 3; H335: C ≥ 1 %	
612-005-00-0	butylamine	203-699-2	109-73-9	Flam. Liq. 2 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1A	H225 H332 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H332 H312 H302 H314		STOT SE 3; H335: C ≥ 1 %	
612-006-00-6	ethylenediamine; 1,2-diaminoethane	203-468-6	107-15-3	Flam. Liq. 3 Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1	H226 H312 H302 H314 H334 H317	GHS02 GHS08 GHS05 GHS07 Dgr	H226 H312 H302 H314 H334 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-007-00-1	2-aminopropane; isopropylamine	200-860-9	75-31-0	Flam. Liq. 1 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H224 H319 H335 H315	GHS02 GHS07 Dgr	H224 H319 H335 H315			
612-008-00-7	aniline	200-539-3	62-53-3	Carc. 2 Muta. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 1 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H351 H341 H331 H311 H301 H372 (**) H318 H317 H317 H400	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H341 H331 H311 H301 H372 (**) H318 H317 H400		(*) STOT RE 1; H372: C ≥ 1 % STOT RE 2; H373: 0,2 % ≤ C < 1 %	
612-009-00-2	salts of aniline	—	—	Carc. 2 Muta. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 1 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H351 H341 H331 H311 H301 H372 (**) H318 H317 H317 H400	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H341 H331 H311 H301 H372 (**) H318 H317 H400		(*) STOT RE 1; H372: C ≥ 1 % STOT RE 2; H373: 0,2 % ≤ C < 1 %	A
612-010-00-8	chloroanilines (with exception of those specified elsewhere in this Annex)	—	—	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 (**) H410			C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-011-00-3	4-nitrosoaniline	211-535-6	659-49-4	Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*)	H332 H312 H302	GHS07 Wng	H332 H312 H302			
612-012-00-9	<i>o</i> -nitroaniline; [1] <i>m</i> -nitroaniline; [2] <i>p</i> -nitroaniline [3]	201-855-4 [1] 202-729-1 [2] 202-810-1 [3]	88-74-4 [1] 99-09-2 [2] 100-01-6 [3]	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Chronic 3	H331 H311 H301 H373 (**) H412	GHS06 GHS08 Dgr	H331 H311 H301 H373 (**) H412			C
612-013-00-4	3-aminobenzene sulphonic acid; metanilic acid	204-473-6	121-47-1	Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*)	H332 H312 H302	GHS07 Wng	H332 H312 H302			
612-014-00-X	sulphanilic acid; 4-aminobenzenesulphonic acid	204-482-5	121-57-3	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			
612-015-00-5	<i>N</i> -methylaniline	202-870-9	100-61-8	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 (**) H410			
612-016-00-0	<i>N,N</i> -dimethylaniline	204-493-5	121-69-7	Carc. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Aquatic Chronic 2	H351 H331 H311 H301 H411	GHS06 GHS08 GHS09 Dgr	H351 H331 H311 H301 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-017-00-6	N-methyl-N,2,4,6-tetranitroaniline; tetryl	207-531-9	479-45-8	Expl. 1.1 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*)	H201 H331 H311 H301 H373 (**)	GHS01 GHS06 GHS08 Dgr	H201 H331 H311 H301 H373 (**)			
612-018-00-1	bis(2,4,6-trinitrophenyl)amine; hexyl	205-037-8	131-73-7	Expl. 1.1 Acute Tox. 2(*) Acute Tox. 1 Acute Tox. 2(*) STOT RE 2(*) Aquatic Chronic 2	H201 H330 H310 H300 H373 (**) H411	GHS01 GHS06 GHS08 GHS09 Dgr	H201 H330 H310 H300 H373 (**) H411			
612-019-00-7	dipicrylamine, ammonium salt	220-639-0	2844-92-0	Expl. 1.1 Acute Tox. 2(*) Acute Tox. 1 Acute Tox. 2(*) STOT RE 2(*) Aquatic Chronic 2	H201 H330 H310 H300 H373 (**) H411	GHS01 GHS06 GHS08 GHS09 Dgr	H201 H330 H310 H300 H373 (**) H411	EUH001		
612-020-00-2	1-naphthylamine	205-138-7	134-32-7	Acute Tox. 4(*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
612-022-00-3	2-naphthylamine	202-080-4	91-59-8	Carc. 1A Acute Tox. 4(*) Aquatic Chronic 2	H350 H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H302 H411		Carc. 1A; H350: C ≥ 0,01 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-023-00-9	phenylhydrazine; [1] phenylhydrazinium chloride; [2] phenylhydrazine hydrochloride; [3] phenylhydrazinium sulphate (2:1) [4]	202-873-5 [1] 200-444-7 [2] 248-259-0 [3] 257-622-2 [4]	100-63-0 [1] 59-88-1 [2] 27140-08-5 [3] 52033-74-6 [4]	Carc. 1B Muta. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 1 Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1	H350 H341 H331 H311 H301 H372 (**) H319 H315 H317 H400	GHS06 GHS08 GHS09 Dgr	H350 H341 H331 H311 H301 H372 (**) H319 H315 H317 H400			
612-024-00-4	m-toluidine; 3-aminotoluene	203-583-1	108-44-1	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Acute 1	H331 H311 H301 H373 (**) H400	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 (**) H400			
612-025-00-X	nitrotoluidines, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Chronic 2	H331 H311 H301 H373 (**) H411	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 (**) H411			C
612-026-00-5	diphenylamine	204-539-4	122-39-4	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H373 (**) H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 (**) H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-027-00-0	xylidines with the exception of those specified elsewhere in this Annex; dimethyl anilines with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Chronic 2	H331 H311 H301 H373 (**) H411	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 (**) H411			C
612-028-00-6	<i>p</i> -phenylenediamine	203-404-7	106-50-3	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H319 H317 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H319 H317 H410			
612-029-00-1	benzene-1,4-diamine dihydrochloride; <i>p</i> -phenylenediamine dihydrochloride	210-834-9	624-18-0	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H319 H317 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H319 H317 H410			
612-030-00-7	2-methyl- <i>p</i> -phenylenediamine sulphate [1]	210-431-8 [1] 228-871-4 [2]	615-50-9 [1] 6369-59-1 [2]	Acute Tox. 3(*) Acute Tox. 4(*) Acute Tox. 4(*) Skin Sens. 1 Aquatic Chronic 2	H301 H332 H312 H317 H411	GHS06 GHS09 Dgr	H301 H332 H312 H317 H411			
612-031-00-2	<i>N,N</i> -dimethylbenzene-1,3-diamine; [1] 4-amino- <i>N,N</i> -dimethylaniline; 3-amino- <i>N,N'</i> -dimethylaniline [2]	220-623-3 [1] 202-807-5 [2]	2836-04-6 [1] 99-98-9 [2]	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*)	H331 H311 H301	GHS06 Dgr	H331 H311 H301			C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-032-00-8	<i>N,N,N',N'</i> -tetramethyl- <i>p</i> -phenylenediamine	202-831-6	100-22-1	Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*)	H332 H312 H302	GHS07 Wng	H332 H312 H302			
612-033-00-3	2-aminophenol	202-431-1	95-55-6	Muta. 2 Acute Tox. 4(*) Acute Tox. 4(*)	H341 H332 H302	GHS08 GHS07 Wng	H341 H332 H302			
612-034-00-9	2-amino-4,6-dinitrophenol; picramic acid (< 20 % water)	202-544-6	96-91-3	Expl. 1.1 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Chronic 3	H201 H332 H312 H302 H412	GHS01 GHS07 Wng	H201 H332 H312 H302 H412			T
612-034-01-6	2-amino-4,6-dinitrophenol; picramic acid; [≥ 20 % water]	202-544-6	96-91-3	Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Chronic 3	H332 H312 H302 H412	GHS07 Wng	H332 H312 H302 H412			G
612-035-00-4	2-methoxyaniline; <i>o</i> -anisidine	201-963-1	90-04-0	Carc. 1B Muta. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*)	H350 H341 H331 H311 H301	GHS06 GHS08 Dgr	H350 H341 H331 H311 H301			
612-036-00-X	3,3'-dimethoxybenzidine; <i>o</i> -dianisidine	204-355-4	119-90-4	Carc. 1B Acute Tox. 4(*)	H350 H302	GHS08 GHS07 Dgr	H350 H302			
612-037-00-5	salts of 3,3'-dimethoxybenzidine; salts of <i>o</i> -dianisidine	—	—	Carc. 1B Acute Tox. 4(*)	H350 H302	GHS08 GHS07 Dgr	H350 H302			A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-038-00-0	2-nitro- <i>p</i> -anisidine; 4-methoxy-2-nitroaniline	202-547-2	96-96-8	Acute Tox. 2(*) Acute Tox. 1 Acute Tox. 2(*) STOT RE 2(*) Aquatic Chronic 3	H330 H310 H300 H373 (**) H412	GHS06 GHS08 Dgr	H330 H310 H300 H373 (**) H412			
612-039-00-6	2-ethoxyaniline; <i>o</i> -phenetidine	202-356-4	94-70-2	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*)	H331 H311 H301 H373 (**)	GHS06 GHS08 Dgr	H331 H311 H301 H373 (**)			
612-040-00-1	2,4-dinitroaniline	202-553-5	97-02-9	Acute Tox. 2(*) Acute Tox. 1 Acute Tox. 2(*) STOT RE 2(*) Aquatic Chronic 2	H330 H310 H300 H373 (**) H411	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 (**) H411			
612-041-00-7	4,4'-bi- <i>o</i> -toluidine	204-358-0	119-93-7	Carc. 1B Acute Tox. 4(*) Aquatic Chronic 2	H350 H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H302 H411			
612-042-00-2	benzidine; 1,1'-biphenyl-4,4'-diamine; 4,4'-diaminobiphenyl; biphenyl-4,4'-ylenediamine	202-199-1	92-87-5	Carc. 1A Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H410		Carc. 1A; H350: C ≥ 0,01 %	
612-043-00-8	<i>N,N'</i> -dimethylbenzidine	—	2810-74-4	Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*)	H332 H312 H302	GHS07 Wng	H332 H312 H302			
612-044-00-3	<i>N,N'</i> -diacetylbenzidine	210-338-2	613-35-4	Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*)	H332 H312 H302	GHS07 Wng	H332 H312 H302			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-046-00-4	allylamine	203-463-9	107-11-9	Flam. Liq. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Aquatic Chronic 2	H225 H331 H311 H301 H411	GHS02 GHS06 GHS09 Dgr	H225 H331 H311 H301 H411			
612-047-00-X	benzylamine	202-854-1	100-46-9	Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314			
612-048-00-5	dipropylamine	205-565-9	142-84-7	Flam. Liq. 2 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1A	H225 H332 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H332 H312 H302 H314		STOT SE 3; H335: C ≥ 1 %	
612-049-00-0	di- <i>n</i> -butylamine; [1] di- <i>sec</i> -butylamine [2]	203-921-8 [1] 210-937-9 [2]	111-92-2 [1] 626-23-3 [2]	Flam. Liq. 3 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*)	H226 H332 H312 H302	GHS02 GHS07 Wng	H226 H332 H312 H302			
612-050-00-6	cyclohexylamine	203-629-0	108-91-8	Flam. Liq. 3 Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B	H226 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H226 H312 H302 H314			
612-051-00-1	4,4'-diaminodiphenylmethane; 4,4'-methylenedianiline	202-974-4	101-77-9	Carc. 1B Muta. 2 STOT SE 1 STOT RE 2(*) Skin Sens. 1 Aquatic Chronic 2	H350 H341 H370 (**) H373 (**) H317 H411	GHS08 GHS07 GHS09 Dgr	H350 H341 H370 (**) H373 (**) H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-052-00-7	(S)-sec-butylamine; (S)-2-aminobutane; [1] (R)-sec-butylamine; (R)-2-aminobutane; [2] sec-butylamine; 2-aminobutane [3]	208-164-7 [1] 236-232-6 [2] 237-732-7 [3]	513-49-5 [1] 13250-12-9 [2] 13952-84-6 [3]	Flam. Liq. 2 Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1A Aquatic Acute 1	H225 H332 H302 H314 H400	GHS02 GHS05 GHS07 GHS09 Dgr	H225 H332 H302 H314 H400			C
612-053-00-2	N-ethylaniline	203-135-5	103-69-5	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*)	H331 H311 H301 H373 (**)	GHS06 GHS08 Dgr	H331 H311 H301 H373 (**)			
612-054-00-8	N,N-diethylaniline	202-088-8	91-66-7	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Chronic 2	H331 H311 H301 H373 (**) H411	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 (**) H411		(*)	
612-055-00-3	N-methyl-o-toluidine; [1] N-methyl-m-toluidine; [2] N-methyl-p-toluidine [3]	210-260-9 [1] 211-795-0 [2] 210-769-6 [3]	611-21-2 [1] 696-44-6 [2] 623-08-5 [3]	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Chronic 3	H331 H311 H301 H373 (**) H412	GHS06 GHS08 Dgr	H331 H311 H301 H373 (**) H412			C
612-056-00-9	N,N-dimethyl-p-toluidine; [1] N,N-dimethyl-m-toluidine; [2] N,N-dimethyl-o-toluidine [3]	202-805-4 [1] 204-495-6 [2] 210-199-8 [3]	99-97-8 [1] 121-72-2 [2] 609-72-3 [3]	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) STOT RE 2(*) Aquatic Chronic 3	H331 H311 H301 H373 (**) H412	GHS06 GHS08 Dgr	H331 H311 H301 H373 (**) H412		(*)	C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-057-00-4	piperazine	203-808-3	110-85-0	Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 3	H314 H334 H317 H412	GHS08 GHS05 Dgr	H314 H334 H317 H412			
612-058-00-X	2,2'-iminodiethylamine; diethylenetriamine	203-865-4	111-40-0	Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1	H312 H302 H314 H317	GHS05 GHS07 Dgr	H312 H302 H314 H317			
612-059-00-5	3,6-diazaoctanethylenediamin; triethylenetetramine	203-950-6	112-24-3	Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 3	H312 H314 H317 H412	GHS05 GHS07 Dgr	H312 H314 H317 H412			
612-060-00-0	3,6,9-triazaundecamethylenediamine; tetraethylenepentamine	203-986-2	112-57-2	Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H312 H302 H314 H317 H411	GHS05 GHS07 GHS09 Dgr	H312 H302 H314 H317 H411			
612-061-00-6	3-aminopropyldimethylamine; N,N-dimethyl-1,3-diaminopropane	203-680-9	109-55-7	Flam. Liq. 3 Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1	H226 H302 H314 H317	GHS02 GHS05 GHS07 Dgr	H226 H302 H314 H317			
612-062-00-1	3-aminopropyldiethylamine; N,N-diethyl-1,3-diaminopropane	203-236-4	104-78-9	Flam. Liq. 3 Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1	H226 H312 H302 H314 H317	GHS02 GHS05 GHS07 Dgr	H226 H312 H302 H314 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-063-00-7	3,3'-iminodi(propylamine); dipropylenetriamine	200-261-2	56-18-8	Acute Tox. 2(*) Acute Tox. 3(*) Acute Tox. 4(*) Skin Corr. 1A Skin Sens. 1	H330 H311 H302 H314 H317	GHS06 GHS05 Dgr	H330 H311 H302 H314 H317			
612-064-00-2	3,6,9,12-tetra-azatetradecamethylenediamine; pentactylenhexamine	223-775-9	4067-16-7	Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H314 H317 H410			
612-065-00-8	polyethylenepolyamines with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H312 H302 H314 H317 H410			
612-066-00-3	dicyclohexylamine	202-980-7	101-83-7	Acute Tox. 4(*) Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H314 H410			
612-067-00-9	3-aminomethyl-3,5,5-trimethylcyclohexylamine	220-666-8	2855-13-2	Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 3	H312 H302 H314 H317 H412	GHS05 GHS07 Dgr	H312 H302 H314 H317 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-068-00-4	3,3'-dichlorobenzidine; 3,3'-dichlorobiphenyl-4,4'-ylenediamine	202-109-0	91-94-1	Carc. 1B Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H312 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H312 H317 H410			
612-069-00-X	salts of 3,3'-dichlorobenzidine; salts of 3,3'-dichlorobiphenyl-4,4'-ylenediamine	—	—	Carc. 1B Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H312 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H312 H317 H410			A
612-070-00-5	salts of benzidine	208-519-6 208-520-1 244-236-4 252-984-8	531-85-1 531-86-2 21136-70-9 36341-27-2	Carc. 1A Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H410			A
612-071-00-0	salts of 2-naphthylamine	209-030-0 210-313-6	553-00-4 612-52-2	Carc. 1A Acute Tox. 4(*) Aquatic Chronic 2	H350 H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H302 H411			A
612-072-00-6	biphenyl-4-ylamine; xenylamine; 4-aminobiphenyl	202-177-1	92-67-1	Carc. 1A Acute Tox. 4(*)	H350 H302	GHS08 GHS07 Dgr	H350 H302			
612-073-00-1	salts of biphenyl-4-ylamine; salts of xenylamine; salts of 4-aminobiphenyl	—	—	Carc. 1A Acute Tox. 4(*)	H350 H302	GHS08 GHS07 Dgr	H350 H302			A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-074-00-7	benzyl dimethylamine	203-149-1	103-83-3	Flam. Liq. 3 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B Aquatic Chronic 3	H226 H332 H312 H302 H314 H412	GHS02 GHS05 GHS07 Dgr	H226 H332 H312 H302 H314 H412			
612-075-00-2	2-aminoethyl dimethylamine; 2-dimethylaminoethylamine	203-541-2	108-00-9	Flam. Liq. 2 Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1A	H225 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H312 H302 H314			
612-076-00-8	ethyl dimethylamine	209-940-8	598-56-1	Flam. Liq. 2 Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B	H225 H332 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H332 H302 H314			
612-077-00-3	dimethyl nitrosoamine; N-nitrosodimethylamine	200-549-8	62-75-9	Carc. 1B Acute Tox. 2(*) Acute Tox. 3(*) STOT RE 1 Aquatic Chronic 2	H350 H330 H301 H372 (**) H411	GHS06 GHS08 GHS09 Dgr	H350 H330 H301 H372 (**) H411		Carc. 1B; H350: C ≥ 0,001 %	
612-078-00-9	2,2'-dichloro-4,4'-methylenedianiline; 4,4'-methylene bis(2-chloroaniline)	202-918-9	101-14-4	Carc. 1B Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H410			
612-079-00-4	salts of 2,2'-dichloro-4,4'-methylenedianiline; salts of 4,4'-methylenebis(2-chloroaniline)	—	—	Carc. 1B Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H410			A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-080-00-X	4-amino- <i>N,N</i> -diethylaniline; <i>N,N</i> -diethyl- <i>p</i> -phenyldiamine	202-214-1	93-05-0	Acute Tox. 3(*) Skin Corr. 1B	H301 H314	GHS06 GHS05 Dgr	H301 H314			
612-081-00-5	salts of 4,4'-bi- <i>o</i> -toluidine; salts of 3,3'-dimethylbenzidine; salts of <i>o</i> -toluidine	210-322-5 265-294-7 277-985-0	612-82-8 64969-36-4 74753-18-7	Carc. 1B Acute Tox. 4(*) Aquatic Chronic 2	H350 H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H302 H411			A
612-082-00-0	thiourea; thiocarbamide	200-543-5	62-56-6	Carc. 2 Repr. 2 Acute Tox. 4(*) Aquatic Chronic 2	H351 H361d (***) H302 H411	GHS08 GHS07 GHS09 Wng	H351 H361d (***) H302 H411			
612-083-00-6	1-methyl-3-nitro-1-nitrosoguanidine	200-730-1	70-25-7	Carc. 1B Acute Tox. 4(*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H350 H332 H319 H315 H411	GHS08 GHS07 GHS09 Dgr	H350 H332 H319 H315 H411		Carc. 1B; H350: C ≥ 0,01 %	
612-084-00-1	dapsone; 4,4'-diamino diphenyl sulfone	201-248-4	80-08-0	Acute Tox. 4(*)	H302	GHS07 Wng	H302			
612-085-00-7	4,4'-methylenedi- <i>o</i> -toluidine	212-658-8	838-88-0	Carc. 1B Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H317 H410			
612-086-00-2	amitraz (ISO); <i>N,N</i> -bis(2,4-xylyliminomethyl) methylamine	251-375-4	33089-61-1	Acute Tox. 4(*) STOT RE 2(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H373 (**) H317 H400 H410	GHS08 GHS07 GHS09 Wng	H302 H373 (**) H317 H410		M=10	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-087-00-8	guazatine (ISO)		108173-90-6	Acute Tox. 2(*) Acute Tox. 4(*) Acute Tox. 4(*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H312 H302 H335 H315 H318 H400 H410	GHS06 GHS05 GHS09 Dgr	H330 H312 H302 H335 H315 H318 H410			
612-088-00-3	simazine (ISO); 6-chloro-N,N'-diethyl-1,3,5-triazine-2,4-diamine	204-535-2	122-34-9	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			
612-089-00-9	1,5-naphthylenediamine	218-817-8	2243-62-1	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			
612-090-00-4	2,2'-(nitrosoimino)bisethanol	214-237-4	1116-54-7	Carc. 1B	H350	GHS08 Dgr	H350			
612-091-00-X	o-toluidine; 2-aminotoluene	202-429-0	95-53-4	Carc. 1B Acute Tox. 3(*) Acute Tox. 3(*) Eye Irrit. 2 Aquatic Acute 1	H350 H331 H301 H319 H400	GHS06 GHS08 GHS09 Dgr	H350 H331 H301 H319 H400			
612-092-00-5	N,N'-(2,2-dimethylpropylidene)hexamethylenediamine	401-660-6	1000-78-8	Skin Irrit. 2 Skin Sens. 1	H315 H317	GHS07 Wng	H315 H317			
612-093-00-0	3,5-dichloro-4-(1,1,2,2-tetrafluoroethoxy)aniline	401-790-3	104147-32-2	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-094-00-6	4-(2-chloro-4-trifluoromethyl)phenoxy-2-fluoroaniline hydrochloride	402-190-4	—	STOT RE 1 Acute Tox. 4(*) Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H372 (**) H302 H318 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H372 (**) H302 H318 H317 H410			
612-095-00-1	benzyl-2-hydroxydodecyltrimethylammonium benzoate	402-610-6	113694-52-3	Skin Corr. 1B Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H314 H302 H400 H410	GHS05 GHS07 GHS09 Dgr	H314 H302 H410			
612-096-00-7	4,4'-carbonimidoylbis[N,N-dimethylaniline]	207-762-5	492-80-8	Carc. 2 Acute Tox. 4(*) Eye Irrit. 2 Aquatic Chronic 2	H351 H302 H319 H411	GHS08 GHS07 GHS09 Wng	H351 H302 H319 H411			
612-097-00-2	salts of 4,4'-carbonimidoylbis[N,N-dimethylaniline]	—	—	Carc. 2 Acute Tox. 4(*) Eye Irrit. 2 Aquatic Chronic 2	H351 H302 H319 H411	GHS08 GHS07 GHS09 Wng	H351 H302 H319 H411			A
612-098-00-8	nitrosodipropylamine	210-698-0	621-64-7	Carc. 1B Acute Tox. 4(*) Aquatic Chronic 2	H350 H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H302 H411		Carc. 1B; H350: C ≥ 0,001 %	
612-099-00-3	4-methyl-m-phenylenediamine; 2,4-toluenediamine	202-453-1	95-80-7	Carc. 1B Acute Tox. 3(*) Acute Tox. 4(*) Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H350 H301 H312 H319 H317 H411	GHS06 GHS08 GHS09 Dgr	H350 H301 H312 H319 H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-100-00-7	propylenediamine	201-155-9	78-90-0	Flam. Liq. 3 Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1A	H226 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H226 H312 H302 H314			
612-101-00-2	methenamine; hexamethylenetetramine	202-905-8	100-97-0	Flam. Sol. 2 Resp. Sens. 1 Skin Sens. 1	H228 H334 H317	GHS02 GHS08 Dgr	H228 H334 H317			
612-102-00-8	N,N-bis(3-aminopropyl)methylamine	203-336-8	105-83-9	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 4(*) Skin Corr. 1B	H331 H311 H302 H314	GHS06 GHS05 Dgr	H331 H311 H302 H314			
612-103-00-3	N,N,N',N'-tetramethylethylenediamine	203-744-6	110-18-9	Flam. Liq. 2 Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B	H225 H332 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H332 H302 H314			
612-104-00-9	hexamethylenediamine	204-679-6	124-09-4	Acute Tox. 4(*) Acute Tox. 4(*) STOT SE 3 Skin Corr. 1B	H312 H302 H335 H314	GHS05 GHS07 Dgr	H312 H302 H335 H314			
612-105-00-4	2-piperazin-1-ylethylamine	205-411-0	140-31-8	Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 3	H312 H302 H314 H317 H412	GHS05 GHS07 Dgr	H312 H302 H314 H317 H412			
612-106-00-X	2,6-diethylaniline	209-445-7	579-66-8	Acute Tox. 4(*)	H302	—	H302			
612-107-00-5	1-phenylethylamine; [1] DL-α-methylbenzylamine [2]	202-706-6 [1] 210-545-8 [2]	98-84-0 [1] 618-36-0 [2]	Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-108-00-0	3-aminopropyltriethoxysilane	213-048-4	919-30-2	Acute Tox. 4(*) Skin Corr. 1B	H302 H314	GHS05 GHS07 Dgr	H302 H314			
612-109-00-6	bis(2-dimethylaminoethyl)(methyl)amine	221-201-1	3030-47-5	Acute Tox. 3(*) Acute Tox. 4(*) Skin Corr. 1B	H311 H302 H314	GHS06 GHS05 Dgr	H311 H302 H314			
612-110-00-1	2,2'-dimethyl-4,4'-methylenebis(cyclohexylamine)	229-962-1	6864-37-5	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 4(*) Skin Corr. 1A Aquatic Chronic 2	H331 H311 H302 H314 H411	GHS06 GHS05 GHS09 Dgr	H331 H311 H302 H314 H411			
612-111-00-7	2-methyl- <i>m</i> -phenylenediamine; 2,6-toluenediamine	212-513-9	823-40-5	Muta. 2 Acute Tox. 4(*) Acute Tox. 4(*) Skin Sens. 1 Aquatic Chronic 2	H341 H312 H302 H317 H411	GHS08 GHS07 GHS09 Wng	H341 H312 H302 H317 H411			
612-112-00-2	<i>p</i> -anisidine; 4-methoxyaniline	203-254-2	104-94-9	Acute Tox. 2(*) Acute Tox. 1 Acute Tox. 2(*) STOT RE 2(*) Aquatic Acute 1	H330 H310 H300 H373 (**) H400	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 (**) H400			
612-113-00-8	6-methyl-2,4-bis(methylthio)phenylene-1,3-diamine	403-240-8	106264-79-3	Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-114-00-3	<i>R,R</i> -2-hydroxy-5-(1-hydroxy-2-(4-phenylbut-2-ylamino)ethyl)benzamide hydrogen 2,3-bis(benzoyloxy)succinate	404-390-7	—	Flam. Sol. 1 Skin Sens. 1 Aquatic Chronic 3	H228 H317 H412	GHS02 GHS07 Wng	H228 H317 H412			
612-115-00-9	dimethyldioctadecylammonium hydrogen sulfate	404-050-8	123312-54-9	Eye Irrit. 2 Aquatic Chronic 4	H319 H413	GHS07 Wng	H319 H413			
612-116-00-4	C ₈₋₁₈ alkylbis(2-hydroxyethyl)ammonium bis (2-ethylhexyl)phosphate	404-690-8	68132-19-4	Acute Tox. 3(*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H314 H317 H400 H410	GHS06 GHS05 GHS09 Dgr	H331 H314 H317 H410			
612-117-00-X	C ₁₂₋₁₄ — <i>tert</i> -alkylamine, methylphosphonic acid salt	404-750-3	119415-07-5	Acute Tox. 4(*) Skin Corr. 1B Aquatic Chronic 2	H302 H314 H411	GHS05 GHS07 GHS09 Dgr	H302 H314 H411			
612-118-00-5	A reaction mass of: (1,3-dioxo-2 <i>H</i> -benz(de)isoquinolin-2-ylpropyl)hexadecyldimethylammonium 4-toluenesulfonate; (1,3-dioxo-2 <i>H</i> -benz(de)isoquinolin-2-ylpropyl)hexadecyldimethylammonium bromide	405-080-4	—	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
612-119-00-0	benzyldimethyloctadecylammonium 3-nitrobenzenesulfonate	405-330-2	—	Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H400 H410	GHS05 GHS09 Dgr	H315 H318 H410			
612-120-00-6	acлонifen (ISO); 2-chloro-6-nitro-3-phenoxyaniline	277-704-1	74070-46-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-121-00-1	amines, polyethylenepoly-; HEPA	268-626-9	68131-73-7	Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H312 H302 H314 H317 H410			
612-122-00-7	hydroxylamine	232-259-2	7803-49-8	Unst. Expl. Met. Corr. 1 Acute Tox. 4(*) STOT RE 2(*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H200 H290 H302 H373 (>**) H335 H315 H318 H317 H400	GHS01 GHS08 GHS05 GHS07 GHS09 Dgr	H200 H290 H302 H373 (**) H335 H315 H318 H317 H400			T
612-123-00-2	hydroxylammonium chloride; hydroxylamine hydrochloride; [1] bis(hydroxylammonium) sulphate; hydroxylamine sulphate (2:1); [2] hydroxylammonium hydrogensulphate; hydroxylamine sulphate (1:1) [3]	226-798-2 [1] 233-118-8 [2] 233-154-4 [3]	5470-11-1 [1] 10039-54-0 [2] 10046-00-1 [3]	Met. Corr. 1 Acute Tox. 4(*) STOT RE 2(*) Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1	H290 H302 H373 (**) H319 H315 H317 H400	GHS08 GHS05 GHS07 GHS09 Wng	H290 H302 H373 (**) H319 H315 H317 H400			G T
612-124-00-8	N,N,N-trimethylanilinium chloride	205-319-0	138-24-9	Acute Tox. 3(*) Acute Tox. 3(*)	H311 H301	GHS06 Dgr	H311 H301			
612-125-00-3	2-methyl- <i>p</i> -phenylenediamine; 2,5-toluenediamine	202-442-1	95-70-5	Acute Tox. 3(*) Acute Tox. 4(*) Acute Tox. 4(*) Skin Sens. 1 Aquatic Chronic 2	H301 H332 H312 H317 H411	GHS06 GHS09 Dgr	H301 H332 H312 H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-126-00-9	toluene-2,4-diammonium sulphate; 4-methyl-m-phenylenediamine sulfate	265-697-8	65321-67-7	Carc. 1B Acute Tox. 3(*) Acute Tox. 4(*) Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H350 H301 H312 H319 H317 H411	GHS06 GHS08 GHS09 Dgr	H350 H301 H312 H319 H317 H411			
612-127-00-4	3-aminophenol	209-711-2	591-27-5	Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Chronic 2	H332 H302 H411	GHS07 GHS09 Wng	H332 H302 H411			
612-128-00-X	4-aminophenol	204-616-2	123-30-8	Muta. 2 Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H341 H332 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H341 H332 H302 H410			
612-129-00-5	diisopropylamine	203-558-5	108-18-9	Flam. Liq. 2 Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B	H225 H332 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H332 H302 H314		STOT SE 3; H335: C ≥ 5 %	
612-130-00-0	2,6-diamino-3,5-diethyltoluene; 4,6-diethyl-2-methyl-1,3-benzenediamine; [1] 2,4-diamino-3,5-diethyltoluene; 2,4-diethyl-6-methyl-1,3-benzenediamine; [2] diethylmethylbenzenediamine [3]	218-255-3 [1] 218-256-9 [2] 270-877-4 [3]	2095-01-4 [1] 2095-02-5 [2] 68479-98-1 [3]	Acute Tox. 4(*) Acute Tox. 4(*) STOT RE 2(*) Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H373 (**) H319 H400 H410	GHS08 GHS07 GHS09 Wng	H312 H302 H373 (**) H319 H410			C
612-131-00-6	didecyldimethylammonium chloride	230-525-2	7173-51-5	Acute Tox. 4(*) Skin Corr. 1B	H302 H314	GHS05 GHS07 Dgr	H302 H314			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-132-00-1	N,N'-diphenyl- <i>p</i> -phenylenediamine; N,N'-diphenyl-1,4-benzenediamine	200-806-4	74-31-7	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
612-133-00-7	(4-ammonio- <i>m</i> -tolyl)ethyl(2-hydroxyethyl) ammonium sulphate; 4-(N-ethyl-N-2-hydroxyethyl)-2-methylphenylenediamine sulphate	247-162-0	25646-77-9	Acute Tox. 3(*) STOT RE 2(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H301 H373 (**) H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H301 H373 (**) H317 H410			
612-134-00-2	N-(2-(4-amino-N-ethyl- <i>m</i> -toluidino)ethyl) methanesulphonamide sesquisulphate; 4-(N-ethyl-N-2-methanesulphonylaminoethyl)-2-methylphenylenediamine sesquisulphate monohydrate	247-161-5	25646-71-3	Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
612-135-00-8	N-2-naphthylaniline; N-phenyl-2-naphthylamine	205-223-9	135-88-6	Carc. 2 Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H351 H319 H315 H317 H411	GHS08 GHS07 GHS09 Wng	H351 H319 H315 H317 H411			
612-136-00-3	N-isopropyl-N'-phenyl- <i>p</i> -phenylenediamine	202-969-7	101-72-4	Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410		Skin Sens. 1; H317: C ≥ 0,1 %	
612-137-00-9	4-chloroaniline	203-401-0	106-47-8	Carc. 1B Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H331 H311 H301 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H331 H311 H301 H317 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-138-00-4	furalaxyl (ISO); methyl N-(2,6-dimethylphenyl)-N-(2-furyl-carbonyl)-DL-alaninate	260-875-1	57646-30-7	Acute Tox. 4(*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
612-139-00-X	mefenacet (ISO); 2-(benzothiazol-2-yloxy)-N-methyl-N-phenylacetamide	277-328-8	73250-68-7	Aquatic Chronic 2	H411	GHS09	H411			
612-140-00-5	quaternary ammonium compounds, benzyl-C ₈₋₁₈ -alkyldimethyl, chlorides	264-151-6	63449-41-2	Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B Aquatic Acute 1	H312 H302 H314 H400	GHS05 GHS07 GHS09 Dgr	H312 H302 H314 H400			
612-141-00-0	4,4'-methylenebis(2-ethylaniline); 4,4'-methylenebis(2-ethylbenzeneamine)	243-420-1	19900-65-3	Carc. 2 Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H410			
612-142-00-6	biphenyl-2-ylamine	201-990-9	90-41-5	Carc. 2 Acute Tox. 4(*) Aquatic Chronic 3	H351 H302 H412	GHS08 GHS07 Wng	H351 H302 H412			
612-143-00-1	N ⁵ ,N ⁵ -diethyltoluene-2,5-diamine monohydrochloride; 4-diethylamino-2-methylaniline monohydrochloride	218-130-3	2051-79-8	Acute Tox. 3(*) Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H301 H319 H317 H400 H410	GHS06 GHS09 Dgr	H301 H319 H317 H410			
612-144-00-7	flumetralin (ISO); N-(2-chloro-6-fluorobenzyl)-N-ethyl-α, α,α-trifluoro-2,6-dinitro-p-toluidine	—	62924-70-3	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H319 H315 H317 H400 H410	GHS07 GHS09 Wng	H319 H315 H317 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-145-00-2	<i>o</i> -phenylenediamine	202-430-6	95-54-5	Carc. 2 Muta. 2 Acute Tox. 3(*) Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H341 H301 H332 H312 H319 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H341 H301 H332 H312 H319 H317 H410			
612-146-00-8	<i>o</i> -phenylenediamine dihydrochloride	210-418-7	615-28-1	Carc. 2 Muta. 2 Acute Tox. 3(*) Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H341 H301 H332 H312 H319 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H341 H301 H332 H312 H319 H317 H410			
612-147-00-3	<i>m</i> -phenylenediamine	203-584-7	108-45-2	Muta. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H341 H331 H311 H301 H319 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H341 H331 H311 H301 H319 H317 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-148-00-9	<i>m</i> -phenylenediamine dihydrochloride	208-790-0	541-69-5	Muta. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H341 H331 H311 H301 H319 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H341 H331 H311 H301 H319 H317 H410			
612-149-00-4	1,3-diphenylguanidine	203-002-1	102-06-7	Repr. 2 Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H361f (***) H302 H319 H335 H315 H411	GHS08 GHS07 GHS09 Wng	H361f (***) H302 H319 H335 H315 H411			
612-150-00-X	spiroxamine (ISO); 8- <i>tert</i> -butyl-1,4-dioxaspiro[4.5]decan-2-ylmethyl(ethyl)(propyl)amine	—	118134-30-8	Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H315 H317 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H315 H317 H410			
612-151-00-5	diaminotoluene, technical product – reaction mass of [2] and [3]; methyl-phenylenediamine; [1] 4-methyl- <i>m</i> -phenylene diamine; [2] 2-methyl- <i>m</i> -phenylene diamine [3]	246-910-3 [1] 202-453-1 [2] 212-513-9 [3]	25376-45-8 [1] 95-80-7 [2] 823-40-5 [3]	Carc. 1B Acute Tox. 3(*) Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H350 H301 H332 H312 H319 H317 H411	GHS06 GHS08 GHS09 Dgr	H350 H301 H332 H312 H319 H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-152-00-0	N,N-diethyl-N',N'-dimethylpropan-1,3-diyl-diamine	406-610-7	62478-82-4	Flam. Liq. 3 Acute Tox. 4(*) Acute Tox. 4(*) STOT RE 2(*) Skin Corr. 1A Aquatic Chronic 3	H226 H332 H302 H373 (**) H314 H412	GHS02 GHS08 GHS05 GHS07 Dgr	H226 H332 H302 H373 (**) H314 H412			
612-153-00-6	4-[N-ethyl-N-(2-hydroxyethyl)amino]-1-(2-hydroxyethyl)amino-2-nitrobenzene, monohydrochloride	407-020-2	132885-85-9	Acute Tox. 4(*) Skin Sens. 1 Aquatic Chronic 3	H302 H317 H412	GHS07 Wng	H302 H317 H412			
612-154-00-1	6'-(isobutylethylamino)-3'-methyl-2'-phenylamino-spiro[isobenzofuran-7,9'-[9H]-xanthene]	410-890-6	95235-29-3	Aquatic Chronic 4	H413	—	H413			
612-155-00-7	2'-anilino-6'-((3-ethoxypropyl)ethylamino)-3'-methylspiro(isobenzofuran-3-oxofuran)-1-(1H)-9'-xanthene	411-730-8	93071-94-4	Aquatic Chronic 4	H413	—	H413			
612-156-00-2	reaction mass of: trihexadecylmethylammonium chloride; dihexadecyldimethylammonium chloride	405-620-9	—	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
612-157-00-8	(Z)-1-benzo[b]thien-2-ylethanone oxime hydrochloride	410-780-8	—	Acute Tox. 4(*) STOT RE 2(*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H373 (**) H318 H317 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H302 H373 (**) H318 H317 H411			
612-158-00-3	reaction mass of: bis(5-dodecyl-2-hydroxybenzal-oximate) copper (II) C ₁₂ -alkyl group is branched; 4-dodecylsalicylaldoxime	410-820-4	—	Aquatic Chronic 4	H413	—	H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-159-00-9	Reaction products of: trimethylhexamethylene diamine (a mixture of 2,2,4-trimethyl-1,6-hexanediamine and 2,4,4-trimethyl-1,6-hexanediamine, EINECS listed), Epoxide 8 (mono[(C ₁₀ -C ₁₆ -alkyloxy)methyl]oxirane derivatives) and <i>p</i> -toluene-sulfonic acid	410-880-1	—	Acute Tox. 4(*) Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H314 H410			
612-160-00-4	<i>p</i> -toluidine; 4-aminotoluene; [1] toluidinium chloride; [2] toluidine sulphate (1:1) [3]	203-403-1 [1] 208-740-8 [2] 208-741-3 [3]	106-49-0 [1] 540-23-8 [2] 540-25-0 [3]	Carc. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1	H351 H331 H311 H301 H319 H317 H400	GHS06 GHS08 GHS09 Dgr	H351 H331 H311 H301 H319 H317 H400			
612-161-00-X	2,6-xylidine; 2,6-dimethylaniline	201-758-7	87-62-7	Carc. 2 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H351 H332 H312 H302 H335 H315 H411	GHS08 GHS07 GHS09 Wng	H351 H332 H312 H302 H335 H315 H411			
612-162-00-5	dimethyldioctadecylammonium chloride; DODMAC	203-508-2	107-64-2	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
612-163-00-0	metalaxyl-M (ISO); mefenoxam; (<i>R</i>)-2-[(2,6-dimethylphenyl)-methoxyacetyl-amino]propionic acid methyl ester	—	70630-17-0	Acute Tox. 4(*) Eye Dam. 1	H302 H318	GHS05 GHS07 Dgr	H302 H318			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-164-00-6	2-butyl-2-ethyl-1,5-diaminopentane	412-700-7	137605-95-9	Acute Tox. 4(*) Acute Tox. 4(*) STOT RE 2(*) Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 3	H312 H302 H373 (**) H314 H317 H412	GHS08 GHS05 GHS07 Dgr	H312 H302 H373 (**) H314 H317 H412			
612-165-00-1	N,N'-diphenyl-N,N'-bis(3-methylphenyl)-(1,1'-diphenyl)-4,4'-diamine	413-810-8	65181-78-4	Aquatic Chronic 2	H411	GHS09	H411			
612-166-00-7	reaction mass of: <i>cis</i> -(5-ammonium-1,3,3-trimethyl)-cyclohexanemethylammonium phosphate (1:1); <i>trans</i> -(5-ammonium-1,3,3-trimethyl)-cyclohexanemethylammonium phosphate (1:1)	411-830-1	114765-88-7	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			
612-167-00-2	5-acetyl-3-amino-10,11-dihydro-5 <i>H</i> -dibenz[b,f]azepine-hydrochloride	410-490-1	—	Acute Tox. 4(*) STOT RE 2(*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H373 (**) H318 H317 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H302 H373 (**) H318 H317 H411			
612-168-00-8	3,5-dichloro-2,6-difluoropyridine-4-amine	220-630-1	2840-00-8	Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Chronic 2	H312 H302 H411	GHS07 GHS09 Wng	H312 H302 H411			
612-170-00-9	4-chlorophenyl cyclopropyl ketone O-(4-aminobenzyl)oxime	405-260-2	—	Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
612-171-00-4	N,N,N',N'-tetraglycidyl-4,4'-diamino-3,3'-diethyldiphenylmethane	410-060-3	130728-76-6	Muta. 2 Skin Sens. 1 Aquatic Chronic 2	H341 H317 H411	GHS08 GHS09 Wng	H341 H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-172-00-X	4,4'-methylenebis(N,N'-dimethylcyclohexanamine	412-840-9	13474-64-1	Acute Tox. 4(*) STOT RE 2(*) Skin Corr. 1A Aquatic Chronic 3	H302 H373 (**) H314 H412	GHS08 GHS05 GHS07 Dgr	H302 H373 (**) H314 H412			
612-173-00-5	lithium 1-amino-4-(4-tert-butylanilino)ant-hraquinone-2-sulfonate	411-140-0	125328-86-1	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			
612-174-00-0	4,4-dimethoxybutylamine	407-690-6	19060-15-2	Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 3	H302 H314 H317 H412	GHS05 GHS07 Dgr	H302 H314 H317 H412			
612-175-00-6	2-(O-aminooxy)ethylamine dihydrochloride	412-310-7	37866-45-8	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
612-176-00-1	polymer of 1,3-dibromopropane and N,N-diethyl-N',N'-dimethyl-1,3-propanediamine	410-570-6	143747-73-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
612-177-00-7	2-naphthylamino-6-sulfomethylamide	412-120-4	104295-55-8	STOT RE 2(*) Skin Sens. 1 Aquatic Chronic 2	H373 (**) H317 H411	GHS08 GHS09 Wng	H373 (**) H317 H411			
612-178-00-2	1,4,7,10-tetraazacyclododecane disulfate	412-080-8	112193-77-8	Acute Tox. 4(*) STOT SE 3 Eye Dam. 1 Aquatic Chronic 3	H302 H335 H318 H412	GHS05 GHS07 Dgr	H302 H335 H318 H412			
612-179-00-8	1-(2-propenyl)pyridinium chloride	412-740-5	25965-81-5	Acute Tox. 4(*) Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-180-00-3	3-aminobenzylamine	412-230-2	4403-70-7	Acute Tox. 4(*) Skin Corr. 1B Aquatic Chronic 2	H302 H314 H411	GHS05 GHS07 GHS09 Dgr	H302 H314 H411			
612-181-00-9	2-phenylthioaniline	413-030-8	1134-94-7	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
612-182-00-4	1-ethyl-1-methylmorpholinium bromide	418-210-1	65756-41-4	Muta. 2	H341	GHS08 Wng	H341			
612-183-00-X	1-ethyl-1-methylpyrrolidinium bromide	418-200-5	69227-51-6	Muta. 2	H341	GHS08 Wng	H341			
612-184-00-5	6'-(dibutylamino)-3'-methyl-2'-(phenylamino)spiro[isobenzofuran-1(3H),9-(9H)-xanthen]-3-one	403-830-5	89331-94-2	Aquatic Chronic 3	H412	—	H412			
612-185-00-0	1-[3-[4-((heptadecafluorononyl)oxy)-benzamido]propyl]-N,N,N-trimethylammonium iodide	407-400-8	59493-72-0	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
612-186-00-6	bis(N-(7-hydroxy-8-methyl-5-phenylphenazin-3-ylidene)dimethylammonium) sulfate	406-770-8	149057-64-7	STOT RE 2(*) Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H318 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H373 (**) H318 H317 H410			
612-187-00-1	2,3,4-trifluoroaniline	407-170-9	3862-73-5	Acute Tox. 4(*) Acute Tox. 4(*) STOT RE 2(*) Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H312 H302 H373 (**) H315 H318 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H312 H302 H373 (**) H315 H318 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-188-00-7	4,4'-(9H-fluoren-9-ylidene)bis(2-chloroaniline)	407-560-9	107934-68-9	Aquatic Chronic 2	H411	GHS09	H411			
612-189-00-2	4-amino-2-(aminomethyl)phenol dihydrochloride	412-510-4	135043-64-0	Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
612-190-00-8	4,4'-methylenebis(2-isopropyl-6-methylaniline)	415-150-6	16298-38-7	STOT RE 2(*) Aquatic Chronic 2	H373 (**) H411	GHS08 GHS09 Wng	H373 (**) H411			
612-191-00-3	polymer of allylamine hydrochloride	415-050-2	71550-12-4	Acute Tox. 4(*) Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			
612-192-00-9	2-isopropyl-4-(N-methyl)aminomethylthiazole	414-800-6	154212-60-9	Acute Tox. 4(*) Acute Tox. 4(*) Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H312 H302 H315 H318 H411	GHS05 GHS07 GHS09 Dgr	H312 H302 H315 H318 H411			
612-193-00-4	3-methylaminomethylphenylamine	414-570-7	18759-96-1	Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H312 H302 H314 H317 H410			
612-194-00-X	2-hydroxy-3-[(2-hydroxyethyl)-[2-(1-oxotetradecyl)amino]ethyl]amino]-N,N,N-trimethyl-1-propanammonium chloride	414-670-0	141890-30-4	Acute Tox. 4(*) Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H318 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-195-00-5	bis[tributyl 4-(methylbenzyl)ammonium] 1,5-naphthalenedisulfonate	415-210-1	160236-81-7	Acute Tox. 4(*) Acute Tox. 4(*) Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H332 H302 H318 H410			
612-196-00-0	4-chloro-o-toluidine; [1] 4-chloro-o-toluidine hydrochloride [2]	202-441-6 [1] 221-627-8 [2]	95-69-2 [1] 3165-93-3 [2]	Carc. 1B Muta. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Aquatic Acute 1 Aquatic Chronic 1	H350 H341 H331 H311 H301 H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H341 H331 H311 H301 H410			
612-197-00-6	2,4,5-trimethylaniline; [1] 2,4,5-trimethylaniline hydrochloride [2]	205-282-0 [1] - [2]	137-17-7 [1] 21436-97-5 [2]	Carc. 1B Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Aquatic Chronic 2	H350 H331 H311 H301 H411	GHS06 GHS08 GHS09 Dgr	H350 H331 H311 H301 H411			
612-198-00-1	4,4'-thiodianiline and its salts	205-370-9	139-65-1	Carc. 1B Acute Tox. 4(*) Aquatic Chronic 2	H350 H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H302 H411			
612-199-00-7	4,4'-oxydianiline and its salts; <i>p</i> -aminophenyl ether	202-977-0	101-80-4	Carc. 1B Muta. 1B Repr. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Aquatic Chronic 2	H350 H340 H361f (***) H331 H311 H301 H411	GHS06 GHS08 GHS09 Dgr	H350 H340 H361f (***) H331 H311 H301 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-200-00-0	2,4-diaminoanisolet; 4-metoksi- <i>m</i> -fenylenediamin; [1] 2,4-diaminoanisolet sulfat [2]	210-406-1 [1] 254-323-9 [2]	615-05-4 [1] 39156-41-7 [2]	Carc. 1B Muta. 2 Acute Tox. 4(*) Aquatic Chronic 2	H350 H341 H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H341 H302 H411			
612-201-00-6	<i>N,N,N',N'</i> -tetrametil-4,4'-metilendianilin	202-959-2	101-61-1	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410			
612-202-00-1	3,4-dihloroanilin	202-448-4	95-76-1	Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H318 H317 H400 H410	GHS06 GHS05 GHS09 Dgr	H331 H311 H301 H318 H317 H410			
612-204-00-2	C.I. Basic Violet 3; 4-[4,4'-bis(dimetilamino) benzhidrylidene]cyclohexa-2,5-dien-1-ylidene]dimetilammonij klorid	208-953-6	548-62-9	Carc. 2 Acute Tox. 4(*) Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H318 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H351 H302 H318 H410			
612-205-00-8	C.I. Basic Violet 3 with ≥ 0,1 % of Michler's ketone (EC no. 202-027-5)	208-953-6	548-62-9	Carc. 1B Acute Tox. 4(*) Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H318 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H350 H302 H318 H410			
612-206-00-3	famoxadon (ISO); 3-anilino-5-metil-5-(4-fenoksifenil)-1,3-oksazolidin-2,4-dion	—	131807-57-3	STOT RE 2(*) Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H400 H410	GHS08 GHS09 Wng	H373 (**) H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-207-00-9	4-ethoxyaniline; <i>p</i> -phenetidine	205-855-5	156-43-4	Muta. 2 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2 Skin Sens. 1	H341 H332 H312 H302 H319 H317	GHS08 GHS07 Wng	H341 H332 H312 H302 H319 H317			
612-209-00-X	6-methoxy- <i>m</i> -toluidine; <i>p</i> -cresidine	204-419-1	120-71-8	Carc. 1B Acute Tox. 4(*)	H350 H302	GHS08 GHS07 Dgr	H350 H302			
612-210-00-5	5-nitro- <i>o</i> -toluidine; [1] 5-nitro- <i>o</i> -toluidine hydrochloride [2]	202-765-8 [1] 256-960-8 [2]	99-55-8 [1] 51085-52-0 [2]	Carc. 2 Acute Tox. 3(*) Acute Tox. 3(*) Acute Tox. 3(*) Aquatic Chronic 3	H351 H331 H311 H301 H412	GHS06 GHS08 Dgr	H351 H331 H311 H301 H412			
612-211-00-0	<i>N</i> -[(benzotriazole-1-yl)methyl]-4-carboxybenzenesulfonamide	416-470-9	170292-97-4	Eye Irrit. 2 Aquatic Chronic 2	H319 H411	GHS07 GHS09 Wng	H319 H411			
612-212-00-6	2,6-dichloro-4-trifluoromethylaniline	416-430-0	24279-39-8	Acute Tox. 4(*) Acute Tox. 4(*) Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H315 H317 H400 H410	GHS07 GHS09 Wng	H332 H302 H315 H317 H410			
612-213-00-1	isobutylidene-(2-(2-isopropyl-4,4-dimethylloxazolidine-3-yl)-1,1-dimethylethyl)amine	419-850-2	148348-13-4	Skin Corr. 1B Aquatic Chronic 3	H314 H412	GHS05 Dgr	H314 H412			
612-214-00-7	4-(2,2-diphenylethenyl)- <i>N,N</i> -di-phenylbenzenamine	421-390-2	89114-90-9	Aquatic Chronic 4	H413	—	H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
612-215-00-2	3-chloro-2-(isopropylthio)aniline	421-700-6	179104-32-6	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
612-217-00-3	1-methoxy-2-propylamine	422-550-4	37143-54-7	Flam. Liq. 2 Skin Corr. 1B Acute Tox. 4(*) Aquatic Chronic 3	H225 H314 H302 H412	GHS02 GHS05 GHS07 Dgr	H225 H314 H302 H412			
613-001-00-1	ethyleneimine; aziridine	205-793-9	151-56-4	Flam. Liq. 2 Carc. 1B Muta. 1B Acute Tox. 2(*) Acute Tox. 1 Acute Tox. 2(*) Skin Corr. 1B Aquatic Chronic 2	H225 H350 H340 H330 H310 H300 H314 H411	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H225 H350 H340 H330 H310 H300 H314 H411			D
613-002-00-7	pyridine	203-809-9	110-86-1	Flam. Liq. 2 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*)	H225 H332 H312 H302	GHS02 GHS07 Dgr	H225 H332 H312 H302		(*)	
613-003-00-2	1,2,3,4-tetranitrocarbazole	—	6202-15-9	Expl. 1.1 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*)	H201 H332 H312 H302	GHS01 GHS07 Wng	H201 H332 H312 H302			
613-004-00-8	crimidine (ISO); 2-chloro-6-methylpyrimidin-4-yl dimethylamine	208-622-6	535-89-7	Acute Tox. 2(*)	H300	GHS06 Dgr	H300			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-007-00-4	desmetryne (ISO); 6-isopropylamino-2-methylamino-4-methylthio-1,3,5-triazine	213-800-1	1014-69-3	Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
613-008-00-X	dazomet (ISO); tetrahydro-3,5-dimethyl-1,3,5-thiadiazine-2-thione	208-576-7	533-74-4	Acute Tox. 4(*) Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H400 H410	GHS07 GHS09 Wng	H302 H319 H410			
613-009-00-5	2,4,6-trichloro-1,3,5-triazine; cyanuric chloride	203-614-9	108-77-0	Acute Tox. 2(*) Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1	H330 H302 H314 H317	GHS06 GHS05 Dgr	H330 H302 H314 H317	EUH014	STOT SE 3; H335: C ≥ 5 %	
613-010-00-0	ametryn (ISO); 2-ethylamino-4-isopropylamino-6-methylthio-1,3,5-triazine	212-634-7	834-12-8	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-011-00-6	amitrole (ISO); 1,2,4-triazol-3-ylamine	200-521-5	61-82-5	Repr. 2 STOT RE 2(*) Aquatic Chronic 2	H361d (***) H373 (**) H411	GHS08 GHS09 Wng	H361d (***) H373 (**) H411			
613-012-00-1	bentazone (ISO); 3-isopropyl-2,1,3-benzothiadiazine-4-one-2,2-dioxide	246-585-8	25057-89-0	Acute Tox. 4(*) Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H302 H319 H317 H412	GHS07 Wng	H302 H319 H317 H412			
613-013-00-7	cyanazine (ISO); 2-(4-chloro-6-ethylamino-1,3,5-triazine-2-ylamino)-2-methylpropionitrile	244-544-9	21725-46-2	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-014-00-2	ethoxyquin(ISO); 6-ethoxy-1,2-dihydro-2,2,4-trimethylquinoline	202-075-7	91-53-2	Acute Tox. 4(*)	H302	GHS07 Wng	H302			
613-015-00-8	fenazaflor (ISO); phenyl 5,6-dichloro-2-trifluoromethylbenzimidazole-1-carboxylate	238-134-9	14255-88-0	Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
613-016-00-3	fuberidazole(ISO); 2-(2-furyl)benzimidazole	223-404-0	3878-19-1	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-017-00-9	bis (8-hydroxyquinolinium) sulphate	205-137-1	134-31-6	Acute Tox. 4(*)	H302	GHS07 Wng	H302			
613-018-00-4	morfamquat (ISO); 1,1'-bis(3,5-dimethylmorpholinocarbonylmethyl)-4,4'-bipyridilium ion	—	7411-47-4	Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 3	H302 H319 H335 H315 H412	GHS07 Wng	H302 H319 H335 H315 H412			
613-019-00-X	thioquinox(ISO); 2-thio-1,3-dithiolo(4,5,b)quinoxaline	202-272-8	93-75-4	Acute Tox. 4(*)	H302	GHS07 Wng	H302			
613-020-00-5	tridemorph (ISO); 2,6-dimethyl-4-tridecylmorpholine	246-347-3	24602-86-6	Repr. 1B Acute Tox. 4(*) Acute Tox. 4(*) Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H360D (***) H332 H302 H315 H400 H410	GHS08 GHS07 GHS09 Dgr	H360D (***) H332 H302 H315 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-021-00-0	dithianon (ISO); 5,10-dihydro-5,10-dioxonaphtho(2,3-b)(1,4)dithiazine-2,3-dicarbonitrile	222-098-6	3347-22-6	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-022-00-6	pyrethrins including cinerins, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410			A
613-023-00-1	2-methyl-4-oxo-3-(penta-2,4-dienyl)cyclopent-2-enyl [1R-[1 α [S ⁽ⁿ⁾ (Z)],3 β]]-chrysanthemate; pyrethrin I	204-455-8	121-21-1	Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410			
613-024-00-7	2-methyl-4-oxo-3-(penta-2,4-dienyl)cyclopent-2-enyl[1R-[1 α [S ⁽ⁿ⁾ (Z)](3 β)]-3-(3-methoxy-2-methyl-3-oxoprop-1-enyl)-2,2-dimethylcyclopropanecarboxylate; pyrethrin II	204-462-6	121-29-9	Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410			
613-025-00-2	cinerin I; 3-(but-2-enyl)-2-methyl-4-oxocyclopent-2-enyl 2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate	246-948-0	25402-06-6	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-026-00-8	cinerin II; 3-(but-2-enyl)-2-methyl-4-oxocyclopent-2-enyl 2,2-dimethyl-3-(3-methoxy-2-methyl-3-oxoprop-1-enyl)cyclopropanecarboxylate	204-454-2	121-20-0	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-027-00-3	piperidine	203-813-0	110-89-4	Flam. Liq. 2 Acute Tox. 3(*) Acute Tox. 3(*) Skin Corr. 1B	H225 H331 H311 H314	GHS02 GHS06 GHS05 Dgr	H225 H331 H311 H314		(*)	
613-028-00-9	morpholine	203-815-1	110-91-8	Flam. Liq. 3 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B	H226 H332 H312 H302 H314	GHS02 GHS05 GHS07 Dg	H226 H332 H312 H302 H314			
613-029-00-4	dichloro-1,3,5-triazinetriione; dichloroisocyanuric acid	220-487-5	2782-57-2	Ox. Sol. 2 Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H272 H302 H319 H335 H400 H410	GHS03 GHS07 GHS09 Dgr	H272 H302 H319 H335 H410	EUH031		T
613-030-00-X	troclosene potassium; [1] troclosene sodium [2]	218-828-8 [1] 220-767-7 [2]	2244-21-5 [1] 2893-78-9 [2]	Ox. Sol. 2 Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H272 H302 H319 H335 H400 H410	GHS03 GHS07 GHS09 Dgr	H272 H302 H319 H335 H410	EUH031	(*) STOT SE 3; H335: C ≥ 10 % EUH031: C ≥ 10 %	
613-030-01-7	troclosene sodium, dihydrate	220-767-7	51580-86-0	Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H335 H400 H410	GHS07 GHS09 Wng	H302 H319 H335 H410	EUH031		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-031-00-5	symclosene; trichloroisocyanuric acid; trichloro-1,3,5-triazinetriion	201-782-8	87-90-1	Ox. Sol. 2 Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H272 H302 H319 H335 H400 H410	GHS03 GHS07 GHS09 Dgr	H272 H302 H319 H335 H410	EUH031		
613-032-00-0	methyl-2,3,5,6-tetrachloro-4-pyridylsulphone; 2,3,5,6-tetrachloro-4-(methylsulphonyl)pyridine	236-035-5	13108-52-6	Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2 Skin Sens. 1	H312 H302 H319 H317	GHS07 Wng	H312 H302 H319 H317			
613-033-00-6	2-methylaziridine; propyleneimine	200-878-7	75-55-8	Flam. Liq. 2 Carc. 1B Acute Tox. 2(*) Acute Tox. 1 Acute Tox. 2(*) Eye Dam. 1 Aquatic Chronic 2	H225 H350 H330 H310 H300 H318 H411	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H225 H350 H330 H310 H300 H318 H411		Carc. 1B; H350: C ≥ 0,01 %	
613-034-00-1	1,2-dimethylimidazole	217-101-2	1739-84-0	Acute Tox. 4(*) Skin Irrit. 2 Eye Dam. 1	H302 H315 H318	GHS05 GHS07 Dgr	H302 H315 H318			
613-035-00-7	1-methylimidazole	210-484-7	616-47-7	Acute Tox. 4(*) Acute Tox. 4(*) Skin Corr. 1B	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314			
613-036-00-2	2-methylpyridine; 2-picoline	203-643-7	109-06-8	Flam. Liq. 3 Acute Tox. 4(*) Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3	H226 H332 H312 H302 H319 H335	GHS02 GHS07 Wng	H226 H332 H312 H302 H319 H335			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-037-00-8	4-methylpyridine; 4-picoline	203-626-4	108-89-4	Flam. Liq. 3 Acute Tox. 3(*) Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H226 H311 H332 H302 H319 H335 H315	GHS02 GHS06 Dgr	H226 H311 H332 H302 H319 H335 H315			
613-038-00-3	6-phenyl-1,3,5-triazine-2,4-diyl diamine; 6-phenyl-1,3,5-triazine-2,4-diamine; benzoguanamine	202-095-6	91-76-9	Acute Tox. 4(*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
613-039-00-9	ethylene thiourea; imidazolidine-2-thione; 2-imidazoline-2-thiol	202-506-9	96-45-7	Repr. 1B Acute Tox. 4(*)	H360-D (***) H302	GHS08 GHS07 Dgr	H360D (***) H302			
613-040-00-4	azaconazole (ISO); 1-[[2-(2,4-dichlorophenyl)-1,3-dioxolan-2-yl]methyl]-1 <i>H</i> -1,2,4-triazole	262-102-3	60207-31-0	Acute Tox. 4(*)	H302	GHS07 Wng	H302			
613-041-00-X	morpholine-4-carbonyl chloride	239-213-0	15159-40-7	Carc. 2 Eye Irrit. 2 Skin Irrit. 2	H351 H319 H315	GHS08 Wng	H351 H319 H315	EUH014		
613-042-00-5	imazalil (ISO); 1-[2-(allyloxy)-2-(2,4-dichlorophenyl)ethyl]-1 <i>H</i> -imidazole	252-615-0	35554-44-0	Acute Tox. 4(*) Acute Tox. 4(*) Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H332 H302 H318 H410			
613-043-00-0	imazalil sulphate (ISO) powder; 1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1 <i>H</i> -imidazolium hydrogen sulphate; [1] (±)-1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1 <i>H</i> -imidazolium hydrogen sulphate [2]	261-351-5 [1] 281-291-3 [2]	58594-72-2 [1] 83918-57-4 [2]	Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-043-01-8	imazalil sulphate (ISO), aqueous solution; 1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1H-imidazolium hydrogen sulphate; [1] (±)-1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1H-imidazolium hydrogen sulphate [2]	261-351-5 [1] 281-291-3 [2]	58594-72-2 [1] 83918-57-4 [2]	Acute Tox. 4(*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Wng	H302 H314 H317 H410		Skin Corr. 1B; H314: C ≥ 50 % Skin Irrit. 2; H315: 30 % ≤ C < 50 % Eye Dam. 1; H318: 15 % ≤ C < 50 % Eye Irrit. 2; H319: 5 % ≤ C < 15 %	
613-044-00-6	captan (ISO); 1,2,3,6-tetrahydro-N-(trichloromethylthio) phthalimide	205-087-0	133-06-2	Carc. 2 Acute Tox. 3(*) Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H351 H331 H318 H317 H400	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H331 H318 H317 H400			
613-045-00-1	folpet (ISO); N-(trichloromethylthio)phthalimide	205-088-6	133-07-3	Carc. 2 Acute Tox. 4(*) Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1	H351 H332 H319 H317 H400	GHS08 GHS07 GHS09 Wng	H351 H332 H319 H317 H400			
613-046-00-7	captafol (ISO); 1,2,3,6-tetrahydro-N-(1,1,2,2-tetrachloroethylthio)phthalimide	219-363-3	2425-06-1	Carc. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H317 H400 H410	GHS08 GHS09 Dgr	H350 H317 H410			
613-047-00-2	1-dimethylcarbamoyl-5-methylpyrazol-3-yl dimethylcarbamate; dimetilan (ISO)	211-420-0	644-64-4	Acute Tox. 3(*) Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H301 H312 H400 H410	GHS06 GHS09 Dgr	H301 H312 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-048-00-8	carbendazim (ISO); methyl benzimidazol-2-ylcarbamate	234-232-0	10605-21-7	Muta. 1B Repr. 1B Aquatic Acute 1 Aquatic Chronic 1	H340 H360-FD H400 H410	GHS08 GHS09 Dgr	H340 H360FD H410			
613-049-00-3	benomyl (ISO); methyl 1-(butylcarbamoyl)benzimidazol-2-ylcarbamate	241-775-7	17804-35-2	Muta. 1B Repr. 1B STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H340 H360-FD H335 H315 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H340 H360FD H335 H315 H317 H410		M=10	
613-050-00-9	carbadox (INN); methyl 3-(quinoxalin-2-ylmethylene)carbazate 1,4-dioxide; 2-(methoxycarbonylhydrazonomethyl)quinoxaline 1,4-dioxide	229-879-0	6804-07-5	Flam. Sol. 1 Carc. 1B Acute Tox. 4(*)	H228 H350 H302	GHS02 GHS08 GHS07 Dgr	H228 H350 H302			T
613-051-00-4	molinate (ISO); S-ethyl 1-perhydroazepinecarbothioate; S-ethyl perhydroazepine-1-carbothioate	218-661-0	2212-67-1	Carc. 2 Repr. 2 Acute Tox. 4(*) Acute Tox. 4(*) STOT RE 2(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H361f (***) H332 H302 H373 (**) H317 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H361f (***) H332 H302 H373 (**) H317 H410		M=100	
613-052-00-X	trifenmorph (ISO); 4-tritylmorpholine	215-812-2	1420-06-0	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-053-00-5	anilazine (ISO); 2-chloro-N-(4,6-dichloro-1,3,5-triazin-2-yl) aniline	202-910-5	101-05-3	Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H315 H400 H410	GHS07 GHS09 Wng	H319 H315 H410			
613-054-00-0	thiabendazol (ISO); 2-(thiazole-4-yl)benzimidazole	205-725-8	148-79-8	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-056-00-1	1,2-dimethyl-3,5-diphenylpyrazolium methylsulphate; difenzoquat methyl sulfate	256-152-5	43222-48-6	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS09 Wng	H302 H410			
613-057-00-7	dodemorph (ISO); 4-cyclododecyl-2,6-dimethylmorpholine	216-474-9	1593-77-7	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H319 H335 H315 H411	GHS07 GHS09 Wng	H319 H335 H315 H411			
613-058-00-2	permethrin (ISO); <i>m</i> -phenoxybenzyl 3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate	258-067-9	52645-53-1	Acute Tox. 4(*) Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H317 H400 H410	GHS07 GHS09 Wng	H332 H302 H317 H410		M=1000	
613-059-00-8	profluralin (ISO); N-(cyclopropylmethyl)- α , α , α -trifluoro-2,6-dinitro-N-propyl-p-toluidine	247-656-6	26399-36-0	Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H400 H410	GHS07 GHS09 Wng	H319 H410			
613-060-00-3	resmethrin (ISO); 5-benzyl-3-furylmethyl ($\pm$)-cis—trans-chrysanthemate	233-940-7	10453-86-8	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-061-00-9	6-(1 α ,5 α ,8 α ,9-pentahydroxy-7 β -isopropyl-2 β ,5 β ,8 β -trimethylperhydro-8 α ,9-epoxy-5,8-ethanocyclopenta[1,2-b]indenyl) pyrrrole-2-carboxylate; ryania	239-732-2	15662-33-6	Acute Tox. 4(*) Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
613-062-00-4	sabadilla (ISO); veratrine	—	8051-02-3	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315			
613-063-00-X	secbumeton (ISO); 2-sec-butylamino-4-ethylamino-6-methoxy-1,3,5-triazine	247-554-1	26259-45-0	Acute Tox. 4(*) Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H400 H410	GHS07 GHS09 Wng	H302 H319 H410			
613-064-00-5	5-(3,6,9-trioxa-2-undecyloxy)benzo(d)-1,3-dioxolane; sesamex	—	51-14-9	Acute Tox. 4(*)	H302	GHS07 Wng	H302			
613-065-00-0	simetryn (ISO); 2,4-bis(ethylamino)-6-methylthio-1,3,5-triazine	213-801-7	1014-70-6	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-066-00-6	terbumeton (ISO); 2-tert-butylamino-4-ethylamino-6-methoxy-1,3,5-triazine	251-637-8	33693-04-8	Acute Tox. 4(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-067-00-1	propazine(ISO); 2-chloro-4,6-bis(isopropylamino)-1,3,5-triazine	205-359-9	139-40-2	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-068-00-7	atrazine (ISO); 2-chloro-4-ethylamine-6-isopropylamine-1,3,5-triazine	217-617-8	1912-24-9	STOT RE 2(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H317 H400 H410	GHS08 GHS09 Wng	H373 (**) H317 H410			
613-069-00-2	ε-caprolactam	203-313-2	105-60-2	Acute Tox. 4(*) Acute Tox. 4(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H332 H302 H319 H335 H315	GHS07 Wng	H332 H302 H319 H335 H315			
613-070-00-8	propylenethiourea	—	2122-19-2	Repr. 2 Acute Tox. 4(*) Aquatic Chronic 3	H361d (***) H302 H412	GHS08 GHS07 Wng	H361d (***) H302 H412			
613-071-00-3	2-fluoro-5-trifluoromethylpyridine	400-290-2	69045-82-5	Flam. Liq. 3 Skin Sens. 1 Aquatic Chronic 3	H226 H317 H412	GHS02 GHS07 Wng	H226 H317 H412			
613-072-00-9	N,N-bis(2-ethylhexyl)-((1,2,4-triazol-1-yl)methyl)amine	401-280-0	91273-04-0	Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H314 H317 H411	GHS05 GHS07 GHS09 Dgr	H314 H317 H411			
613-073-00-4	N,N-dimethyl-2-(3-(4-chlorophenyl)-4,5-dihydropyrazol-1-ylphenylsulphonyl)ethylamine	401-410-6	10357-99-0	STOT RE 2(*) Skin Sens. 1 Aquatic Chronic 2	H373 (**) H317 H411	GHS08 GHS09 Wng	H373 (**) H317 H411			
613-074-00-X	3-(3-methylpent-3-yl)isoxazol-5-ylamine	401-460-9	82560-06-3	Acute Tox. 3(*) Acute Tox. 3(*) Eye Dam. 1 Aquatic Chronic 3	H331 H301 H318 H412	GHS06 GHS05 Dgr	H331 H301 H318 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-075-00-5	1,3-dichloro-5-ethyl-5-methylimidazolidine-2,4-dione	401-570-7	89415-87-2	Ox. Sol. 1 (****) Acute Tox. 3(*) Skin Corr. 1B Acute Tox. 4(*) Skin Sens. 1 Aquatic Acute 1	H271 H331 H314 H302 H317 H400	GHS03 GHS06 GHS05 GHS09 Dgr	H271 H331 H314 H302 H317 H400			
613-076-00-0	3-chloro-5-trifluoromethyl-2-pyridylamine	401-670-0	79456-26-1	Acute Tox. 4(*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
613-077-00-6	reaction mass of 5-heptyl-1,2,4-triazol-3-ylamine and 5-nonyl-1,2,4-triazol-3-ylamine	401-940-8	—	Acute Tox. 4(*) Eye Irrit. 2 Aquatic Chronic 2	H302 H319 H411	GHS07 GHS09 Wng	H302 H319 H411			
613-078-00-1	N,N,N,N-tetrakis(4,6-bis(butyl-(N-methyl-2,2,6,6-tetramethylpiperidin-4-yl)amino)triazin-2-yl)-4,7-diazadecane-1,10-diamine	401-990-0	106990-43-6	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
613-079-00-7	4-(1(or 4 or 5 or 6)-methyl-8,9,10-trinorborn-5-en-2-yl)pyridine, reaction mass of isomers	402-520-7	—	Acute Tox. 4(*) Acute Tox. 4(*) Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H315 H317 H400 H410	GHS07 GHS09 Wng	H312 H302 H315 H317 H410			
613-080-00-2	3-(bis(2-ethylhexyl)aminomethyl)benzothiazole-2(3H)-thione	402-540-6	105254-85-1	Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H314 H317 H410			
613-081-00-8	1-butyl-2-methylpyridinium bromide	402-680-8	26576-84-1	Acute Tox. 4(*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-082-00-3	2-methyl-1-pentylpyridinium bromide	402-690-2	—	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 3	H312 H302 H412	GHS07 Wng	H312 H302 H412			
613-083-00-9	2-(4-(3-(4-chlorophenyl)-2-pyrazolin-1-yl)phenylsulfonyl)ethyl dimethylammonium formate	402-120-2	—	Skin Corr. 1B STOT RE 2 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H314 H373 (**) H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H314 H373 (**) H317 H410			
613-084-00-4	2-(4-(3-(4-chlorophenyl)-4,5-dihydropyrazolyl)phenylsulphonyl)ethyl dimethylammonium hydrogen phosphonate	402-490-5	106359-93-7	Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H400 H410	GHS07 GHS09 Wng	H319 H410			
613-085-00-X	reaction mass of 1,1'-(methylenebis(4,1-phenylene))dipyrrole-2,5-dione and N-(4-(4-(2,5-dioxopyrrol-1-yl)benzyl)phenyl)acetamide and 1-(4-(4-(5-oxo-2H-2-furylidena-mino)benzyl)phenyl)pyrrole-2,5-dione	401-970-1	—	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
613-086-00-5	caffeine	200-362-1	58-08-2	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
613-087-00-0	tetrahydrothiophene	203-728-9	110-01-0	Flam. Liq. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 3	H225 H332 H312 H302 H319 H315 H412	GHS02 GHS07 Dgr	H225 H332 H312 H302 H319 H315 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-088-00-6	1,2-benzisothiazol-3(2H)-one; 1,2-benzisothiazolin-3-one	220-120-9	2634-33-5	Acute Tox. 4 ^(*) Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H302 H315 H318 H317 H400	GHS05 GHS07 GHS09 Dgr	H302 H315 H318 H317 H400		Skin Sens. 1; H317: C ≥ 0,05 %	
613-089-00-1	diquat dibromide; [1] diquat dichloride; [2] 6,7-dihydrodipyrido[1,2-α:2',1'-c]pyrazine-diylium dihydroxide [3]	201-579-4 [1] 223-714-6 [2] 301-467-6 [3]	85-00-7 [1] 4032-26-2 [2] 94021-76-8 [3]	Acute Tox. 2 ^(*) STOT RE 1 Acute Tox. 4 ^(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H372 ^(**) H302 H319 H335 H315 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H372 ^(**) H302 H319 H335 H315 H317 H410			
613-090-00-7	paraquat dichloride; 1,1-dimethyl-4,4'-bipyridinium dichloride; [1] paraquat dimethylsulfate; 1,1-dimethyl-4,4'-bipyridinium dimethyl sulphate [2]	217-615-7 [1] 218-196-3 [2]	1910-42-5 [1] 2074-50-2 [2]	Acute Tox. 2 ^(*) Acute Tox. 3 ^(*) Acute Tox. 3 ^(*) STOT RE 1 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H330 H311 H301 H372 ^(**) H319 H335 H315 H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H311 H301 H372 ^(**) H319 H335 H315 H410			
613-091-00-2	morfamquat dichloride; [1] morfamquat sulfate [2]	225-062-8 [1] - [2]	4636-83-3 [1] 29873-36-7 [2]	Acute Tox. 4 ^(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 3	H302 H319 H335 H315 H412	GHS07 Wng	H302 H319 H335 H315 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-092-00-8	1,10-phenanthroline	200-629-2	66-71-7	Acute Tox. 3 ^(*) Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410			
613-093-00-3	hexasodium 6,13-dichloro-3,10-bis((4-(2,5-disulfonatoanilino)-6-fluoro-1,3,5-triazin-2-ylamino)prop-3-ylamino)-5,12-dioxa-7,14-diazapentacene-4,11-disulfonate	400-050-7	85153-92-0	Resp. Sens. 1 Skin Sens. 1	H334 H317	GHS08 Dgr	H334 H317			
613-094-00-9	4-methoxy-N,6-dimethyl-1,3,5-triazin-2-ylamine	401-360-5	5248-39-5	Acute Tox. 4 ^(*) STOT RE 2 ^(*)	H302 H373 ^(**)	GHS08 GHS07 Wng	H302 H373 ^(**)			
613-095-00-4	sodium 3-(2H-benzotriazol-2-yl)-5-sec-butyl-4-hydroxybenzenesulfonate	403-080-9	92484-48-5	Eye Dam. 1	H318	GHS05 Dgr	H318			
613-096-00-X	2-amino-6-ethoxy-4-methylamino-1,3,5-triazine	403-580-7	62096-63-3	Acute Tox. 4 ^(*)	H302	GHS07 Wng	H302			
613-097-00-5	7-amino-3-((5-carboxymethyl-4-methyl-1,3-thiazol-2-ylthio)methyl)-8-oxo-5-thia-1-azabicyclo(4.2.0)oct-2-ene-2-carboxylic acid	403-690-5	111298-82-9	Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 3	H334 H317 H412	GHS08 Dgr	H334 H317 H412			
613-098-00-0	N-(n-octyl)-2-pyrrolidone	403-700-8	2687-94-7	Skin Corr. 1B Aquatic Chronic 2	H314 H411	GHS05 GHS09 Dgr	H314 H411			
613-099-00-6	1-dodecyl-2-pyrrolidone	403-730-1	2687-96-9	Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H314 H317 H410			
613-100-00-X	2,9-bis(3-(diethylamino)propylsulfamoyl)quino(2,3-b)acridine-7,14-dione	404-230-6	—	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-101-00-5	N—tert-pentyl-2-benzothiazolesulfenamide	404-380-2	110799-28-5	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
613-102-00-0	dimethomorph (ISO); 4-(3-(4-chlorophenyl)-3-(3,4-dimethoxyphenyl)acryloyl)morpholine	404-200-2	110488-70-5	Aquatic Chronic 2	H411	GHS09	H411			
613-103-00-6	sodium 5-n-butylbenzotriazole	404-450-2	118685-34-0	Acute Tox. 4 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H302 H314 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H314 H317 H411			
613-104-00-1	5-tert-butyl-3-isoxazolyamine hydrochloride	404-840-2	—	Acute Tox. 4 (*) STOT RE 2 (*) Eye Dam. 1 Aquatic Chronic 3	H302 H373 (**) H318 H412	GHS08 GHS05 GHS07 Dgr	H302 H373 (**) H318 H412			
613-105-00-7	hexakis(tetramethylammonium) 4,4'-vinylenebis((3-sulfonato-4,1-phenylene)imino(6-morpholino-1,3,5-triazine-4,2-diyl)imino)bis(5-hydroxy-6-phenylazonaphthalene-2,7-disulfonate)	405-160-9	124537-30-0	Acute Tox. 3 (*) Skin Sens. 1 Aquatic Chronic 3	H301 H317 H412	GHS06 Dgr	H301 H317 H412			
613-106-00-2	tetrapotassium 2-(4-(5-(1-(2,5-disulfonato-phenyl)-3-ethoxycarbonyl-5-hydroxypyrazol-4-yl)penta-2,4-dienylidene)-3-ethoxycarbonyl-5-oxo-2-pyrazolin-1-yl)benzene-1,4-disulfonate	405-240-3	—	Skin Sens. 1	H317	GHS07 Wng	H317			
613-107-00-8	hexasodium 2,2'-vinylenebis((3-sulfonato-4,1-phenylene)imino(6-(N-cyanoethyl-N-(2-hydroxypropyl)amino)-1,3,5-triazine-4,2-diyl)imino)dibenzene-1,4-disulfonate	405-280-1	76508-02-6	Eye Irrit. 2	H319	GHS07 Wng	H319			
613-108-00-3	benzothiazole-2-thiol	205-736-8	149-30-4	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-109-00-9	bis(piperidinothiocarbonyl) disulphide	202-328-1	94-37-1	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H319 H335 H315 H317	GHS07 Wng	H319 H335 H315 H317			
613-110-00-4	dimepiperate (ISO); S-(1-methyl-1-phenylethyl) piperidine-1-carbothioate	262-784-2	61432-55-1	Acute Tox. 4 (*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
613-111-00-X	1,2,4-triazole	206-022-9	288-88-0	Repr. 2 Acute Tox. 4 (*) Eye Irrit. 2	H361d (***) H302 H319	GHS08 GHS07 Wng	H361d (***) H302 H319			
613-112-00-5	octhilinone (ISO); 2-octyl-2H-isothiazol-3-one	247-761-7	26530-20-1	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 4 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H302 H314 H317 H400 H410	GHS06 GHS05 GHS09 Dgr	H331 H311 H302 H314 H317 H410		Skin Sens. 1; H317: C ≥ 0,05 %	
613-113-00-0	2-(morpholinothio)benzothiazole	203-052-4	102-77-2	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H319 H315 H317 H411	GHS07 GHS09 Wng	H319 H315 H317 H411			
613-114-00-6	2,2',2''-(hexahydro-1,3,5-triazine-1,3,5-triyl) triethanol; 1,3,5-tris(2-hydroxyethyl)hexahydro-1,3,5-triazine	225-208-0	4719-04-4	Acute Tox. 4 (*) Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317		Skin Sens. 1; H317: C ≥ 0,1 %	
613-115-00-1	hymexazol (ISO); 3-hydroxy-5-methylisoxazole	233-000-6	10004-44-1	Acute Tox. 4 (*) Eye Dam. 1 Aquatic Chronic 3	H302 H318 H412	GHS05 GHS07 Dgr	H302 H318 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-116-00-7	tolylfluamid (ISO); dichloro-N-[(dimethylamino)sulphonyl]fluoro-N-(p-tolyl)methanesulphenamide	211-986-9	731-27-1	Acute Tox. 3 ^(*) STOT RE 2 ^(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H373 ^(**) H319 H335 H315 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H373 ^(**) H319 H335 H315 H317 H410			
613-117-00-2	diniconazole (ISO); (E)-β-[(2,4-dichlorophenyl)methylene]-α-(1,1-dimethylethyl)-1H-1,2,4-triazol-1-ethanol; (E)-(RS)-1-(2,4-dichlorophenyl)-4,4-dimethyl-2-(1H-1,2,4-triazol-1-yl)pent-1-en-3-ol	—	76714-88-0	Acute Tox. 4 ^(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-118-00-8	flubenzimine (ISO); N-[3-phenyl-4,5-bis[(trifluoromethyl)imino]thiazolidin-2-ylidene]aniline	253-703-1	37893-02-0	Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H400 H410	GHS07 GHS09 Wng	H319 H410			
613-119-00-3	(benzothiazol-2-ylthio)methyl thiocyanate; TCMTB	244-445-0	21564-17-0	Acute Tox. 2 ^(*) Acute Tox. 4 ^(*) Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H302 H319 H315 H317 H400 H410	GHS06 GHS09 Dgr	H330 H302 H319 H315 H317 H410			
613-120-00-9	bioresmethrin; (5-bezylfur-3-yl)methyl(1R)-trans—2,2-dimethyl-3-(2-methylpropenyl)cyclopropanecarboxylate	249-014-0	28434-01-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-121-00-4	chlorsulfuron (ISO); 2-chloro-N-[[[(4-methoxy-6-methyl-1,3,5-triazin-2-yl)amino]carbonyl]benzenesulphonamide	265-268-5	64902-72-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-122-00-X	diclobutrazole (ISO); (R ⁽ⁿ⁾ , R ⁽ⁿ⁾)-(±)-β-[(2,4-dichlorophenyl)methyl]-α-(1,1-dimethylethyl)-1H-1,2,4-triazole-1-ethanol; (2RS, 3RS)-1-(2,4-dichlorophenyl)-4,4-dimethyl-2-(1H-1,2,4-triazol-1-yl)pentan-3-ol	—	75736-33-3	Eye Irrit. 2 Aquatic Chronic 2	H319 H411	GHS07 GHS09 Wng	H319 H411			
613-123-00-5	5,6-dihydro-3H-imidazo[2,1-c]-1,2,4-dithiazole-3-thione; etem	251-684-4	33813-20-6	Acute Tox. 4 ^(*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-124-00-0	fenpropimorph (ISO); cis-4-[3-(p-tert-butylphenyl)-2-methylpropyl]-2,6-dimethylmorpholine	266-719-9	67564-91-4	Repr. 2 Acute Tox. 4 ^(*) Skin Irrit. 2 Aquatic Chronic 2	H361d ^(***) H302 H315 H411	GHS08 GHS07 GHS09 Wng	H361d ^(***) H302 H315 H411			
613-125-00-6	hexythiazox(ISO); trans-5-(4-chlorophenyl)-N-cyclohexyl-4-methyl-2-oxo-3-thiazolidine-carboxamide	—	78587-05-0	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-126-00-1	imazapyr (ISO); 2-[4,5-dihydro-4-methyl-4-(1-methylethyl)-5-oxo-1H-imidazol-2-yl]-3-pyridine carboxylate	—	81334-34-1	Eye Irrit. 2 Aquatic Chronic 3	H319 H412	GHS07 Wng	H319 H412			
613-127-00-7	1,1-dimethylpiperidinium chloride; mepiquat chloride	246-147-6	24307-26-4	Acute Tox. 4 ^(*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-128-00-2	prochloraz (ISO); N-propyl-N-[2-(2,4,6-trichlorophenoxy)ethyl]-1H-imidazole-1-carboxamide	266-994-5	67747-09-5	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-129-00-8	metamitron (ISO); 4-amino-3-methyl-6-phenyl-1,2,4-triazin-5-one	255-349-3	41394-05-2	Acute Tox. 4 (*) Aquatic Acute 1	H302 H400	GHS07 GHS09 Wng	H302 H400			
613-131-00-9	pyroquilon (ISO); 1,2,5,6-tetrahydropyrrolo[3,2,1-ij]quinolin-4-one	—	57369-32-1	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
613-132-00-4	hexazinone (ISO); 3-cyclohexyl-6-dimethylamino-1-methyl-1,2,3,4-tetrahydro-1,3,5-triazine-2,4-dione	257-074-4	51235-04-2	Acute Tox. 4 (*) Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H400 H410	GHS07 GHS09 Wng	H302 H319 H410			
613-133-00-X	etridiazole (ISO); 5-ethoxy-3-trichloromethyl-1,2,4-thiadiazole	219-991-8	2593-15-9	Carc. 2 Acute Tox. 3 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H331 H312 H302 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H331 H312 H302 H410			
613-134-00-5	myclobutanil(ISO); 2-(4-chlorophenyl)-2-(1H-1,2,4-triazol-1-ylmethyl)hexanenitrile	—	88671-89-0	Repr. 2 Acute Tox. 4 (*) Eye Irrit. 2 Aquatic Chronic 2	H361d (***) H302 H319 H411	GHS08 GHS07 GHS09 Wng	H361d (***) H302 H319 H411			
613-135-00-0	di(benzothiazol-2-yl) disulphide	204-424-9	120-78-5	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410	EUH031		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-136-00-6	N-cyclohexylbenzothiazole-2-sulphenamide	202-411-2	95-33-0	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
613-137-00-1	methabenzthiazuron (ISO); 1-(1,3-benzothiazol-2-yl)1,3-dimethylurea	242-505-0	18691-97-9	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-138-00-7	quinoxifen (ISO); 5,7-dichloro-4-(4-fluorophenoxy)quinoline	—	124495-18-7	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
613-139-00-2	metsulfuron-methyl; 2-(4-methoxy-6-methyl-1,3,5-triazin-2-ylcarbamoylsulfamoyl) benzoic acid	—	74223-64-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-140-00-8	cycloheximide (ISO); 4-[(2R)-2-[(1S,3S,5S)-3,5-dimethyl-2-oxocyclohexyl]-2-hydroxyethyl]piperidine-2,6-dione	200-636-0	66-81-9	Muta. 2 Repr. 1B Acute Tox. 2 (*) Aquatic Chronic 2	H341 H360D (***) H300 H411	GHS06 GHS08 GHS09 Dgr	H341 H360D (***) H300 H411			
613-141-00-3	1,4-diamino-2-(2-butyltetrazol-5-yl)-3-cyanoanthraquinone	401-470-3	93686-63-6	Aquatic Chronic 4	H413	—	H413			
613-142-00-9	<i>trans</i> —N-methyl-2-styryl-[4'-aminomethine-(1-acetyl-1-(2-methoxyphenyl)acetamido)] pyridinium acetate	405-860-4	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
613-143-00-4	1-(3-phenylpropyl)-2-methylpyridinium bromide	405-930-4	10551-42-5	Acute Tox. 4 (*) Eye Irrit. 2 Aquatic Chronic 3	H302 H319 H412	GHS07 Wng	H302 H319 H412			
613-144-00-X	reaction products of: poly(vinyl acetate), partially hydrolyzed, with (E)-2-(4-formylstyryl)-3,4-dimethylthiazoliummethyl sulfate	406-460-2	125139-08-4	Aquatic Chronic 3	H412	—	H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-145-00-5	(S)-3-benzyloxycarbonyl-1,2,3,4-tetrahydroisoquinolinium 4-methylbenzenesulfonate	406-960-0	77497-97-3	Aquatic Chronic 2	H411	GHS09	H411			
613-146-00-0	N-ethyl-N-methylpiperidinium iodide	407-780-5	4186-71-4	Acute Tox. 4 (*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
613-147-00-6	4-[2-(1-methyl-2-(4-morpholinyl)ethoxy)ethyl]morpholine	407-940-4	111681-72-2	Eye Dam. 1	H318	GHS05 Dgr	H318			
613-148-00-1	tetrasodium 1,2-bis(4-fluoro-6-[5-(1-amino-2-sulfonatoanthrachinon-4-ylamino)-2,4,6-trimethyl-3-sulfonatophenylamino]-1,3,5-triazin-2-ylamino)ethane	411-240-4	143683-23-2	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
613-149-00-7	pyridaben (ISO); 2-tert-butyl-5-(4-tert-butylbenzylthio)-4-chloropyridazin-3(2H)-one	405-700-3	96489-71-3	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H400 H410	GHS06 GHS09 Dgr	H331 H301 H410			
613-150-00-2	2,2'-[3,3'-(piperazine-1,4-diyl)dipropyl]bis(1H-benzimidazo[2,1-b]benzo[l,m,n][3,8]phenanthroline-1,3,6-trione	406-295-6	—	Aquatic Chronic 4	H413	—	H413			
613-151-00-8	1-(3-mesyloxy-5-trityloxymethyl-2-D-threo-furyl)thymine	406-360-9	104218-44-2	Aquatic Chronic 4	H413	—	H413			
613-152-00-3	phenyl N-(4,6-dimethoxypyrimidin-2-yl)carbamate	406-600-2	89392-03-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
613-153-00-9	2,3,5-trichloropyridine	407-270-2	16063-70-0	Aquatic Chronic 3	H412	—	H412			
613-154-00-4	2-amino-4-chloro-6-methoxypyrimidine	410-050-9	5734-64-5	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-155-00-X	5-chloro-2,3-difluoropyridine	410-090-7	89402-43-7	Flam. Liq. 3 Acute Tox. 4 (*) Aquatic Chronic 3	H226 H302 H412	GHS02 GHS07 Wng	H226 H302 H412			
613-156-00-5	2-butyl-4-chloro-5-formylimidazole	410-260-0	83857-96-9	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
613-157-00-0	2,4-diamino-5-methoxymethylpyrimidine	410-330-0	54236-98-5	Acute Tox. 4 (*) STOT RE 2 (*) Eye Irrit. 2	H302 H373 (**) H319	GHS08 GHS07 Wng	H302 H373 (**) H319			
613-158-00-6	2,3-dichloro-5-trifluoromethyl-pyridine	410-340-5	69045-84-7	Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H332 H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H332 H302 H318 H317 H411			
613-159-00-1	fenazaquin (ISO); 4-[2-[4-(1,1-dimethylethyl)phenyl]-ethoxy] quinazoline	410-580-0	120928-09-8	Acute Tox. 3 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H332 H400 H410	GHS06 GHS09 Dgr	H301 H332 H410			
613-160-00-7	(1S)-2-methyl-2,5-diazobicyclo[2.2.1]heptane dihydrobromide	411-000-9	125224-62-6	Skin Sens. 1	H317	GHS07 Wng	H317			
613-163-00-3	azimsulfuron (ISO); 1-(4,6-dimethoxypyrimidin-2-yl)-3-[1-methyl-4-(2-methyl-2H-tetrazol-5-yl)pyrazol-5-ylsulfonyl]urea	—	120162-55-2	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-164-00-9	flufenacet (ISO); N-(4-fluorophenyl)-N-isopropyl-2-(5-trifluoromethyl-[1,3,4]thiadiazol-2-yloxy)acetamide	—	142459-58-3	Acute Tox. 4 (*) STOT RE 2 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H373 (**) H317 H400 H410	GHS08 GHS07 GHS09 Wng	H302 H373 (**) H317 H410			
613-165-00-4	flupyrsulfuron-methyl-sodium (ISO); methyl 2-[[[(4,6-dimethoxypyrimidin-2-ylcarbamoyl)sulfamoyl]-6-trifluoromethyl] nicotinate, monosodium salt	—	144740-54-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-166-00-X	flumioxazin (ISO); N-(7-fluoro-3,4-dihydro-3-oxo-4-prop-2-ynyl-2H—1,4-benzoxazin-6-yl)cyclohex-1-ene-1,2-dicarboxamide	—	103361-09-7	Repr. 1B Aquatic Acute 1 Aquatic Chronic 1	H360D (***) H400 H410	GHS08 GHS09 Dgr	H360D (***) H410			
613-167-00-5	reaction mass of: 5-chloro-2-methyl-4-isothiazolin-3-one [EC no. 247-500-7] and 2-methyl-2H -isothiazol-3-one [EC no. 220-239-6] (3:1); reaction mass of: 5-chloro-2-methyl-4-isothiazolin-3-one [EC no. 247-500-7] and 2-methyl-4-isothiazolin-3-one [EC no. 220-239-6] (3:1)	—	55965-84-9	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H314 H317 H400 H410	GHS06 GHS05 GHS09 Dgr	H331 H311 H301 H314 H317 H410		Skin Corr. 1B; H314: C ≥ 0,6 % Skin Irrit. 2; H315: 0,06 % ≤ C < 0,6 % Eye Irrit. 2; H319: 0,06 % ≤ C < 0,6 % Skin Sens. 1; H317: C ≥ 0,0015 %	
613-168-00-0	1-vinyl-2-pyrrolidone	201-800-4	88-12-0	Carc. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) STOT SE 3 Eye Dam. 1	H351 H332 H312 H302 H373 (**) H335 H318	GHS06 GHS05 GHS09 Dgr	H351 H332 H312 H302 H373 (**) H335 H318			D

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-169-00-6	9-vinylcarbazole	216-055-0	1484-13-5	Muta. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H341 H312 H302 H315 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H341 H312 H302 H315 H317 H410			
613-170-00-1	2,2-ethylmethylthiazolidine	404-500-3	694-64-4	Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H317 H411			
613-171-00-7	hexaconazole (ISO); (RS)-2-(2,4-dichlorophenyl)-1-(1H-1,2,4-triazol-1-yl)hexan-2-ol	413-050-7	79983-71-4	Acute Tox. 4 (*) Skin Sens. 1 Aquatic Chronic 2	H302 H317 H411	GHS07 GHS09 Wng	H302 H317 H411			
613-172-00-2	5-chloro-1,3-dihydro-2H-indol-2-one	412-200-9	17630-75-0	Repr. 2 Acute Tox. 4 (*) Skin Sens. 1 Aquatic Chronic 3	H361f (***) H302 H317 H412	GHS08 GHS07 Wng	H361f (***) H302 H317 H412			
613-173-00-8	fluquinconazole (ISO); 3-(2,4-dichlorophenyl)-6-fluoro-2-(1H-1,2,4-triazol-1-yl)quinazolin-4-(3H)-one	411-960-9	136426-54-5	Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 1 Acute Tox. 4 (*) Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H372 (**) H312 H315 H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H301 H372 (**) H312 H315 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-174-00-3	(±) 2-(2,4-dichlorophenyl)-3-(1 <i>H</i> -1,2,4-triazol-1-yl)propyl-1,1,2,2-tetrafluoroethylether	407-760-6	112281-77-3	Carc. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 2	H351 H332 H302 H411	GHS08 GHS07 GHS09 Wng	H351 H332 H302 H411			
613-175-00-9	epoxiconazole(ISO); (2 <i>RS</i> ,3 <i>SR</i>)-3-(2-chlorophenyl)-2-(4-fluorophenyl)-[(1 <i>H</i> -1,2,4-triazol-1-yl)methyl]oxirane	406-850-2	133855-98-8	Carc. 2 Repr. 2 Aquatic Chronic 2	H351 H361fd H411	GHS08 GHS09 Wng	H351 H361fd H411			
613-176-00-4	2-methyl-2-azabicyclo[2.2.1]heptane	404-810-9	4524-95-2	Flam. Liq. 3 Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Skin Corr. 1B	H226 H312 H302 H373 (**) H314	GHS02 GHS08 GHS05 GHS07 Dgr	H226 H312 H302 H373 (**) H314			
613-177-00-X	8-amino-7-methylquinoline	412-760-4	5470-82-6	Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Sens. 1 Aquatic Chronic 2	H312 H302 H317 H411	GHS07 GHS09 Wng	H312 H302 H317 H411			
613-178-00-5	4-ethyl-2-methyl-2-isopentyl-1,3-oxazolidine	410-470-2	137796-06-6	Skin Corr. 1B Skin Sens. 1	H314 H317	GHS05 GHS07 Dgr	H314 H317		STOT SE 3; H335: C ≥ 5 %	
613-179-00-0	lithium 3-oxo-1,2(2 <i>H</i>)-benzisothiazol-2-ide	411-690-1	111337-53-2	Acute Tox. 4 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H302 H314 H317 H411	GHS05 GHS07 Dgr	H302 H314 H317 H411			
613-180-00-6	N-(1,1-dimethylethyl)bis(2-benzothiazole-sulfen)amide	407-430-1	3741-80-8	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-181-00-1	5,5-dimethyl-perhydro-pyrimidin-2-one α -(4-trifluoromethylstyryl)- α -(4-trifluoromethyl)cinnamylidenehydrazone	405-090-9	67485-29-4	STOT RE 1 Acute Tox. 4 (*) Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H372 (**) H302 H319 H400 H410	GHS08 GHS07 GHS09 Dgr	H372 (**) H302 H319 H410			
613-182-00-7	1-(1-naphthylmethyl)quinolinium chloride	406-220-7	65322-65-8	Carc. 2 Muta. 2 Acute Tox. 4 (*) Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 3	H351 H341 H302 H315 H318 H412	GHS08 GHS05 GHS07 Dgr	H351 H341 H302 H315 H318 H412			
613-183-00-2	reaction mass of: 5-(N-methylperfluorooctylsulfonamido)methyl-3-octadecyl-1,3-oxazolidin-2-one; 5-(N-methylperfluoroheptylsulfonamido)methyl-3-octadecyl-1,3-oxazolidin-2-one	413-640-4	—	STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H400 H410	GHS08 GHS09 Wng	H373 (**) H410			
613-184-00-8	nitrilotriethyleneammonio propane-2-ol 2-ethylhexanoate	413-670-8	—	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			
613-185-00-3	2,3,5,6-tetrahydro-2-methyl-2H-cyclopenta[d]-1,2-thiazol-3-one	407-630-9	82633-79-2	Acute Tox. 3 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H301 H318 H317 H400 H410	GHS06 GHS05 GHS09 Dgr	H301 H318 H317 H410			
613-186-00-9	(2R,3R)-3-((R)-1-(tert-butyl dimethylsiloxy)ethyl)-4-oxoazetidin-2-yl acetate	408-050-9	76855-69-1	Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H319 H317 H411	GHS07 GHS09 Wng	H319 H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-188-00-X	1-(3-(4-fluorophenoxy)propyl)-3-methoxy-4-piperidinone	411-500-7	116256-11-2	Acute Tox. 4 ^(*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H317 H411			
613-189-00-5	1,4,7,10-tetrakis(p-toluensulfonyl)-1,4,7,10-tetraazacyclododecane	414-030-0	52667-88-6	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
613-190-00-0	disodium 1-amino-4-(2-(5-chloro-6-fluoropyrimidin-4-ylamino-methyl)-4-methyl-6-sulfo-phenylamino)-9,10-dioxo-9,10-dihydro-anthracene-2-sulfonate	414-040-5	149530-93-8	Acute Tox. 4 ^(*) Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			
613-191-00-6	3-ethyl-2-methyl-2-(3-methylbutyl)-1,3-oxazolidine	421-150-7	143860-04-2	Repr. 1B Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H360F ^(***) H314 H400 H410	GHS08 GHS05 GHS09 Dgr	H360F ^(***) H314 H410			
613-193-00-7	pentakis[3-(dimethylammonio)propylsulfamoyl]-[(6-hydroxy-4,4,8,8-tetramethyl-4,8-diazoniaundecane-1,11-diyl)disulfamoyl]di[phthalocyaninecopper(II)] heptalactate	414-930-3	—	Aquatic Chronic 2	H411	GHS09	H411			
613-194-00-2	6,13-dichloro-3,10-bis[2-[4-fluoro-6-(2-sulfo-phenylamino)-1,3,5-triazin-2-ylamino]propylamino]benzo[5,6][1,4]oxazino[2,3-b.]phenoxazine-4,11-disulphonic acid, lithium-, sodium salt	418-000-8	163062-28-0	Eye Dam. 1	H318	GHS05 Dgr	H318			
613-195-00-8	2,2-(1,4-phenylene)bis((4H—3,1-benzoxazine-4-one)	418-280-1	18600-59-4	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-196-00-3	5-[[[4-chloro-6-[[2-[[[4-fluoro-6-[[5-hydroxy-6-[[4-methoxy-2-sulphophenyl]azo]-7-sulfo-2-naphthalenyl]amino]-1,3,5-triazin-2-yl]amino]-1-methylethyl]amino]-1,3,5-triazin-2-yl]amino]-3-[[4-(ethenylsulfonyl)phenyl]azo]-4-hydroxy-naphtalene-2,7-disulfonic acid, sodium salt	418-380-5	168113-78-8	Eye Dam. 1	H318	GHS05 Dgr	H318			
613-197-00-9	reaction mass of: 2,4,6-tri(butylcarbamoyl)-1,3,5-triazine; 2,4,6-tri(methylcarbamoyl)-1,3,5-triazine; [(2-butyl-4,6-dimethyl)tricarbamoyl]-1,3,5-triazine; [(2,4-dibutyl-6-methyl)tricarbamoyl]-1,3,5-triazine	420-390-1	187547-46-2	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
613-199-00-X	reaction mass of: 1,3,5-tris(3-aminomethylphenyl)-1,3,5-(1 <i>H</i> ,3 <i>H</i> ,5 <i>H</i>)-triazine-2,4,6-trione; reaction mass of oligomers of 3,5-bis(3-aminomethylphenyl)-1-poly[3,5-bis(3-aminomethylphenyl)-2,4,6-trioxo-1,3,5-(1 <i>H</i> ,3 <i>H</i> ,5 <i>H</i>)-triazin-1-yl]-1,3,5-(1 <i>H</i> ,3 <i>H</i> ,5 <i>H</i>)-triazine-2,4,6-trione	421-550-1	—	Carc. 1B Repr. 1B Skin Sens. 1 Aquatic Chronic 3	H350 H360D (***) H317 H412	GHS08 Dgr	H350 H360D (***) H317 H412			
613-200-00-3	Reaction product of: copper, (29 <i>H</i> ,31 <i>H</i> -phthalocyaninato(2-)- <i>N</i> 29, <i>N</i> 30, <i>N</i> 31, <i>N</i> 32)-, chlorosulfuric acid and 3-(2-sulfooxyethylsulfonyl)aniline, sodium salts	420-980-7	—	Eye Dam. 1	H318	GHS05 Dgr	H318			
613-201-00-9	(<i>R</i>)-5-bromo-3-(1-methyl-2-pyrrolidinylmethyl)-1 <i>H</i> -indole	422-390-5	143322-57-0	Repr. 2 STOT RE 1 Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361f (***) H372 (**) H332 H302 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H361f (***) H372 (**) H332 H302 H317 H410	EUH070		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-202-00-4	pymetrozine (ISO); (E)-4,5-dihydro-6-methyl-4-(3-pyridylmethyleneamino)-1,2,4-triazin-3(2H)-one	—	123312-89-0	Carc. 2 Aquatic Chronic 3	H351 H412	GHS08 Wng	H351 H412			
613-203-00-X	pyraflufen-ethyl; [1] pyraflufen [2]	- [1] - [2]	129630-19-9 [1] 129630-17-7 [2]	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-204-00-5	oxadiargyl (ISO); 3-[2,4-dichloro-5-(2-propynyloxy)phenyl]-5-(1,1-dimethylethyl)-1,3,4-oxadiazol-2(3H)-one; 5-tert-butyl-3-[2,4-dichloro-5-(prop-2-ynyloxy)phenyl]-1,3,4-oxadiazol-2(3H)-one	254-637-6	39807-15-3	Repr. 2 STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H361d (***) H373 (**) H400 H410	GHS08 GHS09 Wng	H361d (***) H373 (**) H410			
613-205-00-0	propiconazole(ISO); (±) 1-[2-(2,4-dichlorophenyl)-4-propyl-1,3-dioxolan-2-ylmethyl]-1H-1,2,4-triazole	262-104-4	60207-90-1	Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
613-206-00-6	fenamidone (ISO); (S)-5-methyl-2-methylthio-5-phenyl-3-phenylamino-3,5-dihydroimidazol-4-one	—	161326-34-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-208-00-7	imazamox (ISO); (RS)-2-(4-isopropyl-4-methyl-5-oxo-2-imidazolin-2-yl)-5-methoxymethylnicotinic acid	—	114311-32-9	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-209-00-2	cis-1-(3-chloropropyl)-2,6-dimethyl-piperidin hydrochloride	417-430-3	63645-17-0	Acute Tox. 3 (*) STOT RE 2 (*) Skin Sens. 1 Aquatic Chronic 2	H301 H373 (**) H317 H411	GHS06 GHS08 GHS09 Dgr	H301 H373 (**) H317 H411			
613-210-00-8	2-(3-chloropropyl)-2,5,5-trimethyl-1,3-dioxane	417-650-1	88128-57-8	STOT RE 2 (*) Aquatic Chronic 3	H373 (**) H412	GHS08 Wng	H373 (**) H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-211-00-3	N-methyl-4-(p-formylstyryl)pyridinium methylsulfate	418-240-3	74401-04-0	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
613-212-00-9	4-[4-(2-ethylhexyloxy)phenyl](1,4-thiazinane-1,1-dioxide)	418-320-8	133467-41-1	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-213-00-4	cis-1-benzoyl-4-[(4-methylsulfonyl)oxy]-L-proline	416-040-0	120807-02-5	Aquatic Chronic 3	H412	—	H412			
613-214-00-X	N,N-di-n-butyl-2-(1,2-dihydro-3-hydroxy-6-isopropyl-2-quinolyldiene)-1,3-dioxindan-5-carboxamide	416-260-7	147613-95-4	Aquatic Chronic 4	H413	—	H413			
613-215-00-5	2-chloromethyl-3,4-dimethoxypyridinium chloride	416-440-5	72830-09-2	Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H312 H302 H373 (**) H315 H318 H317 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H312 H302 H373 (**) H315 H318 H317 H411			
613-216-00-0	6-tert-butyl-7-(6-diethylamino-2-methyl-3-pyridylimino)-3-(3-methylphenyl)pyrazolo [3,2-c][1,2,4]triazole	416-490-8	162208-01-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-217-00-6	4-[3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionyloxy]-1-[2-[3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionyloxy]ethyl]-2,2,6,6-tetramethylpiperidine	416-770-1	73754-27-5	Aquatic Chronic 4	H413	—	H413			
613-218-00-1	6-hydroxyindole	417-020-4	2380-86-1	Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-219-00-7	7a-ethyl-3,5-bis(1-methylethyl)-2,3,4,5-tetrahydrooxazolo[3,4-c]-2,3,4,5-tetrahydrooxazole	417-140-7	79185-77-6	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
613-220-00-2	trans-(4S,6S)-5,6-dihydro-6-methyl-4H-thieno[2,3-b]thiopyran-4-ol, 7,7-dioxide	417-290-3	147086-81-5	Acute Tox. 4 ^(*)	H302	GHS07 Wng	H302			
613-221-00-8	2-chloro-5-methyl-pyridine	418-050-0	18368-64-4	Acute Tox. 4 ^(*) Acute Tox. 4 ^(*) Skin Irrit. 2 Aquatic Chronic 3	H312 H302 H315 H412	GHS07 Wng	H312 H302 H315 H412			
613-222-00-3	4-(1-oxo-2-propenyl)-morpholine	418-140-1	5117-12-4	Acute Tox. 4 ^(*) STOT RE 2 ^(*) Eye Dam. 1 Skin Sens. 1	H302 H373 ^(**) H318 H317	GHS08 GHS05 GHS07 Dgr	H302 H373 ^(**) H318 H317			
613-223-00-9	N-isopropyl-3-(4-fluorophenyl)-1H-indole	418-790-4	93957-49-4	Aquatic Chronic 4	H413	—	H413			
613-224-00-4	2,5-dimercaptomethyl-1,4-dithiane	419-770-8	136122-15-1	Acute Tox. 4 ^(*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H314 H317 H410			
613-225-00-X	reaction mass of:[2-(anthraquinon-1-ylamino)-6-[(5-benzoylamino)-anthraquinone-1-ylamino]-4-phenyl]-1,3,5-triazine; 2,6-bis-[(5-benzoylamino)-anthraquinon-1-ylamino]-4-phenyl-1,3,5-triazine.	421-290-9	—	STOT RE 2 ^(*) Aquatic Chronic 4	H373 ^(**) H413	GHS08 Wng	H373 ^(**) H413			
613-226-00-5	1-(2-(ethyl(4-(4-(4-(4-(ethyl(2-pyridinoethyl)amino)-2-methylphenylazo)benzoylamino)-phenylazo)-3-methylphenyl)amino)ethyl)-pyridinium dichloride	420-950-3	163831-67-2	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
613-227-00-0	(±)-[(R ^(*) ,R ^(*)) and (R ^(*) ,S ^(*))]-6-fluoro-3,4-dihydro-2-oxiranyl-2H-1-benzopyran	419-600-2	99199-90-3	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
613-228-00-6	(±)-(R ^(*) ,S ^(*))-6-fluoro-3,4-dihydro-2-oxiranyl-2H-1-benzopyran	419-630-6	793669-26-8	Aquatic Chronic 2	H411	GHS09	H411			
613-230-00-7	florasulam (ISO); 2',6',8-trifluoro-5-methoxy-5-triazolo[1,5-c]; pyrimidine-2-sulfonilide	—	145701-23-1	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-233-00-3	4,4'-(oxy-(bismethylene))-bis-1,3-dioxolane	423-230-7	56552-15-9	Eye Dam. 1	H318	GHS05 Dgr	H318			
614-001-00-4	nicotine (ISO); 3-(N-methyl-2-pyrrolidinyl)pyridine	200-193-3	54-11-5	Acute Tox. 1 Acute Tox. 3 (*) Aquatic Chronic 2	H310 H301 H411	GHS06 GHS09 Dgr	H310 H301 H411			
614-002-00-X	salts of nicotine	—	—	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) Aquatic Chronic 2	H330 H310 H300 H411	GHS06 GHS09 Dgr	H330 H310 H300 H411			A
614-003-00-5	strychnine	200-319-7	57-24-9	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			
614-004-00-0	salts of strychnine	—	—	Acute Tox. 2 (*) Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H400 H410	GHS06 GHS09 Dgr	H330 H300 H410			A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
614-005-00-6	colchicine	200-598-5	64-86-8	Acute Tox. 2 ^(*) Acute Tox. 2 ^(*)	H330 H300	GHS06 Dgr	H330 H300			
614-006-00-1	brucine; 2,3-dimethoxystrychnine	206-614-7	357-57-3	Acute Tox. 2 ^(*) Acute Tox. 2 ^(*) Aquatic Chronic 3	H330 H300 H412	GHS06 Dgr	H330 H300 H412			
614-007-00-7	brucine sulphate; [1] brucine nitrate; [2] strychnidin-10-one, 2,3-dimethoxy-, mono [(R)-1-methylheptyl 1,2-benzenedicarboxylate]; [3] strychnidin-10-one, 2,3-dimethoxy-, compd. with (S)mono(1-methylheptyl)-1,2-benzenedicarboxylate (1:1) [4]	225-432-9 [1] 227-317-9 [2] 269-439-5 [3] 269-710-8 [4]	4845-99-2 [1] 5786-97-0 [2] 68239-26-9 [3] 68310-42-9 [4]	Acute Tox. 2 ^(*) Acute Tox. 2 ^(*) Aquatic Chronic 3	H330 H300 H412	GHS06 Dgr	H330 H300 H412			A
614-008-00-2	aconitine	206-121-7	302-27-2	Acute Tox. 2 ^(*) Acute Tox. 2 ^(*)	H330 H300	GHS06 Dgr	H330 H300			
614-009-00-8	salts of aconitine	—	—	Acute Tox. 2 ^(*) Acute Tox. 2 ^(*)	H330 H300	GHS06 Dgr	H330 H300			A
614-010-00-3	atropine	200-104-8	51-55-8	Acute Tox. 2 ^(*) Acute Tox. 2 ^(*)	H330 H300	GHS06 Dgr	H330 H300			
614-011-00-9	salts of atropine	—	—	Acute Tox. 2 ^(*) Acute Tox. 2 ^(*)	H330 H300	GHS06 Dgr	H330 H300			A
614-012-00-4	hyoscyamine	202-933-0	101-31-5	Acute Tox. 2 ^(*) Acute Tox. 2 ^(*)	H330 H300	GHS06 Dgr	H330 H300			
614-013-00-X	salts of hyoscyamine	—	—	Acute Tox. 2 ^(*) Acute Tox. 2 ^(*)	H330 H300	GHS06 Dgr	H330 H300			A
614-014-00-5	hyoscine	200-090-3	51-34-3	Acute Tox. 2 ^(*) Acute Tox. 1 Acute Tox. 2 ^(*)	H330 H310 H300	GHS06 Dgr	H330 H310 H300			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
614-015-00-0	salts of hyoscine	—	—	Acute Tox. 2 ^(*) Acute Tox. 1 Acute Tox. 2 ^(*)	H330 H310 H300	GHS06 Dgr	H330 H310 H300			A
614-016-00-6	pilocarpine	202-128-4	92-13-7	Acute Tox. 2 ^(*) Acute Tox. 2 ^(*)	H330 H300	GHS06 Dgr	H330 H300			
614-017-00-1	salts of pilocarpine	—	—	Acute Tox. 2 ^(*) Acute Tox. 2 ^(*)	H330 H300	GHS06 Dgr	H330 H300			A
614-018-00-7	papaverine	200-397-2	58-74-2	Acute Tox. 4 ^(*)	H302	GHS07 Wng	H302			
614-019-00-2	salts of papaverine	—	—	Acute Tox. 4 ^(*)	H302	GHS07 Wng	H302			A
614-020-00-8	physostigmine	200-332-8	57-47-6	Acute Tox. 2 ^(*) Acute Tox. 2 ^(*)	H330 H300	GHS06 Dgr	H330 H300			
614-021-00-3	salts of physostigmine	—	—	Acute Tox. 2 ^(*) Acute Tox. 2 ^(*)	H330 H300	GHS06 Dgr	H330 H300			A
614-022-00-9	digitoxin	200-760-5	71-63-6	Acute Tox. 3 ^(*) Acute Tox. 3 ^(*) STOT RE 2 ^(*)	H331 H301 H373 ^(**)	GHS06 GHS08 Dgr	H331 H301 H373 ^(**)			
614-023-00-4	ephedrine	206-080-5	299-42-3	Acute Tox. 4 ^(*)	H302	GHS07 Wng	H302			
614-024-00-X	salts of ephedrine	—	—	Acute Tox. 4 ^(*)	H302	GHS07 Wng	H302			A
614-025-00-5	ouabain	211-139-3	630-60-4	Acute Tox. 3 ^(*) Acute Tox. 3 ^(*) STOT RE 2 ^(*)	H331 H301 H373 ^(**)	GHS06 GHS08 Dgr	H331 H301 H373 ^(**)			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
614-026-00-0	strophantin-K	234-239-9	11005-63-3	Acute Tox. 3 ^(*) Acute Tox. 3 ^(*) STOT RE 2 ^(*)	H331 H301 H373 ^(**)	GHS06 GHS08 Dgr	H331 H301 H373 ^(**)			
614-027-00-6	bufa-4,20,22-trienolide, 6-(acetyloxy)-3-(β-D-glucopyranosyloxy)-8,14-dihydroxy-, (3β, 6β)-; red squill; scilliroside	208-077-4	507-60-8	Acute Tox. 2 ^(*)	H300	GHS06 Dgr	H300			
614-028-00-1	reaction mass of: 2-ethylhexyl mono-D-glucopyranoside; 2-ethylhexyl di-D-glucopyranoside	414-420-0	—	Eye Dam. 1	H318	GHS05 Dgr	H318			
614-029-00-7	constitutional isomers of penta-O-allyl-β-D-fructofuranosyl-α-D-glucopyranoside; constitutional isomers of hexa-O-allyl-β-D-fructofuranosyl-α-D-glucopyranoside; constitutional isomers of hepta-O-allyl-β-D-fructofuranosyl-α-D-glucopyranoside	419-640-0	68784-14-5	Acute Tox. 4 ^(*)	H302	GHS07 Wng	H302			
615-001-00-7	methyl isocyanate	210-866-3	624-83-9	Flam. Liq. 2 Repr. 2 Acute Tox. 2 ^(*) Acute Tox. 3 ^(*) Acute Tox. 3 ^(*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H225 H361d ^(***) H330 H330 H311 H301 H335 H315 H315 H318 H334 H334 H317	GHS02 GHS06 GHS06 GHS08 GHS05 Dgr	H225 H361d ^(***) H330 H311 H301 H335 H315 H318 H334 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
615-002-00-2	methyl isothiocyanate	209-132-5	556-61-6	Acute Tox. 3 ^(*) Acute Tox. 3 ^(*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H314 H317 H400 H410	GHS06 GHS05 GHS09 Dgr	H331 H301 H314 H317 H410			
615-003-00-8	thiocyanic acid	207-337-4	463-56-9	Acute Tox. 4 ^(*) Acute Tox. 4 ^(*) Acute Tox. 4 ^(*) Aquatic Chronic 3	H332 H312 H302 H412	GHS07 Wng	H332 H312 H302 H412	EUH032		
615-004-00-3	salts of thiocyanic acid	—	—	Acute Tox. 4 ^(*) Acute Tox. 4 ^(*) Acute Tox. 4 ^(*) Aquatic Chronic 3	H332 H312 H302 H412	GHS07 Wng	H332 H312 H302 H412	EUH032		A
615-005-00-9	4,4'-methylenediphenyl diisocyanate; diphenylmethane-4,4'-diisocyanate; [1] 2,2'-methylenediphenyl diisocyanate; diphenylmethane-2,2'-diisocyanate; [2] o-(p-isocyanatobenzyl)phenyl isocyanate; diphenylmethane-2,4'-diisocyanate; [3] methylenediphenyl diisocyanate [4]	202-966-0 [1] 219-799-4 [2] 227-534-9 [3] 247-714-0 [4]	101-68-8 [1] 2536-05-2 [2] 5873-54-1 [3] 26447-40-5 [4]	Acute Tox. 4 ^(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Skin Sens. 1	H332 H319 H335 H315 H334 H317	GHS08 GHS07 Dgr	H332 H319 H335 H315 H334 H317		Eye Irrit.; H319: C ≥ 5 % STOT SE 3; H335: C ≥ 5 % Skin Irrit. 2; H315: C ≥ 5 % Resp. Sens. 1; H334: C ≥ 0,1 %	C 2
615-006-00-4	2-methyl- <i>m</i> -phenylene diisocyanate; toluene-2,4-di-isocyanate; [1] 4-methyl- <i>m</i> -phenylene diisocyanate; toluene-2,6-di-isocyanate; [2] <i>m</i> -tolylidene diisocyanate; toluene-diisocyanate [3]	202-039-0 [1] 209-544-5 [2] 247-722-4 [3]	91-08-7 [1] 584-84-9 [2] 26471-62-5 [3]	Carc. 2 Acute Tox. 2 ^(*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 3	H351 H330 H319 H335 H315 H334 H317 H412	GHS06 GHS08 Dgr	H351 H330 H319 H335 H315 H334 H317 H412		Resp. Sens. 1; H334: C ≥ 0,1 %	C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
615-007-00-X	1,5-naphthylene diisocyanate	221-641-4	3173-72-6	Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Aquatic Chronic 3	H332 H319 H335 H315 H334 H412	GHS08 GHS07 Dgr	H332 H319 H335 H315 H334 H412			
615-008-00-5	3-isocyanatomethyl-3,5,5-trimethylcyclohexyl isocyanate; isophorone di-isocyanate	223-861-6	4098-71-9	Acute Tox. 3 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 2	H331 H319 H335 H315 H334 H317 H411	GHS06 GHS08 GHS09 Dgr	H331 H319 H335 H315 H334 H317 H411		(*) Resp. Sens. 1; H334: C ≥ 0,5 % Skin Sens.1; H317: C ≥ 0,5 %	2
615-009-00-0	4,4'-methylenedi(cyclohexyl isocyanate); dicyclohexylmethane-4,4'-di-isocyanate	225-863-2	5124-30-1	Acute Tox. 3 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Skin Sens. 1	H331 H319 H335 H315 H334 H317	GHS06 GHS08 Dgr	H331 H319 H335 H315 H334 H317		(*) Resp. Sens. 1; H334: C ≥ 0,5 % Skin Sens. 1; H317: C ≥ 0,5 %	2
615-010-00-6	2,2,4-trimethylhexamethylene-1,6-di-isocyanate; [1] 2,4,4-trimethylhexamethylene-1,6-di-isocyanate [2]	241-001-8 [1] 239-714-4 [2]	16938-22-0 [1] 15646-96-5 [2]	Acute Tox. 3 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H331 H319 H335 H315 H334	GHS06 GHS08 Dgr	H331 H319 H335 H315 H334		(*) Resp. Sens. 1; H334: C ≥ 0,5 % Skin Sens. 1; H317: C ≥ 0,5 %	C 2
615-011-00-1	hexamethylene-di-isocyanate	212-485-8	822-06-0	Acute Tox. 3 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Skin Sens. 1	H331 H319 H335 H315 H334 H317	GHS06 GHS08 Dgr	H331 H319 H335 H315 H334 H317		(*) Resp. Sens. 1; H334: C ≥ 0,5 % Skin Sens. 1; H317: C ≥ 0,5 %	2

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
615-012-00-7	4-isocyanatosulphonyltoluene; tosyl isocyanate	223-810-8	4083-64-1	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334	EUH014	Eye Irrit.; H319: C $\geq$ 5 % STOT SE 3; H335: C $\geq$ 5 % Skin Irrit. 2; H315: C $\geq$ 5 %	
615-013-00-2	cyanamide; carbanonitril	206-992-3	420-04-2	Acute Tox. 3 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H301 H312 H319 H315 H317	GHS06 Dgr	H301 H312 H319 H315 H317			
615-014-00-8	tris(1-dodecyl-3-methyl-2-phenylbenzimidazolium)hexacyanoferrate	—	7276-58-6	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
615-015-00-3	1,7,7-trimethylbicyclo(2,2,1)hept-2-yl thiocyanatoacetate; isobornyl thiocyanacetate	204-081-5	115-31-1	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
615-016-00-9	potassium cyanate	209-676-3	590-28-3	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
615-017-00-4	calcium cyanamide	205-861-8	156-62-7	Acute Tox. 4 (*) STOT SE 3 Eye Dam. 1	H302 H335 H318	GHS05 GHS07 Dgr	H302 H335 H318			
615-018-00-X	2-(2-butoxyethoxy)ethyl thiocyanate	203-985-7	112-56-1	Flam. Liq. 3 Acute Tox. 3 (*) Acute Tox. 3 (*)	H226 H311 H301	GHS02 GHS06 Dgr	H226 H311 H301			
615-019-00-5	dicyclohexylcarbodiimide	208-704-1	538-75-0	Acute Tox. 3 (*) Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1	H311 H302 H318 H317	GHS06 GHS05 Dgr	H311 H302 H318 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
615-020-00-0	methylene dithiocyanate	228-652-3	6317-18-6	Acute Tox. 2 ^(*) Acute Tox. 3 ^(*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1	H330 H301 H314 H317 H400	GHS06 GHS05 GHS09 Dgr	H330 H301 H314 H317 H400			
615-021-00-6	1,3,5-tris(oxiranylmethyl)-1,3,5-triazine-2,4,6(1H,3H,5H)-trione; TGIC	219-514-3	2451-62-9	Muta. 1B Acute Tox. 3 ^(*) Acute Tox. 3 ^(*) STOT RE 2 ^(*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H340 H331 H301 H373 ^(**) H318 H317 H412	GHS06 GHS08 GHS05 Dgr	H340 H331 H301 H373 ^(**) H318 H317 H412			
615-022-00-1	methyl 3-isocyanatosulfonyl-2-thiophene-carboxylate	410-550-7	79277-18-2	STOT RE 2 ^(*) Resp. Sens. 1 Skin Sens. 1	H373 ^(**) H334 H317	GHS08 Dgr	~~E; R2~~ H373 ^(**) H334 H317	EUH014		
615-023-00-7	2-(isocyanatosulfonylmethyl)benzoic acid methyl ester; (alt.):methyl 2-(isocyanatosulfonylmethyl)benzoate	410-900-9	83056-32-0	Flam. Liq. 3 Muta. 2 Acute Tox. 4 ^(*) STOT RE 2 ^(*) Eye Dam. 1 Resp. Sens. 1	H226 H341 H332 H373 ^(**) H318 H334	GHS02 GHS08 GHS05 GHS07 Dgr	H226 H341 H332 H373 ^(**) H318 H334	EUH014		
615-024-00-2	2-phenylethylisocyanate	413-080-0	1943-82-4	Acute Tox. 3 ^(*) Acute Tox. 4 ^(*) Skin Corr. 1A Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 2	H331 H302 H314 H334 H317 H411	GHS06 GHS08 GHS05 GHS09 Dgr	H331 H302 H314 H334 H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
615-025-00-8	4,4'-ethylenediphenyl dicyanate	405-740-1	47073-92-7	Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H373 (**) H318 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H332 H302 H373 (**) H318 H410			
615-026-00-3	4,4'-methylenebis(2,6-dimethylphenyl cyanate)	405-790-4	101657-77-6	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
615-028-00-4	ethyl 2-(isocyanatosulfonyl)benzoate	410-220-2	77375-79-2	(****) Acute Tox. 4 (*) STOT RE 2 (*) Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H302 H373 (**) H318 H334 H317	GHS08 GHS05 GHS07 Dgr	~~E; R2~~ H302 H373 (**) H318 H334 H317	EUH014		
615-029-00-X	2,5-bis-isocyanatomethyl-bicyclo[2.2.1]heptane	411-280-2	—	Acute Tox. 2 (*) Acute Tox. 4 (*) Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 3	H330 H302 H314 H334 H317 H412	GHS06 GHS08 GHS05 Dgr	H330 H302 H314 H334 H317 H412			
615-030-00-5	alkali salts, alkali earth salts and other salts of thiocyanic acid not mentioned elsewhere in this Annex	—	—	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 3	H332 H312 H302 H412	GHS07 Wng	H332 H312 H302 H412	EUH032		A
615-031-00-0	thallium salt of thiocyanic acid	222-571-7	3535-84-0	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 2	H332 H312 H302 H411	GHS07 GHS09 Wng	H332 H312 H302 H411	EUH032		A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
615-032-00-6	metal salts of thiocyanic acid not mentioned elsewhere in this Annex	—	—	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410	EUH032		A
616-001-00-X	N,N-dimethylformamide; dimethyl formamide	200-679-5	68-12-2	Repr. 1B Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2	H360D (***) H332 H312 H319	GHS08 GHS07 Dgr	H360D (***) H332 H312 H319			
616-002-00-5	2-fluoroacetamide	211-363-1	640-19-7	Acute Tox. 2 (*) Acute Tox. 3 (*)	H300 H311	GHS06 Dgr	H300 H311			
616-003-00-0	acrylamide; prop-2-enamide	201-173-7	79-06-1	Carc. 1B Muta. 1B Repr. 2 Acute Tox. 3 (*) STOT RE 1 Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H350 H340 H361f (***) H301 H372 (**) H332 H312 H319 H315 H317	GHS06 GHS08 Dgr	H350 H340 H361f (***) H301 H372 (**) H332 H312 H319 H315 H317			D
616-004-00-6	allidochlor (ISO); N,N-diallylchloroacetamide	202-270-7	93-71-0	Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H312 H302 H319 H315 H411	GHS07 GHS09 Wng	H312 H302 H319 H315 H411			
616-005-00-1	chlorthiamid (ISO); 2,6-dichloro (thiobenzamide)	217-637-7	1918-13-4	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-006-00-7	dichlofluanid (ISO); N-dichlorofluoromethylthio-N',N'-dimethyl-N-phenylsulphamide	214-118-7	1085-98-9	Acute Tox. 4 (*) Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H319 H317 H400 H410	GHS07 GHS09 Wng	H332 H319 H317 H410			
616-007-00-2	diphenamid (ISO); N,N-dimethyl-2,2-diphenylacetamide	213-482-4	957-51-7	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
616-008-00-8	propachlor (ISO); 2-chloro-N-isopropylacetanilide; α-chloro-N-isopropylacetanilide	217-638-2	1918-16-7	Acute Tox. 4 (*) Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H317 H400 H410	GHS07 GHS09 Wng	H302 H319 H317 H410			
616-009-00-3	propanil (ISO); 3',4'-dichloropropionanilide	211-914-6	709-98-8	Acute Tox. 4 (*) Aquatic Acute 1	H302 H400	GHS07 GHS09 Wng	H302 H400			
616-010-00-9	tosylchloramide sodium	204-854-7	127-65-1	Acute Tox. 4 (*) Skin Corr. 1B Resp. Sens. 1	H302 H314 H334	GHS08 GHS05 GHS07 Dg	H302 H314 H334	EUH031		
616-011-00-4	N,N-dimethylacetamide	204-826-4	127-19-5	Repr. 1B Acute Tox. 4 (*) Acute Tox. 4 (*)	H360D (***) H332 H312	GHS08 GHS07 Dgr	H360D (***) H332 H312		Repr. 1B; H360D: C ≥ 5 %	
616-012-00-X	N-(dichlorofluoromethylthio)phthalimide; N-(fluorodichloromethylthio)phthalimide	211-952-3	719-96-0	Skin Irrit. 2	H315	GHS07 Wng	H315			
616-013-00-5	butyraldehyde oxime	203-792-8	110-69-0	Acute Tox. 3 (*) Acute Tox. 4 (*) Eye Irrit. 2	H311 H302 H319	GHS06 Dgr	H311 H302 H319			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-014-00-0	2-butanone oxime; ethyl methyl ketoxime; ethyl methyl ketone oxime	202-496-6	96-29-7	Carc. 2 Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1	H351 H312 H318 H317	GHS08 GHS05 GHS07 Dgr	H351 H312 H318 H317			
616-015-00-6	alachlor (ISO); 2-chloro-2',6'-diethyl-N-(methoxymethyl) acetanilide	240-110-8	15972-60-8	Carc. 2 Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H317 H410		M=10	
616-016-00-1	1-(3,4-dichlorophenylimino) thiosemicarbazide	—	5836-73-7	Acute Tox. 2 (*)	H300	GHS06 Dgr	H300			
616-017-00-7	cartap hydrochloride	239-309-2	15263-52-2	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
616-018-00-2	N,N-diethyl- <i>m</i> -toluamide; deet	205-149-7	134-62-3	Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 3	H302 H319 H315 H412	GHS07 Wng	H302 H319 H315 H412			
616-019-00-8	perfluidone (ISO); 1,1,1-trifluoro-N-(4-phenylsulphonyl- <i>o</i> -tolyl)methanesulphonamide;	253-718-3	37924-13-3	Acute Tox. 4 (*) Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			
616-020-00-3	tebuthiuron (ISO); 1-(5- <i>tert</i> -butyl-1,3,4-thiadiazol-2-yl)-1,3-dimethylurea	251-793-7	34014-18-1	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-021-00-9	thiazafluron (ISO); 1,3-dimethyl-1-(5-trifluoromethyl-1,3,4-thiadiazol-2-yl)urea	246-901-4	25366-23-8	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
616-022-00-4	acetamide	200-473-5	60-35-5	Carc. 2	H351	GHS08 Wng	H351			
616-023-00-X	N-hexadecyl(or octadecyl)-N-hexadecyl(or octadecyl)benzamide	401-980-6	—	Skin Irrit. 2 Skin Sens. 1	H315 H317	GHS07 Wng	H315 H317			
616-024-00-5	2-(4,4-dimethyl-2,5-dioxooxazolidin-1-yl)-2-chloro-5-(2-(2,4-di- <i>tert</i> -pentylphenoxy)butyramido)-4,4-dimethyl-3-oxovaleranilide	402-260-4	54942-74-4	Aquatic Chronic 4	H413	—	H413			
616-025-00-0	valinamide	402-840-7	20108-78-5	Repr. 2 Eye Irrit. 2 Skin Sens. 1	H361f (***) H319 H317	GHS08 Wng	H361f (***) H319 H317			
616-026-00-6	thioacetamide	200-541-4	62-55-5	Carc. 1B Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 3	H350 H302 H319 H315 H412	GHS08 GHS07 Dgr	H350 H302 H319 H315 H412			
616-027-00-1	tris(2-(2-hydroxyethoxy)ethyl)ammonium 3-acetoacetamido-4-methoxybenzenesulfonate	403-760-5	—	Skin Sens. 1	H317	GHS07 Wng	H317			
616-028-00-7	N-(4-(3-(4-cyanophenyl)ureido)-3-hydroxyphenyl)-2-(2,4-di- <i>tert</i> -pentylphenoxy)octanamide	403-790-9	108673-51-4	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
616-029-00-2	N,N'-ethylenebis(vinylsulfonylacetamide)	404-790-1	66710-66-5	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-030-00-8	ethidimuron (ISO); 1-(5-ethylsulphonyl-1,3,4-thiadiazol-2-yl)-1,3-dimethylurea	250-010-6	30043-49-3	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
616-031-00-3	dimethachlor (ISO); 2-chloro-N-(2,6-dimethylphenyl)-N-(2-methoxyethyl)acetamide;	256-625-6	50563-36-5	Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
616-032-00-9	diflufenican (ISO); N-(2,4-difluorophenyl)-2-[3-(trifluoromethyl)phenoxy]-3-pyridinecarboxamide	—	83164-33-4	Aquatic Chronic 3	H412	—	H412			
616-033-00-4	cyprofuram (ISO); N-(3-chlorophenyl)-N-(tetrahydro-2-oxo-3-furyl)cyclopropanecarboxamide	274-050-9	69581-33-5	Acute Tox. 3 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H312 H400 H410	GHS06 GHS09 Dgr	H301 H312 H410			
616-034-00-X	pyracarbolid; (ISO); 3,4-dihydro-6-methyl-2H-pyran-5-carboxanilide	246-419-4	24691-76-7	Aquatic Chronic 3	H412	—	H412			
616-035-00-5	cymoxanil (ISO); 2-cyano-N-[(ethylamino)carbonyl]-2-(methoxyimino)acetamide	261-043-0	57966-95-7	Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
616-036-00-0	2-chloracetamide	201-174-2	79-07-2	Repr. 2 Acute Tox. 3 (*) Skin Sens. 1	H361f (***) H301 H317	GHS06 GHS08 Dgr	H361f (***) H301 H317		Skin Sens. 1; H317: C ≥ 0,1 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-037-00-6	acetochlor (ISO); 2-chloro-N-(ethoxymethyl)-N-(2-ethyl-6-methylphenyl)acetamide	251-899-3	34256-82-1	Acute Tox. 4 ^(*) STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H335 H315 H317 H400 H410	GHS07 GHS09 Wng	H332 H335 H315 H317 H410			
616-038-00-1	(4-aminophenyl)-N-methylmethylsulfonamide hydrochloride	406-010-5	88918-84-7	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			
616-039-00-7	3',5'-dichloro-4'-ethyl-2'-hydroxypalmitanilide	406-200-8	117827-06-2	Skin Sens. 1	H317	GHS07 Wng	H317			
616-040-00-2	potassium N-(4-toluenesulfonyl)-4-toluenesulfonamide	406-650-5	97888-41-0	Eye Dam. 1	H318	GHS05 Dgr	H318			
616-041-00-8	3',5'-dichloro-2-(2,4-di- <i>tert</i> -pentylphenoxy)-4'-ethyl-2'-hydroxyhexanilide	406-840-8	101664-25-9	Aquatic Chronic 4	H413	—	H413			
616-042-00-3	N-(2-(6-ethyl-7-(4-methylphenoxy)-1H-pyrazolo[1,5-b][1,2,4]triazol-2-yl)propyl)-2-octadecyloxybenzamide	407-070-5	142859-67-4	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
616-043-00-9	isoxaben (ISO); N-[3-(1-ethyl-1-methylpropyl)-1,2-oxazol-5-yl]-2,6-dimethoxybenzamide	407-190-8	82558-50-7	Aquatic Chronic 4	H413	—	H413			
616-044-00-4	N-(3,5-dichloro-4-ethyl-2-hydroxyphenyl)-2-(3-pentadecylphenoxy)-butanamide	402-510-2	—	Aquatic Chronic 2	H411	GHS09	H411			
616-045-00-X	2'-(4-chloro-3-cyano-5-formyl-2-thienylazo)-5'-diethylamino-2-methoxyacetanilide	405-190-2	122371-93-1	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-046-00-5	N-(2-(6-chloro-7-methylpyrazolo(1,5-b)-1,2,4-triazol-4-yl)propyl)-2-(2,4-di-tert-pentylphenoxy)octanamide	406-390-2	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
616-047-00-0	reaction mass of: 2,2',2'',2'''-(ethylenedinitrilotetrakis-N,N-di(C ₁₆)alkylacetamide; 2,2',2'',2'''-(ethylenedinitrilotetrakis-N,N-di(C ₁₈)alkylacetamide	406-640-0	—	Skin Sens. 1	H317	GHS07 Wng	H317			
616-048-00-6	3'-trifluoromethylisobutyranilide	406-740-4	1939-27-1	STOT RE 2 (*) Aquatic Chronic 2	H373 (**) H411	GHS08 GHS09 Wng	H373 (**) H411			
616-049-00-1	2-(2,4-bis(1,1-dimethylethyl)phenoxy)-N-(3,5-dichloro-4-ethyl-2-hydroxyphenyl)-hexanamide	408-150-2	99141-89-6	Aquatic Chronic 4	H413	—	H413			
616-050-00-7	lufenuron (ISO); N-[2,5-dichloro-4-(1,1,2,3,3,3-hexafluoropropoxy)-phenyl-aminocarbonyl]-2,6-difluorobenzamide	410-690-9	103055-07-8	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
616-051-00-2	reaction mass of: 2,4 -bis(N'-(4-methylphenyl)-ureido)-toluene; 2,6 -bis(N'-(4-methylphenyl)-ureido)-toluene	411-070-0	—	Aquatic Chronic 4	H413	—	H413			
616-052-00-8	formamide	200-842-0	75-12-7	Repr. 1B	H360-D (***)	GHS08 Dgr	H360D (***)			
616-053-00-3	N-methylacetamide	201-182-6	79-16-3	Repr. 1B	H360-D (***)	GHS08 Dgr	H360D (***)			
616-054-00-9	iprodione (ISO); 3-(3,5-dichlorophenyl)-2,4-dioxo-N-isopropylimidazolidine-1-carboxamide	253-178-9	36734-19-7	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-055-00-4	propyzamide (ISO); 3,5-dichloro-N-(1,1-dimethylprop-2-ynyl) benzamide	245-951-4	23950-58-5	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			
616-056-00-X	N-methylformamide	204-624-6	123-39-7	Repr. 1B Acute Tox. 4 (*)	H360D (***) H312	GHS08 GHS07 Dg	H360D (***) H312			
616-057-00-5	reaction mass of: N-[3-hydroxy-2-(2-methylacryloylaminomethoxy)propoxymethyl]-2-methylacrylamide; N-[2,3-bis-(2-methylacryloylaminomethoxy)propoxymethyl]-2-methylacrylamide; methacrylamide; 2-methyl-N-(2-methylacryloylaminomethoxymethyl)-acrylamide; N-(2,3-dihydroxypropoxymethyl)-2-methylacrylamide	412-790-8	—	Carc. 1B Muta. 2 STOT RE 2 (*)	H350 H341 H373 (**)	GHS08 Dgr	H350 H341 H373 (**)			
616-058-00-0	1,3-bis(3-methyl-2,5-dioxo-1H-pyrrolinyl-methyl)benzene	412-570-1	119462-56-5	STOT RE 2 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H318 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H373 (**) H318 H317 H410			
616-059-00-6	4-((4-(diethylamino)-2-ethoxyphenyl)imino)-1,4-dihydro-1-oxo-N-propyl-2-naphthalenecarboxamide	412-650-6	121487-83-0	Aquatic Chronic 4	H413	—	H413			
616-060-00-1	Condensation product of: 3-(7-carboxyhept-1-yl)-6-hexyl-4-cyclohexene-1,2-dicarboxylic acid with polyamines (primarily aminoethyl-piperazine and triethylenetetramine)	413-770-1	—	Acute Tox. 4 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H314 H317 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-061-00-7	N,N'—1,6-hexanediylbis(N-(2,2,6,6-tetramethyl-piperidin-4-yl)-formamide	413-610-0	124172-53-8	Eye Irrit. 2 Aquatic Chronic 3	H319 H412	GHS07 Wng	H319 H412			
616-062-00-2	N-[3-[(2-acetyloxy)ethyl](phenyl-methyl)amino]-4-methoxyphenylacetamide	411-590-8	70693-57-1	Skin Corr. 1B Aquatic Chronic 3	H314 H412	GHS05 Dgr	H314 H412			
616-063-00-8	3-dodecyl-(1-(1,2,2,6,6-pentamethyl-4-piperidin-yl)-2,5-pyrrolidindione	411-920-0	106917-30-0	Acute Tox. 3 (*) Acute Tox. 4 (*) STOT RE 2 (*) Skin Corr. 1A Aquatic Acute 1 Aquatic Chronic 1	H331 H302 H373 (**) H314 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H331 H302 H373 (**) H314 H410			
616-064-00-3	N—tert-butyl-3-methylpicolinamide	406-720-5	32998-95-1	Aquatic Chronic 3	H412	—	H412			
616-065-00-9	3'-(3-acetyl-4-hydroxyphenyl)-1,1-diethylurea	411-970-3	79881-89-3	Acute Tox. 4 (*) STOT RE 2 (*)	H302 H373 (**)	GHS08 GHS07 Wng	H302 H373 (**)			
616-066-00-4	5,6,12,13-tetrachloroanthra(2,1,9-def:6,5,10—d'e'f')diisoquinoline-1,3,8,10(2H,9H)-tetrone	405-100-1	115662-06-1	Repr. 2	H361f (***)	GHS08 Wng	H361f (***)			
616-067-00-X	dodecyl 3-(2-(3-benzyl-4-ethoxy-2,5-dioximidazolidin-1-yl)-4,4-dimethyl-3-oxovaleramido)-4-chlorobenzoate	407-300-4	92683-20-0	Aquatic Chronic 4	H413	—	H413			
616-068-00-5	potassium 4-(11-methacrylamidoundecanamido)benzenesulfonate	406-500-9	174393-75-0	Skin Sens. 1	H317	GHS07 Wng	H317			
616-069-00-0	1-hydroxy-5-(2-methylpropyloxycarbonylamino)-N-(3-dodecyloxypropyl)-2-naphthoamide	406-210-2	110560-22-0	Aquatic Chronic 4	H413	—	H413			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-070-00-6	reaction mass of: 3,3'-dicyclohexyl-1,1'-methylenebis(4,1-phenylene)diurea; 3-cyclohexyl-1-(4-(4-(3-octadecylureido)benzyl)phenyl)urea; 3,3'-dioctadecyl-1,1'-methylenebis(4,1-phenylene)diurea	406-530-2	—	Aquatic Chronic 4	H413	—	H413			
616-071-00-1	reaction mass of: bis(N-cyclohexyl-N'-phenyleneureido)methylene; bis(N-octadecyl-N'-phenyleneureido)methylene; bis(N-dicyclohexyl-N'-phenyleneureido)methylene (1:2:1)	406-550-1	—	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
616-072-00-7	1-(2-deoxy-5-O-trityl-β-D-threopentofuranosyl)thymine	407-120-6	55612-11-8	Aquatic Chronic 4	H413	—	H413			
616-073-00-2	4'-ethoxy-2-benzimidazoleanilide	407-600-5	120187-29-3	Muta. 2 Aquatic Chronic 4	H341 H413	GHS08 Wng	H341 H413			
616-074-00-8	N-butyl-2-(4-morpholinylcarbonyl)benzamide	407-730-2	104958-67-0	Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H319 H317 H412	GHS07 Wng	H319 H317 H412			
616-075-00-3	D, L-(N,N-diethyl-2-hydroxy-2-phenylacetamide)	408-120-9	65197-96-8	Acute Tox. 4 (*) Eye Dam. 1	H302 H318	GHS05 GHS07 Dgr	H302 H318			
616-076-00-9	tebufenozide (ISO); N—tert-butyl-N'-(4-ethylbenzoyl)-3,5-dimethylbenzohydrazide	412-850-3	112410-23-8	Aquatic Chronic 2	H411	GHS09	H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-077-00-4	reaction mass of: 2-(9-methyl-1,3,8,10-tetraoxo-2,3,9,10-tetrahydro-(1 <i>H</i> ,8 <i>H</i>)-anthra[2,1,9- <i>def</i> : 6,5,10— <i>d'e'f'</i>]diisoquinolin-2-ylethansulfonic acid; potassium 2-(9-methyl-1,3,8,10-tetraoxo-2,3,9,10-tetrahydro-(1 <i>H</i> ,8 <i>H</i>)-anthra[2,1,9- <i>def</i> : 6,5,10— <i>d'e'f'</i>]diisoquinolin-2-ylethansulfate	411-310-4	—	Eye Dam. 1	H318	GHS05 Dgr	H318			
616-078-00-X	2-[2,4-bis(1,1-dimethyl-ethyl)phenoxy]- <i>N</i> -(2-hydroxy-5-methyl-phenyl)hexanamide	411-330-3	104541-33-5	Aquatic Chronic 4	H413	—	H413			
616-079-00-5	1,6-hexanediyl-bis(2-(2-(1-ethylpentyl)-3-oxazolidinyl)ethyl)carbamate	411-700-4	140921-24-0	Skin Sens. 1	H317	GHS07 Wng	H317			
616-080-00-0	4-(2-((3-ethyl-4-methyl-2-oxo-pyrrolin-1-yl)carboxamido)ethyl)benzenesulfonamide)	411-850-0	119018-29-0	Aquatic Chronic 3	H412	—	H412			
616-081-00-6	5-bromo-8-naphtholactam	413-480-5	24856-00-6	Acute Tox. 4 ^(*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
616-082-00-1	<i>N</i> -(5-chloro-3-((4-(diethylamino)-2-methylphenyl)imino-4-methyl-6-oxo-1,4-cyclohexadien-1-yl)benzamide	413-200-1	129604-78-0	Skin Sens. 1	H317	GHS07 Wng	H317			
616-083-00-7	[2-[(4-nitrophenyl)amino]ethyl]urea	410-700-1	27080-42-8	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
616-084-00-2	2,4-bis[<i>N'</i> -(4-methylphenyl)ureido]toluene	411-790-5	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
616-085-00-8	3-(2,4-dichlorophenyl)-6-fluoro-quinazoline-2,4(1 <i>H</i> ,3 <i>H</i>)-dione	412-190-6	168900-02-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-086-00-3	2-acetylamino-6-chloro-4-[(4-diethylamino) 2-methylphenyl-imino]-5-methyl-1-oxo-2,5-cyclohexadiene	412-250-1	102387-48-4	Aquatic Chronic 4	H413	—	H413			
616-087-00-9	reaction mass of: 7,9,9-trimethyl-3,14-dioxo-4,13-dioxo-5,12-diazahexadecane-1,16-diyl-prop-2-enoate; 7,7,9-trimethyl-3,14-dioxo-4,13-dioxo-5,12-diazahexadecan-1,16-diyl-prop-2-enoate	412-260-6	52658-19-2	Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H319 H317 H411	GHS07 GHS09 Wng	H319 H317 H411			
616-088-00-4	2-aminosulfonyl-N,N-dimethylnicotinamide	413-440-7	112006-75-4	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
616-089-00-X	5-(2,4-dioxo-1,2,3,4-tetrahydropyrimidine)-3-fluoro-2-hydroxymethyltetrahydrofuran	415-360-8	41107-56-6	Muta. 2	H341	GHS08 Wng	H341			
616-090-00-5	1-(1,4-benzodioxan-2-ylcarbonyl)piperazine hydrochloride	415-660-9	70918-74-0	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*) Aquatic Chronic 2	H331 H311 H301 H373 (**) H411	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 (**) H411			
616-091-00-0	1,3,5-tris-[(2S and 2R)-2,3-epoxypropyl]-1,3,5-triazine-2,4,6-(1H,3H,5H)-trione	423-400-0	59653-74-6	Muta. 1B Acute Tox. 3 (*) Acute Tox. 4 (*) STOT RE 2 (*) Eye Dam. 1 Skin Sens. 1	H340 H331 H302 H373 (**) H318 H317	GHS06 GHS08 GHS05 Dgr	H340 H331 H302 H373 (**) H318 H317			
616-092-00-6	Polymeric reaction product of bicyclo[2.2.1] hepta-2,5-diene, ethene, 1,4-hexadiene, 1-propene with N,N-di-2-propenylformamide	404-035-6	—	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
616-093-00-1	Reaction products of: aniline-terephthalaldehyde-o-toluidine condensate with maleic anhydride	406-620-1	129217-90-9	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-094-00-7	3,3'-dicyclohexyl-1,1'-methylenebis(4,1-phenylene)diurea	406-370-3	58890-25-8	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
616-095-00-2	3,3'-dioctadecyl-1,1'-methylenebis(4,1-phenylene)diurea	406-690-3	43136-14-7	Aquatic Chronic 4	H413	—	H413			
616-096-00-8	N-(3-hexadecyloxy-2-hydroxyprop-1-yl)-N-(2-hydroxyethyl)palmitamide	408-110-4	110483-07-3	Aquatic Chronic 4	H413	—	H413			
616-097-00-3	N,N'—1,4-phenylenebis(2-((2-methoxy-4-nitrophenyl)azo)-3-oxobutanamide	411-840-6	83372-55-8	Aquatic Chronic 4	H413	—	H413			
616-098-00-9	1-[4-chloro-3-((2,2,3,3,3-pentafluoropropoxy)methyl)phenyl]-5-phenyl-1H-1,2,4-triazole-3-carboxamide	411-750-7	119126-15-7	Aquatic Chronic 2	H411	GHS09	H411			
616-099-00-4	2-[4-[(4-hydroxyphenyl)sulfonyl]phenoxy]-4,4-dimethyl-N-[5-[(methylsulfonyl)amino]-2-[4-(1,1,3,3-tetramethylbutyl)phenoxy]phenyl]-3-oxopentanamide	414-170-2	135937-20-1	Aquatic Chronic 4	H413	—	H413			
616-100-00-8	1,3-dimethyl-1,3-bis(trimethylsilyl)urea	414-180-7	10218-17-4	Acute Tox. 4 (*) Skin Irrit. 2	H302 H315	GHS07 Wng	H302 H315			
616-101-00-3	(S)-N—tert-butyl-1,2,3,4-tetrahydro-3-isoquinolinecarboxamide	414-600-9	149182-72-9	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
616-102-00-9	reaction mass of: α-[3-(3-mercaptopropanoxycarbonylamino)methylphenylaminocarbonyl]-ω-[3-(3-mercaptopropanoxycarbonylamino)methylphenylaminocarbonyloxy]-poly-(oxyethylene-co-oxypropylene); 1,2-(or 1,3-)bis[α-(3-mercaptopropanoxycarbonylamino)methylphenylaminocarbonyl]-ω-oxy-poly(oxyethylene-co-oxypropylene)]-3-(or 2-)propanol; 1,2,3-tris[α-(3-mercaptopropanoxycarbonylamino)methylphenylaminocarbonyl]-ω-oxy-poly-(oxyethylene-co-oxypropylene)]propane]	415-870-0	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-103-00-4	(S,S)-trans-4-(acetylamo)-5,6-dihydro-6-methyl-7,7-dioxo-4H-thieno[2,3-b]thiopyran-2-sulfonamide	415-030-3	120298-38-6	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
616-104-00-X	benalaxyl (ISO); methyl N-(2,6-dimethylphenyl)-N-(phenylacetyl)-DL-alaninate	275-728-7	71626-11-4	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
616-105-00-5	chlorotoluron (ISO); 3-(3-chloro-p-tolyl)-1,1-dimethylurea	239-592-2	15545-48-9	Carc. 2 Repr. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H361d (***) H400 H410	GHS08 GHS09 Wng	H351 H361d (***) H410			
616-106-00-0	phenmedipham (ISO); methyl 3-(3-methylcarbaniloyloxy)carbanilate	237-199-0	13684-63-4	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
616-108-00-1	iodosulfuron-methyl-sodium; sodium ([5-iodo-2-(methoxycarbonyl)phenyl]sulfonyl)carbamoyl(4-methoxy-6-methyl-1,3,5-triazin-2-yl)azanide	—	144550-36-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
616-109-00-7	sulfosulfuron (ISO); 1-(4,6-dimethoxypyrimidin-2-yl)-3-(2-ethyl-sulfonylimidazo[1,2-a]pyridin-3-yl)sulfonylurea	—	141776-32-1	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
616-110-00-2	cyclanilide (ISO); 1-(2,4-dichloroanilinocarbonyl)cyclopropanecarboxylic acid	419-150-7	113136-77-9	Acute Tox. 4 (*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
616-111-00-8	fenhexamid (ISO); N-(2,3-dichlor-4-hydroxyphenyl)-1-methylcyclohexancarboxamid	422-530-5	126833-17-8	Aquatic Chronic 2	H411	GHS09	H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-112-00-3	oxasulfuron (ISO); oxetan-3-yl 2-[(4,6-dimethylpyrimidin-2-yl)- carbamoylsulfamoyl]benzoate	—	144651-06-9	STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H400 H410	GHS08 GHS09 Wng	H373 (**) H410			
616-113-00-9	desmedipham (ISO); ethyl 3-phenylcarbamoyloxyphenylcarbamate	237-198-5	13684-56-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410		M=10	
616-114-00-4	dodecanamide, N,N'-(9,9',10,10'-tetrahydro- 9,9',10,10'-tetraoxo(1,1'-bianthracene)-4,4'- diyl)bis-	418-010-2	136897-58-0	Aquatic Chronic 4	H413	—	H413			
616-115-00-X	N-(3-acetyl-2-hydroxyphenyl)-4-(4-phenyl- butoxy)benzamide	416-150-9	136450-06-1	Aquatic Chronic 4	H413	—	H413			
616-116-00-5	N-(4-dimethylaminopyridinium)-3- methoxy-4-(1-methyl-5-nitroindol-3-ylme- thyl)-N-(o-tolylsulfonyl)benzamidate	416-790-9	143052-96-4	Aquatic Chronic 4	H413	—	H413			
616-117-00-0	N-[2-(3-acetyl-5-nitrothiophen-2-ylazo)-5- diethylaminophenyl]acetamide	416-860-9	777891-21-1	Repr. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361f (***) H317 H400 H410	GHS08 GHS09 Wng	H361f (***) H317 H410			
616-118-00-6	N-(2',6'-dimethylphenyl)-2-piperidinecarbo- xamide hydrochloride	417-950-0	65797-42-4	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
616-119-00-1	2-(1-butyl-3,5-dioxo-2-phenyl-(1,2,4)-triazol- olidin-4-yl)-4,4-dimethyl-3-oxo-N-(2- methoxy-5-(2-(dodecyl-1-sulfonyl))propio- nylamino)-phenyl)-pentanamide	418-060-5	118020-93-2	Aquatic Chronic 4	H413	—	H413			
616-120-00-7	reaction mass of: N-(3-dimethylamino-4- methyl-phenyl)-benzamide; N-(3-dimethylamino-2-methyl-phenyl)-ben- zamide; N-(3-dimethylamino-3-methyl-phenyl)-ben- zamide	420-600-1	—	STOT RE 2 (*) Aquatic Chronic 2	H373 (**) H411	GHS08 GHS09 Wng	H373 (**) H411			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-121-00-2	2,4-dihydroxy-N-(2-methoxyphenyl)benzamide	419-090-1	129205-19-2	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
616-123-00-3	N-[3-[[4-(diethylamino)-2-methylphenyl]imino]-6-oxo-1,4-cyclohexadienyl]acetamide	414-740-0	96141-86-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
616-124-00-9	lithium bis(trifluoromethylsulfonyl)imide	415-300-0	90076-65-6	Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Aquatic Chronic 3	H311 H301 H314 H412	GHS06 GHS05 Dgr	H311 H301 H314 H412			
616-125-00-4	3-cyano-N-(1,1-dimethylethyl)androsta-3,5-diene-17-β-carboxamide	415-730-9	151338-11-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	410			
616-127-00-5	reaction mass of: N,N'-Ethane-1,2-diylbis(decanamide); 12-Hydroxy-N-[2-[1-oxydecyl]amino]ethyl]octadecanamide; N,N'-Ethane-1,2-diylbis(12-hydroxyoctadecanamide)	430-050-2	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
616-128-00-0	N-(2-(1-allyl-4,5-dicyanoimidazol-2-ylazo)-5-(dipropylamino)phenyl)-acetamide	417-530-7	123590-00-1	Aquatic Chronic 4	H413	—	H413			
616-129-00-6	N,N'-bis(2,2,6,6-tetramethyl-4-piperidyl)isophthalamide	419-710-0	42774-15-2	Acute Tox. 4 (*) Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			
616-130-00-1	N-(3-(2-(4,4-dimethyl-2,5-dioxoimidazolin-1-yl)-4,4-dimethyl-3-oxo-pentanoylamino)-4-methoxy-phenyl)-octadecanamide	421-780-2	150919-56-5	Aquatic Chronic 4	H413	—	H413			
616-132-00-2	N-[4-(4-cyano-2-furfurylidene-2,5-dihydro-5-oxo-3-furyl)phenyl]butane-1-sulfonamide	423-250-6	130016-98-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
616-133-00-8	N-cyclohexyl-S,S-dioxobenzo[b]tiophene-2-carboxamide	423-990-1	149118-66-1	Acute Tox. 4 ^(*) Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H318 H410			
616-134-00-3	3,3'-bis(dioctyloxyphosphinothioylthio)-N,N'-oxybis(methylene)dipropionamide	401-820-5	793710-14-2	Aquatic Chronic 3	H412	—	H412			
616-135-00-9	(3S,4aS,8aS)-2-[(2R,3S)-3-amino-2-hydroxy-4-phenylbutyl]-N-tert-butyldecahydroisoquinoline-3-carboxamide	430-230-0	136522-17-3	Acute Tox. 4 ^(*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
616-142-00-7	1,3-Bis(vinylsulfonylacetamido)propane	428-350-3	93629-90-4	Muta. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H341 H318 H317 H412	GHS08 GHS05 GHS07 Dgr	H341 H318 H317 H412			
616-143-00-2	N,N'-dihexadecyl-N,N'-bis(2-hydroxyethyl)propanediamide	422-560-9	149591-38-8	Repr. 2 Eye Irrit. 2 Aquatic Chronic 4	H361f ^(***) H319 H413	GHS08 Wng	H361f ^(***) H319 H413			
617-001-00-2	di-tert-butyl peroxide	203-733-6	110-05-4	Org. Perox. E Flam. Liq. 2	H242 H225	GHS02 Dgr	H242 H225			
617-002-00-8	α, α-dimethylbenzyl hydroperoxide; cumene hydroperoxide	201-254-7	80-15-9	Org. Perox. E Acute Tox. 3 ^(*) Acute Tox. 4 ^(*) Acute Tox. 4 ^(*) STOT RE 2 ^(*) Skin Corr. 1B Aquatic Chronic 2	H242 H331 H312 H302 H373 ^(**) H314 H411	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H242 H331 H312 H302 H373 ^(**) H314 H411		Skin Corr. 1B; H314: C ≥ 10 % Skin Irrit. 2; H315: 3 % ≤ C < 10 % Eye Dam. 1; H318: 3 % ≤ C < 10 % Eye Irrit. 2; H319: 1 % ≤ C < 3 % STOT SE 3; H335: C < 10 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
617-003-00-3	dilauroyl peroxide	203-326-3	105-74-8	Org. Perox. D	H242	GHS02 Dgr	H242			
617-004-00-9	1,2,3,4-tetrahydro-1-naphthyl hydroperoxide	212-230-0	771-29-9	Org. Perox. D Acute Tox. 4 (*) Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H242 H302 H314 H400 H410	GHS02 GHS05 GHS07 GHS09 Dgr	H242 H302 H314 H410		STOT SE 3; H335: C ≥ 5 %	
617-006-00-X	bis(α, α-dimethylbenzyl) peroxide	201-279-3	80-43-3	Org. Perox. F Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H242 H319 H315 H411	GHS02 GHS07 GHS09 Wng	H242 H319 H315 H411			
617-007-00-5	tert-butyl α, α-dimethylbenzyl peroxide	222-389-8	3457-61-2	Org. Perox. E Skin Irrit. 2 Aquatic Chronic 2	H242 H315 H411	GHS02 GHS07 GHS09 Wng	H242 H315 H411			
617-008-00-0	dibenzoyl peroxide; benzoyl peroxide	202-327-6	94-36-0	Org. Perox. B Eye Irrit. 2 Skin Sens. 1	H241 H319 H317	GHS01 GHS02 GHS07 Wng	H241 H319 H317			T
617-010-00-1	1-hydroperoxycyclohexyl 1-hydroxycyclohexyl peroxide; [1] 1,1'-dioxobiscyclohexan-1-ol; [2] cyclohexylidene hydroperoxide; [3] cyclohexanone, peroxide [4] [> 91 % solution]	201-091-1 [1] 219-306-2 [2] 220-279-4 [3] 235-527-7 [4]	78-18-2 [1] 2407-94-5 [2] 2699-11-8 [3] 12262-58-7 [4]	Org. Perox. A Acute Tox. 4 (*) Skin Corr. 1B	H240 H302 H314	GHS01 GHS05 GHS07 Dgr	H240 H302 H314		STOT SE 3; H335: C ≥ 5 %	C T

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
617-010-01-9	1-hydroperoxycyclohexyl 1-hydroxycyclohexyl peroxide; [1] 1,1'-dioxybiscyclohexan-1-ol; [2] cyclohexylidene hydroperoxide; [3] cyclohexanone, peroxide [4] [≤ 91 % solution]	201-091-1 [1] 219-306-2 [2] 220-279-4 [3] 235-527-7 [4]	78-18-2 [1] 2407-94-5 [2] 2699-11-8 [3] 12262-58-7 [4]	Org. Perox. C Acute Tox. 4 (*) Skin Corr. 1B	H242 H302 H314	GHS02 GHS05 GHS07 Dgr	H242 H302 H314		STOT SE 3; H335: C ≥ 5 %	C T
617-012-00-2	8-p-menthyl hydroperoxide; p-menthane hydroperoxide	201-281-4	80-47-7	Org. Perox. D Skin Corr. 1B Acute Tox. 4 (*)	H242 H314 H332	GHS02 GHS05 GHS07 Dgr	H242 H314 H332		STOT SE 3; H335: C ≥ 5 %	
617-013-00-8	O,O—tert-butyl O-docosyl monoperoxyoxalate	404-300-6	116753-76-5	Org. Perox. C (****) Aquatic Acute 1 Aquatic Chronic 1	H242 H400 H410	GHS02 GHS09 Dgr	H242 H410			
617-014-00-3	6-(nonylamino)-6-oxo-peroxyhexanoic acid	406-680-9	104788-63-8	Org. Perox. C (****) Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H242 H318 H317 H400	GHS02 GHS05 GHS07 GHS09 Dgr	H242 H318 H317 H400			
617-015-00-9	bis(4-methylbenzoyl)peroxide	407-950-9	895-85-2	Org. Perox. B (****) Aquatic Acute 1 Aquatic Chronic 1	H241 H400 H410	GHS01 GHS02 GHS09 Dgr	H241 H410			
617-016-00-4	3-hydroxy-1,1-dimethylbutyl 2-ethyl-2-methylheptaneperoxoate	413-910-1	—	Org. Perox. C (****) Flam. Liq. 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H242 H226 H315 H400 H410	GHS02 GHS07 GHS09 Dgr	H242 H226 H315 H410			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
617-017-00-X	reaction mass of: 2,2'-bis(<i>tert</i> -pentylperoxy)- <i>p</i> -diisopropylbenzene; 2,2'-bis(<i>tert</i> -pentylperoxy)- <i>m</i> -diisopropylbenzene	412-140-3	32144-25-5	Org. Perox. D ^(***5) Aquatic Chronic 4	H242 H413	GHS02 Dgr	H242 H413			T
617-018-00-5	reaction mass of: 1-methyl-1-(3-(1-methylethyl)phenyl)ethyl-1-methyl-1-phenylethylperoxide, 63 % by weight; 1-methyl-1-(4-(1-methylethyl)phenyl)ethyl-1-methyl-1-phenylethylperoxide, 31 % by weight	410-840-3	71566-50-2	Org. Perox. C ^(***5) Aquatic Chronic 2	H242 H411	GHS02 GHS09 Dgr	H242 H411			T
617-019-00-0	6-(phthalimido)peroxyhexanoic acid	410-850-8	128275-31-0	Org. Perox. D Eye Dam. 1 Aquatic Acute 1	H242 H318 H400	GHS02 GHS05 GHS09 DgDgr	H242 H318 H400			T
617-020-00-6	1,3-di(prop-2,2-diyl)benzene bis(neodecanyloperoxide)	420-060-5	117663-11-3	Flam. Liq. 3 Org. Perox. D ^(***5) Aquatic Chronic 2	H226 H242 H411	GHS02 GHS09 Dgr	H226 H242 H411			
647-001-00-8	glucosidase, β-	232-589-7	9001-22-3	Resp. Sens. 1	H334	GHS08 Dgr	H334			
647-002-00-3	cellulase	232-734-4	9012-54-8	Resp. Sens. 1	H334	GHS08 Dgr	H334			
647-003-00-9	cellobiohydrolase, exo-	253-465-9	37329-65-0	Resp. Sens. 1	H334	GHS08 Dgr	H334			
647-004-00-4	cellulases with the exception of those specified elsewhere in this Annex	—	—	Resp. Sens. 1	H334	GHS08 Dgr	H334			A
647-005-00-X	bromelain, juice	232-572-4	9001-00-7	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne kon- centracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Ozna- ka(-e) stavka o nevar- nosti	Piktogram, Oznaka(-e) opo- zorilne besede	Ozna- ka(-e) stavka o nevarnosti	Dod. ozna- ka(-e) stavka o nevarnosti		
647-006-00-5	ficin	232-599-1	9001-33-6	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-007-00-0	papain	232-627-2	9001-73-4	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-008-00-6	pepsin A	232-629-3	9001-75-6	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-009-00-1	rennin	232-645-0	9001-98-3	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-010-00-7	trypsin	232-650-8	9002-07-7	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-011-00-2	chymotrypsin	232-671-2	9004-07-3	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-012-00-8	subtilisin	232-752-2	9014-01-1	STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Resp. Sens. 1	H335 H315 H318 H334	GHS08 GHS05 GHS07 Dgr	H335 H315 H318 H334			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
647-013-00-3	proteinase, microbial neutral	232-966-6	9068-59-1	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-014-00-9	proteases with the exception of those specified elsewhere in this Annex	—	—	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-015-00-4	amylase, α-	232-565-6	9000-90-2	Resp. Sens. 1	H334	GHS08 Dgr	H334			
647-016-00-X	amylases with the exception of those specified elsewhere in this Annex	—	—	Resp. Sens. 1	H334	GHS08 Dgr	H334			
648-001-00-0	Distillates (coal tar), benzole fraction; Light Oil; [A complex combination of hydrocarbons obtained by the distillation of coal tar. It consists of hydrocarbons having carbon numbers primarily in the range of C ₄ to C ₁₀ and distilling in the approximate range of 80 °C to 160 °C (175°F to 320°F).]	283-482-7	84650-02-2	Carc. 1B	H350	GHS08 Dgr	H350			H
648-002-00-6	Tar oils, brown-coal; Light Oil; [The distillate from lignite tar boiling in the range of approximately 80 °C to 250 °C (176°F to 482°F). Composed primarily of aliphatic and aromatic hydrocarbons and monobasic phenols.]	302-674-4	94114-40-6	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-003-00-1	Benzol forerunnings (coal); Light Oil Redistillate, low boiling; [The distillate from coke oven light oil having an approximate distillation range below 100 °C (212°F). Composed primarily of C ₄ to C ₆ aliphatic hydrocarbons.]	266-023-5	65996-88-5	Carc. 1B	H350	GHS08 Dgr	H350			H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-004-00-7	Distillates (coal tar), benzole fraction, BTX-rich; Light Oil Redistillate, low boiling; [A residue from the distillation of crude benzole to remove benzole fronts. Composed primarily of benzene, toluene and xylenes boiling in the range of approximately 75 °C to 200 °C (167°F to 392°F).]	309-984-9	101896-26-8	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-005-00-2	Aromatic hydrocarbons, C ₆₋₁₀ , C ₈ -rich; Light Oil Redistillate, low boiling	292-697-5	90989-41-6	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-006-00-8	Solvent naphtha (coal), light; Light Oil Redistillate, low boiling	287-498-5	85536-17-0	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-007-00-3	Solvent naphtha (coal), xylene-styrene cut; Light Oil Redistillate, intermediate boiling	287-502-5	85536-20-5	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-008-00-9	Solvent naphtha (coal), coumarone-styrene contg.; Light Oil Redistillate, intermediate boiling	287-500-4	85536-19-2	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-009-00-4	Naphtha (coal), distn. residues; Light Oil Redistillate, high boiling; [The residue remaining from the distillation of recovered naphtha. Composed primarily of naphthalene and condensation products of indene and styrene.]	292-636-2	90641-12-6	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-010-00-X	Aromatic hydrocarbons, C ₈ ; Light Oil Redistillate, high boiling	292-694-9	90989-38-1	Carc. 1B	H350	GHS08 Dgr	H350			H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-012-00-0	Aromatic hydrocarbons, C ₈₋₉ , hydrocarbon resin polymn. by-product; Light Oil Redistillate, high boiling; [A complex combination of hydrocarbons obtained from the evaporation of solvent under vacuum from polymerized hydrocarbon resin. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₉ and boiling in the range of approximately 120 °C to 215 °C (248°F to 419°F).]	295-281-1	91995-20-9	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-013-00-6	Aromatic hydrocarbons, C ₉₋₁₂ , benzene distn.; Light Oil Redistillate, high boiling	295-551-9	92062-36-7	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-014-00-1	Extract residues (coal), benzole fraction alk., acid ext.; Light Oil Extract Residues, low boiling; [The redistillate from the distillate, freed of tar acids and tar bases, from bituminous coal high temperature tar boiling in the approximate range of 90 °C to 160 °C (194°F to 320°F). It consists predominantly of benzene, toluene and xylenes.]	295-323-9	91995-61-8	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-015-00-7	Extract residues (coal tar), benzole fraction alk., acid ext.; Light Oil Extract Residues, low boiling; [A complex combination of hydrocarbons obtained by the redistillation of the distillate of high temperature coal tar (tar acid and tar base free). It consists predominantly of unsubstituted and substituted mononuclear aromatic hydrocarbons boiling in the range of 85 °C-195 °C (185°F-383°F).]	309-868-8	101316-63-6	Carc. 1B	H350	GHS08 Dgr	H350			H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-016-00-2	Extract residues (coal), benzole fraction acid; Light Oil Extract Residues, low boiling; [An acid sludge by-product of the sulphuric acid refining of crude high temperature coal. Composed primarily of sulfuric acid and organic compounds.]	298-725-2	93821-38-6	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-017-00-8	Extract residues (coal), light oil alk., distn. overheads; Light Oil Extract Residues, low boiling; [The first fraction from the distillation of aromatic hydrocarbons, coumarone, naphthalene and indene rich prefractionator bottoms or washed carbolic oil boiling substantially below 145 °C (293°F). Composed primarily of C ₇ and C ₈ aliphatic and aromatic hydrocarbons.]	292-625-2	90641-02-4	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-018-00-3	Extract residues (coal), light oil alk., acid ext., indene fraction; Light Oil Extract Residues, intermediate boiling	309-867-2	101316-62-5	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-019-00-9	Extract residues (coal), light oil alk., indene naphtha fraction; Light Oil Extract Residues, high boiling; [The distillate from aromatic hydrocarbons, coumarone, naphthalene and indene rich prefractionator bottoms or washed carbolic oils, having an approximate boiling range of 155 °C to 180 °C (311°F to 356°F). Composed primarily of indene, indan and trimethylbenzenes.]	292-626-8	90641-03-5	Carc. 1B	H350	GHS08 Dgr	H350			H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-020-00-4	Solvent naphtha (coal); Light Oil Extract Residues, high boiling; [The distillate from either high temperature coal tar, coke oven light oil, or coal tar oil alkaline extract residue having an approximate distillation range of 130 °C to 210 °C (266°F to 410°F) Composed primarily of indene and other polycyclic ring systems containing a single aromatic ring. May contain phenolic compounds and aromatic nitrogen bases.]	266-013-0	65996-79-4	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-021-00-X	Distillates (coal tar), light oils, neutral fraction; Light Oil Extract Residues, high boiling; [A distillate from the fractional distillation of high temperature coal tar. Composed primarily of alkyl-substituted one ring aromatic hydrocarbons boiling in the range of approximately 135 °C to 210 °C (275°F to 410°F). May also include unsaturated hydrocarbons such as indene and coumarone.]	309-971-8	101794-90-5	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-022-00-5	Distillates (coal tar), light oils, acid exts.; Light Oil Extract Residues, high boiling; [This oil is a complex mixture of aromatic hydrocarbons, primarily indene, naphthalene, coumarone, phenol, and <i>o</i> -, <i>m</i> - and <i>p</i> -cresol and boiling in the range of 140 °C to 215 °C (284°F to 419°F).]	292-609-5	90640-87-2	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-023-00-0	Distillates (coal tar), light oils; Carbolic Oil; [A complex combination of hydrocarbons obtained by distillation of coal tar. It consists of aromatic and other hydrocarbons, phenolic compounds and aromatic nitrogen compounds and distills at the approximate range of 150 °C to 210 °C (302°F to 410°F).]	283-483-2	84650-03-3	Carc. 1B	H350	GHS08 Dgr	H350			H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-024-00-6	Tar oils, coal; Carbolic Oil; [The distillate from high temperature coal tar having an approximate distillation range of 130 °C to 250 °C (266°F to 410°F). Composed primarily of naphthalene, alkyl-naphthalenes, phenolic compounds, and aromatic nitrogen bases.]	266-016-7	65996-82-9	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-026-00-7	Extract residues (coal), light oil alk., acid ext.; Carbolic Oil Extract Residue; [The oil resulting from the acid washing of alkali-washed carbolic oil to remove the minor amounts of basic compounds (tar bases). Composed primarily of indene, indan and alkylbenzenes.]	292-624-7	90641-01-3	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-027-00-2	Extract residues (coal), tar oil alk.; Carbolic Oil Extract Residue; [The residue obtained from coal tar oil by an alkaline wash such as aqueous sodium hydroxide after the removal of crude coal tar acids. Composed primarily of naphthalenes and aromatic nitrogen bases.]	266-021-4	65996-87-4	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-028-00-8	Extract oils (coal), light oil; Acid Extract; [The aqueous extract produced by an acidic wash of alkali-washed carbolic oil. Composed primarily of acid salts of various aromatic nitrogen bases including pyridine, quinoline and their alkyl derivatives.]	292-622-6	90640-99-6	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-029-00-3	Pyridine, alkyl derivs.; Crude Tar Bases; [The complex combination of polyalkylated pyridines derived from coal tar distillation or as high-boiling distillates approximately above 150 °C (302°F) from the reaction of ammonia with acetaldehyde, formaldehyde or paraformaldehyde.]	269-929-9	68391-11-7	Carc. 1B	H350	GHS08 Dgr	H350			H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-030-00-9	Tar bases, coal, picoline fraction; Distillate Bases; [Pyridine bases boiling in the range of approximately 125 °C to 160 °C (257°F to 320°F) obtained by distillation of neutralized acid extract of the base-containing tar fraction obtained by the distillation of bituminous coal tars. Composed chiefly of lutidines and picolines.]	295-548-2	92062-33-4	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-031-00-4	Tar bases, coal, lutidine fraction; Distillate Bases	293-766-2	91082-52-9	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-032-00-X	Extract oils (coal), tar base, collidine fraction; Distillate Bases; [The extract produced by the acidic extraction of bases from crude coal tar aromatic oils, neutralization, and distillation of the bases. Composed primarily of collidines, aniline, toluidines, lutidines, xylidines.]	273-077-3	68937-63-3	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-033-00-5	Tar bases, coal, collidine fraction; Distillate Bases; [The distillation fraction boiling in the range of approximately 181 °C to 186 °C (356°F to 367°F) from the crude bases obtained from the neutralized, acid-extracted base-containing tar fractions obtained by the distillation of bituminous coal tar. It contains chiefly aniline and collidines.]	295-543-5	92062-28-7	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-034-00-0	Tar bases, coal, aniline fraction; Distillate Bases; [The distillation fraction boiling in the range of approximately 180 °C to 200 °C (356°F to 392°F) from the crude bases obtained by dephenolating and debasing the carbolated oil from the distillation of coal tar. It contains chiefly aniline, collidines, lutidines and toluidines.]	295-541-4	92062-27-6	Carc. 1B	H350	GHS08 Dgr	H350			H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-035-00-6	Tar bases, coal, toluidine fraction; Distillate Bases	293-767-8	91082-53-0	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-036-00-1	Distillates (petroleum), alkene-alkyne manuf. pyrolysis oil, mixed with high-temp. coal tar, indene fraction; Redistillates; [A complex combination of hydrocarbons obtained as a redistillate from the fractional distillation of bituminous coal high temperature tar and residual oils that are obtained by the pyrolytic production of alkenes and alkynes from petroleum products or natural gas. It consists predominantly of indene and boils in a range of approximately 160 °C to 190 °C (320°F to 374°F).]	295-292-1	91995-31-2	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-037-00-7	Distillates (coal), coal tar-residual pyrolysis oils, naphthalene oils; Redistillates; [The redistillate obtained from the fractional distillation of bituminous coal high temperature tar and pyrolysis residual oils and boiling in the range of approximately 190 °C to 270 °C (374°F to 518°F). Composed primarily of substituted dinuclear aromatics.]	295-295-8	91995-35-6	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-038-00-2	Extract oils (coal), coal tar-residual pyrolysis oils, naphthalene oil, redistillate; Redistillates; [The redistillate from the fractional distillation of dephenolated and debased methyl-naphthalene oil obtained from bituminous coal high temperature tar and pyrolysis residual oils boiling in the approximate range of 220 °C to 230 °C (428°F to 446°F). It consists predominantly of unsubstituted and substituted dinuclear aromatic hydrocarbons.]	295-329-1	91995-66-3	Carc. 1B	H350	GHS08 Dgr	H350			H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-039-00-8	Extract oils (coal), coal tar-residual pyrolysis oils, naphthalene oils; Redistillates; [A neutral oil obtained by debasing and dephenolating the oil obtained from the distillation of high temperature tar and pyrolysis residual oils which has a boiling range of 225 °C to 255 °C (437°F to 491°F). Composed primarily of substituted dinuclear aromatic hydrocarbons.]	310-170-0	122070-79-5	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-040-00-3	Extract oils (coal), coal tar residual pyrolysis oils, naphthalene oil, distn. residues; Redistillates; [Residue from the distillation of dephenolated and debased methylnaphthalene oil (from bituminous coal tar and pyrolysis residual oils) with a boiling range of 240 °C to 260 °C (464°F to 500°F). Composed primarily of substituted dinuclear aromatic and heterocyclic hydrocarbons.]	310-171-6	122070-80-8	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-041-00-9	Absorption oils, bicyclo arom. and heterocyclic hydrocarbon fraction; Wash Oil Redistillate; [A complex combination of hydrocarbons obtained as a redistillate from the distillation of wash oil. It consists predominantly of 2-ringed aromatic and heterocyclic hydrocarbons boiling in the range of approximately 260 °C to 290 °C (500°F to 554°F).]	309-851-5	101316-45-4	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-042-00-4	Distillates (coal tar), upper, fluorene-rich; Wash Oil Redistillate; [A complex combination of hydrocarbons obtained by the crystallization of tar oil. It consists of aromatic and polycyclic hydrocarbons primarily fluorene and some acenaphthene.]	284-900-0	84989-11-7	Carc. 1B	H350	GHS08 Dgr	H350			H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-043-00-X	Creosote oil, acenaphthene fraction, acenaphthene-free; Wash Oil Redistillate; [The oil remaining after removal by a crystallization process of acenaphthene from acenaphthene oil from coal tar. Composed primarily of naphthalene and alkyl naphthalenes.]	292-606-9	90640-85-0	Carc. 1B	H350	GHS08 Dgr	H350			H
648-044-00-5	Distillates (coal tar), heavy oils; Heavy Anthracene Oil; [Distillate from the fractional distillation of coal tar of bituminous coal, with boiling range of 240 °C to 400 °C (464°F to 752°F). Composed primarily of tri- and polynuclear hydrocarbons and heterocyclic compounds.]	292-607-4	90640-86-1	Carc. 1B	H350	GHS08 Dgr	H350			H
648-045-00-0	Distillates (coal tar), upper; Heavy Anthracene Oil; [The distillate from coal tar having an approximate distillation range of 220 °C to 450 °C (428°F to 842°F). Composed primarily of three to four membered condensed ring aromatic hydrocarbons and other hydrocarbons.]	266-026-1	65996-91-0	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-046-00-6	Anthracene oil, acid ext.; Anthracene Oil Extract Residue; [A complex combination of hydrocarbons from the base-freed fraction obtained from the distillation of coal tar and boiling in the range of approximately 325 °C to 365 °C (617°F to 689°F). It contains predominantly anthracene and phenanthrene and their alkyl derivatives.]	295-274-3	91995-14-1	Carc. 1B	H350	GHS08 Dgr	H350			H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-047-00-1	Distillates (coal tar); Heavy Anthracene Oil; [The distillate from coal tar having an approximate distillation range of 100 °C to 450 °C (212°F to 842°F). Composed primarily of two to four membered condensed ring aromatic hydrocarbons, phenolic compounds, and aromatic nitrogen bases.]	266-027-7	65996-92-1	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-048-00-7	Distillates (coal tar), pitch, heavy oils; Heavy Anthracene Oil; [The distillate from the distillation of the pitch obtained from bituminous high temperature tar. Composed primarily of tri- and polynuclear aromatic hydrocarbons and boiling in the range of approximately 300 °C to 470 °C (572°F to 878°F). The product may also contain heteroatoms.]	295-312-9	91995-51-6	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-049-00-2	Distillates (coal tar), pitch; Heavy Anthracene Oil; [The oil obtained from condensation of the vapors from the heat treatment of pitch. Composed primarily of two- to four-ring aromatic compounds boiling in the range of 200 °C to greater than 400 °C (392°F to greater than 752°F).]	309-855-7	101316-49-8	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-050-00-8	Distillates (coal tar), heavy oils, pyrene fraction; Heavy Anthracene Oil Redistillate; [The redistillate obtained from the fractional distillation of pitch distillate boiling in the range of approximately 350 °C to 400 °C (662°F to 752°F). Consists predominantly of tri- and polynuclear aromatics and heterocyclic hydrocarbons.]	295-304-5	91995-42-5	Carc. 1B	H350	GHS08 Dgr	H350			H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-051-00-3	Distillates (coal tar), pitch, pyrene fraction; Heavy Anthracene Oil Redistillate; [The redistillate obtained from the fractional distillation of pitch distillate and boiling in the range of approximately 380 °C to 410 °C (7160 to 770°F). Composed primarily of tri- and polynuclear aromatic hydrocarbons and heterocyclic compounds.]	295-313-4	91995-52-7	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-052-00-9	Paraffin waxes (coal), brown-coal high-temp. tar, carbon-treated; Coal Tar Extract; [A complet combination of hydrocarbons obtained by the treatment of lignite carbonization tar with activated carbon for removal of trace constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-296-6	97926-76-6	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-053-00-4	Paraffin waxes (coal), brown-coal high-temp tar, clay-treated; Coal Tar Extract; [A complex combination of hydrocarbons obtained by the treatment of lignite carbonization tar with bentonite for removal of trace constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-297-1	97926-77-7	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-054-00-X	Pitch; Pitch	263-072-4	61789-60-4	Carc. 1B	H350	GHS08 Dgr	H350			H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-055-00-5	Pitch, coal tar, high-temp.; Pitch; [The residue from the distillation of high temperature coal tar. A black solid with an approximate softening point from 30 °C to 180 °C (86°F to 356°F). Composed primarily of a complex mixture of three or more membered condensed ring aromatic hydrocarbons.]	266-028-2	65996-93-2	Carc. 1B	H350	GHS08 Dgr	H350			H
648-056-00-0	Pitch, coal tar, high-temp., heat-treated; Pitch; [The heat treated residue from the distillation of high temperature coal tar. A black solid with an approximate softening point from 80 °C to 180 °C (176°F to 356°F). Composed primarily of a complex mixture of three or more membered condensed ring aromatic hydrocarbons.]	310-162-7	121575-60-8	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-057-00-6	Pitch, coal tar, high-temp., secondary; Pitch Redistillate; [The residue obtained during the distillation of high boiling fractions from bituminous coal high temperature tar and/or pitch coke oil, with a softening point of 140 °C to 170 °C (284°F to 392°F) according to DIN 52025. Composed primarily of tri- and polynuclear aromatic compounds which also contain heteroatoms.]	302-650-3	94114-13-3	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-058-00-1	Residues (coal tar), pitch distn.; Pitch Redistillate; [Residue from the fractional distillation of pitch distillate boiling in the range of approximately 400 °C to 470 °C (752°F to 846°F). Composed primarily of polynuclear aromatic hydrocarbons, and heterocyclic compounds.]	295-507-9	92061-94-4	Carc. 1B	H350	GHS08 Dgr	H350			H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-059-00-7	Tar, coal, high-temp., distn. and storage residues; Coal Tar Solids Residue; [Coke- and ash-containing solid residues that separate on distillation and thermal treatment of bituminous coal high temperature tar in distillation installations and storage vessels. Consists predominantly of carbon and contains a small quantity of hetero compounds as well as ash components.]	295-535-1	92062-20-9	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-060-00-2	Tar, coal, storage residues; Coal Tar Solids Residue; [The deposit removed from crude coal tar storages. Composed primarily of coal tar and carbonaceous particulate matter.]	293-764-1	91082-50-7	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-061-00-8	Tar, coal, high-temp., residues; Coal Tar Solids Residue; [Solids formed during the coking of bituminous coal to produce crude bituminous coal high temperature tar. Composed primarily of coke and coal particles, highly aromatized compounds and mineral substances.]	309-726-5	100684-51-3	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-062-00-3	Tar, coal, high-temp., high-solids; Coal Tar Solids Residue; [The condensation product obtained by cooling, to approximately ambient temperature, the gas evolved in the high temperature (greater than 700 °C (1292°F)) destructive distillation of coal. Composed primarily of a complex mixture of condensed ring aromatic hydrocarbons with a high solid content of coal-type materials.]	273-615-7	68990-61-4	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-063-00-9	Waste solids, coal-tar pitch coking; Coal Tar Solids Residue; [The combination of wastes formed by the coking of bituminous coal tar pitch. It consists predominantly of carbon.]	295-549-8	92062-34-5	Carc. 1B	H350	GHS08 Dgr	H350			H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-064-00-4	Extract residues (coal), brown; Coal Tar Extract; [The residue from extraction of dried coal.]	294-285-0	91697-23-3	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-065-00-X	Paraffin waxes (coal), brown-coal-high-temp. tar; Coal Tar Extract; [A complex combination of hydrocarbons obtained from lignite carbonization tar by solvent crystallisation (solvent deoiling), by sweating or an adducting process. It consists predominantly of straight and branched chain saturated hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	295-454-1	92045-71-1	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-066-00-5	Paraffin waxes (coal), brown-coal-high-temp. tar, hydrotreated; Coal Tar Extract; [A complex combination of hydrocarbons obtained from lignite carbonization tar by solvent crystallisation (solvent deoiling), by sweating or an adducting process treated with hydrogen in the presence of a catalyst. It consists predominantly of straight and branched chain saturated hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	295-455-7	92045-72-2	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-067-00-0	Paraffin waxes (coal), brown-coal high-temp tar, silicic acid-treated; Coal Tar Extract; [A complex combination of hydrocarbons obtained by the treatment of lignite carbonization tar with silicic acid for removal of trace constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-298-7	97926-78-8	Carc. 1B	H350	GHS08 Dgr	H350			H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-068-00-6	Tar, coal, low-temp., distn. residues; Tar Oil, intermediate boiling; [Residues from fractional distillation of low temperature coal tar to remove oils that boil in a range up to approximately 300 °C (572°F). Composed primarily of aromatic compounds.]	309-887-1	101316-85-2	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-069-00-1	Pitch, coal tar, low-temp; Pitch Residue; [A complex black solid or semi-solid obtained from the distillation of a low temperature coal tar. It has a softening point within the approximate range of 40 °C to 180 °C (104°F to 356°F). Composed primarily of a complex mixture of hydrocarbons.]	292-651-4	90669-57-1	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-070-00-7	Pitch, coal tar, low-temp., oxidized; Pitch Residue, oxidised; [The product obtained by air-blowing, at elevated temperature, low-temperature coal tar pitch. It has a softening-point within the approximate range of 70 °C to 180 °C (158°F to 356°F). Composed primarily of a complex mixture of hydrocarbons.]	292-654-0	90669-59-3	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-071-00-2	Pitch, coal tar, low-temp., heat-treated; Pitch Residue, oxidised; Pitch Residue, heat-treated; [A complex black solid obtained by the heat treatment of low temperature coal tar pitch. It has a softening point within the approximate range of 50 °C to 140 °C (122°F to 284°F). Composed primarily of a complex mixture of aromatic compounds.]	292-653-5	90669-58-2	Carc. 1B	H350	GHS08 Dgr	H350			H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-072-00-8	Distillates (coal-petroleum), condensed-ring arom; Distillates; [The distillate from a mixture of coal and tar and aromatic petroleum streams having an approximate distillation range of 220 °C to 450 °C (428°F to 842°F). Composed primarily of 3- to 4-membered condensed ring aromatic hydrocarbons.]	269-159-3	68188-48-7	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-073-00-3	Aromatic hydrocarbons, C ₂₀₋₂₈ , polycyclic, mixed coal-tar pitch-polyethylene-polypropylene pyrolysis-derived; Pyrolysis Products; [A complex combination hydrocarbons obtained from mixed coal tar pitch-polyethylene-polypropylene pyrolysis. Composed primarily of polycyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₂₈ and having a softening point of 100 °C to 220 °C (212°F to 428°F) according to DIN 52025.]	309-956-6	101794-74-5	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-074-00-9	Aromatic hydrocarbons, C ₂₀₋₂₈ , polycyclic, mixed coal-tar pitch-polyethylene pyrolysis-derived; Pyrolysis Products; [A complex combination of hydrocarbons obtained from mixed coal tar pitch-polyethylene pyrolysis. Composed primarily of polycyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₂₈ and having a softening point of 100 °C to 220 °C (212°F to 428°F) according to DIN 52025.]	309-957-1	101794-75-6	Carc. 1B	H350	GHS08 Dgr	H350			H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-075-00-4	Aromatic hydrocarbons, C ₂₀₋₂₈ , polycyclic, mixed coal-tar pitch-polystyrene pyrolysis-derived; Pyrolysis Products; [A complex combination of hydrocarbons obtained from mixed coal tar pitch-polystyrene pyrolysis. Composed primarily of polycyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₂₈ and having a softening point of 100 °C to 220 °C (212°F to 428°F) according to DIN 52025.]	309-958-7	101794-76-7	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-076-00-X	Pitch, coal tar-petroleum; Pitch Residues; [The residue from the distillation of a mixture of coal tar and aromatic petroleum streams. A solid with a softening point from 40 °C to 180 °C (140°F to 356°F). Composed primarily of a complex combination of three or more membered condensed ring aromatic hydrocarbons.]	269-109-0	68187-57-5	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-077-00-5	Phenanthrene, distn. residues; Heavy Anthracene Oil Redistillate; [Residue from the distillation of crude phenanthrene boiling in the approximate range of 340 °C to 420 °C (644°F to 788°F). It consists predominantly of phenanthrene, anthracene and carbazole.]	310-169-5	122070-78-4	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-078-00-0	Distillates (coal tar), upper, fluorene-free; Wash Oil Redistillate; [A complex combination of hydrocarbons obtained by the crystallization of tar oil. It consists of aromatic polycyclic hydrocarbons, primarily diphenyl, dibenzofuran and acenaphthene.]	284-899-7	84989-10-6	Carc. 1B	H350	GHS08 Dgr	H350			H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-079-00-6	Anthracene oil; Anthracene oil; [A complex combination of polycyclic aromatic hydrocarbons obtained from coal tar having an approximate distillation range of 300 °C ot 400 °C (572°F to 752°F). Composed primarily of phenanthrene, anthracene and carbazole.]	292-602-7	90640-80-5	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-080-00-1	Residues (coal tar), creosote oil distn.; Wash Oil Redistillate; [The residue from the fractional distillation of wash oil boiling in the approximate range of 270 °C to 330 °C (518°F to 626°F). It consists predominantly of dinuclear aromatic and heterocyclic hydrocarbons.]	295-506-3	92061-93-3	Carc. 1B	H350	GHS08 Dgr	H350			H
648-081-00-7	Tar, coal; Coal tar; [The by-product from the destructive distillation of coal. Almost black semisolid. A complex combination of aromatic hydrocarbons, phenolic compounds, nitrogen bases and thiophene.]	232-361-7	8007-45-2	Carc. 1A	H350	GHS08 Dgr	H350			H
648-082-00-2	Tar, coal, high-temp.; Coal tar; [The condensation product obtained by cooling, to approximately ambient temperature, the gas evolved in the high temperature (greater than 700 °C (1292°F)) destructive distillation of coal. A black viscous liquid denser than water. Composed primarily of a complex mixture of condensed ring aromatic hydrocarbons. May contain minor amounts of phenolic compounds and aromatic nitrogen bases.]	266-024-0	65996-89-6	Carc. 1A	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-083-00-8	Tar, coal, low-temp.; Coal oil; [The condensation product obtained by cooling, to approximately ambient temperature, the gas evolved in low temperature (less than 700 °C (1292°F)) destructive distillation of coal. A black viscous liquid denser than water. Composed primarily of condensed ring aromatic hydrocarbons, phenolic compounds, aromatic nitrogen bases, and their alkyl derivatives.]	266-025-6	65996-90-9	Carc. 1A	H350	GHS08 Dgr	H350			H
648-084-00-3	Distillates (coal), coke-oven light oil, naphthalene cut; Naphthalene Oil; [The complex combination of hydrocarbons obtained from prefractionation (continuous distillation) of coke oven light oil. It consists predominantly of naphthalene, coumarone and indene and boils above 148 °C (298°F).]	285-076-5	85029-51-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-085-00-9	Distillates (coal tar), naphthalene oils; Naphthalene Oil; [A complex combination of hydrocarbons obtained by the distillation of coal tar. It consists primarily of aromatic and other hydrocarbons, phenolic compounds and aromatic nitrogen compounds and distills in the approximate range of 200 °C to 250 °C (392°F to 482°F).]	283-484-8	84650-04-4	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-086-00-4	Distillates (coal tar), naphthalene oils, naphthalene-low; Naphthalene Oil Redistillate; [A complex combination of hydrocarbons obtained by crystallization of naphthalene oil. Composed primarily of naphthalene, alkyl naphthalenes and phenolic compounds.]	284-898-1	84989-09-3	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-087-00-X	Distillates (coal tar), naphthalene oil crystn. mother liquor; Naphthalene Oil Redistillate; [A complex combination of organic compounds obtained as a filtrate from the crystallization of the naphthalene fraction from coal tar and boiling in the range of approximately 200 °C to 230 °C (392°F to 446°F). Contains chiefly naphthalene, thionaphthene and alkyl naphthalenes.]	295-310-8	91995-49-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-088-00-5	Extract residues (coal), naphthalene oil, alk.; Naphthalene Oil Extract Residue; [A complex combination of hydrocarbons obtained from the alkali washing of naphthalene oil to remove phenolic compounds (tar acids). It is composed of naphthalene and alkyl naphthalenes.]	310-166-9	121620-47-1	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-089-00-0	Extract residues (coal), naphthalene oil, alk., naphthalene-low; Naphthalene Oil Extract Residue; [A complex combination of hydrocarbons remaining after the removal of naphthalene from alkali-washed naphthalene oil by a crystallization process. It is composed primarily of naphthalene and alkyl naphthalenes.]	310-167-4	121620-48-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-090-00-6	Distillates (coal tar), naphthalene oils, naphthalene-free, alk. exts.; Naphthalene Oil Extract Residue; [The oil remaining after the removal of phenolic compounds (tar acids) from drained naphthalene oil by an alkali wash. Composed primarily of naphthalene and alkyl naphthalenes.]	292-612-1	90640-90-7	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-091-00-1	Extract residues (coal), naphthalene oil alk., distn. overheads; Naphthalene Oil Extract Residue; [The distillation from alkali-washed naphthalene oil having an approximate distillation range of 180 °C to 220 °C (356°F to 428°F). Composed primarily of naphthalene, alkylbenzenes, indene and indan.]	292-627-3	90641-04-6	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-092-00-7	Distillates (coal tar), naphthalene oils, methylnaphthalene fraction; Methylnaphthalene Oil; [A distillate from the fractional distillation of high temperature coal tar. Composed primarily of substituted two ring aromatic hydrocarbons and aromatic nitrogen bases boiling in the range of approximately 225 °C to 255 °C (437°F to 491°F).]	309-985-4	101896-27-9	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-093-00-2	Distillates (coal tar), naphthalene oils, indole-methylnaphthalene fraction; Methylnaphthalene Oil; [A distillate from the fractional distillation of high temperature coal tar. Composed primarily of indole and methylnaphthalene boiling in the range of approximately 235 °C to 255 °C (455°F to 491°F).]	309-972-3	101794-91-6	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-094-00-8	Distillates (coal tar), naphthalene oils, acid exts.; Methylnaphthalene Oil Extract Residue; [A complex combination of hydrocarbons obtained by debasing the methylnaphthalene fraction obtained by the distillation of coal tar and boiling in the range of approximately 230 °C to 255 °C (446°F to 491°F). Contains chiefly 1(2)-methylnaphthalene, naphthalene, dimethylnaphthalene and biphenyl.]	295-309-2	91995-48-1	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-095-00-3	Extract residues (coal), naphthalene oil alk., distn. residues; Methylnaphthalene Oil Extract Residue; [The residue from the distillation of alkali-washed naphthalene oil having an approximate distillation range of 220 °C to 300 °C (428°F to 572°F). Composed primarily of naphthalene, alkylnaphthalenes and aromatic nitrogen bases.]	292-628-9	90641-05-7	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-096-00-9	Extract oils (coal), acidic, tar-base free; Methylnaphthalene Oil Extract Residue; [The extract oil boiling in the range of approximately 220 °C to 265 °C (428°F to 509°F) from coal tar alkaline extract residue produced by an acidic wash such as aqueous sulfuric acid after distillation to remove tar bases. Composed primarily of alkylnaphthalenes.]	284-901-6	84989-12-8	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-097-00-4	Distillates (coal tar), benzole fraction, distn. residues; Wash Oil; [A complex combination of hydrocarbons obtained from the distillation of crude benzole (high temperature coal tar). It may be a liquid with the approximate distillation range of 150 °C to 300 °C (302°F to 572°F) or a semi-solid or solid with a melting point up to 70 °C (158°F). It is composed primarily of naphthalene and alkyl naphthalenes.]	310-165-3	121620-46-0	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-098-00-X	Creosote oil, acenaphthene fraction; Wash Oil; [A complex combination of hydrocarbons produced by the distillation of coal tar and boiling in the range of approximately 240 °C to 280 °C (464°F to 536°F). Composed primarily of acenaphthene, naphthalene and alkyl naphthalene.]	292-605-3	90640-84-9	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-099-00-5	Creosote oil; [A complex combination of hydrocarbons obtained by the distillation of coal tar. It consists primarily of aromatic hydrocarbons and may contain appreciable quantities of tar acids and tar bases. It distills at the approximate range of 200 °C to 325 °C (392°F to 617°F).]	263-047-8	61789-28-4	Carc. 1B	H350	GHS08 Dgr	H350			H
648-100-00-9	Creosote oil, high-boiling distillate; Wash Oil; [The high-boiling distillation fraction obtained from the high temperature carbonization of bituminous coal which is further refined to remove excess crystalline salts. It consists primarily of creosote oil with some of the normal polynuclear aromatic salts, which are components of coal tar distillates, removed. It is crystal free at approximately 5 °C (41°F).]	274-565-9	70321-79-8	Carc. 1B	H350	GHS08 Dgr	H350			H
648-101-00-4	Creosote; [The distillate of coal tar produced by the high temperature carbonization of bituminous coal. It consists primarily of aromatic hydrocarbons, tar acids and tar bases.]	232-287-5	8001-58-9	Carc. 1B	H350	GHS08 Dgr	H350			H
648-102-00-X	Extract residues (coal), creosote oil acid; Wash Oil Extract Residue; [A complex combination of hydrocarbons from the base-freed fraction from the distillation of coal tar, boiling in the range of approximately 250 °C to 280 °C (482°F to 536°F). It consists predominantly of biphenyl and isomeric diphenylnaphthalenes.]	310-189-4	122384-77-4	Carc. 1B	H350	GHS08 Dgr	H350			H
648-103-00-5	Anthracene oil, anthracene paste; Anthracene Oil Fraction; [The anthracene-rich solid obtained by the crystallization and centrifuging of anthracene oil. It is composed primarily of anthracene, carbazole and phenanthrene.]	292-603-2	90640-81-6	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-104-00-0	Anthracene oil, anthracene-low; Anthracene Oil Fraction; [The oil remaining after the removal, by a crystallization process, of an anthracene-rich solid (anthracene paste) from anthracene oil. It is composed primarily of two, three and four membered aromatic compounds.]	292-604-8	90640-82-7	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-105-00-6	Residues (coal tar), anthracene oil distn.; Anthracene Oil Fraction; [The residue from the fraction distillation of crude anthracene boiling in the approximate range of 340 °C to 400 °C (644°F to 752°F). It consists predominantly of tri- and polynuclear aromatic and heterocyclic hydrocarbons.]	295-505-8	92061-92-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-106-00-1	Anthracene oil, anthracene paste, anthracene fraction; Anthracene Oil Fraction; [A complex combination of hydrocarbons from the distillation of anthracene obtained by the crystallization of anthracene oil from bituminous high temperature tar and boiling in the range of 330 °C to 350 °C (626°F to 662°F). It contains chiefly anthracene, carbazole and phenanthrene.]	295-275-9	91995-15-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-107-00-7	Anthracene oil, anthracene paste, carbazole fraction; Anthracene Oil Fraction; [A complex combination of hydrocarbons from the distillation of anthracene obtained by crystallization of anthracene oil from bituminous coal high temperature tar and boiling in the approximate range of 350 °C to 360 °C (662°F to 680°F). It contains chiefly anthracene, carbazole and phenanthrene.]	295-276-4	91995-16-3	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-108-00-2	Anthracene oil, anthracene paste, distn. lights; Anthracene Oil Fraction; [A complex combination of hydrocarbons from the distillation of anthracene obtained by crystallization of anthracene oil from bituminous light temperature tar and boiling in the range of approximately 290 °C to 340 °C (554°F to 644°F). It contains chiefly trinuclear aromatics and their dihydro derivatives.]	295-278-5	91995-17-4	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-109-00-8	Tar oils, coal, low-temp.; Tar Oil, high boiling; [A distillate from low-temperature coal tar. Composed primarily of hydrocarbons, phenolic compounds and aromatic nitrogen bases boiling in the range of approximately 160 °C to 340 °C (320°F to 644°F).]	309-889-2	101316-87-4	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-110-00-3	Extract residues (coal), low temp. coal atar alk.; [The residue from low temperature coal tar oils after an alkaline wash, such as aqueous sodium hydroxide, to remove crude coal tar acids. Composed primarily of hydrocarbons and aromatic nitrogen bases.]	310-191-5	122384-78-5	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-111-00-9	Phenols, ammonia liquor ext.; Alkaline Extract; [The combination of phenols extracted, using isobutyl acetate, from the ammonia liquor condensed from the gas evolved in low-temperature (less than 700 °C (1292°F)) destructive distillation of coal. It consists predominantly of a mixture of monohydric and dihydric phenols.]	284-881-9	84988-93-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-112-00-4	Distillates (coal tar), light oils, alk. exts.; Alkaline Extract; [The aqueous extract from carbolic oil produced by an alkaline wash such as aqueous sodium hydroxide. Composed primarily of the alkali salts of various phenolic compounds.]	292-610-0	90640-88-3	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-113-00-X	Extracts, coal tar oil alk.; Alkaline Extract; [The extract from coal tar oil produced by an alkaline wash such as aqueous sodium hydroxide. Composed primarily of the alkali salts of various phenolic compounds.]	266-017-2	65996-83-0	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-114-00-5	Distillates (coal tar), naphthalene oils, alk. exts.; Alkaline Extract; [The aqueous extract from naphthalene oil produced by an alkaline wash such as aqueous sodium hydroxid. Composed primarily of the alkali salts of various phenolic compounds.]	292-611-6	90640-89-4	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-115-00-0	Extract residues (coal), tar oil alk., carbonated, limed; Crude Phenols; [The product obtained by treatment of coal tar oil alkaline extract with CO ₂ and CaO. Composed primarily of CaCO ₃ , Ca(OH) ₂ , Na ₂ CO ₃ and other organic and inorganic impurities.]	292-629-4	90641-06-8	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-116-00-6	Tar acids, coal, crude; Crude Phenols; [The reaction product obtained by neutralizing coal tar oil alkaline extract with an acidic solution, such as aqueous sulfuric acid, or gaseous carbon dioxide, to obtain the free acids. Composed primarily of tar acids such as phenol, cresols, and xylenols.]	266-019-3	65996-85-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-117-00-1	Tar acids, brown-coal, crude; Crude Phenols; [An acidified alkaline extract of brown coal tar distillate. Composed primarily of phenol and phenol homologs.]	309-888-7	101316-86-3	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-118-00-7	Tar acids, brown-coal gasification; Crude Phenols; [A complex combination of organic compounds obtained from brown coal gasification. Composed primarily of C ₆₋₁₀ hydroxy aromatic phenols and their homologs.]	295-536-7	92062-22-1	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-119-00-2	Tar acids, distn. residues; Distillate Phenols; [A residue from the distillation of crude phenol from coal. It consists predominantly of phenols having carbon numbers in the range of C ₈ through C ₁₀ with a softening point of 60 °C to 80 °C (140°F to 176°F).]	306-251-5	96690-55-0	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-120-00-8	Tar acids, methylphenol fraction; Distillate Phenols; [The fraction of tar acid rich in 3- and 4-methylphenol, recovered by distillation of low-temperature coal tar crude tar acids.]	284-892-9	84989-04-8	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-121-00-3	Tar acids, polyalkylphenol fraction; Distillate Phenols; [The fraction of tar acids, recovered by distillation of low-temperature coal tar crude tar acids, having an approximate boiling range of 225 °C to 320 °C (437°F to 608°F). Composed primarily of polyalkylphenols.]	284-893-4	84989-05-9	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-122-00-9	Tar acids, xlenol fraction; Distillate Phenols; [The fraction of tar acids, rich in 2,4- and 2,5-dimethylphenol, recovered by distillation of low-temperature coal tar crude tar acids.]	284-895-5	84989-06-0	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-123-00-4	Tar acids, ethylphenol fraction; Distillate Phenols; [The fraction of tar acids, rich in 3- and 4-ethylphenol, recovered by distillation of low-temperature coal tar crude tar acids.]	284-891-3	84989-03-7	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-124-00-X	Tar acids, 3,5-xylenol fraction; Distillate Phenols; [The fraction of tar acids, rich in 3,5-dimethylphenol, recovered by distillation of low-temperature coal tar acids.]	284-896-0	84989-07-1	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-125-00-5	Tar acids, residues, distillates, first-cut; Distillate Phenols; [The residue from the distillation in the range of 235 °C to 355 °C (481°F to 697°F) of light carbolic oil.]	270-713-1	68477-23-6	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-126-00-0	Tar acids, cresylic, residues; Distillate Phenols; [The residue from crude coal tar acids after removal of phenol, cresols, xylenols and any higher boiling phenols. A black solid with a melting point approximately 80 °C (176°F). Composed primarily of polyalkylphenols, resin gums, and inorganic salts.]	271-418-0	68555-24-8	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-127-00-6	Phenols, C ₉₋₁₁ ; Distillate Phenols	293-435-2	91079-47-9	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-128-00-1	Tar acids, cresylic; Distillate Phenols; [A complex combination of organic compounds obtained from brown coal and boiling in the range of approximately 200 °C to 230 °C (392°F to 446°F). It contains chiefly phenols and pyridine bases.]	295-540-9	92062-26-5	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-129-00-7	Tar acids, brown-coal, C ₂ -alkylphenol fraction; Distillate Phenols; [The distillate from the acidification of alkaline washed lignite tar distillate boiling in the range of approximately 200 °C to 230 °C (392°F to 446°F). Composed primarily of <i>m</i> - and <i>p</i> -ethylphenol as well as cresols and xlenols.]	302-662-9	94114-29-1	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-130-00-2	Extract oils (coal), naphthalene oils; Acid Extract; [The aqueous extract produced by an acidic wash of alkali-washed naphthalene oil. Composed primarily of acid salts of various aromatic nitrogen bases including pyridine, quinoline and their alkyl derivatives.]	292-623-1	90641-00-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-131-00-8	Tar bases, quinoline derivs.; Distillate Bases	271-020-7	68513-87-1	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-132-00-3	Tar bases, coal, quinoline derivs. fraction; Distillate Bases	274-560-1	70321-67-4	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-133-00-9	Tar bases, coal, distn. residues; Distillate Bases; [The distillation residue remaining after the distillation of the neutralized, acid-extracted base-containing tar fractions obtained by the distillation of coal tars. It contains chiefly aniline, collidines, quinoline and quinoline derivatives and toluidines.]	295-544-0	92062-29-8	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-134-00-4	Hydrocarbon oils, arom., mixed with polyethylene and polypropylene, pyrolyzed, light oil fraction; Heat Treatment Products; [The oil obtained from the heat treatment of a polyethylene/polypropylene mixture with coal tar pitch or aromatic oils. It consists predominantly of benzene and its homologs boiling in a range of approximately 70 °C to 120 °C (158°F to 248°F).]	309-745-9	100801-63-6	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-135-00-X	Hydrocarbon oils, arom., mixed with polyethylene, pyrolyzed, light oil fraction; Heat Treatment Products; [The oil obtained from the heat treatment of polyethylene with coal tar pitch or aromatic oils. It consists predominantly of benzene and its homologs boiling in a range of 70 °C to 120 °C (158°F to 248°F).]	309-748-5	100801-65-8	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-136-00-5	Hydrocarbon oils, arom., mixed with polystyrene, pyrolyzed, light oil fraction; Heat Treatment Products; [The oil obtained from the heat treatment of polystyrene with coal tar pitch or aromatic oils. It consists predominantly of benzene and its homologs boiling in a range of approximately 70 °C to 210 °C (158°F to 410°F).]	309-749-0	100801-66-9	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-137-00-0	Extract residues (coal), tar oil alk., naphthalene distn. residues; Naphthalene Oil Extract Residue; [The residue obtained from chemical oil extracted after the removal of naphthalene by distillation composed primarily of two to four membered condensed ring aromatic hydrocarbons and aromatic nitrogen bases.]	277-567-8	73665-18-6	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-138-00-6	Creosote oil, low-boiling distillate; Wash Oil; [The low-boiling distillation fraction obtained from the high temperature carbonization of bituminous coal, which is further refined to remove excess crystalline salts. It consists primarily of creosote oil with some of the normal polynuclear aromatic salts, which are components of coal tar distillate, removed. It is crystal free at approximately 38 °C (100°F).]	274-566-4	70321-80-1	Carc. 1B	H350	GHS08 Dgr	H350			H
648-139-00-1	Tar acids, cresylic, sodium salts, caustic solns.; Alkaline Extract	272-361-4	68815-21-4	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-140-00-7	Extract oils (coal), tar base; Acid Extract; [The extract from coal tar oil alkaline extract residue produced by an acidic wash such as aqueous sulfuric acid after distillatin to remove naphthalene. Composed primarily of the acid salts of various aromatic nitrogen bases including pyridine, quinoline, and their alkyl derivatives.]	266-020-9	65996-86-3	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-141-00-2	Tar bases, coal, crude; Crude Tar Bases; [The reaction product obtained by neutralizing coal tar base extract oil with an alkaline solution, such as aqueous sodium hydroxide, to obtain the free bases. Composed primarily of such organic bases as acridine, phenanthridine, pyridine, quinoline and their alkyl derivatives.]	266-018-8	65996-84-1	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-142-00-8	Residues (coal), liq. solvent extrn.; [A cohesive powder composed of coal mineral matter and undissolved coal remaining after extraction of coal by a liquid solvent.]	302-681-2	94114-46-2	Carc. 1B	H350	GHS08 Dgr	H350			H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-143-00-3	Coal liquids, liq. solvent extrn. soln.; [The product obtained by filtration of coal mineral matter and undissolved coal from coal extract solution produced by digesting coal in a liquid solvent. A black, viscous, highly complex liquid combination composed primarily of aromatic and partly hydrogenated aromatic hydrocarbons, aromatic nitrogen compounds, aromatic sulfur compounds, phenolic and other aromatic oxygen compounds and their alkyl derivatives.]	302-682-8	94114-47-3	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-144-00-9	Coal liquids, liq. solvent extrn.; [The substantially solvent-free product obtained by the distillation of the solvent from filtered coal extract solution produced by digesting coal in a liquid solvent. A black semi-solid, composed primarily of a complex combination of condensed-ring aromatic hydrocarbons, aromatic nitrogen compounds, aromatic sulfur compounds, phenolic compounds and other aromatic oxygen compounds, and their alkyl derivatives.]	302-683-3	94114-48-4	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-145-00-4	Tar brown-coal; [An oil distilled from brown-coal tar. Composed primarily of aliphatic, naphthenic and one- to three-ring aromatic hydrocarbons, their alkyl derivatives, heteroaromatics and one- and two-ring phenols boiling in the range of approximately 150 °C to 360 °C (302°F to 680°F).]	309-885-0	101316-83-0	Carc. 1A	H350	GHS08 Dgr	H350			H
648-146-00-X	Tar, brown-coal, low-temp.; [A tar obtained from low temperature carbonization and low temperature gasification of brown coal. Composed primarily of aliphatic, naphthenic and cyclic aromatic hydrocarbons, heteroaromatic hydrocarbons and cyclic phenols.]	309-886-6	101316-84-1	Carc. 1A	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-147-00-5	Light oil (coal), coke-oven; Crude benzole; [The volatile organic liquid extracted from the gas evolved in the high temperature (greater than 700 °C (1292°F)) destructive distillation of coal. Composed primarily of benzene, toluene, and xylenes. May contain other minor hydrocarbon constituents.]	266-012-5	65996-78-3	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-148-00-0	Distillates (coal), liq. solvent extrn., primary; [The liquid product of condensation of vapors emitted during the digestion of coal in a liquid solvent and boiling in the range of approximately 30 °C to 300 °C (86°F to 572°F). Composed primarily of partly hydrogenated condensed-ring aromatic hydrocarbons, aromatic compounds containing nitrogen, oxygen and sulfur, and their alkyl derivatives having carbon numbers predominantly in the range of C ₄ through C ₁₄ .]	302-688-0	94114-52-0	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-149-00-6	Distillates (coal), solvent extrn., hydrocracked; [Distillate obtained by hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction process and boiling in the range of approximately 30 °C to 300 °C (86°F to 572°F). Composed primarily of aromatic, hydrogenated aromatic and naphthenic compounds, their alkyl derivatives and alkanes with carbon numbers predominantly in the range of C ₄ through C ₁₄ . Nitrogen, sulfur and oxygen-containing aromatic and hydrogenated aromatic compounds are also present.]	302-689-6	94114-53-1	Carc. 1B	H350	GHS08 Dgr	H350			H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-150-00-1	Naphtha (coal), solvent extn., hydrocracked; [Fraction of the distillate obtained by hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 30 °C to 180 °C (86°F to 356°F). Composed primarily of aromatic, hydrogenated aromatic and naphthenic compounds, their alkyl derivatives and alkanes with carbon numbers predominantly in the range of C ₄ to C ₉ . Nitrogen, sulfur and oxygen-containing aromatic and hydrogenated aromatic compounds are also present.]	302-690-1	94114-54-2	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-151-00-7	Gasoline, coal solvent extn., hydrocracked naphtha; [Motor fuel produced by the reforming of the refined naphtha fraction of the products of hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 30 °C to 180 °C (86°F to 356°F). Composed primarily of aromatic and naphthenic hydrocarbons, their alkyl derivatives and alkyl hydrocarbons having carbon numbers in the range of C ₄ through C ₉ .]	302-691-7	94114-55-3	Carc. 1B	H350	GHS08 Dgr	H350			H
648-152-00-2	Distillates (coal), solvent extn., hydrocracked middle; [Distillate obtained from the hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 180 °C to 300 °C (356°F to 572°F). Composed primarily of two-ring aromatic, hydrogenated aromatic and naphthenic compounds, their alkyl derivatives and alkanes having carbon numbers predominantly in the range of C ₉ through C ₁₄ . Nitrogen, sulfur and oxygen-containing compounds are also present.]	302-692-2	94114-56-4	Carc. 1B	H350	GHS08 Dgr	H350			H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-153-00-8	Distillates (coal), solvent extn., hydrocracked hydrogenated middle; [Distillate from the hydrogenation of hydrocracked middle distillate from coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 180 °C to 280 °C (356°F to 536°F). Composed primarily of hydrogenated two- ring carbon compounds and their alkyl derivatives having carbon numbers predominantly in the range of C ₉ through C ₁₄ .]	302-693-8	94114-57-5	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-154-00-3	Fuels, jet aircraft, coal solvent extn., hydrocracked hydrogenated; [Jet engine fuel produced by hydrogenation of the middle distillate fraction of the products of hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 180 °C to 225 °C (356°F to 473°F). Composed primarily of hydrogenated two-ring hydrocarbons and their alkyl derivatives having carbon numbers predominantly in the range of C ₁₀ through C ₁₂ .]	302-694-3	94114-58-6	Carc. 2	H351	GHS08 Wng	H350			H
648-155-00-9	Fuels, diesel, coal solvent extn., hydrocracked hydrogenated; [Diesel engine fuel produced by the hydrogenation of the middle distillate fraction of the products of hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 200 °C to 280 °C (392°F to 536°F). Composed primarily of hydrogenated two-ring hydrocarbons and their alkyl derivatives having carbon numbers predominantly in the range of C ₁₁ through C ₁₄ .]	302-695-9	94114-59-7	Carc. 2	H351	GHS08 Wng	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
648-156-00-4	Light oil (coal), semi-coking process; Fresh oil; [The volatile organic liquid condensed from the gas evolved in the low temperature (less than 700 °C (1292°F) destructive distillation of coal. Composed primarily of C ₆₋₁₀ hydrocarbons.]	292-635-7	90641-11-5	Carc. 1B	H350	GHS08 Dgr	H350			H J
649-001-00-3	Extracts (petroleum), light naphthenic distillate solvent	265-102-1	64742-03-6	Carc. 1B	H350	GHS08 Dgr	H350			H
649-002-00-9	Extracts (petroleum), heavy paraffinic distillate solvent	265-103-7	64742-04-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-003-00-4	Extracts (petroleum), light paraffinic distillate solvent	265-104-2	64742-05-8	Carc. 1B	H350	GHS08 Dgr	H350			H
649-004-00-X	Extracts (petroleum), heavy naphthenic distillate solvent	265-111-0	64742-11-6	Carc. 1B	H350	GHS08 Dgr	H350			H
649-005-00-5	Extracts (petroleum), light vacuum gas oil solvent	295-341-7	91995-78-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-006-00-0	hydrocarbons C ₂₆₋₅₅ , arom-rich	307-753-7	97722-04-8	Carc. 1B	H350	GHS08 Dgr	H350			H
649-007-00-6	fatty acids, tall-oil, reaction products with iminodiethanol and boric acid	400-160-5	—	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
649-008-00-1	Residues (petroleum), atm. tower; Heavy Fuel oil; [A complex residuum from the atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly greater than C ₂₀ and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-045-2	64741-45-3	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-009-00-7	Gas oils (petroleum), heavy vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and boiling in the range of approximately 350 °C to 600 °C (662°F to 1112°F). This stream is likely to contain 5 wt. % or more of 4-to 6-membered condensed ring aromatic hydrocarbons.]	265-058-3	64741-57-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-010-00-2	Distillates (petroleum), heavy catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₅ and boiling in the range of approximately 260 °C to 500 °C (500°F to 932°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-063-0	64741-61-3	Carc. 1B	H350	GHS08 Dgr	H350			H
649-011-00-8	Clarified oils (petroleum), catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly greater than C ₂₀ and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-064-6	64741-62-4	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-012-00-3	Residues (petroleum), hydrocracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the products of a hydrocracking process. It consists of hydrocarbons having carbon numbers predominantly greater than C ₂₀ and boiling above approximately 350 °C (662°F).]	265-076-1	64741-75-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-013-00-9	Residues (petroleum), thermal cracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the product from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly greater than C ₂₀ and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-081-9	64741-80-6	Carc. 1B	H350	GHS08 Dgr	H350			H
649-014-00-4	Distillates (petroleum), heavy thermal cracked; Heavy Fuel oil; [A complex combination of hydrocarbons from the distillation of the products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₆ and boiling in the range of approximately 260 °C to 480 °C (500°F to 896°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-082-4	64741-81-7	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-015-00-X	Gas oils (petroleum), hydrotreated vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₅₀ and boiling in the range of approximately 230 °C to 600 °C (446°F to 1112°F). This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-162-9	64742-59-2	Carc. 1B	H350	GHS08 Dgr	H350			H
649-016-00-5	Residues (petroleum), hydrodesulfurized atmospheric tower; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating an atmospheric tower residuum with hydrogen in the presence of a catalyst under conditions primarily to remove organic sulfur compounds. It consists of hydrocarbons having carbon numbers predominantly greater than C ₂₀ and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-181-2	64742-78-5	Carc. 1B	H350	GHS08 Dgr	H350			H
649-017-00-0	Gas oils (petroleum), hydrodesulfurized heavy vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and boiling in the range of approximately 350 °C to 600 °C (662°F to 1112 °C). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-189-6	64742-86-5	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-018-00-6	Residues (petroleum), steam-cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained as the residual fraction from the distillation of the products of a steam cracking process (including steam cracking to produce ethylene). It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly greater than C ₁₄ and boiling above approximately 260 °C (500°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-193-8	64742-90-1	Carc. 1B	H350	GHS08 Dgr	H350			H
649-019-00-1	Residues (petroleum), atmospheric; Heavy Fuel oil; [A complex residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly greater than C ₁₁ and boiling above approximately 200 °C (392°F). This stream is likely to contain 5 wt. % or more of 4-to 6-membered condensed ring aromatic hydrocarbons.]	269-777-3	68333-22-2	Carc. 1B	H350	GHS08 Dgr	H350			H
649-020-00-7	Clarified oils (petroleum), hydrosulfurized catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating catalytic cracked clarified oil with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly greater than C ₂₀ and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4-to 6-membered condensed ring aromatic hydrocarbons.]	269-782-0	68333-26-6	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-021-00-2	Distillates (petroleum), hydrosulfurized intermediate catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating intermediate catalytic cracked distillates with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₃₀ and boiling in the range of approximately 205 °C to 450 °C (401°F to 842°F). It contains a relatively large proportion of tricyclic aromatic hydrocarbons.]	269-783-6	68333-27-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-022-00-8	Distillates (petroleum), hydrosulfurized heavy catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treatment of heavy catalytic cracked distillates with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₅ and boiling in the range of approximately 260 °C to 500 °C (500°F to 932°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	269-784-1	68333-28-8	Carc. 1B	H350	GHS08 Dgr	H350			H
649-023-00-3	Fuel oil, residues-straight-run gas oils, high-sulfur; Heavy Fuel oil	270-674-0	68476-32-4	Carc. 1B	H350	GHS08 Dgr	H350			H
649-024-00-9	Fuel oil, residual; Heavy Fuel oil; [The liquid product from various refinery streams, usually residues. The composition is complex and varies with the source of the crude oil.]	270-675-6	68476-33-5	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-025-00-4	Residues (petroleum), catalytic reformer fractionator residue distn.; Heavy Fuel oil; [A complex residuum from the distillation of catalytic reformer fractionator residue. It boils approximately above 399 °C (750°F).]	270-792-2	68478-13-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-026-00-X	Residues (petroleum), heavy coker gas oil and vacuum gas oil; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from the distillation of heavy coker gas oil and vacuum gas oil. It predominantly consists of hydrocarbons having carbon numbers predominantly greater than C ₁₃ and boiling above approximately 230 °C (446°F).]	270-796-4	68478-17-1	Carc. 1B	H350	GHS08 Dgr	H350			H
649-027-00-5	Residues (petroleum), heavy coker and light vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from the distillation of heavy coker gas oil and light vacuum gas oil. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C ₁₃ and boiling above approximately 230 °C (446°F).]	270-983-0	68512-61-8	Carc. 1B	H350	GHS08 Dgr	H350			H
649-028-00-0	Residues (petroleum), light vacuum; Heavy Fuel oil; [A complex residuum from the vacuum distillation of the residuum from the atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly greater than C ₁₃ and boiling above approximately 230 °C (446°F).]	270-984-6	68512-62-9	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-029-00-6	Residues (petroleum), steam-cracked light; Heavy Fuel oil; [A complex residuum from the distillation of the products from a steam-cracking process. It consists predominantly of aromatic and unsaturated hydrocarbons having carbon numbers greater than C ₇ and boiling in the range of approximately 101 °C to 555 °C (214°F to 1030°F).]	271-013-9	68513-69-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-030-00-1	Fuel oil, No 6; Heavy Fuel oil; [A distillate oil having a minimum viscosity of 900 SUS at 37.7 °C (100°F) to a maximum of 9000 SUS at 37.7 °C (100°F).]	271-384-7	68553-00-4	Carc. 1B	H350	GHS08 Dgr	H350			H
649-031-00-7	Residues (petroleum), topping plant, low-sulfur; Heavy Fuel oil; [A low-sulfur complex combination of hydrocarbons produced as the residual fraction from the topping plant distillation of crude oil. It is the residuum after the straight-run gasoline cut, kerosene cut and gas oil cut have been removed.]	271-763-7	68607-30-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-032-00-2	Gas oils (petroleum), heavy atmospheric; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₃₅ and boiling in the range of approximately 121 °C to 510 °C (250°F to 950°F).]	272-184-2	68783-08-4	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-033-00-8	Residues (petroleum), coker scrubber, Condensed-ring-arom.-contg.; Heavy Fuel oil; [A very complex combination of hydrocarbons produced as the residual fraction from the distillation of vacuum residuum and the products from a thermal cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C ₂₀ and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	272-187-9	68783-13-1	Carc. 1B	H350	GHS08 Dgr	H350			H
649-034-00-3	Distillates (petroleum), petroleum residues vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from the atmospheric distillation of crude oil.]	273-263-4	68955-27-1	Carc. 1B	H350	GHS08 Dgr	H350			H
649-035-00-9	Residues (petroleum), steam-cracked, resinous; Heavy Fuel oil; [A complex residuum from the distillation of steam-cracked petroleum residues.]	273-272-3	68955-36-2	Carc. 1B	H350	GHS08 Dgr	H350			H
649-036-00-4	Distillates (petroleum), intermediate vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum, distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₄ through C ₄₂ and boiling in the range of approximately 250 °C to 545 °C (482°F to 1013°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	274-683-0	70592-76-6	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-037-00-X	Distillates (petroleum), light vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₃₅ and boiling in the range of approximately 250 °C to 545 °C (482°F to 1013°F).]	274-684-6	70592-77-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-038-00-5	Distillates (petroleum), vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having numbers predominantly in the range of C ₁₅ through C ₅₀ and boiling in the range of approximately 270 °C to 600 °C (518°F to 1112°F). This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	274-685-1	70592-78-8	Carc. 1B	H350	GHS08 Dgr	H350			H
649-039-00-0	Gas oils (petroleum), hydrodesulfurized coker heavy vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by hydrodesulfurization of heavy coker distillate stocks, It consists predominantly of hydrocarbons having carbon numbers predominantly in the range C ₁₈ to C ₄₄ and boiling in the range of approximately 304 °C to 548 °C (579°F to 1018°F). Likely to contain 5 % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	285-555-9	85117-03-9	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-040-00-6	Residues (petroleum), steam-cracked, distillates; Heavy Fuel oil; [A complex combination of hydrocarbons obtained during the production of refined petroleum tar by the distillation of steam cracked tar. It consists predominantly of aromatic and other hydrocarbons and organic sulfur compounds.]	292-657-7	90669-75-3	Carc. 1B	H350	GHS08 Dgr	H350			H
649-041-00-1	Residues (petroleum), vacuum, light; Heavy Fuel oil; [A complex residuum from the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C ₂₄ and boiling above approximately 390 °C (734°F).]	292-658-2	90669-76-4	Carc. 1B	H350	GHS08 Dgr	H350			H
649-042-00-7	Fuel oil, heavy, high-sulfur; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by the distillation of crude petroleum. It consists predominantly of aliphatic, aromatic and cycloaliphatic hydrocarbons having carbon numbers predominantly higher than C ₂₅ and boiling above approximately 400 °C (752°F).]	295-396-7	92045-14-2	Carc. 1B	H350	GHS08 Dgr	H350			H
649-043-00-2	Residues (petroleum), catalytic cracking; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from the distillation of the products from a catalytic cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C ₁₁ and boiling above approximately 200 °C (392°F).]	295-511-0	92061-97-7	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-044-00-8	Distillates (petroleum), intermediate catalytic cracked, thermally degraded; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process which has been used as a heat transfer fluid. It consists predominantly of hydrocarbons boiling in the range of approximately 220 °C to 450 °C (428°F to 842°F). This stream is likely to contain organic sulfur compounds.]	295-990-6	92201-59-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-045-00-3	Residual oils (petroleum); Heavy Fuel oil; [A complex combination of hydrocarbons, sulfur compounds and metal-containing organic compounds obtained as the residue from refinery fractionation cracking processes. It produces a finished oil with a viscosity above 2cSt. at 100 °C.]	298-754-0	93821-66-0	Carc. 1B	H350	GHS08 Dgr	H350			H
649-046-00-9	Residues, steam cracked, thermally treated; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by the treatment and distillation of raw steam-cracked naphtha. It consists predominantly of unsaturated hydrocarbons boiling in the range above approximately 180 °C (356°F).]	308-733-0	98219-64-8	Carc. 1B	H350	GHS08 Dgr	H350			H
649-047-00-4	Distillates (petroleum), hydrosulfurized full-range middle; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating a petroleum stock with hydrogen. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₂₅ and boiling in the range of approximately 150 °C to 400 °C (302°F to 752°F).]	309-863-0	101316-57-8	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-048-00-X	Residues (petroleum), catalytic reformer fractionator; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the product from a catalytic reforming process. It consists of predominantly aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₂₅ and boiling in the range of approximately 160 °C to 400 °C (320°F to 725°F). This stream is likely to contain 5 wt. % or more of 4- or 6-membered condensed ring aromatic hydrocarbons.]	265-069-3	64741-67-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-049-00-5	Petroleum; Crude oil; [A complex combination of hydrocarbons, It consists predominantly of aliphatic, alicyclic and aromatic hydrocarbons. It may also contain small amounts of nitrogen, oxygen and sulfur compounds. This category encompasses light, medium, and heavy petroleums, as well as the oils extended from tar sands. Hydrocarbonaceous materials requiring major chemical changes for their recovery or conversion to petroleum refinery feedstocks such as crude shale oils; upgraded shale oils and liquid coal fuels are not included in this definition.]	232-298-5	8002-05-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-050-00-0	Distillates (petroleum), light paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated aliphatic hydrocarbons normally present in this distillation range of crude oil.]	265-051-5	64741-50-0	Carc. 1A	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-051-00-6	Distillates (petroleum), heavy paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated aliphatic hydrocarbons.]	265-052-0	64741-51-1	Carc. 1A	H350	GHS08 Dgr	H350			H
649-052-00-1	Distillates (petroleum), light naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-053-6	64741-52-2	Carc. 1A	H350	GHS08 Dgr	H350			H
649-053-00-7	Distillates (petroleum), heavy naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-054-1	64741-53-3	Carc. 1A	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-054-00-2	Distillates (petroleum), acid-treated heavy naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-117-3	64742-18-3	Carc. 1A	H350	GHS08 Dgr	H350			H
649-055-00-8	Distillates (petroleum), acid-treated light naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-118-9	64742-19-4	Carc. 1A	H350	GHS08 Dgr	H350			H
649-056-00-3	Distillates (petroleum), acid-treated heavy paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil having a viscosity of a least 100 SUS at 100°F (19cSt at 40 °C).]	265-119-4	64742-20-7	Carc. 1A	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-057-00-9	Distillates (petroleum), acid-treated light paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil having a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-121-5	64742-21-8	Carc. 1A	H350	GHS08 Dgr	H350			H
649-058-00-4	Distillates (petroleum), chemically neutralized heavy paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained from a treating process to remove acidic materials. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of aliphatic hydrocarbons.]	265-127-8	64742-27-4	Carc. 1A	H350	GHS08 Dgr	H350			H
649-059-00-X	Distillates (petroleum), chemically neutralized light paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity less than 100 SUS at 100°F (19cSt at 40 °C).]	265-128-3	64742-28-5	Carc. 1A	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-060-00-5	Distillates (petroleum), chemically neutralized heavy naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-135-1	64742-34-3	Carc. 1A	H350	GHS08 Dgr	H350			H
649-061-00-0	Distillates (petroleum), chemically neutralized light naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS a 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-136-7	64742-35-4	Carc. 1A	H350	GHS08 Dgr	H350			H
649-062-00-6	Gases (petroleum), catalytic cracked naphtha depropanizer overhead, C ₃ -rich acid-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked hydrocarbons and treated to remove acidic impurities. It consists of hydrocarbons having carbon numbers in the range of C ₂ through C ₄ , predominantly C ₃ .]	270-755-0	68477-73-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-063-00-1	Gases (petroleum), catalytic cracker; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of the products from a catalytic cracking process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-756-6	68477-74-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-064-00-7	Gases (petroleum), catalytic cracker, C ₁₋₅ -rich; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of aliphatic hydrocarbons having carbon numbers in the range of C ₁ through C ₆ , predominantly C ₁ through C ₅ .]	270-757-1	68477-75-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-065-00-2	Gases (petroleum), catalytic polymd. naphtha stabilizer overhead, C ₂₋₄ -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of catalytic polymerized naphtha. It consists of aliphatic hydrocarbons having carbon numbers in the range of C ₂ through C ₆ , predominantly C ₂ through C ₄ .]	270-758-7	68477-76-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-066-00-8	Gases (petroleum), catalytic reformer, C ₁₋₄ -rich; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers in the range of C ₁ through C ₆ , predominantly C ₁ through C ₄ .]	270-760-8	68477-79-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-067-00-3	Gases (petroleum), C ₃₋₅ olefinic-paraffinic alkylation feed; Petroleum gas; [A complex combination of olefinic and paraffinic hydrocarbons having carbon numbers in the range of C ₃ through C ₅ which are used as alkylation feed. Ambient temperatures normally exceed the critical temperature of these combinations.]	270-765-5	68477-83-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-068-00-9	Gases (petroleum), C ₄ -rich; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from a catalytic fractionation process. It consists of aliphatic hydrocarbons having carbon numbers in the range of C ₃ through C ₅ , predominantly C ₄ .]	270-767-6	68477-85-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-069-00-4	Gases (petroleum), deethanizer overheads; Petroleum gas; [A complex combination of hydrocarbons produced from distillation of the gas and gasoline fractions from the catalytic cracking process. It contains predominantly ethane and ethylene.]	270-768-1	68477-86-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-070-00-X	Gases (petroleum), deisobutanizer tower overheads; Petroleum gas; [A complex combination of hydrocarbons produced by the atmospheric distillation of a butane-butylene stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₄ .]	270-769-7	68477-87-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-071-00-5	Gases (petroleum), depropanizer dry, propene-rich; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from the gas and gasoline fractions of a catalytic cracking process. It consists predominantly of propylene with some ethane and propane.]	270-772-3	68477-90-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-072-00-0	Gases (petroleum), depropanizer overheads; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from the gas and gasoline fractions of a catalytic cracking process. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₄ .]	270-773-9	68477-91-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-073-00-6	Gases (petroleum), gas recovery plant depropanizer overheads; Petroleum gas; [A complex combination of hydrocarbons obtained by fractionation of miscellaneous hydrocarbon streams. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₁ through C ₄ , predominantly propane.]	270-777-0	68477-94-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-074-00-1	Gases (petroleum), Girbatol unit feed; Petroleum gas; [A complex combination of hydrocarbons that is used as the feed into the Girbatol unit to remove hydrogen sulfide. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₄ .]	270-778-6	68477-95-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-075-00-7	Gases (petroleum), isomerized naphtha fractionator, C ₄ -rich, hydrogen sulfide-free; Petroleum gas	270-782-8	68477-99-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-076-00-2	Tail gas (petroleum), catalytic cracked clarified oil and thermal cracked vacuum residue fractionation reflux drum; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked clarified oil and thermal cracked vacuum residue. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-802-5	68478-21-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-077-00-8	Tail gas (petroleum), catalytic cracked naphtha stabilization absorber; Petroleum gas; [A complex combination of hydrocarbons obtained from the stabilization of catalytic cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-803-0	68478-22-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-078-00-3	Tail gas (petroleum), catalytic cracker, catalytic reformer and hydrodesulfurizer combined fractionater; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation of products from catalytic cracking, catalytic reforming and hydrodesulfurizing processes treated to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	270-804-6	68478-24-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-079-00-9	Tail gas (petroleum), catalytic reformed naphtha fractionation stabilizer; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of catalytic reformed naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	270-806-7	68478-26-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-080-00-4	Tail gas (petroleum), saturate gas plant mixed stream, C ₄ -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of straight-run naphtha, distillation tail gas and catalytic reformed naphtha stabilizer tail gas. It consists of hydrocarbons having carbon numbers in the range of C ₃ through C ₆ , predominantly butane and isobutane.]	270-813-5	68478-32-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-081-00-X	Tail gas (petroleum), saturate gas recovery plant, C _{1,2} -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of distillate tail gas, straight-run naphtha, catalytic reformed naphtha stabilizer tail gas. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₁ through C ₅ , predominantly methane and ethane.]	270-814-0	68478-33-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-082-00-5	Tail gas (petroleum), vacuum residues thermal cracker; Petroleum gas; [A complex combination of hydrocarbons obtained from the thermal cracking of vacuum residues. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	270-815-6	68478-34-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-083-00-0	Hydrocarbons, C _{3,4} -rich, petroleum distillate; Petroleum gas; [A complex combination of hydrocarbons produced by distillation and condensation of crude oil. It consists of hydrocarbons having carbon numbers in the range of C ₃ through C ₅ , predominantly C ₃ through C ₄ .]	270-990-9	68512-91-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-084-00-6	Gases (petroleum), full-range straight-run naphtha dehexanizer off; petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of the full-range straight-run naphtha. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₆ .]	271-000-8	68513-15-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-085-00-1	Gases (petroleum), hydrocracking depropa-nizer off, hydrocarbon-rich; Petroleum gas; [A complex combination of hydrocarbon produced by the distillation of products from a hydrocracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ . It may also contain small amounts of hydrogen and hydrogen sulfide.]	271-001-3	68513-16-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-086-00-7	Gases (petroleum), light straight-run naphtha stabilizer off; Petroleum gas; [A complex combination of hydrocarbons obtained by the stabilization of light straight-run naphtha. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₆ .]	271-002-9	68513-17-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-087-00-2	Residues (petroleum), alkylation splitter, C ₄ -rich; Petroleum gas; [A complex residuum from the distillation of streams various refinery operations. It consists of hydrocarbons having carbon numbers in the range of C ₄ through C ₅ , predominantly butane and boiling in the range of approximately - 11.7 °C to 27.8 °C (11°F to 82°F).]	271-010-2	68513-66-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne kon- centracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Ozna- ka(-e) stavka o nevar- nosti	Piktogram, Oznaka(-e) opo- zorilne besede	Ozna- ka(-e) stavka o nevarnosti	Dod. ozna- ka(-e) stavka o nevarnosti		
649-088-00-8	Hydrocarbons, C ₁₋₄ ; Petroleum gas; [A complex combination of hydrocarbons provided by thermal cracking and absorber operations and by distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ and boiling in the range of approximately minus 164 °C to minus 0.5 °C (-263°F to 31°F).]	271-032-2	68514-31-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-089-00-3	Hydrocarbons, C ₁₋₄ , sweetened; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting hydrocarbon gases to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ and boiling in the range of approximately - 164 °C to - 0.5 °C (-263°F to 31°F).]	271-038-5	68514-36-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-090-00-9	Hydrocarbons, C ₁₋₃ ; Petroleum gas; [A complex combination of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₃ and boiling in the range of approximately minus 164 °C to minus 42 °C (-263°F to - 44°F).]	271-259-7	68527-16-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-091-00-4	Hydrocarbons, C ₁₋₄ , debutanizer fraction; Petroleum gas	271-261-8	68527-19-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-092-00-X	Gases (petroleum), C ₁₋₅ , wet; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of crude oil and/ or the cracking of tower gas oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	271-624-0	68602-83-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-093-00-5	Hydrocarbons, C ₂₋₄ ; Petroleum gas	271-734-9	68606-25-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-094-00-0	Hydrocarbons, C ₃ ; Petroleum gas	271-735-4	68606-26-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-095-00-6	Gases (petroleum), alkylation feed; Petroleum gas; [A complex combination of hydrocarbons produced by the catalytic cracking of gas oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₄ .]	271-737-5	68606-27-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-096-00-1	Gases (petroleum), depropanizer bottoms fractionation off; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation of depropanizer bottoms. It consists predominantly of butane, isobutane and butadiene.]	271-742-2	68606-34-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-097-00-7	Gases (petroleum), refinery blend; Petroleum gas; [A complex combination obtained from various processes. It consists of hydrogen, hydrogen sulfide and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-183-7	68783-07-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-098-00-2	Gases (petroleum), catalytic cracking; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of the products from a catalytic cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₅ .]	272-203-4	68783-64-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-099-00-8	Gases (petroleum), C ₂₋₄ , sweetened; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of saturated and unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₄ and boiling in the range of approximately - 51 °C to - 34 °C (-60°F to - 30°F).]	272-205-5	68783-65-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-100-00-1	Gases (petroleum), crude oil fractionation off; Petroleum gas; [A complex combination of hydrocarbons produced by the fractionation of crude oil. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-871-7	68918-99-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-101-00-7	Gases (petroleum), dehexanizer off; Petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of combined naphtha streams. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-872-2	68919-00-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-102-00-2	Gases (petroleum), light straight run gasoline fractionation stabilizer off; Petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of light straight-run gasoline. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-878-5	68919-05-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-103-00-8	Gases (petroleum), naphtha unfiner desulfurization stripper off; Petroleum gas; [A complex combination of hydrocarbons produced by a naphtha unfiner desulfurization process and stripped from the naphtha product. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	272-879-0	68919-06-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-104-00-3	Gases (petroleum), straight-run naphtha catalytic reforming off; Petroleum gas; [A complex combination of hydrocarbons obtained by the catalytic reforming of straight-run naphtha and fractionation of the total effluent. It consists of methane, ethane, and propane.]	272-882-7	68919-09-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-105-00-9	Gases (petroleum), fluidized catalytic cracker splitter overheads; Petroleum gas; [A complex combination of hydrocarbons produced by the fractionation of the charge to the C ₃ -C ₄ splitter. It consists predominantly of C ₃ hydrocarbons.]	272-893-7	68919-20-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-106-00-4	Gases (petroleum), straight-run stabilizer off; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation of the liquid from the first tower used in the distillation of crude oil. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	272-883-2	68919-10-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-107-00-X	Gases (petroleum), catalytic cracked naphtha debutanizer; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked naphtha. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	273-169-3	68952-76-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-108-00-5	Tail gas (petroleum), catalytic cracked distillate and naphtha stabilizer; Petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of catalytic cracked naphtha and distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	273-170-9	68952-77-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-109-00-0	Tail gas (petroleum), thermal-cracked distillate, gas oil and naphtha absorber; petroleum gas; [A complex combination of hydrocarbons obtained from the separation of thermal-cracked distillates, naphtha and gas oil. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	273-175-6	68952-81-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-110-00-6	Tail gas (petroleum), thermal cracked hydrocarbon fractionation stabilizer, petroleum coking; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of thermal cracked hydrocarbons from petroleum coking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	273-176-1	68952-82-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-111-00-1	Gases (petroleum, light steam-cracked, butadiene conc.; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a thermal cracking process, It consists of hydrocarbons having a carbon number predominantly of C ₄ .]	273-265-5	68955-28-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-112-00-7	Gases (petroleum), straight-run naphtha catalytic reformer stabilizer overhead; Petroleum gas; [A complex combination of hydrocarbons obtained by the catalytic reforming of straight-run naphtha and the fractionation of the total effluent. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₄ .]	273-270-2	68955-34-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-113-00-2	Hydrocarbons, C ₄ ; Petroleum gas	289-339-5	87741-01-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-114-00-8	Alkanes, C ₁₋₄ , C ₃ -rich; Petroleum gas	292-456-4	90622-55-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-115-00-3	Gases (petroleum), steam-cracker C ₃ -rich; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a steam cracking process. It consists predominantly of propylene with some propane and boils in the range of approximately - 70 °C to 0 °C (-94°F to 32°F).]	295-404-9	92045-22-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-116-00-9	Hydrocarbons, C ₄ , steam-cracker distillate; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of the products of a steam cracking process. It consists predominantly of hydrocarbons having a carbon number of C ₄ , predominantly 1-butene and 2-butene, containing also butane and isobutene and boiling in the range of approximately minus 12 °C to 5 °C (10.4°F to 41°F).]	295-405-4	92045-23-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-117-00-4	Petroleum gases, liquefied, sweetened, C ₄ fraction; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting a liquified petroleum gas mix to a sweetening process to oxidize mercaptans or to remove acidic impurities. It consists predominantly of C ₄ saturated and unsaturated hydrocarbons.]	295-463-0	92045-80-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			HKSU
649-118-00-X	Hydrocarbons, C ₄ , 1,3-butadiene- and isobutene-free; Petroleum gas	306-004-1	95465-89-7	Flam. Gas 1 Press. Gas Carc. 1B	H220 H350	GHS02 GHS04 GHS08 Dgr	H220 H350			H K U
649-119-00-5	Raffinates (petroleum), steam-cracked C ₄ fraction cuprous ammonium acetate extn., C ₃₋₅ and C ₃₋₅ unsatd., butadiene-free; Petroleum gas	307-769-4	97722-19-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-120-00-0	Gases (petroleum), amine system feed; Refinery gas; [The feed gas to the amine system for removal of hydrogen sulfide. It consists of hydrogen. Carbon monoxide, carbon dioxide, hydrogen sulfide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ may also be present.]	270-746-1	68477-65-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-121-00-6	Gases (petroleum), benzene unit hydrodesulfurizer off; Refinery gas; [Off gases produced by the benzene unit. It consists primarily of hydrogen. Carbon monoxide and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ , including benzene, may also be present.]	270-747-7	68477-66-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-122-00-1	Gases (petroleum), benzene unit recycle, hydrogen-rich; Refinery gas; [A complex combination of hydrocarbons obtained by recycling the gases of the benzene unit. It consists primarily of hydrogen with various small amounts of carbon monoxide and hydrocarbons having carbon numbers in the range of C ₁ through C ₆ .]	270-748-2	68477-67-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-123-00-7	Gases (petroleum), blend oil, hydrogen-nitrogen-rich; Refinery gas; [A complex combination of hydrocarbons obtained by distillation of a blend oil. It consists primarily of hydrogen and nitrogen with various small amounts of carbon monoxide, carbon dioxide, and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	270-749-8	68477-68-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-124-00-2	Gases (petroleum), catalytic reformed naphtha stripper overheads; Refinery gas; [A complex combination of hydrocarbons obtained from stabilization of catalytic reformed naphtha. Its consists of hydrogen and saturated hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	270-759-2	68477-77-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-125-00-8	Gases (petroleum), C ₆₋₈ catalytic reformer recycle; Refinery gas; [A complex combination of hydrocarbons produced by distillation of products from catalytic reforming of C ₆ -C ₈ feed and recycled to conserve hydrogen. It consists primarily of hydrogen. It may also contain various small amounts of carbon monoxide, carbon dioxide, nitrogen, and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-761-3	68477-80-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-126-00-3	Gases (petroleum), C ₆₋₈ catalytic reformer; Refinery gas; [A complex combination of hydrocarbons produced by distillation of products from catalytic reforming of C ₆ -C ₈ feed. It consists of hydrocarbons having carbon numbers in the range of C ₁ through C ₅ and hydrogen.]	270-762-9	68477-81-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-127-00-9	Gases (petroleum), C ₆₋₈ catalytic reformer recycle, hydrogen-rich; Refinery gas	270-763-4	68477-82-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-128-00-4	Gases (petroleum), C ₂ -return stream; Refinery gas; [A complex combination of hydrocarbons obtained by the extraction of hydrogen from a gas stream which consists primarily of hydrogen with small amounts of nitrogen, carbon monoxide, methane, ethane, and ethylene. It contains predominantly hydrocarbons such as methane, ethane, and ethylene with small amounts of hydrogen, nitrogen and carbon monoxide.]	270-766-0	68477-84-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-129-00-X	Gases (petroleum), dry sour, gas-concn.-unit-off; Refinery gas; [The complex combination of dry gases from a gas concentration unit. It consists of hydrogen, hydrogen sulfide and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₃ .]	270-774-4	68477-92-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-130-00-5	Gases (petroleum), gas concn. reabsorber distn.; Refinery gas; [A complex combination of hydrocarbons produced by distillation of products from combined gas streams in a gas concentration reabsorber. It consists predominantly of hydrogen, carbon monoxide, carbon dioxide, nitrogen, hydrogen sulfide and hydrocarbons having carbon numbers in the range of C ₁ through C ₃ .]	270-776-5	68477-93-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-131-00-0	Gases (petroleum), hydrogen absorber off; Refinery gas; [A complex combination obtained by absorbing hydrogen from a hydrogen rich stream. It consists of hydrogen, carbon monoxide, nitrogen, and methane with small amounts of C ₂ hydrocarbons.]	270-779-1	68477-96-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-132-00-6	Gases (petroleum), hydrogen-rich; Refinery gas; [A complex combination separated as a gas from hydrocarbon gases by chilling. It consists primarily of hydrogen with various small amounts of carbon monoxide, nitrogen, methane, and C ₂ hydrocarbons.]	270-780-7	68477-97-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-133-00-1	Gases (petroleum), hydrotreater blend oil recycle, hydrogen-nitrogen-rich; Refinery gas; [A complex combination obtained from recycled hydrotreated blend oil. It consists primarily of hydrogen and nitrogen with various small amounts of carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	270-781-2	68477-98-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-134-00-7	Gases (petroleum), recycle, hydrogen-rich; Refinery gas; [A complex combination obtained from recycled reactor gases. It consists primarily of hydrogen with various small amounts of carbon monoxide, carbon dioxide, nitrogen, hydrogen sulfide, and saturated aliphatic hydrocarbons having carbon numbers in the range of C ₁ through C ₅ .]	270-783-3	68478-00-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-135-00-2	Gases (petroleum), reformer make-up, hydrogen-rich; Refinery gas; [A complex combination obtained from the reformers. It consists primarily of hydrogen with various small amounts of carbon monoxide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	270-784-9	68478-01-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-136-00-8	Gases (petroleum), reforming hydrotreater; Refinery gas; [A complex combination obtained from the reforming hydrotreating process. It consists primarily of hydrogen, methane, and ethane with various small amounts of hydrogen sulfide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₅ .]	270-785-4	68478-02-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-137-00-3	Gases (petroleum), reforming hydrotreater, hydrogen-methane-rich; Refinery gas; [A complex combination obtained from the reforming hydrotreating process. It consists primarily of hydrogen and methane with various small amounts of carbon monoxide, carbon dioxide, nitrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₅ .]	270-787-5	68478-03-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-138-00-9	Gases (petroleum), reforming hydrotreater make-up, hydrogen-rich; Refinery gas; [A complex combination obtained from the reforming hydrotreating process. It consists primarily of hydrogen with various small amounts of carbon monoxide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	270-788-0	68478-04-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-139-00-4	Gases (petroleum), thermal cracking distn.; Refinery gas; [A complex combination produced by distillation of products from a thermal cracking process. It consists of hydrogen, hydrogen sulfide, carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-789-6	68478-05-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne kon- centracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Ozna- ka(-e) stavka o nevar- nosti	Piktogram, Oznaka(-e) opo- zorilne besede	Ozna- ka(-e) stavka o nevarnosti	Dod. ozna- ka(-e) stavka o nevarnosti		
649-140-00-X	Tail gas (petroleum), catalytic cracker refractionation absorber; Refinery gas; [A complex combination of hydrocarbons obtained from refractionation of products from a catalytic cracking process. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₃ .]	270-805-1	68478-25-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-141-00-5	Tail gas (petroleum), catalytic reformed naphtha separator; Refinery gas; [A complex combination of hydrocarbons obtained from the catalytic reforming of straight run naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-807-2	68478-27-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-142-00-0	Tail gas (petroleum), catalytic reformed naphtha stabilizer; Refinery gas; [A complex combination of hydrocarbons obtained from the stabilization of catalytic reformed naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-808-8	68478-28-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-143-00-6	Tail gas (petroleum), cracked distillate hydrotreater separator; Refinery gas; [A complex combination of hydrocarbons obtained by treating cracked distillates with hydrogen in the presence of a catalyst. It consists of hydrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	270-809-3	68478-29-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-144-00-1	Tail gas (petroleum), hydrodesulfurized straight-run naphtha separator; Refinery gas; [A complex combination of hydrocarbons obtained from hydrodesulfurization of straight-run naphtha. It consists of hydrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-810-9	68478-30-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-145-00-7	Gases (petroleum), catalytic reformed straight-run naphtha stabilizer overheads; Refinery gas; [A complex combination of hydrocarbons obtained from the catalytic reforming of straight-run naphtha followed by fractionation of the total effluent. It consists of hydrogen, methane, ethane and propane.]	270-999-8	68513-14-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-146-00-2	Gases (petroleum), reformer effluent high-pressure flash drum off; Refinery gas; [A complex combination produced by the high-pressure flashing of the effluent from the reforming reactor. It consists primarily of hydrogen with various small amounts of methane, ethane, and propane.]	271-003-4	68513-18-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-147-00-8	Gases (petroleum), reformer effluent low-pressure flash drum off; Refinery gas; [A complex combination produced by low-pressure flashing of the effluent from the reforming reactor. It consists primarily of hydrogen with various small amounts of methane, ethane, and propane.]	271-005-5	68513-19-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-148-00-3	Gases (petroleum), oil refinery gas distn. off; Refinery gas; [A complex combination separated by distillation of a gas stream containing hydrogen, carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers in the range of C ₁ through C ₆ or obtained by cracking ethane and propane. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₂ , hydrogen, nitrogen, and carbon monoxide.]	271-258-1	68527-15-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-149-00-9	Gases (petroleum), benzene unit hydrotreater depentanizer overheads; Refinery gas; [A complex combination produced by treating the feed from the benzene unit with hydrogen in the presence of a catalyst followed by depentanizing. It consists primarily of hydrogen, ethane and propane with various small amounts of nitrogen, carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ . It may contain trace amounts of benzene.]	271-623-5	68602-82-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-150-00-4	Gases (petroleum), secondary absorber off, fluidized catalytic cracker overheads fractionator; Refinery gas; [A complex combination produced by the fractionation of the overhead products from the catalytic cracking process in the fluidized catalytic cracker. It consists of hydrogen, nitrogen, and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₃ .]	271-625-6	68602-84-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-151-00-X	Petroleum products, refinery gases; Refinery gas; [A complex combination which consists primarily of hydrogen with various small amounts of methane, ethane, and propane.]	271-750-6	68607-11-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-152-00-5	Gases (petroleum), hydrocracking low-pressure separator; Refinery gas; [A complex combination obtained by the liquid-vapor separation of the hydrocracking process reactor effluent. It consists predominantly of hydrogen and saturated hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₃ .]	272-182-1	68783-06-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-153-00-0	Gases (petroleum), refinery; Refinery gas; [A complex combination obtained from various petroleum refining operations. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₃ .]	272-338-9	68814-67-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-154-00-6	Gases (petroleum), platformer products separator off; Refinery gas; [A complex combination obtained from the chemical reforming of naphthenes to aromatics. It consists of hydrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₄ .]	272-343-6	68814-90-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-155-00-1	Gases (petroleum), hydrotreated sour kerosine depentanizer stabilizer off; Refinery gas; [The complex combination obtained from the depentanizer stabilization of hydrotreated kerosine. It consists primarily of hydrogen, methane, ethane, and propane with various small amounts of nitrogen, hydrogen sulfide, carbon monoxide and hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₅ .]	272-775-5	68911-58-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-156-00-7	Gases (petroleum), hydrotreated sour kerosine flash drum; Refinery gas; [A complex combination obtained from the flash drum of the unit treating sour kerosine with hydrogen in the presence of a catalyst. It consists primarily of hydrogen and methane with various small amounts of nitrogen, carbon monoxide, and hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₅ .]	272-776-0	68911-59-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-157-00-2	Gases (petroleum), distillate unifiner desulfurization stripper off; Refinery gas; [A complex combination stripped from the liquid product of the unifiner desulfurization process. It consists of hydrogen sulfide, methane, ethane, and propane.]	272-873-8	68919-01-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-158-00-8	Gases (petroleum), fluidized catalytic cracker fractionation off; Refinery gas; [A complex combination produced by the fractionation of the overhead product of the fluidized catalytic cracking process. It consists of hydrogen, hydrogen sulfide, nitrogen, and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-874-3	68919-02-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-159-00-3	Gases (petroleum), fluidized catalytic cracker scrubbing secondary absorber off; Refinery gas; [A complex combination produced by scrubbing the overhead gas from the fluidized catalytic cracker. It consists of hydrogen, nitrogen, methane, ethane and propane.]	272-875-9	68919-03-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-160-00-9	Gases (petroleum), heavy distillate hydro-treater desulfurization stripper off; Refinery gas; [A complex combination stripped from the liquid product of the heavy distillate hydro-treater desulfurization process. It consists of hydrogen, hydrogen sulfide, and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-876-4	68919-04-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-161-00-4	Gases (petroleum), platformer stabilizer off, light ends fractionation; Refinery gas; [A complex combination obtained by the fractionation of the light ends of the platinum reactors of the platformer unit. It consists of hydrogen, methane, ethane and propane.]	272-880-6	68919-07-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-162-00-X	Gases (petroleum), preflash tower off, crude distn.; Refinery gas; [A complex combination produced from the first tower used in the distillation of crude oil. It consists of nitrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-881-1	68919-08-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-163-00-5	Gases (petroleum), tar stripper off; Refinery gas; [A complex combination obtained by the fractionation of reduced crude oil. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	272-884-8	68919-11-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-164-00-0	Gases (petroleum), unifier stripper off; Refinery gas; [A combination of hydrogen and methane obtained by fractionation of the products from the unifier unit.]	272-885-3	68919-12-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-165-00-6	Tail gas (petroleum), catalytic hydrodesulfurized naphtha separator; Refinery gas; [A complex combination of hydrocarbons obtained from the hydrodesulfurization of naphtha. It consists of hydrogen, methane, ethane, and propane.]	273-173-5	68952-79-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-166-00-1	Tail gas (petroleum), straight-run naphtha hydrodesulfurizer; Refinery gas; [A complex combination obtained from the hydrodesulfurization of straight-run naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	273-174-0	68952-80-7	Press. Gas Flam. Gas 1 Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-167-00-7	Gases (petroleum), sponge absorber off, fluidized catalytic cracker and gas oil desulfurizer overhead fractionation; Refinery gas; [A complex combination obtained by the fractionation of products from the fluidized catalytic cracker and gas oil desulfurizer. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	273-269-7	68955-33-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-168-00-2	Gases (petroleum), crude distn. and catalytic cracking; Refinery gas; [A complex combination produced by crude distillation and catalytic cracking processes. It consists of hydrogen, hydrogen sulfide, nitrogen, carbon monoxide and paraffinic and olefinic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	273-563-5	68989-88-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-169-00-8	Gases (petroleum), gas oil diethanolamine scrubber off; Refinery gas; [A complex combination produced by desulfurization of gas oils with diethanolamine. It consists predominantly of hydrogen sulfide, hydrogen and aliphatic hydrocarbons having carbon numbers in the range of C ₁ through C ₅ .]	295-397-2	92045-15-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-170-00-3	Gases (petroleum), gas oil hydrodesulfurization effluent; Refinery gas; [A complex combination obtained by separation of the liquid phase from the effluent from the hydrogenation reaction. It consists predominantly of hydrogen, hydrogen sulfide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₃ .]	295-398-8	92045-16-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-171-00-9	Gases (petroleum), gas oil hydrodesulfurization purge; Refinery gas; [A complex combination of gases obtained from the reformer and from the purges from the hydrogenation reactor. It consists predominantly of hydrogen and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	295-399-3	92045-17-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-172-00-4	Gases (petroleum), hydrogenator effluent flash drum off; Refinery gas; [A complex combination of gases obtained from flash of the effluents after the hydrogenation reaction. It consists predominantly of hydrogen and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	295-400-7	92045-18-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-173-00-X	Gases (petroleum), naphtha steam cracking high-pressure residual; Refinery gas; [A complex combination obtained as a mixture of the non-condensable portions from the product of a naphtha steam cracking process as well as residual gases obtained during the preparation of subsequent products. It consists predominantly of hydrogen and paraffinic and olefinic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ with which natural gas may also be mixed.]	295-401-2	92045-19-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-174-00-5	Gases (petroleum), residue visbaking off; Refinery gas; [A complex combination obtained from viscosity reduction of residues in a furnace. It consists predominantly of hydrogen sulfide and paraffinic and olefinic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	295-402-8	92045-20-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-175-00-0	Foots oil (petroleum), acid-treated; Foots oil; [A complex combination of hydrocarbons obtained by treatment of Foot's oil with sulfuric acid. It consists predominantly of branched-chain hydrocarbons with carbon numbers predominantly in the range of C ₂₀ through C ₅₀ .]	300-225-7	93924-31-3	Flam. Gas 1 Press. Gas Carc. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-176-00-6	Foots oil (petroleum), clay-treated; Foots oil; [A complex combination of hydrocarbons obtained by treatment of Foot's oil with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists predominantly of branched chain hydrocarbons with carbon numbers predominantly in the range of C ₂₀ through C ₅₀ .]	300-226-2	93924-32-4	Flam. Gas 1 Press. Gas Carc. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-177-00-1	Gases (petroleum), C ₃₋₄ ; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from the cracking of crude oil. It consists of hydrocarbons having carbon numbers in the range of C ₃ through C ₄ , predominantly of propane and propylene, and boiling in the range of approximately - 51 °C to - 1 °C (- 60°F to 30°F.)]	268-629-5	68131-75-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-178-00-7	Tail gas (petroleum), catalytic cracked distillate and catalytic cracked naphtha fractionation absorber; Petroleum gas; [The complex combination of hydrocarbons from the distillation of the products from catalytic cracked distillates and catalytic cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₁ through C ₄ .]	269-617-2	68307-98-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-179-00-2	Tail gas (petroleum), catalytic polymn. naphtha fractionation stabilizer; Petroleum gas; [A complex combination of hydrocarbons from the fractionation stabilization products from polymerization of naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₁ through C ₄ .]	269-618-8	68307-99-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-180-00-8	Tail gas (petroleum), catalytic reformed naphtha fractionation stabilizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation stabilization of catalytic reformed naphtha and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	269-619-3	68308-00-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-181-00-3	Tail gas (petroleum), cracked distillate hydrotreater stripper; Petroleum gas; [A complex combination of hydrocarbons obtained by treating thermal cracked distillates with hydrogen in the presence of a catalyst. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	269-620-9	68308-01-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-182-00-9	Tail gas (petroleum), straight-run distillate hydrodesulfurizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from catalytic hydrodesulfurization of straight run distillates and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	269-630-3	68308-10-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-183-00-4	Tail gas (petroleum), gas oil catalytic cracking absorber; Petroleum gas; [A complex combination of hydrocarbons obtained from the distillation of products from the catalytic cracking of gas oil. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	269-623-5	68308-03-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-184-00-X	Tail gas (petroleum), gas recovery plant; Petroleum gas; [A complex combination of hydrocarbons from the distillation of products from miscellaneous hydrocarbon streams. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	269-624-0	68308-04-3	Press. Gas Flam. Gas 1 Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-185-00-5	Tail gas (petroleum), gas recovery plant deethanizer; Petroleum gas; [A complex combination of hydrocarbons from the distillation of products from miscellaneous hydrocarbon streams. It consists of hydrocarbon having carbon numbers predominantly in the range of C ₁ through C ₄ .]	269-625-6	68308-05-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-186-00-0	Tail gas (petroleum), hydrodesulfurized distillate and hydrodesulfurized naphtha fractionator, acid-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of hydrodesulfurized naphtha and distillate hydrocarbon streams and treated to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	269-626-1	68308-06-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-187-00-6	Tail gas (petroleum), hydrodesulfurized vacuum gas oil stripper, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from stripping stabilization of catalytic hydrodesulfurized vacuum gas oil and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	269-627-7	68308-07-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-188-00-1	Tail gas (petroleum), light straight-run naphtha stabilizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation stabilization of light straight run naphtha and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	269-629-8	68308-09-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-189-00-7	Tail gas (petroleum), propane-propylene alkylation feed prep deethanizer; Petroleum gas; [A complex combination of hydrocarbons obtained from the distillation of the reaction products of propane with propylene. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	269-631-9	68308-11-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-190-00-2	Tail gas (petroleum), vacuum gas oil hydrodesulfurizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from catalytic hydrodesulfurization of vacuum gas oil and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	269-632-4	68308-12-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-191-00-8	Gases (petroleum), catalytic cracked overheads; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from the catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₅ and boiling in the range of approximately - 48 °C to 32 °C (-54°F to 90°F).]	270-071-2	68409-99-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-193-00-9	Alkanes, C ₁₋₂ ; Petroleum gas	270-651-5	68475-57-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-194-00-4	Alkanes, C ₂₋₃ ; Petroleum gas	270-652-0	68475-58-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-195-00-X	Alkanes, C ₃₋₄ ; Petroleum gas	270-653-6	68475-59-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-196-00-5	Alkanes, C ₄₋₅ ; Petroleum gas	270-654-1	68475-60-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-197-00-0	Fuel gases; Petroleum gas; [A combination of light gases. It consists predominantly of hydrogen and/or low molecular weight hydrocarbons.]	270-667-2	68476-26-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne kon- centracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Ozna- ka(-e) stavka o nevar- nosti	Piktogram, Oznaka(-e) opo- zorilne besede	Ozna- ka(-e) stavka o nevarnosti	Dod. ozna- ka(-e) stavka o nevarnosti		
649-198-00-6	Fuel gases, crude oil of distillates; Petroleum gas; [A complex combination of light gases produced by distillation of crude oil and by catalytic reforming of naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ and boiling in the range of approximately - 217 °C to - 12 °C (- 423°F to 10°F).]	270-670-9	68476-29-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-199-00-1	Hydrocarbons, C ₃₋₄ ; Petroleum gas	270-681-9	68476-40-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-200-00-5	Hydrocarbons, C ₄₋₅ ; Petroleum gas	270-682-4	68476-42-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-201-00-0	Hydrocarbons, C ₂₋₄ , C ₃ -rich; Petroleum gas	270-689-2	68476-49-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-202-00-6	Petroleum gases, liquefied; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₇ and boiling in the range of approximately - 40 °C to 80 °C (-40 °F to 176 °F).]	270-704-2	68476-85-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			HKSU

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-203-00-1	Petroleum gases, liquefied, sweetened; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting liquefied petroleum gas mix to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₇ and boiling in the range of approximately - 40 °C to 80 °C (-40 °F to 176 °F).]	270-705-8	68476-86-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			HKSU
649-204-00-7	Gases (petroleum), C ₃₋₄ , isobutane-rich; Petroleum gas; [A complex combination of hydrocarbons from the distillation of saturated and unsaturated hydrocarbons usually ranging in carbon numbers from C ₃ through C ₆ , predominantly butane and isobutane. It consists of saturated and unsaturated hydrocarbons having carbon numbers in the range of C ₃ through C ₄ , predominantly isobutane.]	270-724-1	68477-33-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-205-00-2	Distillates (petroleum), C ₃₋₆ , piperylene-rich; Petroleum gas; [A complex combination of hydrocarbons from the distillation of saturated and unsaturated aliphatic hydrocarbons usually ranging in the carbon numbers C ₃ through C ₆ . It consists of saturated and unsaturated hydrocarbons having carbon numbers in the range of C ₃ through C ₆ , predominantly piperylenes.]	270-726-2	68477-35-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-206-00-8	Gases (petroleum), butane splitter overheads; Petroleum gas; [A complex combination of hydrocarbons obtained from the distillation of the butane stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₄ .]	270-750-3	68477-69-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-207-00-3	Gases (petroleum), C ₂ ; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic fractionation process. It contains predominantly ethane, ethylene, propane, and propylene.]	270-751-9	68477-70-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-208-00-9	Gases (petroleum), catalytic-cracked gas oil depropanizer bottoms, C ₄ -rich acid-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked gas oil hydrocarbon stream and treated to remove hydrogen sulfide and other acidic components. It consists of hydrocarbons having carbon numbers in the range of C ₃ through C ₅ , predominantly C ₄ .]	270-752-4	68477-71-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-209-00-4	Gases (petroleum), catalytic-cracked naphtha debutanizer bottoms, C ₃₋₅ -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from the stabilization of catalytic cracked naphtha. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₅ .]	270-754-5	68477-72-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-210-00-X	Tail gas (petroleum), isomerized naphtha fractionation stabilizer; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization products from isomerized naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	269-628-2	68308-08-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-211-00-5	Foots oil (petroleum), carbon-treated; Foots oil; [A complex combination of hydrocarbons obtained by the treatment of Foots oil with activated carbon for the removal of trace constituents and impurities. It consists predominantly of saturated straight chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-126-0	97862-76-5	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-212-00-0	Distillates (petroleum), sweetened middle; Gasoil – unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₂₀ and boiling in the range of approximately 150 °C to 345 °C (302°F to 653°F).]	265-088-7	64741-86-2	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-213-00-6	Gas oils (petroleum), solvent-refined; Gasoil – unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₂₅ and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	265-092-9	64741-90-8	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-214-00-1	Distillates (petroleum), solvent-refined middle; Gasoil – unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₂₀ and boiling in the range of approximately 150 °C to 345 °C (302°F to 653°F).]	265-093-4	64741-91-9	Carc. 1B	H350	GHS08 Dgr	H350			H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne kon- centracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Ozna- ka(-e) stavka o nevar- nosti	Piktogram, Oznaka(-e) opo- zorilne besede	Ozna- ka(-e) stavka o nevarnosti	Dod. ozna- ka(-e) stavka o nevarnosti		
649-215-00-7	Gas oils (petroleum), acid-treated; Gasoil – unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₂₅ and boiling in the range of approximately 230 °C to 400 °C (446°F to 752°F).]	265-112-6	64742-12-7	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-216-00-2	Distillates (petroleum), acid-treated middle; Gasoil – unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₂₀ and boiling in the range of approximately 205 °C to 345 °C (401°F to 653°F).]	265-113-1	64742-13-8	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-217-00-8	Distillates (petroleum), acid-treated light; Gasoil – unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-114-7	64742-14-9	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-218-00-3	Gas oils (petroleum), chemically neutralized; Gasoil – unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₂₅ and boiling in the range of approximately 230 °C to 400 °C (446°F to 752°F).]	265-129-9	64742-29-6	Carc. 1B	H350	GHS08 Dgr	H350			H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-219-00-9	Distillates (petroleum), chemically neutralized middle; Gasoil – unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₂₀ and boiling in the range of approximately 205 °C to 345 °C (401°F to 653°F).]	265-130-4	64742-30-9	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-220-00-4	Distillates (petroleum), clay-treated middle; Gasoil – unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay, usually in a percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₂₀ and boiling in the range of approximately 150 °C to 345 °C (302°F to 653°F).]	265-139-3	64742-38-7	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-221-00-X	Distillates (petroleum), hydrotreated middle; Gasoil – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₂₅ and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	265-148-2	64742-46-7	Carc. 1B	H350	GHS08 Dgr	H350			H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-222-00-5	Gas oils (petroleum), hydrodesulfurized; Gasoil – unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₂₅ and boiling in the range of approximately 230 °C to 400 °C (446°F to 752°F).]	265-182-8	64742-79-6	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-223-00-0	Distillates (petroleum), hydrodesulfurized middle; Gasoil – unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₂₅ and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	265-183-3	64742-80-9	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-224-00-6	Fuels, diesel; Gasoil – unspecified; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₂₀ and boiling in the range of approximately 163 °C to 357 °C (325°F to 675°F).]	269-822-7	68334-30-5	Carc. 2	H351	GHS08 Wng	H351			H N
649-225-00-1	Fuel oil, No 2; Gasoil – unspecified; [A distillate oil having a minimum viscosity of 32,6 SUS at 37,7 °C (100°F) to a maximum of 37,9 SUS at 37,7 °C (100°F).]	270-671-4	68476-30-2	Carc. 2	H351	GHS08 Wng	H351			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-226-00-7	Fuel oil, No 4; Gasoil – unspecified; [A distillate oil having a minimum viscosity of 45 SUS at 37,7 °C (100°F) to a maximum of 125 SUS at 37,7 °C (100°F).]	270-673-5	68476-31-3	Carc. 2	H351	GHS08 Wng	H351			H
649-227-00-2	Fuels, diesel, No 2; Gasoil – unspecified; [A distillate oil having a minimum viscosity of 32,6 SUS at 37,7 °C (100°F).]	270-676-1	68476-34-6	Carc. 2	H351	GHS08 Wng	H351			H
649-228-00-8	Distillates (petroleum), catalytic reformer fractionator residue, high-boiling; Gasoil – unspecified; [A complex combination of hydrocarbons from the distillation of catalytic reformer fractionator residue. It boils in the range of approximately 343 °C to 399 °C (650°F to 750°F).]	270-719-4	68477-29-2	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-229-00-3	Distillates (petroleum), catalytic reformer fractionator residue, intermediate-boiling; Gasoil – unspecified; [A complex combination of hydrocarbons from the distillation of catalytic reformer fractionator residue. It boils in the range of approximately 288 °C to 371 °C (550°F to 700°F).]	270-721-5	68477-30-5	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-230-00-9	Distillates (petroleum), catalytic reformer fractionator residue, low-boiling; Gasoil – unspecified; [The complex combination of hydrocarbons from the distillation of catalytic reformer fractionator residue. It boils approximately below 288 °C (550°F).]	270-722-0	68477-31-6	Carc. 1B	H350	GHS08 Dgr	H350			H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-231-00-4	Distillates (petroleum), highly refined middle; Gasoil – unspecified; [A complex combination of hydrocarbons obtained by the subjection of a petroleum fraction to several of the following steps: filtration, centrifugation, atmospheric distillation, vacuum distillation, acidification, neutralization and clay treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₂₀ .]	292-615-8	90640-93-0	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-232-00-X	Distillates (petroleum) catalytic reformer, heavy arom. conc.; Gasoil – unspecified; [A complex combination of hydrocarbons obtained from the distillation of a catalytically reformed petroleum cut. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₁₆ and boiling in the range of approximately 200 °C to 300 °C (392°F to 572°F).]	295-294-2	91995-34-5	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-233-00-5	Gas oils, paraffinic; Gasoil – unspecified; [A distillate obtained from the redistillation of a complex combination of hydrocarbons obtained by the distillation of the effluents from a severe catalytic hydrotreatment of paraffins. It boils in the range of approximately 190 °C to 330 °C (374°F to 594°F).]	300-227-8	93924-33-5	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-234-00-0	Naphtha (petroleum), solvent-refined hydrodesulfurized heavy; Gasoil – unspecified	307-035-3	97488-96-5	Carc. 1B	H350	GHS08 Dgr	H350			H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-235-00-6	Hydrocarbons, C ₁₆₋₂₀ , hydrotreated middle distillate, distn. lights; Gasoil – unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the treatment of a middle distillate with hydrogen. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₂₀ and boiling in the range of approximately 290 °C to 350 °C (554°F to 662°F). It produces a finished oil having a viscosity of 2cSt at 100 °C (212°F).]	307-659-6	97675-85-9	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-236-00-1	Hydrocarbons, C ₁₂₋₂₀ , hydrotreated paraffinic, distn. lights; Gasoil – unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the treatment of heavy paraffins with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₂ through C ₂₀ and boiling in the range of approximately 230 °C to 350 °C (446°F to 662°F). It produces a finished oil having a viscosity of 2cSt at 100 °C (212°F).]	307-660-1	97675-86-0	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-237-00-7	Hydrocarbons, C ₁₁₋₁₇ , solvent-extd. light naphthenic; Gasoil – unspecified; [A complex combination of hydrocarbons obtained by extraction of the aromatics from a light naphthenic distillate having a viscosity of 2.2 cSt at 40 °C (104°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₁₇ and boiling in the range of approximately 200 °C to 300 °C (392°F to 572°F).]	307-757-9	97722-08-2	Carc. 1B	H350	GHS08 Dgr	H350			H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-238-00-2	Gas oils, hydrotreated; Gasoil – unspecified; [A complex combination of hydrocarbons obtained from the redistillation of the effluents from the treatment of paraffins with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₇ through C ₂₇ and boiling in the range of approximately 330 °C to 340 °C (626°F to 644°F).]	308-128-1	97862-78-7	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-239-00-8	Distillates (petroleum), carbon-treated light paraffinic; Gasoil – unspecified; [A complex combination of hydrocarbons obtained by the treatment of a petroleum oil fraction with activated charcoal for the removal of traces of polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₂ through C ₂₈ .]	309-667-5	100683-97-4	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-240-00-3	Distillates (petroleum), intermediate paraffinic, carbon-treated; Gasoil – unspecified; [A complex combination of hydrocarbons obtained by the treatment of petroleum with activated charcoal for the removal of trace polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₃₆ .]	309-668-0	100683-98-5	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-241-00-9	Distillates (petroleum), intermediate paraffinic, clay-treated; Gasoil – unspecified; [A complex combination of hydrocarbons obtained by the treatment of petroleum with bleaching earth for the removal of trace polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₃₆ .]	309-669-6	100683-99-6	Carc. 1B	H350	GHS08 Dgr	H350			H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-242-00-4	Alkanes, C ₁₂₋₂₆ -branched and linear	292-454-3	90622-53-0	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-243-00-X	Lubricating greases; Grease; [A complex combination of hydrocarbons having carbon numbers predominantly in the range of C ₁₂ through C ₅₀ . May contain organic salts of alkali metals, alkaline earth metals, and/or aluminium compounds.]	278-011-7	74869-21-9	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-244-00-5	Slack wax (petroleum); Slack wax; [A complex combination of hydrocarbons obtained from a petroleum fraction by solvent crystallization (solvent dewaxing) or as a distillation fraction from a very waxy crude. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₂₀ .]	265-165-5	64742-61-6	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-245-00-0	Slack wax (petroleum), acid-treated; Slack wax; [A complex combination of hydrocarbons obtained as a raffinate by treatment of a petroleum slack wax fraction with sulfuric acid treating process. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₂₀ .]	292-659-8	90669-77-5	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-246-00-6	Slack wax (petroleum), clay-treated; Slack wax; [A complex combination of hydrocarbons obtained by treatment of a petroleum slack wax fraction with natural or modified clay in either a contacting or percolation process. It consists predominantly of saturated straight and branched hydrocarbons having carbon numbers predominantly greater than C ₂₀ .]	292-660-3	90669-78-6	Carc. 1B	H350	GHS08 Dgr	H350			H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-247-00-1	Slack wax (petroleum), hydrotreated; Slack wax; [A complex combination of hydrocarbons obtained by treating slack wax with hydrogen in the presence of a catalyst. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₂₀ .]	295-523-6	92062-09-4	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-248-00-7	Slack wax (petroleum), low-melting; Slack wax; [A complex combination of hydrocarbons obtained from a petroleum fraction by solvent deparaffination. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	295-524-1	92062-10-7	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-249-00-2	Slack wax (petroleum), low-melting, hydrotreated; Slack wax; [A complex combination of hydrocarbons obtained by treatment of low-melting petroleum slack wax with hydrogen in the presence of a catalyst. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	295-525-7	92062-11-8	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-250-00-8	Slack wax (petroleum), low-melting, carbon-treated; Slack wax; [A complex combination of hydrocarbons obtained by the treatment of low-melting slack wax with activated carbon for the removal of trace polar constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-155-9	97863-04-2	Carc. 1B	H350	GHS08 Dgr	H350			H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-251-00-3	Slack wax (petroleum), low-melting, clay-treated; Slack wax; [A complex combination of hydrocarbons obtained by the treatment of low-melting petroleum slack wax with bentonite for removal of trace polar constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-156-4	97863-05-3	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-252-00-9	Slack wax (petroleum), low-melting, silicic acid-treated; Slack wax; [A complex combination of hydrocarbons obtained by the treatment of low-melting petroleum slack wax with silicic acid for the removal of trace polar constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-158-5	97863-06-4	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-253-00-4	Slack wax (petroleum), carbon-treated; Slack wax; [A complex combination of hydrocarbons obtained by treatment of petroleum slack wax with activated charcoal for the removal of trace polar constituents and impurities.]	309-723-9	100684-49-9	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-254-00-X	Petrolatum; Petrolatum; [A complex combination of hydrocarbons obtained as a semi-solid from dewaxing paraffinic residual oil. It consists predominantly of saturated crystalline and liquid hydrocarbons having carbon numbers predominantly greater than C ₂₅ .]	232-373-2	8009-03-8	Carc. 1B	H350	GHS08 Dgr	H350			H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-255-00-5	Petrolatum (petroleum), oxidized; Petrolatum; [A complex combination of organic compounds, predominantly high molecular weight carboxylic acids, obtained by the air oxidation of petrolatum.]	265-206-7	64743-01-7	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-256-00-0	Petrolatum (petroleum), alumina-treated; Petrolatum; [A complex combination of hydrocarbons obtained when petrolatum is treated with Al ₂ O ₃ to remove polar components and impurities. It consists predominantly of saturated, crystalline, and liquid hydrocarbons having carbon numbers predominantly greater than C ₂₅ .]	285-098-5	85029-74-9	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-257-00-6	Petrolatum (petroleum), hydrotreated; Petrolatum; [A complex combination of hydrocarbons obtained as a semi-solid from dewaxed paraffinic residual oil treated with hydrogen in the presence of a catalyst. It consists predominantly of saturated microcrystalline and liquid hydrocarbons having carbon numbers predominantly greater than C ₂₀ .]	295-459-9	92045-77-7	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-258-00-1	Petrolatum (petroleum), carbon-treated; Petrolatum; [A complex combination of hydrocarbons obtained by the treatment of petroleum petrolatum with activated carbon for the removal of trace polar constituents and impurities. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly greater than C ₂₀ .]	308-149-6	97862-97-0	Carc. 1B	H350	GHS08 Dgr	H350			H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-259-00-7	Petrolatum (petroleum), silicic acid-treated; Petrolatum; [A complex combination of hydrocarbons obtained by the treatment of petroleum petrolatum with silicic acid for the removal of trace polar constituents and impurities. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly greater than C ₂₀ .]	308-150-1	97862-98-1	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-260-00-2	Petrolatum (petroleum), clay-treated; Petrolatum; [A complex combination of hydrocarbons obtained by treatment of petrolatum with bleaching earth for the removal of traces of polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of greater than C ₂₅ .]	309-706-6	100684-33-1	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-261-00-8	Gasoline, natural; Low boiling point naphtha; [A complex combination of hydrocarbons separated from natural gas by processes such as refrigeration or absorption. It consists predominantly of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₈ and boiling in the range of approximately minus 20 °C to 120 °C (-4°F to 248°F).]	232-349-1	8006-61-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-262-00-3	Naphtha; Low boiling point naphtha; [Refined, partly refined, or unrefined petroleum products by the distillation of natural gas. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₆ and boiling in the range of approximately 100 °C to 200 °C (212°F to 392°F).]	232-443-2	8030-30-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-263-00-9	Ligroine; Low boiling point naphtha; [A complex combination of hydrocarbons obtained by the fractional distillation of petroleum. This fraction boils in a range of approximately 20 °C to 135 °C (58°F to 275°F).]	232-453-7	8032-32-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-264-00-4	Naphtha (petroleum), heavy straight-run; Low boiling point naphtha; [A complex combination of hydrocarbons produced by distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₂ and boiling in the range of approximately 65 °C to 230 °C (149°F to 446°F).]	265-041-0	64741-41-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-265-00-X	Naphtha (petroleum), full-range straight-run; Low boiling point naphtha; [A complex combination of hydrocarbons produced by distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately minus 20 °C to 220 °C (-4°F to 428°F).]	265-042-6	64741-42-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-266-00-5	Naphtha (petroleum), light straight-run; Low boiling point naphtha; [A complex combination of hydrocarbons produced by distillation of crude oil. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₀ and boiling in the range of approximately minus 20 °C to 180 °C (-4°F to 356°F).]	265-046-8	64741-46-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-267-00-0	Solvent naphtha (petroleum), light aliph.; Low boiling point naphtha; [A complex combination of hydrocarbons obtained from the distillation of crude oil or natural gasoline. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₀ and boiling in the range of approximately 35 °C to 160 °C (95°F to 320°F).]	265-192-2	64742-89-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-268-00-6	Distillates (petroleum), straight-run light; Low boiling point naphtha; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₇ and boiling in the range of approximately - 88 °C to 99 °C (-127°F to 210°F).]	270-077-5	68410-05-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-269-00-1	Gasoline, vapor-recovery; Low boiling point naphtha; [A complex combination of hydrocarbons separated from the gases from vapor recovery systems by cooling. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately - 20 °C to 196 °C (-4°F to 384°F).]	271-025-4	68514-15-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-270-00-7	Gasoline, straight-run, topping-plant; Low boiling point naphtha; [A complex combination of hydrocarbons produced from the topping plant by the distillation of crude oil. It boils in the range of approximately 36,1 °C to 193,3 °C (97°F to 380°F).]	271-727-0	68606-11-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-271-00-2	Naphtha (petroleum), unsweetened; Low boiling point naphtha; [A complex combination of hydrocarbons produced from the distillation of naphtha streams from various refinery processes. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₂ and boiling in the range of approximately 0 °C to 230 °C (25°F to 446°F).]	272-186-3	68783-12-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-272-00-8	Distillates (petroleum), light straight-run gasoline fractionation stabilizer overheads; Low boiling point naphtha; [A complex combination of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₆ .]	272-931-2	68921-08-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-273-00-3	Naphtha (petroleum), heavy straight run, arom.-contg.; Low boiling point naphtha; [A complex combination of hydrocarbons obtained from a distillation process of crude petroleum. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₈ through C ₁₂ and boiling in the range of approximately 130 °C to 210 °C (266°F to 410°F).]	309-945-6	101631-20-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-274-00-9	Naphtha (petroleum), full-range alkylate; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C ₃ through C ₅ . It consist of predominantly branched chain saturated hydro-carbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 90 °C to 220 °C (194°F to 428°F).]	265-066-7	64741-64-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-275-00-4	Naphtha (petroleum), heavy alkylate; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C ₃ to C ₅ . It consists of predominantly branched chain saturated hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₂ and boiling in the range of approximately 150 °C to 220 °C (302°F to 428°F).]	265-067-2	64741-65-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-276-00-X	Naphtha (petroleum), light alkylate; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C ₃ through C ₅ . It consists of predominantly branched chain saturated hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₀ and boiling in the range of approximately 90 °C to 160 °C (194°F to 320°F).]	265-068-8	64741-66-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-277-00-5	Naphtha (petroleum), isomerization; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained from catalytic isomerization of straight chain paraffinic C ₄ through C ₆ hydrocarbons. It consists predominantly of saturated hydrocarbons such as isobutane, isopentane, 2,2-dimethylbutane, 2-methylpentane, and 3-methylpentane.]	265-073-5	64741-70-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-278-00-0	Naphtha (petroleum), solvent-refined light; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₁ and boiling in the range of approximately 35 °C to 190 °C (95°F to 374°F).]	265-086-6	64741-84-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-279-00-6	Naphtha (petroleum), solvent-refined heavy; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-095-5	64741-92-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-280-00-1	Raffinates (petroleum), catalytic reformer ethylene glycol-water countercurrent exts.; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinate from the UDEX extraction process on the catalytic reformer stream. It consists of saturated hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₉ .]	270-088-5	68410-71-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-281-00-7	Raffinates (petroleum), reformer, Lurgi unit-sepd.; Low boiling point modified naphtha; [The complex combination of hydrocarbons obtained as a raffinate from a Lurgi separation unit. It consists predominantly of non-aromatic hydrocarbons with various small amounts of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₈ .]	270-349-3	68425-35-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-282-00-2	Naphtha (petroleum), full-range alkylate, butane-contg.; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by the distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C ₃ through C ₅ . It consists of predominantly branched chain saturated hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ with some butanes and boiling in the range of approximately 35 °C to 200 °C (95°F to 428°F).]	271-267-0	68527-27-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-283-00-8	Distillates (petroleum), naphtha steam cracking-derived, solvent-refined light hydrotreated; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinates from a solvent extraction process of hydrotreated light distillate from steam-cracked naphtha.]	295-315-5	91995-53-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-284-00-3	Naphtha (petroleum), C ₄₋₁₂ butane-alkylate, isooctane-rich; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by alkylation of butanes. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₂ , rich in isooctane, and boiling in the range of approximately 35 °C to 210 °C (95°F to 410°F).]	295-430-0	92045-49-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-285-00-9	Hydrocarbons, hydrotreated light naphtha distillates, solvent-refined; Low boiling point modified naphtha; [A combination of hydrocarbons obtained from the distillation of hydrotreated naphtha followed by a solvent extraction and distillation process. It consists predominantly of saturated hydrocarbons boiling in the range of approximately 94 °C to 99 °C (201°F to 210°F).]	295-436-3	92045-55-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-286-00-4	Naphtha (petroleum), isomerization, C ₆ -fraction; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by distillation of a gasoline which has been catalytically isomerized. It consists predominantly of hexane isomers boiling in the range of approximately 60 °C to 66 °C (140°F to 151°F).]	295-440-5	92045-58-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-287-00-X	Hydrocarbons, C ₆₋₇ , naphtha-cracking, solvent-refined; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by the sorption of benzene from a catalytically fully hydrogenated benzene-rich hydrocarbon cut that was distillatively obtained from prehydrogenated cracked naphtha. It consists predominantly of paraffinic and naphthenic hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₇ and boiling in the range of approximately 70 °C to 100 °C (158°F to 212°F).]	295-446-8	92045-64-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-288-00-5	Hydrocarbons, C ₆ -rich, hydrotreated light naphtha distillates, solvent-refined; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by distillation of hydrotreated naphtha followed by solvent extraction. It consists predominantly of saturated hydrocarbons and boiling in the range of approximately 65 °C to 70 °C (149°F to 158°F).]	309-871-4	101316-67-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-289-00-0	Naphtha (petroleum), heavy catalytic cracked; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by a distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₂ and boiling in the range of approximately 65 °C to 230 °C (148°F to 446°F). It contains a relatively large proportion of unsaturated hydrocarbons.]	265-055-7	64741-54-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-290-00-6	Naphtha (petroleum), light catalytic cracked; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F). It contains a relatively large proportion of unsaturated hydrocarbons.]	265-056-2	64741-55-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne kon- centracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Ozna- ka(-e) stavka o nevar- nosti	Piktogram, Oznaka(-e) opo- zorilne besede	Ozna- ka(-e) stavka o nevarnosti	Dod. ozna- ka(-e) stavka o nevarnosti		
649-291-00-1	Hydrocarbons, C ₃₋₁₁ , catalytic cracker distil- lates; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillations of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₁₁ and boiling in a range approximately up to 204 °C (400°F).]	270-686-6	68476-46-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-292-00-7	Naphtha (petroleum), catalytic cracked light distsd.; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-185-8	68783-09-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-293-00-2	Distillates (petroleum), naphtha steam cracking-derived, hydrotreated light arom.; Low boiling point cat-cracked naphtha.; [A complex combination of hydrocarbons obtained by treating a light distillate from steam-cracked naphtha. It consists predom- inantly of aromatic hydrocarbons.]	295-311-3	91995-50-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-294-00-8	Naphtha (petroleum), heavy catalytic crac- ked, sweetened; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons obtained by subjecting a catalytic cracked petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₂ and boiling in the range of approxima- tely 60 °C to 200 °C (140°F to 392°F).]	295-431-6	92045-50-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-295-00-3	Naphtha (petroleum), light catalytic cracked sweetened; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons obtained by subjecting naphtha from a catalytic cracking process to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons boiling in a range of approximately 35 °C to 210 °C (95°F to 410°F).]	295-441-0	92045-59-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-296-00-9	Hydrocarbons, C ₈₋₁₂ , catalytic-cracking, chem. neutralized; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of a cut from the catalytic cracking process, having undergone an alkaline washing. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₈ through C ₁₂ and boiling in the range of approximately 130 °C to 210 °C (266°F to 410°F).]	295-794-0	92128-94-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-297-00-4	Hydrocarbons, C ₈₋₁₂ , catalytic cracker distillates; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons obtained by distillation of products from a catalytic cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₁₂ and boiling in the range of approximately 140 °C to 210 °C (284°F to 410°F).]	309-974-4	101794-97-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-298-00-X	Hydrocarbons, C ₈₋₁₂ , catalytic cracking, chem. neutralized, sweetened; Low boiling point cat-cracked naphtha	309-987-5	101896-28-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-299-00-5	Naphtha (petroleum), light catalytic reformed; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced from the distillation of products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₁ and boiling in the range of approximately 35 °C to 190 °C (95°F to 374°F). It contains a relatively large proportion of aromatic and branched chain hydrocarbons. This stream may contain 10 vol. % or more benzene.]]	265-065-1	64741-63-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-300-00-9	Naphtha (petroleum), heavy catalytic reformed; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced from the distillation of products from a catalytic reforming process. It consists of predominantly aromatic hydrocarbons having numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-070-9	64741-68-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-301-00-4	Distillates (petroleum), catalytic reformed depentanizer; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons from the distillation of products from a catalytic reforming process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₆ and boiling in the range of approximately - 49 °C to 63 °C - 57°F to 145°F).]	270-660-4	68475-79-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-302-00-X	Hydrocarbons, C ₂₋₆ , C ₆₋₈ catalytic reformer; Low boiling point cat-reformed naphtha	270-687-1	68476-47-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-303-00-5	Residues (petroleum), C ₆₋₈ catalytic reformer; Low boiling point cat-reformed naphtha; [A complex residuum from the catalytic reforming of C ₆₋₈ feed. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₆ .]	270-794-3	68478-15-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-304-00-0	Naphtha (petroleum), light catalytic reformed, arom.-free; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained from distillation of products from a catalytic reforming process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₈ and boiling in the range of approximately 35 °C to 120 °C (95°F to 248°F). It contains a relatively large proportion of branched chain hydrocarbons with the aromatic components removed.]	270-993-5	68513-03-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-305-00-6	Distillates (petroleum), catalytic reformed straight-run naphtha overheads; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by the catalytic reforming of straight-run naphtha followed by the fractionation of the total effluent. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₆ .]	271-008-1	68513-63-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-306-00-1	Petroleum products, hydrofiner-powerformer reformates; Low boiling point cat-reformed naphtha; [The complex combination of hydrocarbons obtained in a hydrofiner-powerformer process and boiling in a range of approximately 27 °C to 210 °C (80°F to 410°F).]	271-058-4	68514-79-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-307-00-7	Naphtha (petroleum, full-range reformed; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced by the distillation of the products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₂ and boiling in the range of approximately 35 °C to 230 °C (95°F to 446°F).]	272-895-8	68919-37-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-308-00-2	Naphtha (petroleum), catalytic reformed; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₂ and boiling in the range of approximately 30 °C to 220 °C (90°F to 430°F). It contains a relatively large proportion of aromatic and branched chain hydrocarbons. This stream may contain 10 vol.% or more benzene.]	273-271-8	68955-35-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-309-00-8	Distillates (petroleum), catalytic reformed hydrotreated light, C ₈₋₁₂ arom. fraction; Low boiling point cat-reformed naphtha; [A complex combination of alkylbenzenes obtained by the catalytic reforming of petroleum naphtha. It consists predominantly of alkylbenzenes having carbon numbers predominantly in the range of C ₈ through C ₁₀ and boiling in the range of approximately 160 °C to 180 °C (320°F to 356°F).]	285-509-8	85116-58-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-310-00-3	Aromatic hydrocarbons, C ₈ , catalytic reforming-derived; Low boiling point cat-reformed naphtha	295-279-0	91995-18-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-311-00-9	Aromatic hydrocarbons, C ₇₋₁₂ , C ₈ -rich; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by separation from the platformate-containing fraction. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ (primarily C ₈) and can contain nonaromatic hydrocarbons, both boiling in the range of approximately 130 °C to 200 °C (266°F to 392°F).]	297-401-8	93571-75-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-312-00-4	Gasoline, C ₅₋₁₁ , high-octane stabilized reformed; Low boiling point cat-reformed naphtha; [A complex high octane combination of hydrocarbons obtained by the catalytic dehydrogenation of a predominantly naphthenic naphtha. It consists predominantly of aromatics and non-aromatics having carbon numbers predominantly in the range of C ₅ through C ₁₁ and boiling in the range of approximately 45 °C to 185 °C (113°F to 365°F).]	297-458-9	93572-29-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-313-00-X	Hydrocarbons, C ₇₋₁₂ , C _{>9} -arom.-rich, reforming heavy fraction; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by separation from the platformate-containing fraction. It consists predominantly of nonaromatic hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 120 °C to 210 °C (248°F to 380°F) and C ₉ and higher aromatic hydrocarbons.]	297-465-7	93572-35-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-314-00-5	Hydrocarbons, C ₅₋₁₁ , nonaroms.-rich, reforming light fraction; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by separation from the platformate-containing fraction. It consists predominantly of nonaromatic hydrocarbons having carbon numbers predominantly in the range of C ₅ to C ₁₁ and boiling in the range of approximately 35 °C to 125 °C (94°F to 257°F), benzene and toluene.]	297-466-2	93572-36-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-315-00-0	Foots oil (petroleum), silicic acid-treated; Foots oil; [A complex combination of hydrocarbons obtained by the treatment of Foots oil with silicic acid for removal of trace constituents and impurities. It consists predominantly of straight chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-127-6	97862-77-6	Carc. 1B	H350 H304	GHS08 Dgr	H350 H304			H L
649-316-00-6	Naphtha (petroleum), light thermal cracked; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons from distillation of products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₈ and boiling in the range of approximately minus 10 °C to 130 °C (14°F to 266°F).]	265-075-6	64741-74-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-317-00-1	Naphtha (petroleum), heavy thermal cracked; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons from distillation of the products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₂ and boiling in the range of approximately 65 °C to 220 °C (148°F to 428°F).]	265-085-0	64741-83-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-318-00-7	Distillates (petroleum), heavy arom.; Low boiling point thermally cracked naphtha; [The complex combination of hydrocarbons from the distillation of the products from the thermal cracking of ethane and propane. This higher boiling fraction consists predominantly of C ₅ -C ₇ aromatic hydrocarbons with some unsaturated aliphatic hydrocarbons having carbon number predominantly of C ₅ . This stream may contain benzene.]	267-563-4	67891-79-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-319-00-2	Distillates (petroleum), light arom.; Low boiling point thermally cracked naphtha; [The complex combination of hydrocarbons from the distillation of the products from the thermal cracking of ethane and propane. This lower boiling fraction consists predominantly of C ₅ -C ₇ aromatic hydrocarbons with some unsaturated aliphatic hydrocarbons having a carbon number predominantly of C ₅ . This stream may contain benzene.]	267-565-5	67891-80-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-320-00-8	Distillates (petroleum), naphtha-raffinate pyrolyzate-derived, gasoline-blending; Low boiling point thermally cracked naphtha; [The complex combination of hydrocarbons obtained by the pyrolysis fractionation at 816 °C (1500°F) of naphtha and raffinate. It consists predominantly of hydrocarbons having a carbon number of C ₉ and boiling at approximately 204 °C (400°F).]	270-344-6	68425-29-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-321-00-3	Aromatic hydrocarbons, C ₆₋₈ , naphtha-raffinate pyrolyzate-derived; Low boiling point thermally cracked naphtha; A complex combination of hydrocarbons obtained by the fractionation pyrolysis at 816 °C (1500°F) of naphtha and raffinate. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₈ , including benzene.]	270-658-3	68475-70-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-322-00-9	Distillates (petroleum), thermal cracked naphtha and gas oil; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by distillation of thermally cracked naphtha and/or gas oil. It consists predominantly of olefinic hydrocarbons having a carbon number of C ₅ and boiling in the range of approximately 33 °C to 60 °C (91°F to 140°F).]	271-631-9	68603-00-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-323-00-4	Distillates (petroleum), thermal cracked naphtha and gas oil, C ₅ -dimer-contg.; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by the extractive distillation of thermal cracked naphtha and/or gas oil. It consists predominantly of hydrocarbons having a carbon number of C ₅ with some dimerized C ₅ olefins and boiling in the range of approximately 33 °C to 184 °C (91°F to 363°F).]	271-632-4	68603-01-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-324-00-X	Distillates (petroleum), thermal cracked naphtha and gas oil, extractive; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by the extractive distillation of thermal cracked naphtha and/or gas oil. It consists of paraffinic and olefinic hydrocarbons, predominantly isoamylenes such as 2-methyl-1-butene and 2-methyl-2-butene and boiling in the range of approximately 31 °C to 40 °C (88°F to 104°F).]	271-634-5	68603-03-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-325-00-5	Distillates (petroleum), light thermal cracked, debutanized arom.; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a thermal cracking process. It consists predominantly of aromatic hydrocarbons, primarily benzene.]	273-266-0	68955-29-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-326-00-0	Naphtha (petroleum), light thermal cracked, sweetened; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate from the high temperature thermal cracking of heavy oil fractions to a sweetening process to convert mercaptans. It consists predominantly of aromatics, olefins and saturated hydrocarbons boiling in the range of approximately 20 °C to 100 °C (68°F to 212°F).]	295-447-3	92045-65-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-327-00-6	Naphtha (petroleum), hydrotreated heavy; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₃ and boiling in the range of approximately 65 °C to 230 °C (149°F to 446°F).]	265-150-3	64742-48-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-328-00-1	Naphtha (petroleum), hydrotreated light; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	265-151-9	64742-49-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-329-00-7	Naphtha (petroleum), hydrodesulfurized light; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	265-178-6	64742-73-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-330-00-2	Naphtha (petroleum), hydrodesulfurized heavy; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-185-4	64742-82-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-331-00-8	Distillates (petroleum), hydrotreated middle, intermediate boiling; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by the distillation of products from a middle distillate hydrotreating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₀ and boiling in the range of approximately 127 °C to 188 °C (262°F to 370°F).]	270-092-7	68410-96-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-332-00-3	Distillates (petroleum), light distillate hydrotreating process, low-boiling; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by the distillation of products from the light distillate hydrotreating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₉ and boiling in the range of approximately 3 °C to 194 °C (37°F to 382°F).]	270-093-2	68410-97-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-333-00-9	Distillates (petroleum), hydrotreated heavy naphtha, deisohexanizer overheads; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by distillation of the products from a heavy naphtha hydrotreating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₆ and boiling in the range of approximately - 49 °C to 68 °C (-57°F to 155°F).]	270-094-8	68410-98-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-334-00-4	Solvent naphtha (petroleum), light arom., hydrotreated; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₁₀ and boiling in the range of approximately 135 °C to 210 °C (275°F to 410°F).]	270-988-8	68512-78-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-335-00-X	Naphtha (petroleum), hydrodesulfurized thermal cracked light; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by fractionation of hydrodesulfurized thermal cracker distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₅ to C ₁₁ and boiling in the range of approximately 23 °C to 195 °C (73°F to 383°F).]	285-511-9	85116-60-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-336-00-5	Naphtha (petroleum), hydrotreated light, cycloalkane-contg.; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from the distillation of a petroleum fraction. It consists predominantly of alkanes and cycloalkanes boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	285-512-4	85116-61-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-337-00-0	Naphtha (petroleum), heavy steam-cracked, hydrogenated; Low boiling point hydrogen treated naphtha	295-432-1	92045-51-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-338-00-6	Naphtha (petroleum), hydrodesulfurized full-range; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately 30 °C to 250 °C (86°F to 482°F).]	295-433-7	92045-52-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-339-00-1	Naphtha (petroleum), hydrotreated light steam-cracked; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction, derived from a pyrolysis process, with hydrogen in the presence of a catalyst. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₁ and boiling in the range of approximately 35 °C to 190 °C (95°F to 374°F).]	295-438-4	92045-57-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-340-00-7	Hydrocarbons, C ₄₋₁₂ , naphtha-cracking, hydrotreated; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by distillation from the product of a naphtha steam cracking process and subsequent catalytic selective hydrogenation of gum formers. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₂ and boiling in the range of approximately 30 °C to 230 °C (86°F to 446°F).]	295-443-1	92045-61-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-341-00-2	Solvent naphtha (petroleum), hydrotreated light naphthenic; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists predominantly of cycloparaffinic hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₇ and boiling in the range of approximately 73 °C to 85 °C (163°F to 185°F).]	295-529-9	92062-15-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-342-00-8	Naphtha (petroleum), light steam-cracked, hydrogenated; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons produced from the separation and subsequent hydrogenation of the products of a steam-cracking process to produce ethylene. It consists predominantly of saturated and unsaturated paraffins, cyclic paraffins and cyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₀ and boiling in the range of approximately 50 °C to 200 °C (122°F to 392°F). The proportion of benzene hydrocarbons may vary up to 30 wt. % and the stream may also contain small amounts of sulphur and oxygenated compounds.]	296-942-7	93165-55-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-343-00-3	Hydrocarbons, C ₆₋₁₁ , hydrotreated, dearomatized; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained as solvents which have been subjected to hydrotreatment in order to convert aromatics to naphthenes by catalytic hydrogenation.]	297-852-0	93763-33-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-344-00-9	Hydrocarbons, C ₉₋₁₂ , hydrotreated, dearomatized; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained as solvents which have been subjected to hydrotreatment in order to convert aromatics to naphthenes by catalytic hydrogenation.]	297-853-6	93763-34-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-345-00-4	Stoddard solvent; Low boiling point naphtha – unspecified; [A colourless, refined petroleum distillate that is free from rancid or objectionable odors and that boils in a range of approximately 300°F to 400°F.]	232-489-3	8052-41-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-346-00-X	Natural gas condensates (petroleum); Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons separated as a liquid from natural gas in a surface separator by retrograde condensation. It consists mainly of hydrocarbons having carbon numbers predominantly in the range of C ₂ to C ₂₀ . It is a liquid at atmospheric temperature and pressure.]	265-047-3	64741-47-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-347-00-5	Natural gas (petroleum), raw liq. mix; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons separated as a liquid from natural gas in a gas recycling plant by processes such as refrigeration or absorption. It consists mainly of saturated aliphatic hydrocarbons having carbon numbers in the range of C ₂ through C ₈ .]	265-048-9	64741-48-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-348-00-0	Naphtha (petroleum), light hydrocracked; Low boiling naphtha – unspecified; [A complex combination of hydrocarbons from distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₀ , and boiling in the range of approximately minus 20 °C to 180 °C (-4°F to 356°F).]	265-071-4	64741-69-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-349-00-6	Naphtha (petroleum), heavy hydrocracked; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons from distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₂ , and boiling in the range of approximately 65 °C to 230 °C (148°F to 446°F).]	265-079-8	64741-78-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-350-00-1	Naphtha (petroleum), sweetened; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum naphtha to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₂ and boiling in the range of approximately minus 10 °C to 230 °C (14°F to 446°F).]	265-089-2	64741-87-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-351-00-7	Naphtha (petroleum), acid-treated; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-115-2	64742-15-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-352-00-2	Naphtha (petroleum), chemically neutralized heavy; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₂ and boiling in the range of approximately 65 °C to 230 °C (149°F to 446°F).]	265-122-0	64742-22-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-353-00-8	Naphtha (petroleum), chemically neutralized light; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	265-123-6	64742-23-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-354-00-3	Naphtha (petroleum), catalytic dewaxed; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained from the catalytic dewaxing of a petroleum fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₂ and boiling in the range of approximately 35 °C to 230 °C (95°F to 446°F).]	265-170-2	64742-66-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-355-00-9	Naphtha (petroleum), light steam-cracked; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by the distillation of the products from a steam cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F). This stream is likely to contain 10 vol.% or more benzene.]	265-187-5	64742-83-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-356-00-4	Solvent naphtha (petroleum), light arom.; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained from distillation of aromatic streams. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₁₀ and boiling in the range of approximately 135 °C to 210 °C (275°F to 410°F).]	265-199-0	64742-95-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-357-00-X	Aromatic hydrocarbons, C ₆₋₁₀ , acid-treated, neutralized; Low boiling point naphtha – unspecified	268-618-5	68131-49-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-358-00-5	Distillates (petroleum), C ₃₋₅ , 2-methyl-2-butene-rich; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons from the distillation of hydrocarbons usually ranging in carbon numbers from C ₃ through C ₅ , predominantly isopentane and 3-methyl-1-butene. It consists of saturated and unsaturated hydrocarbons having carbon numbers in the range of C ₃ through C ₅ , predominantly 2-methyl-2-butene.]	270-725-7	68477-34-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-359-00-0	Distillates (petroleum), polymd. steam-cracked petroleum distillates, C ₅₋₁₂ fraction; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained from the distillation of polymerized steam-cracked petroleum distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₂ .]	270-735-1	68477-50-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-360-00-6	Distillates (petroleum), steam-cracked, C ₅₋₁₂ fraction; Low boiling point naphtha – unspecified; [A complex combination of organic compounds obtained by the distillation of products from a steam cracking process. It consists of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₂ .]	270-736-7	68477-53-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-361-00-1	Distillates (petroleum), steam-cracked, C ₅₋₁₀ fraction, mixed with light steam-cracked petroleum naphtha C ₅ fraction; Low boiling point naphtha – unspecified	270-738-8	68477-55-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-362-00-7	Extracts (petroleum), cold-acid, C ₄₋₆ ; Low boiling point naphtha – unspecified; [A complex combination of organic compounds produced by cold acid unit extraction of saturated and unsaturated aliphatic hydrocarbons usually ranging in carbon numbers from C ₃ through C ₆ , predominantly pentanes and amylenes. It consists predominantly of saturated and unsaturated hydrocarbons having carbon numbers in the range of C ₄ through C ₆ , predominantly C ₅ .]	270-741-4	68477-61-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-363-00-2	Distillates (petroleum), depentanizer overheads; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained from a catalytic cracked gas stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₆ .]	270-771-8	68477-89-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-364-00-8	Residues (petroleum), butane splitter bottoms; Low boiling point naphtha – unspecified; [A complex residuum from the distillation of butane stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₆ .]	270-791-7	68478-12-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-365-00-3	Residual oils (petroleum), deisobutanizer tower; Low boiling point naphtha – unspecified; [A complex residuum from the atmospheric distillation of the butane-butylene stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₆ .]	270-795-9	68478-16-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-366-00-9	Naphtha (petroleum), full-range coker; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons produced by the distillation of products from a fluid coker. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₅ and boiling in the range of approximately 43 °C to 250 °C (110°F to 500°F).]	270-991-4	68513-02-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-367-00-4	Naphtha (petroleum), steam-cracked middle arom.; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons produced by the distillation of products from a steam-cracking process. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 130 °C to 220 °C (266°F to 428°F).]	271-138-9	68516-20-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-368-00-X	Naphtha (petroleum), clay-treated full-range straight-run; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons resulting from treatment of full-range straight-run naphtha with natural or modified clay, usually in a percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately - 20 °C to 220 °C (-4°F to 429°F).]	271-262-3	68527-21-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-369-00-5	Naphtha (petroleum), clay-treated light straight-run; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons resulting from treatment of light straight-run naphtha with a natural or modified clay, usually in a percolation process to remove the trace amounts of polar compounds and impurities, present. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₀ and boiling in the range of approximately 93 °C to 180 °C (200°F to 356°F).]	271-263-9	68527-22-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-370-00-0	Naphtha (petroleum), light steam-cracked arom.; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons produced by distillation of products from a steam-cracking process. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₉ and boiling in the range of approximately 110 °C to 165 °C (230°F to 329°F).]	271-264-4	68527-23-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-371-00-6	Naphtha (petroleum), light steam-cracked, debenzenized; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons produced by distillation of products from a steam-cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₂ and boiling in the range of approximately 80 °C to 218 °C (176°F to 424°F).]	271-266-5	68527-26-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-372-00-1	Naphtha (petroleum), arom.-contg.; Low boiling point naphtha – unspecified	271-635-0	68603-08-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-373-00-7	Gasoline, pyrolysis, deutanizer bottoms; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained from the fractionation of depropanizer bottoms. It consists of hydrocarbons having carbon numbers predominantly greater than C ₅ .]	271-726-5	68606-10-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-374-00-2	Naphtha (petroleum), light, sweetened; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of saturated and unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₆ and boiling in the range of approximately - 20 °C to 100 °C (-4°F to 212°F).]	272-206-0	68783-66-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-375-00-8	Natural gas condensates; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons separated and/or condensed from natural gas during transportation and collected at the wellhead and/or from the production, gathering, transmission, and distribution pipelines in deeps, scrubbers, etc. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₈ .]	272-896-3	68919-39-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H J
649-376-00-3	Distillates (petroleum), naphtha unifiner stripper; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons produced by stripping the products from the naphtha unifiner. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₆ .]	272-932-8	68921-09-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-377-00-9	Naphtha (petroleum), catalytic reformed light, arom.-free fraction; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons remaining after removal of aromatic compounds from catalytic reformed light naphtha in a selective absorption process. It consists predominantly of paraffinic and cyclic compounds having carbon numbers predominantly in the range of C ₅ to C ₈ and boiling in the range of approximately 66 °C to 121 °C (151°F to 250°F).]	285-510-3	85116-59-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-378-00-4	Gasoline; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons consisting primarily of paraffins, cycloparaffins, aromatic and olefinic hydrocarbons having carbon numbers predominantly greater than C ₃ and boiling in the range of 30 °C to 260 °C (86°F to 500°F).]	289-220-8	86290-81-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-379-00-X	Aromatic hydrocarbons, C ₇₋₈ , dealkylation products, distn. residues; Low boiling point naphtha – unspecified	292-698-0	90989-42-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-380-00-5	Hydrocarbons, C ₄₋₆ , depentanizer lights, arom. hydrotreater; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained as first runnings from the depentanizer column before hydrotreatment of the aromatic charges. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₆ , predominantly pentanes and pentenes, and boiling in the range of approximately 25 °C to 40 °C (77°F to 104°F).]	295-298-4	91995-38-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-381-00-0	Distillates (petroleum), heat-soaked steam-cracked naphtha, C ₅ -rich; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by distillation of heat-soaked steam-cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₄ through C ₆ , predominantly C ₅ .]	295-302-4	91995-41-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-382-00-6	Extracts (petroleum), catalytic reformed light naphtha solvent; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained as the extract from the solvent extraction of a catalytically reformed petroleum cut. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₈ and boiling in the range of approximately 100 °C to 200 °C (212°F to 392°F).]	295-331-2	91995-68-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-383-00-1	Naphtha (petroleum), hydrosulfurized light, dearomatized; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by distillation of hydrosulfurized and dearomatized light petroleum fractions. It consists predominantly of C ₇ paraffins and cycloparaffins boiling in a range of approximately 90 °C to 100 °C (194°F to 212°F).]	295-434-2	92045-53-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-384-00-7	Naphtha (petroleum), light, C ₅ -rich, sweetened; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum naphtha to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₅ , predominantly C ₅ , and boiling in the range of approximately minus 10 °C to 35 °C (14°F to 95°F).]	295-442-6	92045-60-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-385-00-2	Hydrocarbons, C ₈₋₁₁ , naphtha-cracking, toluene cut; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by distillation from prehydrogenated cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₁₁ and boiling in the range of approximately 130 °C to 205 °C (266°F to 401°F).]	295-444-7	92045-62-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-386-00-8	Hydrocarbons, C ₄₋₁₁ , naphtha-cracking, arom.-free; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained from prehydrogenated cracked naphtha after distillative separation of benzene- and toluene-containing hydrocarbon cuts and a higher boiling fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range C ₄ through C ₁₁ and boiling in the range of approximately 30 °C to 205 °C (86°F to 401°F).]	295-445-2	92045-63-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-387-00-3	Naphtha (petroleum), light heat-soaked, steam-cracked; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by the fractionation of steam cracked naphtha after recovery from a heat soaking process. It consists predominantly of hydrocarbons having a carbon numbers predominantly in the range of C ₄ through C ₆ and boiling in the range of approximately 0 °C to 80 °C (32°F to 176°F).]	296-028-8	92201-97-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-388-00-9	Distillates (petroleum), C ₆ -rich; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained from the distillation of a petroleum feedstock. It consists predominantly of hydrocarbons having carbon numbers of C ₅ through C ₇ , rich in C ₆ , and boiling in the range of approximately 60 °C to 70 °C (140°F to 158°F).]	296-903-4	93165-19-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-389-00-4	Gasoline, pyrolysis, hydrogenated; Low boiling point naphtha-unspecified; [A distillation fraction from the hydrogenation of pyrolysis gasoline boiling in the range of approximately 20 °C to 200 °C (68°F to 392°F).]	302-639-3	94114-03-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-390-00-X	Distillates (petroleum), steam-cracked, C ₈₋₁₂ fraction, polymd., distn. lights; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by distillation of the polymerized C ₈ through C ₁₂ fraction from steam-cracked petroleum distillates. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₁₂ .]	305-750-5	95009-23-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-391-00-5	Extracts (petroleum) heavy naphtha solvent, clay-treated; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by the treatment of heavy naphthtic solvent petroleum extract with bleaching earth. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₈ and boiling in the range of approximately 80 °C to 180 °C (175°F to 356°F).]	308-261-5	97926-43-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-392-00-0	Naphtha (petroleum), light steam-cracked, debenzenized, thermally treated; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by the treatment and distillation of debenzenized light steam-cracked petroleum naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 95 °C to 200 °C (203°F to 392°F).]	308-713-1	98219-46-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-393-00-6	Naphtha (petroleum), light steam-cracked, thermally treated; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by the treatment and distillation of light steam-cracked petroleum naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₆ and boiling in the range of approximately 35 °C to 80 °C (95°F to 176°F).]	308-714-7	98219-47-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-394-00-1	Distillates (petroleum), C ₇₋₉ , C ₈ -rich, hydrodesulfurized dearomatized; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by the distillation of petroleum light fraction, hydrodesulfurized and dearomatized. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₇ through C ₉ , predominantly C ₈ paraffins and cycloparaffins, boiling in the range of approximately 120 °C to 130 °C (248°F to 266°F).]	309-862-5	101316-56-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-395-00-7	Hydrocarbons, C ₆₋₈ , hydrogenated sorption-dearomatized, toluene raffination; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained during the sorptions of toluene from a hydrocarbon fraction from cracked gasoline treated with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₈ and boiling in the range of approximately 80 °C to 135 °C (176°F to 275°F).]	309-870-9	101316-66-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-396-00-2	Naphtha (petroleum), hydrodesulfurized full-range coker; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by fractionation from hydrodesulfurized coker distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₅ to C ₁₁ and boiling in the range of approximately 23 °C to 196 °C (73°F to 385°F).]	309-879-8	101316-76-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-397-00-8	Naphtha (petroleum), sweetened light; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum naphtha to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₈ and boiling in the range of approximately 20 °C to 130 °C (68°F to 266°F).]	309-976-5	101795-01-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-398-00-3	Hydrocarbons, C ₃₋₆ , C ₅ -rich, steam-cracked naphtha; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by distillation of steam-cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₃ through C ₆ , predominantly C ₅ .]	310-012-0	102110-14-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-399-00-9	Hydrocarbons, C ₅ -rich, dicyclopentadiene-contg.; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by distillation of the products from a stream-cracking process. It consists predominantly of hydrocarbons having carbon numbers of C ₅ and dicyclopentadiene and boiling in the range of approximately 30 °C to 170 °C (86°F to 338°F).]	310-013-6	102110-15-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-400-00-2	Residues (petroleum), steam-cracked light, arom.; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by the distillation of the products of steam cracking or similar processes after taking off the very light products resulting in a residue starting with hydrocarbons having carbon numbers greater than C ₅ . It consists predominantly of aromatic hydrocarbons having carbon numbers greater than C ₅ and boiling above approximately 40 °C (104°F).]	310-057-6	102110-55-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-401-00-8	Hydrocarbons, C ≥ 5, C ₅₋₆ -rich; Low boiling point naphtha – unspecified	270-690-8	68476-50-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-402-00-3	Hydrocarbons, C ₅ -rich; Low boiling point naphtha – unspecified	270-695-5	68476-55-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-403-00-9	Aromatic hydrocarbons, C ₈₋₁₀ ; Low boiling point naphtha – unspecified	292-695-4	90989-39-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-404-00-4	Kerosine (petroleum); Straight run kerosine; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of approximately 150 °C to 290 °C (320°F to 554°F).]	232-366-4	8008-20-6	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-405-00-X	Solvent naphtha (petroleum), medium aliph.; Straight run kerosine; [A complex combination of hydrocarbons obtained from the distillation of crude oil or natural gasoline. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₂ and boiling in the range of approximately 140 °C to 220 °C (284°F to 428°F).]	265-191-7	64742-88-7	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-406-00-5	Solvent naphtha (petroleum) heavy aliph.; Straight run kerosine; [A complex combination of hydrocarbons obtained from the distillation of crude oil or natural gasoline. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₁₆ and boiling in the range of approximately 190 °C to 290 °C (374°F to 554°F).]	265-200-4	64742-96-7	Asp. Tox. 1	H304	GHS08 Dgr	H304			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-407-00-0	Kerosine (petroleum), straight-run wide-cut; Straight run kerosine; [A complex combination of hydrocarbons obtained as a wide cut hydrocarbon fuel cut from atmospheric distillation and boiling in the range of approximately 70 °C to 220 °C (158°F to 428°F).]	295-418-5	92045-37-9	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-408-00-6	Distillates (petroleum), steam-cracked; Cracked kerosine; [A complex combination of hydrocarbons obtained by the distillation of the products from a steam cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₆ and boiling in the range of approximately 90 °C to 290 °C (190°F to 554°F).]	265-194-3	64742-91-2	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-409-00-1	Distillates (petroleum), cracked stripped steam-cracked petroleum distillates, C ₈₋₁₀ fraction; Cracked kerosine; [A complex combination of hydrocarbons obtained by distilling cracked stripped steam-cracked distillates. It consists of hydro-carbons having carbon numbers in the range of C ₈ through C ₁₀ and boiling in the range of approximately 129 °C to 194 °C (264°F to 382°F).]	270-728-3	68477-39-4	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-410-00-7	Distillates (petroleum), cracked stripped steam-cracked petroleum distillates, C ₁₀₋₁₂ fraction; Cracked kerosine; [A complex combination of hydrocarbons obtained by distilling cracked stripped steam-cracked distillates. It consists predominantly of aromatic hydrocarbons having carbon numbers in the range of C ₁₀ through C ₁₂ .]	270-729-9	68477-40-7	Asp. Tox. 1	H304	GHS08 Dgr	H304			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-411-00-2	Distillates (petroleum), steam-cracked, C ₈₋₁₂ fraction; Cracked kerosine; [A complex combination of organic compounds obtained by the distillation of products from a steam cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₁₂ .]	270-737-2	68477-54-3	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-412-00-8	Kerosine (petroleum), hydrodesulfurized thermal cracked; Cracked kerosine; [A complex combination of hydrocarbons obtained by fractionation from hydrodesulfurized thermal cracker distillate. It consists predominantly of hydrocarbons predominantly in the range of C ₈ to C ₁₆ and boiling in the range of approximately 120 °C to 283 °C (284°F to 541°F).]	285-507-7	85116-55-8	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-413-00-3	Aromatic hydrocarbons, C _{≥10} , steam-cracking, hydrotreated; Cracked kerosine; [A complex combination of hydrocarbons produced by the distillation of the products from a steam cracking process treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly greater than C ₁₀ and boiling in the range of approximately 150 °C to 320 °C (302°F to 608°F).]	292-621-0	90640-98-5	Asp. Tox. 1	H304	GHS08 Dgr	H304			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne kon- centracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Ozna- ka(-e) stavka o nevar- nosti	Piktogram, Oznaka(-e) opo- zorilne besede	Ozna- ka(-e) stavka o nevarnosti	Dod. ozna- ka(-e) stavka o nevarnosti		
649-414-00-9	Naphtha (petroleum), steam-cracked, hydrotreated, C ₉₋₁₀ -arom.-rich; Cracked kerosine; [A complex combination of hydrocarbons produced by the distillation of the products from a steam cracking process thereafter treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers in the range of C ₉ through C ₁₀ and boiling in the range of approximately 140 °C to 200 °C (284°F to 392°F).]	292-637-8	90641-13-7	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-415-00-4	Distillates (petroleum), thermal-cracked, alkylarom. hydrocarbon-rich; Cracked kerosine; [A complex combination of hydrocarbons obtained by distillation of thermal-cracking heavy tars. It consists predominantly of highly alkylated aromatic hydrocarbons boiling in the range of approximately 100 °C to 250 °C (212°F to 482°F).]	309-866-7	101316-61-4	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-416-00-X	Distillates (petroleum), catalytic cracked heavy tar light; Cracked kerosine; [A complex combination of hydrocarbons obtained by distillation of catalytic cracking heavy tars. It consists predominantly of highly alkylated aromatic hydrocarbons boiling in the range of approximately 100 °C to 250 °C (212°F to 482°F).]	309-938-8	101631-13-4	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-417-00-5	Solvent naphtha (petroleum), hydrocracked heavy arom.; Cracked kerosine; [A complex combination of hydrocarbons obtained by the distillation of hydrocracked petroleum distillate. It consists predomi- nantly of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of approximately 235 °C to 290 °C (455°F to 554°F).]	309-881-9	101316-80-7	Asp. Tox. 1	H304	GHS08 Dgr	H304			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-418-00-0	Distillates (petroleum), steam-cracked heavy tar light; Cracked kerosine; [A complex combination of hydrocarbons obtained by distillation of steam cracking heavy tars. It consists predominantly of highly alkylated aromatic hydrocarbons boiling in the range of approximately 100 °C to 250 °C (212°F to 482°F).]	309-940-9	101631-15-6	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-419-00-6	Distillates (petroleum), alkylate; Kerosine – unspecified; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C ₃ through C ₅ . It consists of predominantly branched chain saturated hydro-carbons having carbon numbers predominantly in the range of C ₁₁ through C ₁₇ and boiling in the range of approximately 205 °C to 320 °C (401°F to 608°F).]	265-074-0	64741-73-7	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-420-00-1	Extracts (petroleum), heavy naphtha solvent; Kerosine – unspecified; [A complex combination of hydrocarbons obtained as the extract from a solvent extraction process. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 90 °C to 220 °C (194°F to 428°F).]	265-099-7	64741-98-6	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-421-00-7	Distillates (petroleum), chemically neutralized light; Kerosine – unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-132-5	64742-31-0	Asp. Tox. 1	H304	GHS08 Dgr	H304			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-422-00-2	Distillates (petroleum), hydrotreated light; Kerosine – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-149-8	64742-47-8	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-423-00-8	Kerosine (petroleum), hydrodesulfurized; Kerosine – unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-184-9	64742-81-0	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-424-00-3	Solvent naphtha (petroleum), heavy arom.; Kerosine – unspecified; [A complex combination of hydrocarbons obtained from distillation of aromatic streams. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of approximately 165 °C to 290 °C (330°F to 554°F).]	265-198-5	64742-94-5	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-425-00-9	Naphtha (petroleum), heavy coker; Kerosine – unspecified; [A complex combination of hydrocarbons from the distillation of products from a fluid coker. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₅ and boiling in the range of approximately 157 °C to 288 °C (315°F to 550°F).]	269-778-9	68333-23-3	Asp. Tox. 1	H304	GHS08 Dgr	H304			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-426-00-4	Naphtha (petroleum), catalytic reformed hydrodesulfurized heavy, arom. fraction; Kerosine – unspecified; [A complex combination of hydrocarbons produced by fractionation from catalytically reformed hydrodesulfurized naphtha. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₇ to C ₁₃ and boiling in the range of approximately 98 °C to 218 °C (208°F to 424°F).]	285-508-2	85116-57-0	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-427-00-X	Kerosine (petroleum), sweetened; Kerosine – unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of 130 °C to 290 °C (266°F to 554°F).]	294-799-5	91770-15-9	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-428-00-5	Kerosine (petroleum), solvent-refined sweetened; Kerosine – unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by solvent refining and sweetening and boiling in the range of approximately 150 °C to 260 °C (302°F to 500°F).]	295-416-4	92045-36-8	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-429-00-0	Hydrocarbons, C ₉₋₁₆ , hydrotreated, dearomatized; Kerosine – unspecified; [A complex combination of hydrocarbons obtained as solvents which have been subjected to hydrotreatment in order to convert aromatics to naphthenes by catalytic hydrogenation.]	297-854-1	93763-35-0	Asp. Tox. 1	H304	GHS08 Dgr	H304			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-430-00-6	Kerosine (petroleum), solvent-refined hydrosulfurized; Kerosine – unspecified	307-033-2	97488-94-3	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-431-00-1	Distillates (petroleum), hydrosulfurized full-range middle coker; Kerosine – unspecified; [A complex combination of hydrocarbons obtained by fractionation from hydrosulfurized coker distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₁₆ and boiling in the range of approximately 120 °C to 283 °C (248°F to 541°F).]	309-864-6	101316-58-9	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-432-00-7	Solvent naphtha (petroleum), hydrosulfurized heavy arom.; Kerosine – unspecified; [A complex combination of hydrocarbons obtained by the catalytic hydrosulfurization of a petroleum fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₁₃ and boiling in the range of approximately 180 °C to 240 °C (356°F to 464°F).]	309-882-4	101316-81-8	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-433-00-2	Solvent naphtha (petroleum), hydrosulfurized medium; Kerosine – unspecified; [A complex combination of hydrocarbons obtained by the catalytic hydrosulfurization of a petroleum fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₁₃ and boiling in the range of approximately 175 °C to 220 °C (347°F to 428°F).]	309-884-5	101316-82-9	Asp. Tox. 1	H304	GHS08 Dgr	H304			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-434-00-8	Kerosine (petroleum), hydrotreated; Kerosine – unspecified; [A complex combination of hydrocarbons obtained from the distillation of petroleum and subsequent hydrotreatment. It consists predominantly of alkanes, cycloalkanes and alkylbenzenes having carbon numbers predominantly in the range of C ₁₂ through C ₁₆ and boiling in the range of approximately 230 °C to 270 °C (446°F to 518°F).]	309-944-0	101631-19-0	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-435-00-3	Distillates (petroleum), light catalytic cracked; Cracked gasoil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₂₅ and boiling in the range of approximately 150 °C to 400 °C (302°F to 752°F). It contains a relatively large proportion of bicyclic aromatic hydrocarbons.]	265-060-4	64741-59-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-436-00-9	Distillates (petroleum), intermediate catalytic cracked; Cracked gasoil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₃₀ and boiling in the range of approximately 205 °C to 450 °C (401°F to 842°F). It contains a relatively large proportion of tricyclic aromatic hydrocarbons.]	265-062-5	64741-60-2	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-437-00-4	Distillates (petroleum), light hydrocracked; Cracked gasoil; [A complex combination of hydrocarbons from distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₁₈ and boiling in the range of approximately 160 °C to 320 °C (320°F to 608°F).]	265-078-2	64741-77-1	Carc. 2	H351	GHS08 Wng	H351			H
649-438-00-X	Distillates (petroleum), light thermal cracked; Cracked gasoil; [A complex combination of hydrocarbons from the distillation of the products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₂₂ and boiling in the range of approximately 160 °C to 370 °C (320°F to 698°F).]	265-084-5	64741-82-8	Carc. 1B	H350	GHS08 Dgr	H350			H
649-439-00-5	Distillates (petroleum), hydrosulfurized light catalytic cracked; Cracked gasoil; [A complex combination of hydrocarbons obtained by treating light catalytic cracked distillates with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₂₅ and boiling in the range of approximately 150 °C to 400 °C (302°F to 752°F). It contains a relatively large proportion of bicyclic aromatic hydrocarbons.]	269-781-5	68333-25-5	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-440-00-0	Distillates (petroleum), light steam-cracked naphtha; Cracked gasoil; [A complex combination of hydrocarbons from the multiple distillation of products from a steam cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₁₈ .]	270-662-5	68475-80-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-441-00-6	Distillates (petroleum), cracked steam-cracked petroleum distillates; Cracked gasoil; [A complex combination of hydrocarbons produced by distilling cracked steam cracked distillate and/or its fractionation products. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₀ to low molecular weight polymers.]	270-727-8	68477-38-3	Carc. 1B	H350	GHS08 Dgr	H350			H
649-442-00-1	Gas oils (petroleum), steam-cracked; Cracked gasoil; [A complex combination of hydrocarbons produced by distillation of the products from a steam cracking process. It consists of hydrocarbons having carbon numbers predominantly greater than C ₉ and boiling in the range of from approximately 205 °C to 400 °C (400°F to 752°F).]	271-260-2	68527-18-4	Carc. 1B	H350	GHS08 Dgr	H350			H
649-443-00-7	Distillates (petroleum), hydrosulfurized thermal cracked middle; Cracked gasoil; [A complex combination of hydrocarbons obtained by fractionation from hydrosulfurized thermal cracker distillate stocks. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ to C ₂₅ and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	285-505-6	85116-53-6	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-444-00-2	Gas oils (petroleum), thermal-cracked, hydrodesulfurized; Cracked gasoil	295-411-7	92045-29-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-445-00-8	Residues (petroleum), hydrogenated steam-cracked naphtha; Cracked gasoil; [A complex combination of hydrocarbons obtained as a residual fraction from the distillation of hydrotreated steam-cracked naphtha. It consists predominantly of hydrocarbons boiling in the range of approximately 200 °C to 350 °C (32°F to 662°F).]	295-514-7	92062-00-5	Carc. 1B	H350	GHS08 Dgr	H350			H
649-446-00-3	Residues (petroleum), steam-cracked naphtha distn.; Cracked gasoil; [A complex combination of hydrocarbons obtained as a column bottom from the separation of effluents from steam cracking naphtha at a high temperature. It boils in the range of approximately 147 °C to 300 °C (297°F to 572°F) and produces a finished oil having a viscosity of 18cSt at 50 °C.]	295-517-3	92062-04-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-447-00-9	Distillates (petroleum), light catalytic cracked, thermally degraded; Cracked gasoil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process which has been used as a heat transfer fluid. It consists predominantly of hydrocarbons boiling in the range of approximately 190 °C to 340 °C (374°F to 644°F). This stream is likely to contain organic sulfur compounds.]	295-991-1	92201-60-0	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-448-00-4	Residues (petroleum), steam-cracked heat-soaked naphtha; Cracked gasoil; [A complex combination of hydrocarbons obtained as residue from the distillation of steam cracked heat soaked naphtha and boiling in the range of approximately 150 °C to 350 °C (302°F to 662°F).]	297-905-8	93763-85-0	Carc. 1B	H350	GHS08 Dgr	H350			H
649-449-00-X	Hydrocarbons, C ₁₆₋₂₀ , solvent-dewaxed hydrocracked paraffinic distn. residue; Cracked gasoil; [A complex combination of hydrocarbons obtained by solvent dewaxing of a distillation residue from a hydrocracked paraffinic distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₂₀ and boiling in the range of approximately 360 °C to 500 °C (680 °F to 932 °F). It produces a finished oil having a viscosity of 4,5 cSt at approximately 100 °C (212 °F).]	307-662-2	97675-88-2	Carc. 2	H351	GHS08 Wng	H351			H
649-450-00-5	Gas oils (petroleum), light vacuum, thermal-cracked hydrosulfurized; Cracked gasoil; [A complex combination of hydrocarbons obtained by catalytic dehydrosulfurization of thermal-cracked light vacuum petroleum. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₄ through C ₂₀ and boiling in the range of approximately 270 °C to 370 °C (518°F to 698°F).]	308-278-8	97926-59-5	Carc. 1B	H350	GHS08 Dgr	H350			H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-451-00-0	Distillates (petroleum), hydrosulfurized middle coker; Cracked gasoil; [A complex combination of hydrocarbons by fractionation from hydrosulfurised coker distillate stocks. Is consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₂ through C ₂₁ and boiling in the range of approximately 200 °C to 360 °C (392°F to 680°F).]	309-865-1	101316-59-0	Carc. 1B	H350	GHS08 Dgr	H350			H
649-452-00-6	Distillates (petroleum), heavy steam-cracked; Cracked gasoil; [A complex combination of hydrocarbons obtained by distillation of steam cracking heavy residues. It consists predominantly of highly alkylated heavy aromatic hydrocarbons boiling in the range of approximately 250 °C to 400 °C (482°F to 752°F).]	309-939-3	101631-14-5	Carc. 1B	H350	GHS08 Dgr	H350			H
649-453-00-1	Distillates (petroleum), heavy hydrocracked; Baseoil – unspecified; [A complex combination of hydrocarbons from the distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers in the range of C ₁₅ -C ₃₉ and boiling in the range of approximately 260 °C to 600 °C (500°F to 1112°F).]	265-077-7	64741-76-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-454-00-7	Distillates (petroleum), solvent-refined heavy paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C).]	265-090-8	64741-88-4	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-455-00-2	Distillates (petroleum), solvent-refined light paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-091-3	64741-89-5	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-456-00-8	Residual oils (petroleum), solvent deasphalted; Baseoil – unspecified; [A complex combination of hydrocarbons obtained as the solvent soluble fraction from C ₃ -C ₄ solvent deasphalting of a residuum. It consists of hydrocarbons having carbon numbers predominantly higher than C ₂₅ and boiling above approximately 400 °C (752°F).]	265-096-0	64741-95-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-457-00-3	Distillates (petroleum), solvent-refined heavy naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-097-6	64741-96-4	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-458-00-9	Distillates (petroleum), solvent-refined light naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-098-1	64741-97-5	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-459-00-4	Residual oils (petroleum,) solvent-refined; Baseoil – unspecified; [A complex combination by hydrocarbons obtained as the solvent insoluble fraction from solvent refining of a residuum using a polar organic solvent such as phenol or furfural. It consists of hydrocarbons having carbon numbers predominantly higher than C ₂₅ and boiling above approximately 400 °C (752°F).]	265-101-6	64742-01-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-460-00-X	Distillates (petroleum), clay-treated paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-137-2	64742-36-5	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-461-00-5	Distillates (petroleum), clay-treated light paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-138-8	64742-37-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-462-00-0	Residual oils (petroleum), clay-treated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treatment of a residual oil with a natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly higher than C ₂₅ and boiling above approximately 400 °C (752°F).]	265-143-5	64742-41-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-463-00-6	Distillates (petroleum), clay-treated heavy naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-146-1	64742-44-5	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-464-00-1	Distillates (petroleum), clay-treated light naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-147-7	64742-45-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-465-00-7	Distillates (petroleum), hydrotreated heavy naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-155-0	64742-52-5	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-466-00-2	Distillates (petroleum), hydrotreated light naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-156-6	64742-53-6	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-467-00-8	Distillates (petroleum), hydrotreated heavy paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-157-1	64742-54-7	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-468-00-3	Distillates (petroleum), hydrotreated light paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-158-7	64742-55-8	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-469-00-9	Distillates (petroleum), solvent-dewaxed light paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-159-2	64742-56-9	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-470-00-4	Residual oils (petroleum), hydrotreated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly greater than C ₂₅ and boiling above approximately 400 °C (752°F).]	265-160-8	64742-57-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-471-00-X	Residual oils (petroleum), solvent-dewaxed; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by removal of long, branched chain hydrocarbons from a residual oil by solvent crystallization. It consists of hydrocarbons having carbon numbers predominantly greater than C ₂₅ and boiling above approximately 400 °C (752°F).]	265-166-0	64742-62-7	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-472-00-5	Distillates (petroleum), solvent-dewaxed heavy naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil of not less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-167-6	64742-63-8	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-473-00-0	Distillates (petroleum), solvent-dewaxed light naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists of hydrocarbons having carbon numbers predominantly in the range C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-168-1	64742-64-9	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-474-00-6	Distillates (petroleum), solvent-dewaxed heavy paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity not less than 100 SUS at 100°F (19cSt at 40 °C).]	265-169-7	64742-65-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-475-00-1	Naphthenic oils (petroleum), catalytic dewaxed heavy; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-172-3	64742-68-3	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-476-00-7	Naphthenic oils (petroleum), catalytic dewaxed light; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-173-9	64742-69-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-477-00-2	Paraffin oils (petroleum), catalytic dewaxed heavy; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C).]	265-174-4	64742-70-7	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-478-00-8	Paraffin oils (petroleum), catalytic dewaxed light; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewxing process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-176-5	64742-71-8	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-479-00-3	Naphthenic oils (petroleum), complex dewaxed heavy; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by removing straight chain paraffin hydrocarbons as a solid by treatment with an agent such as urea. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil having a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-179-1	64742-75-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-480-00-9	Naphthenic oils (petroleum), complex dewaxed light; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil having a viscosity less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-180-7	64742-76-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-481-00-4	Lubricating oils (petroleum), C ₂₀₋₅₀ , hydro-treated neutral oil-based, high-viscosity; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating light vacuum gas oil, heavy vacuum gas oil, and solvent deasphalted residual oil with hydrogen in the presence of a catalyst in a two stage process with dewaxing being carried out between the two stages. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil having a viscosity of approximately 112cSt at 40 °C. It contains a relatively large proportion of saturated hydrocarbons.]	276-736-3	72623-85-9	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-482-00-X	Lubricating oils (petroleum), C ₁₅₋₃₀ , hydro-treated neutral oil-based; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating light vacuum gas oil and heavy vacuum gas oil with hydrogen in the presence of a catalyst in a two stage process with dewaxing being carried out between the two stages. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil having a viscosity of approximately 15cSt at 40 °C. It contains a relatively large proportion of saturated hydrocabons.]	276-737-9	72623-86-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-483-00-5	Lubricating oils (petroleum), C ₂₀₋₅₀ , hydro-treated neutral oil-based; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating light vacuum gas oil, heavy vacuum gas oil and solvent deasphalted residual oil with hydrogen in the presence of a catalyst in a two stage process with dewaxing being carried out between the two stages. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of approximately 32cSt at 40 °C. It contains a relatively large proportion of saturated hydrocarbons.]	276-738-4	72623-87-1	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-484-00-0	Lubricating oils; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from solvent extraction and dewaxing processes. It consists predominantly of saturated hydrocarbons having carbon numbers in the range C ₁₅ through C ₅₀ .]	278-012-2	74869-22-0	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-485-00-6	Distillates (petroleum), complex dewaxed heavy paraffinci; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by dewaxing heavy paraffinic distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of equal to or greater than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	292-613-7	90640-91-8	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-486-00-1	Distillates (petroleum), complex dewaxed light paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by dewaxing light paraffinic distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₂ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	292-614-2	90640-92-9	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-487-00-7	Distillates (petroleum), solvent dewaxed heavy paraffinic, clay-treated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating dewaxed heavy paraffinic distillate with neutral or modified clay in either a contacting or percolation process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ .]	292-616-3	90640-94-1	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-488-00-2	Hydrocarbons, C ₂₀₋₅₀ , solvent dewaxed heavy paraffinic, hydrotreated; Baseoil – unspecified; [A complex combination of hydrocarbons produced by treating dewaxed heavy paraffinic distillate with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ .]	292-617-9	90640-95-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-489-00-8	Distillates (petroleum), solvent dewaxed light paraffinic, clay-treated; Baseoil – unspecified; [A complex combination of hydrocarbons resulting from treatment of dewaxed light paraffinic distillate with natural or modified clay in either a contacting or percolation process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ .]	292-618-4	90640-96-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-490-00-3	Distillates (petroleum), solvent dewaxed light paraffinic, hydrotreated; Baseoil – unspecified; [A complex combination of hydrocarbons produced by treating a dewaxed light paraffinic distillate with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ .]	292-620-5	90640-97-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-491-00-9	Residual oils (petroleum), hydrotreated solvent dewaxed; Baseoil – unspecified	292-656-1	90669-74-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-492-00-4	Residual oils (petroleum), catalytic dewaxed; Baseoil – unspecified	294-843-3	91770-57-9	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-493-00-X	Distillates (petroleum), dewaxed heavy paraffinic, hydrotreated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from an intensive treatment of dewaxed distillate by hydrogenation in the presence of a catalyst. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₂₅ through C ₃₉ and produces a finished oil with a viscosity of approximately 44 cSt at 50 °C.]	295-300-3	91995-39-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-494-00-5	Distillates (petroleum), dewaxed light paraffinic, hydrotreated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from an intensive treatment of dewaxed distillate by hydrogenation in the presence of a catalyst. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₂₁ through C ₂₉ and produces a finished oil with a viscosity of approximately 13 cSt at 50 °C.]	295-301-9	91995-40-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-495-00-0	Distillates (petroleum), hydrocracked solvent-refined, dewaxed; Baseoil – unspecified; [A complex combination of liquid hydrocarbons obtained by recrystallization of dewaxed hydrocracked solvent-refined petroleum distillates.]	295-306-6	91995-45-8	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-496-00-6	Distillates (petroleum), solvent-refined light naphthenic, hydrotreated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst and removing the aromatic hydrocarbons by solvent extraction. It consists predominantly of naphthenic hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of between 13-15cSt at 40 °C.]	295-316-0	91995-54-9	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-497-00-1	Lubricating oils (petroleum), C ₁₇₋₃₅ , solvent-extd., dewaxed, hydrotreated; Baseoil – unspecified	295-423-2	92045-42-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-498-00-7	Lubricating oils (petroleum), hydrocracked nonarom. solvent-deparaffined; Baseoil – unspecified	295-424-8	92045-43-7	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-499-00-2	Residual oils (petroleum), hydrocracked acid-treated solvent-dewaxed; Baseoil – unspecified; [A complex combination of hydrocarbons produced by solvent removal of paraffins from the residue of the distillation of acid-treated, hydrocracked heavy paraffins and boiling approximately above 380 °C (716°F).]	295-499-7	92061-86-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-500-00-6	Paraffin oils (petroleum), solvent-refined dewaxed heavy; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from sulfur-containing paraffinic crude oil. It consists predominantly of a solvent refined deparaffinated lubricating oil with a viscosity of 65cSt at 50 °C.]	295-810-6	92129-09-4	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-501-00-1	Lubricating oils (petroleum), base oils, paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by refining of crude oil. It consists predominantly of aromatics, naphthenics and paraffinics and produces a finished oil with a viscosity of 120 SUS at 100°F (23cSt at 40 °C).]	297-474-6	93572-43-1	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-502-00-7	Hydrocarbons, hydrocracked paraffinic distn. residues, solvent-dewaxed; Baseoil – unspecified	297-857-8	93763-38-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-503-00-2	Hydrocarbons, C ₂₀₋₅₀ , residual oil hydrogenation vacuum distillate; Baseoil – unspecified	300-257-1	93924-61-9	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-504-00-8	Distillates (petroleum), solvent-refined hydrotreated heavy; hydrogenated; Baseoil – unspecified	305-588-5	94733-08-1	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-505-00-3	Distillates (petroleum), solvent-refined hydrocracked light; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by solvent dearomatization of the residue of hydrocracked petroleum. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₈ through C ₂₇ and boiling in the range of approximately 370 °C to 450 °C (698°F to 842°F).]	305-589-0	94733-09-2	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-506-00-9	Lubricating oils (petroleum), C ₁₈₋₄₀ , solvent-dewaxed hydrocracked distillate-based; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by solvent deparaffination of the distillation residue from hydrocracked petroleum. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₈ through C ₄₀ and boiling in the range of approximately 370 °C to 550 °C (698°F to 1022°F).]	305-594-8	94733-15-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-507-00-4	Lubricating oils (petroleum), C ₁₈₋₄₀ , solvent-dewaxed hydrogenated raffinate-based; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by solvent deparaffination of the hydrogenated raffinate obtained by solvent extraction of a hydrotreated petroleum distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₈ through C ₄₀ and boiling in the range of approximately 370 °C to 550 °C (698°F to 1022°F).]	305-595-3	94733-16-1	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-508-00-X	Hydrocarbons, C ₁₃₋₃₀ , arom.-rich, solvent-extd. naphthenic distillate; Baseoil – unspecified	305-971-7	95371-04-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-509-00-5	Hydrocarbons, C ₁₆₋₃₂ , arom. rich, solvent-extd. naphthenic distillate; Baseoil – unspecified	305-972-2	95371-05-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-510-00-0	Hydrocarbons, C ₃₇₋₆₈ , dewaxed deasphalted hydrotreated vacuum distn. residues; Baseoil – unspecified	305-974-3	95371-07-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-511-00-6	Hydrocarbons, C ₃₇₋₆₅ , hydrotreated deasphalted vacuum distn. residues; Baseoil – unspecified	305-975-9	95371-08-7	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-512-00-1	Distillates (petroleum), hydrocracked solvent-refined light; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by the solvent treatment of a distillate from hydrocracked petroleum distillates. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₈ through C ₂₇ and boiling in the range of approximately 370 °C to 450 °C (698°F to 842°F).]	307-010-7	97488-73-8	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-513-00-7	Distillates (petroleum), solvent-refined hydrogenated heavy; Baseoil – unspecified; [A complex combination of hydrocarbons, obtained by the treatment of a hydrogenated petroleum distillate with a solvent. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₉ through C ₄₀ and boiling in the range of approximately 390 °C to 550 °C (734°F to 1022°F).]	307-011-2	97488-74-9	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-514-00-2	Lubricating oils (petroleum), C ₁₈₋₂₇ , hydrocracked solvent-dewaxed; Baseoil – unspecified	307-034-8	97488-95-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-515-00-8	Hydrocarbons, C ₁₇₋₃₀ , hydrotreated solvent-deasphalted atm. distn. residue, distn. lights; Baseoil – unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the treatment of a solvent deasphalted short residue with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₇ through C ₃₀ and boiling in the range of approximately 300 °C to 400 °C (572°F to 752°F). It produces a finished oil having a viscosity of 4cSt at approximately 100 °C (212°F).]	307-661-7	97675-87-1	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-516-00-3	Hydrocarbons, C ₁₇₋₄₀ , hydrotreated solvent-deasphalted distn. residue, vacuum distn. lights; Baseoil – unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the catalytic hydrotreatment of a solvent deasphalted short residue having a viscosity of 8cSt at approximately 100 °C (212°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₇ through C ₄₀ and boiling in the range of approximately 300 °C to 500 °C (592°F to 932°F).]	307-755-8	97722-06-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-517-00-9	Hydrocarbons, C ₁₃₋₂₇ , solvent-extd. light naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by extraction of the aromatics from a light naphthenic distillate having a viscosity of 9.5cSt at 40 °C (104°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₂₇ and boiling in the range of approximately 240 °C to 400 °C (464°F to 752°F).]	307-758-4	97722-09-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-518-00-4	Hydrocarbons, C ₁₄₋₂₉ , solvent-extd. light naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by extraction of the aromatics from a light naphthenic distillate having a viscosity of 16cSt at 40 °C (104°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₄ through C ₂₉ and boiling in the range of approximately 250 °C to 425 °C (482°F to 797°F).]	307-760-5	97722-10-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-519-00-X	Hydrocarbons, C ₂₇₋₄₂ , dearomatized; Baseoil – unspecified	308-131-8	97862-81-2	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-520-00-5	Hydrocarbons, C ₁₇₋₃₀ , hydrotreated distillates, distn. lights; Baseoil – unspecified	308-132-3	97862-82-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-521-00-0	Hydrocarbons, C ₂₇₋₄₅ , naphthenic vacuum distn.; Baseoil – unspecified	308-133-9	97862-83-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-522-00-6	Hydrocarbons, C ₂₇₋₄₅ , dearomatized; Baseoil – unspecified	308-287-7	97926-68-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-523-00-1	Hydrocarbons, C ₂₀₋₅₈ , hydrotreated; Baseoil – unspecified	308-289-8	97926-70-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-524-00-7	Hydrocarbons, C ₂₇₋₄₂ , naphthenic; Baseoil – unspecified	308-290-3	97926-71-1	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-525-00-2	Residual oils (petroleum), carbon-treated solvent-dewaxed; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by the treatment of solvent-dewaxed petroleum residual oils with activated charcoal for the removal of trace polar constituents and impurities.]	309-710-8	100684-37-5	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-526-00-8	Residual oils (petroleum), clay-treated solvent-dewaxed; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treatment of solvent-dewaxed petroleum residual oils with bleaching earth for the removal of trace polar constituents and impurities.]	309-711-3	100684-38-6	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-527-00-3	Lubricating oils (petroleum), C _{>25} , solvent-extd., deasphalted, dewaxed, hydrogenated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of vacuum distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C ₂₅ and produces a finished oil with a viscosity in the order of 32cSt to 37cSt at 100 °C (212°F).]	309-874-0	101316-69-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-528-00-9	Lubricating oils (petroleum), C ₁₇₋₃₂ , solvent-extd., dewaxed, hydrogenated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of atmospheric distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₇ through C ₃₂ and produced a finished oil with a viscosity in the order of 17cSt to 23cSt at 40 °C (104°F).]	309-875-6	101316-70-5	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-529-00-4	Lubricating oils (petroleum), C ₂₀₋₃₅ , solvent-extd., dewaxed, hydrogenated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of atmospheric distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₃₅ and produces a finished oil with a viscosity in the order of 37cSt to 44cSt at 40 °C (104°F).]	309-876-1	101316-71-6	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-530-00-X	Lubricating oils (petroleum), C ₂₄₋₅₀ , solvent-extd., dewaxed, hydrogenated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of atmospheric distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₄ through C ₅₀ and produces a finished oil with a viscosity in the order of 16cSt to 75cSt at 40 °C (104°F).]	309-877-7	101316-72-7	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-531-00-5	Extracts (petroleum), heavy naphthenic distillate solvent, arom. conc.; Distillate aromatic extract (treated); [An aromatic concentrate produced by adding water to heavy naphthenic distillate solvent extract and extraction solvent.]	272-175-3	68783-00-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-532-00-0	Extracts (petroleum), solvent-refined heavy paraffinic distillate solvent; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as the extract from the re-extraction of solvent-refined heavy paraffinic distillate. It consists of saturated and aromatic hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ .]	272-180-0	68783-04-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-533-00-6	Extracts (petroleum), heavy paraffinic distillates, solvent-deasphalted; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as the extract from a solvent extraction of heavy paraffinic distillate.]	272-342-0	68814-89-1	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-534-00-1	Extracts (petroleum), heavy naphthenic distillate solvent, hydrotreated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by treating a heavy naphthenic distillate solvent extract with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil of at least 19cSt at 40 °C (100 SUS at 100°F).]	292-631-5	90641-07-9	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-535-00-7	Extracts (petroleum), heavy paraffinic distillate solvent, hydrotreated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons produced by treating a heavy paraffinic distillate solvent extract with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₁ through C ₃₃ and boiling in the range of approximately 350 °C to 480 °C (662°F to 896°F).]	292-632-0	90641-08-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-536-00-2	Extracts (petroleum), light paraffinic distillate solvent, hydrotreated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons produced by treating a light paraffinic distillate solvent extract with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₇ through C ₂₆ and boiling in the range of approximately 280 °C to 400 °C (536°F to 752°F).]	292-633-6	90641-09-1	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-537-00-8	Extracts (petroleum), hydrotreated light paraffinic distillate solvent; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as the extract from solvent extraction of intermediate paraffinic top solvent distillate that is treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₃₆ .]	295-335-4	91995-73-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-538-00-3	Extracts (petroleum), light naphthenic distillate solvent, hydrosulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by treating the extract, obtained from a solvent extraction process, with hydrogen in the presence of a catalyst under conditions primarily to remove sulfur compounds. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ . This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	295-338-0	91995-75-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-539-00-9	Extracts (petroleum), light paraffinic distillate solvent, acid-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as a fraction of the distillation of an extract from the solvent extraction of light paraffinic top petroleum distillates that is subjected to a sulfuric acid refining. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₃₂ .]	295-339-6	91995-76-5	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-540-00-4	Extracts (petroleum), light paraffinic distillate solvent, hydrodesulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by solvent extraction of a light paraffin distillate and treated with hydrogen to convert the organic sulfur to hydrogen sulfide which is eliminated. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₄₀ and produces a finished oil with a viscosity of greater than 10cSt at 40 °C.]	295-340-1	91995-77-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-541-00-X	Extracts (petroleum), light vacuum gas oil solvent, hydrotreated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons, obtained by solvent extraction from light vacuum petroleum gas oils and treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₃₀ .]	295-342-2	91995-79-8	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-542-00-5	Extracts (petroleum), heavy paraffinic distillate solvent, clay-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contact or percolation process to remove the trace amounts of polar compounds and impurities present. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ . This stream is likely to contain 5 wt.% or more 4-6 membered ring aromatic hydrocarbons.]	296-437-1	92704-08-0	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-543-00-0	Extracts (petroleum), heavy naphthenic distillate solvent, hydrosulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₅₀ and produces a finished oil with a viscosity of greater than 19cSt at 40 °C.]	297-827-4	93763-10-1	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-544-00-6	Extracts (petroleum), solvent-dewaxed heavy paraffinic distillate solvent, hydrosulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained from a solvent dewaxed petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₅₀ and produces a finished oil with a viscosity of greater than 19cSt at 40 °C.]	297-829-5	93763-11-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-545-00-1	Extracts (petroleum), light paraffinic distillate solvent, carbon-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as a fraction from distillation of an extract recovered by solvent extraction of light paraffinic top petroleum distillate treated with activated charcoal to remove traces of polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₃₂ .]	309-672-2	100684-02-4	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-546-00-7	Extracts (petroleum), light paraffinic distillate solvent, clay-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as a fraction from distillation of an extract recovered by solvent extraction of light paraffinic top petroleum distillates treated with bleaching earth to remove traces of polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₃₂ .]	309-673-8	100684-03-5	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-547-00-2	Extracts (petroleum), light vacuum, gas oil solvent, carbon-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by solvent extraction of light vacuum petroleum gas oil treated with activated charcoal for the removal of trace polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₃₀ .]	309-674-3	100684-04-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-548-00-8	Extracts (petroleum), light vacuum gas oil solvent, clay-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by solvent extraction of light vacuum petroleum gas oils treated with bleaching earth for removal of trace polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₃₀ .]	309-675-9	100684-05-7	Carc. 1B	H350	GHS08 Dgr	H350			H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
649-549-00-3	Foots oil (petroleum); Foots oil; [A complex combination of hydrocarbons obtained as the oil fraction from a solvent deoiling or a wax sweating process. It consists predominantly of branched chain hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ .]	265-171-8	64742-67-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-550-00-9	Foots oil (petroleum), hydrotreated; Foots oil	295-394-6	92045-12-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
650-002-00-6	turpentine, oil	232-350-7	8006-64-2	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Asp. Tox. 1 Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H226 H332 H312 H302 H304 H319 H315 H317 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H226 H332 H312 H302 H304 H319 H315 H317 H411			
650-003-00-1	fenson (ISO); 4-chlorophenyl benzenesulphonate;	201-274-6	80-38-6	Acute Tox. 4 * Eye Irrit. 2 Aquatic Chronic 2	H302 H319 H411	GHS07 GHS09 Wng	H302 H319 H411			
650-004-00-7	norbormide (ISO); 5-(α -hydroxy- α -2-pyridylbenzyl)-7-(α -2-pyridylbenzylidene)bicyclo [2.2.1] hept-5-ene-2,3-dicarboximide	213-589-6	991-42-4	Acute Tox. 4 *	H302	GHS07 Wng	H302			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
650-005-00-2	(2R,6aS,12aS)-1,2,6,6a,12,12a-hexahydro-2-isopropenyl-8,9-dimethoxychromeno[3,4-b]furo[2,3-h]chromen-6-one, rotenone	201-501-9	83-79-4	Acute Tox. 3 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H301 H319 H335 H315 H400 H410	GHS06 GHS09 Dgr	H301 H319 H335 H315 H410			
650-006-00-8	benquinox (ISO); p-benzoquinone 1-benzoylhydrazone 4-oxime	207-807-9	495-73-8	Acute Tox. 3 * Acute Tox. 4 *	H301 H312	GHS06 Dgr	H301 H312			
650-007-00-3	chlordimeform (ISO); N ₂ -(4-chloro-o-tolyl)-N ₁ ,N ₁ -dimethylformamide	228-200-5	6164-98-3	Carc. 2 Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H351 H312 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H312 H302 H410			
650-008-00-9	drazoxolon (ISO); 4-(2-chlorophenylhydrazone)-3-methyl-5-isoxazolone	227-197-8	5707-69-7	Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410			
650-009-00-4	chlordimeform hydrochloride; N'-(4-chloro-o-tolyl)-N,N-dimethylformamide monohydrochloride; N ² -(4-chloro-o-tolyl)-N ¹ ,N ¹ -dimethylformamide hydorchloride	243-269-1	19750-95-9	Carc. 2 Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H410			
650-010-00-X	benzyl violet 4B; α-[4-(4-dimethylamino-α-{4-[ethyl(3-sodiumsulphonatobenzyl)amino] phenyl}benzylidene)cyclohexa-2,5-dienylidene(ethyl ammonio)toluene-3-sulphonate	216-901-9	1694-09-3	Carc. 2	H351	GHS08 Wng	H351			
650-012-00-0	erionite	—	12510-42-8	Carc. 1A	H350	GHS08 Dgr	H350			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
650-013-00-6	asbestos	— — — — — — —	12001-28-4 132207-32-0 12172-73-5 77536-66-4 77536-68-6 77536-67-5 12001-29-5	Carc. 1A STOT RE 1	H350 H372 **	GHS08 Dgr	H350 H372 **			
650-014-00-1	diethyl 2,4-dihydroxycyclodisiloxane-2,4-diylbis(trimethylene)diphosphonate, tetrasodium salt, reaction products with disodium metasilicate	401-770-4	—	Skin Corr. 1B Acute Tox. 4 *	H314 H302	GHS05 GHS07 Dgr	H314 H302			
650-015-00-7	rosin; colophony	232-475-7 232-484-6 277-299-1	8050-09-7 8052-10-6 73138-82-6	Skin Sens. 1	H317	GHS07 Wng	H317			
650-016-00-2	Mineral wool, with the exception of those specified elsewhere in this Annex; [Man-made vitreous (silicate) fibres with random orientation with alkaline oxide and alkali earth oxide (Na ₂ O+K ₂ O+CaO+MgO +BaO) content greater than 18 % by weight]	—	—	Carc. 2 Skin Irrit. 2	H351 H315	GHS08 GHS07 Wng	H351 H315			AQR
650-017-00-8	Refractory Ceramic Fibres; Special Purpose Fibres, with the exception of those specified elsewhere in this Annex; [Man-made vitreous (silicate) fibres with random orientation with alkaline oxide and alkali earth oxide (Na ₂ O+K ₂ O+CaO+ MgO +BaO) content less or equal to 18 % by weight]	—	—	Carc. 1B Skin Irrit. 2	H350i H315	GHS08 GHS07 Dgr	H350i H315			A R

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
650-018-00-3	Reaction product of: acetophenone, formaldehyde, cyclohexylamine, methanol and acetic acid	406-230-1	—	Flam. Liq. 3 Carc. 2 Skin Corr. 1B Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H226 H351 H314 H332 H317 H400 H410	GHS02 GHS08 GHS05 GHS07 GHS09 Dgr	H226 H351 H314 H332 H317 H410			
650-031-00-4	bis(4-hydroxy-N-methylanilinium) sulphate	200-237-1	55-55-0	Acute Tox. 4 * STOT RE 2 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H373 ** H317 H400 H410	GHS08 GHS07 GHS09 Wng	H302 H373 ** H317 H410			
650-032-00-X	ciproconazole (ISO); (2RS,3RS;2RS,3SR)-2-(4-chlorophenyl)-3-cyclopropyl-1-(1H-1,2,4-triazol-1-yl)butan-2-ol	—	94361-06-5	Repr. 2 Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H361d *** H302 H400 H410	GHS08 GHS07 GHS09 Wng	H361d *** H302 H410			
650-033-00-5	(S)-α-cyano-3-phenoxybenzyl-(S)-2-(4-chlorophenyl)-3-methylbutyrate; esfenvalerate	—	66230-04-4	Acute Tox. 3 * Acute Tox. 3 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H317 H400 H410	GHS06 GHS09 Dgr	H331 H301 H317 H410			
650-041-00-9	triasulfuron (ISO) ; 1-[2-(2-chloroethoxy)phenylsulfonyl]-3-(4-methoxy-6-methyl-1,3,5-triazin-2-yl)urea	—	82097-50-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
650-042-00-4	reaction product of: polyethylene-polyamine-(C ₁₆ -C ₁₈)-alkylamides with monothio-(C ₂)-alkyl phosphonates	417-450-2	—	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H319 H315 H317 H412	GHS07 Wng	H319 H315 H317 H412			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
650-043-00-X	reaction product of: 3,5-bis- <i>tert</i> -butylsalicylic acid and aluminiumsulfate	420-310-3	—	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
650-044-00-5	mixed linear and branched C ₁₄₋₁₅ alcohols ethoxylated, reaction product with epichlorohydrin	420-480-9	158570-99-1	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
650-045-00-0	reaction product of: 1,2,3-propanetricarboxylic acid, 2-hydroxy, diethyl ester, 1-propanol and zirconium tetra-n-propanolate	417-110-3	—	Flam. Liq. 2 Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H225 H315 H318 H411	GHS02 GHS05 GHS09 Dgr	H225 H315 H318 H411			
650-046-00-6	di(tetramethylammonium)(29 <i>H</i> ,31 <i>H</i> -phthalocyanin- <i>N</i> 29, <i>N</i> 30, <i>N</i> 31, <i>N</i> 32)disulfonamide disulfonate, cuprate(2-)complex, derivatives	416-180-2	12222-04-7	Acute Tox. 4 * STOT RE 2 * Aquatic Chronic 2	H302 H373 ** H411	GHS08 GHS07 GHS09 Wng	H302 H373 ** H411			
650-047-00-1	dibenzylphenylsulfonium hexafluoroantimonate	417-760-8	134164-24-2	STOT RE 1 Acute Tox. 4 * Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H372 ** H302 H318 H317 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H372 ** H302 H318 H317 H411			
650-048-00-7	reaction product of: borax, hydrogen peroxide, acetic acid anhydride and acetic acid	420-070-1	—	Org. Perox. D ₊₊₊ Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A Aquatic Acute 1	H242 H332 H312 H302 H314 H400	GHS02 GHS05 GHS07 GHS09 Dgr	H242 H332 H312 H302 H314 H400			

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev		Označitev			Posebne mejne koncentracije, M-faktorji	Opombe
				Razred nevarnosti in oznaka(-e) kategorije	Oznaka(-e) stavka o nevarnosti	Piktogram, Oznaka(-e) opozorilne besede	Oznaka(-e) stavka o nevarnosti	Dod. oznaka(-e) stavka o nevarnosti		
650-049-00-2	2-alkoxyloxyethyl hydrogen maleate, where alkoyl represents (by weight) 70 to 85 % unsaturated octadecoyl, 0.5 to 10 % saturated octadecoyl, and 2 to 18 % saturated hexadecoyl	417-960-5	—	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H410			
650-050-00-8	reaction mass of: 1-methyl-3-hydroxypropyl 3,5-[1,1-dimethylethyl]-4-hydroxydihydrocinnamate and/or 3-hydroxybutyl 3,5-[1,1-dimethylethyl]-4-hydroxydihydrocinnamate; 1,3-butanediol bis[3-(3'-(1,1-dimethylethyl)-4'-hydroxy-phenyl)propionate] isomers; 1,3-butanediol bis[3-(3',5'-(1,1-dimethylethyl)-4'-hydroxyphenyl)propionate] isomers	423-600-8	—	Aquatic Chronic 2	H411	GHS09	H411			
650-055-00-5	silver sodium zirconium hydrogenphosphate	422-570-3	155925-27-2	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Tabela 3.2

Seznam usklajenih razvrstitev in označitev nevarnih snovi iz Priloge I k Direktivi 67/548/EGS

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
001-001-00-9	hydrogen	215-605-7	1333-74-0	F+; 12	F+ R: 12 S: (2-)9-16-33		
001-002-00-4	aluminium lithium hydride	240-877-9	16853-85-3	F; R15	F R: 15 S: (2-)7/8-24/25-43		
001-003-00-X	sodium hydride	231-587-3	7646-69-7	F; R15	F R: 15 S: (2-)7/8-24/25-43		
001-004-00-5	calcium hydride	232-189-2	7789-78-8	F; R15	F R: 15 S: (2-)7/8-24/25-43		
003-001-00-4	lithium	231-102-5	7439-93-2	F; R15 R14 C; R34	F; C R: 14/15-34 S: (1/2-)8-43-45		
003-002-00-X	n-hexyllithium	404-950-0	21369-64-2	F; R15-17 R14 C; R35	F; C R: 14/15-17-35 S: (1/2-)6-16-26-30-36/37/39-43-45		
004-001-00-7	beryllium	231-150-7	7440-41-7	Carc. Cat. 2; R49 T+; R26 T; R25-48/23 Xi; R36/37/38 R43	T+ R: 49-25-26-36/37/38-43-48/23 S: 53-45		E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
004-002-00-2	beryllium compounds with the exception of aluminium beryllium silicates, and with those specified elsewhere in this Annex	—	—	Carc. Cat. 2; R49 T+; R26 T; R25-48/23 Xi; R36/37/38 R43 N; R51-53	T+; N R: 49-25-26-36/37/ 38-43-48/23-51/53 S: 53-45-61		AE
004-003-00-8	beryllium oxide	215-133-1	1304-56-9	Carc. Cat. 2; R49 T+; R26 T; R25-48/23 Xi; R36/37/38 R43	T+ R: 49-25-26-36/37/ 38-43-48/23 S: 53-45		E
005-001-00-X	boron trifluoride	231-569-5	7637-07-2	R14 T+; R26 C; R35	T+; C R: 14-26-35 S: (1/2-)9-26-28-36/ 37/39-45		
005-002-00-5	boron trichloride	233-658-4	10294-34-5	R14 T+; R26/28 C; R34	T+ R: 14-26/28-34 S: (1/2-)9-26-28-36/ 37/39-45		
005-003-00-0	boron tribromide	233-657-9	10294-33-4	R14 T+; R26/28 C; R35	T+; C R: 14-26/28-35 S: (1/2-)9-26-28-36/ 37/39-45		
005-004-00-6	trialkylboranes	—	—	F; R17 C; R34	F; C R: 17-34 S: (1/2-)7-23-26-36/ 37/39-43-45		A
005-005-00-1	trimethyl borate	204-468-9	121-43-7	R10 Xn; R21	Xn R: 10-21 S: (2-)23-25		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
005-006-00-7	dibutyltin hydrogen borate	401-040-5	75113-37-0	T; R48/25 Xn; R21/22 Xi; R41 R43 N; R50-53	T; N R: 21/22-41-43-48/ 25-50/53 S: (1/2-)22-26-36/37- 45-60-61		
005-009-00-3	tetrabutylammonium butyltriphenylborate	418-080-4	120307-06-4	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-56-61		
005-010-00-9	N,N-dimethylanilinium tetrakis(pentafluorophenyl)borate	422-050-6	118612-00-3	Carc. Cat. 3; R40 Xn; R22 Xi; R38-41	Xn R: 22-38-40-41 S: (2-)22-26-36/37/39		
005-012-00-X	diethyl{4-[1,5,5-tris(4-diethylaminophenyl)penta-2,4-dienylidene]cyclohexa-2,5-dienylidene}ammonium butyltriphenylborate	418-070-1	141714-54-7	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
006-001-00-2	carbon monoxide	211-128-3	630-08-0	F+; R12 Repr. Cat. 1; R61 T; R23-48/23	F+; T R: 61-12-23-48/23 S: 53-45		E
006-002-00-8	phosgene; carbonyl chloride	200-870-3	75-44-5	T+; R26 C; R34	T+ R: 26-34 S: (1/2-)9-26-36/37/ 39-45		
006-003-00-3	carbon disulphide	200-843-6	75-15-0	F; R11 Repr. Cat. 3; R62-63 T; R48/23 Xi; R36/38	F; T R: 11-36/38-48/23- 62-63 S: (1/2-)16-33-36/37- 45	Repr. Cat. 3; R62-63: C ≥ 1 % T; R48/23: C ≥ 1 % Xn; R48/20: 0,2 % ≤ C < 1 %	
006-004-00-9	calcium carbide	200-848-3	75-20-7	F; R15	F R: 15 S: (2-)8-43		
006-005-00-4	thiram (ISO); tetramethylthiuram disulphide	205-286-2	137-26-8	Xn; R20/22- 48/22 Xi; R36/38 R43 N; R50-53	Xn; N R: 20/22-36/38-43- 48/22-50/53 S: (2-)26-36/37-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
006-006-00-X	hydrogen cyanide; hydrocyanic acid	200-821-6	74-90-8	F+; R12 T+; R26 N; R50-53	F+; T+; N R: 12-26-50/53 S: (1/2-)7/9-16-36/ 37-38-45-60-61		
006-006-01-7	hydrogen cyanide ... %; hydrocyanic acid ... %	200-821-6	74-90-8	T+; R26/27/ 28 N; R50-53	T+; N R: 26/27/28-50/53 S: (1/2-)7/9-36/37- 38-45-60-61		B
006-007-00-5	salts of hydrogen cyanide with the exception of complex cyanides such as ferrocyanides, ferricyanides and mercuric oxycyanide	—	—	T+; R26/27/ 28 R32 N; R50-53	T+; N R: 26/27/28-32-50/ 53 S: (1/2-)7-28-29-45- 60-61		A
006-008-00-0	antu (ISO); 1-(1-naphthyl)-2-thiourea	201-706-3	86-88-4	T+; R28 Carc. Cat. 3; R40	T+ R: 28-40 S: (1/2-)25-36/37-45		
006-009-00-6	1-isopropyl-3-methylpyrazol-5-yl dimethylcarbamate; isolan	204-318-2	119-38-0	T+; R27/28	T+ R: 27/28 S: (1/2-)28-36/37/39- 45		
006-010-00-1	5,5-dimethyl-3-oxocyclohex-1-enyl dimethylcarbamate 5,5- dimethyldihydroresorcinol dimethylcarbamate; dimetan	204-525-8	122-15-6	T; R25	T R: 25 S: (1/2-)36/37-45		
006-011-00-7	carbaryl (ISO); 1-naphthyl methylcarbamate	200-555-0	63-25-2	Carc. Cat. 3; R40 Xn; R22 N; R50	Xn; N R: 22-40-50 S: (2-)22-24-36/37- 46-61		
006-012-00-2	ziram (ISO); zinc bis dimethyldithiocarbamate	205-288-3	137-30-4	T+; R26 Xn; R22-48/ 22 Xi; R37-41 R43 N; R50-53	T+; N R: 22-26-37-41-43- 48/22-50/53 S: (1/2-)22-26-28-36/ 37/39-45-60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
006-013-00-8	metam-sodium (ISO); sodium methyldithiocarbamate	205-293-0	137-42-8	Xn; R22 R31 C; R34 R43 N; R50-53	C; N R: 22-31-34-43-50/ 53 S: (1/2-)26-36/37/39- 45-60-61		
006-014-00-3	nabam (ISO); disodium ethylenebis(N,N'-dithiocarbamate)	205-547-0	142-59-6	Xn; R22 Xi; R37 R43 N; R50-53	Xn; N R: 22-37-43-50/53 S: (2-)8-24/25-46-60- 61		
006-015-00-9	diuron (ISO); 3-(3,4-dichlorophenyl)-1,1-dimethylurea	206-354-4	330-54-1	Carc. Cat. 3; R40 Xn; R22-48/ 22 N; R50-53	Xn; N R: 22-40-48/22-50/ 53 S: (2-)13-22-23-37- 46-60-61		
006-016-00-4	propoxur (ISO); 2-isopropoxyphenyl N-methylcarbamate; 2-isopropoxyphenyl methylcarbamate	204-043-8	114-26-1	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)37-45-60-61		
006-017-00-X	aldicarb (ISO); 2-methyl-2-(methylthio)propanal-O-(N-methylcarbamoyl) oxime	204-123-2	116-06-3	T+; R26/28 T; R24 N; R50-53	T+; N R: 24-26/28-50/53 S: (1/2-)22-36/37-45- 60-61		
006-018-00-5	aminocarb (ISO); 4-dimethylamino-3-tolyl methylcarbamate	217-990-7	2032-59-9	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)28-36/37-45- 60-61		
006-019-00-0	di-allate (ISO); S-(2,3-dichloroallyl)-N,N-diisopropylthiocarbamate	218-961-1	2303-16-4	Carc. Cat. 3; R40 Xn; R22 N; R50-53	Xn; N R: 22-40-50/53 S: (2-)25-36/37-60-61		
006-020-00-6	barban (ISO); 4-chlorbut-2-ynyl N-(3-chlorophenyl)carbamate	202-930-4	101-27-9	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-36/37-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
006-021-00-1	linuron (ISO); 3-(3,4-dichlorophenyl)-1-methoxy-1-methylurea	206-356-5	330-55-2	Repr. Cat. 2; R61 Repr. Cat. 3; R62 Carc. Cat. 3; R40 Xn; R22-48/ 22 N; R50-53	T; N R: 61-22-40-48/22- 62-50/53 S: 53-45-60-61		E
006-022-00-7	decarbofuran (ISO); 2,3-dihydro-2-methylbenzofuran-7-yl methylcarbamate	—	1563-67-3	T; R23/24/25	T R: 23/24/25 S: (1/2-)13-36/37-45		
006-023-00-2	mercaptodimethur (ISO); methiocarb (ISO); 3,5-dimethyl-4-methylthiophenyl N-methylcarbamate	217-991-2	2032-65-7	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)22-37-45-60- 61		
006-024-00-8	proxan-sodium (ISO); sodium O-isopropylthiocarbonate	205-443-5	140-93-2	Xn; R22 Xi; R38 N; R51-53	Xn; N R: 22-38-51/53 S: (2-)13-61		
006-025-00-3	allethrin; (RS)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1RS,3RS;1RS,3SR)-2,2-dimethyl-3-(2-methylprop-1-enyl) cyclopropanecarboxylate; bioallethrin; (RS)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1R,3R)-2,2- dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate; [1] S-bioallethrin; (S)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1R,3R)-2,2-dime- thyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate; [2] esbiothrin; (RS)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1R,3R)-2,2- dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate [3]	209-542-4 [1] 249-013-5 [2] - [3]	584-79-2 [1] 28434-00-6 [2] 84030-86-4 [3]	Xn; R20/22 N; R50-53	Xn; N R: 20/22-50/53 S: (2-)36-60-61		C
006-026-00-9	carbofuran (ISO); 2,3-dihydro-2,2-dimethylbenzofuran-7-yl N-methylcarbamate	216-353-0	1563-66-2	T+; R26/28 N; R50-53	T+; N R: 26/28-50/53 S: (1/2-)36/37-45-60- 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
006-028-00-X	dinobuton (ISO); 2-(1-methylpropyl)-4,6-dinitrophenyl isopropyl carbonate	213-546-1	973-21-7	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)37-45-60-61		
006-029-00-5	dioxacarb (ISO); 2-(1,3-dioxolan-2-yl)phenyl N-methylcarbamate	230-253-4	6988-21-2	T; R25 N; R51-53	T; N R: 25-51/53 S: (1/2-)37-45-61		
006-030-00-0	EPTC (ISO); S-ethyl dipropylthiocarbamate	212-073-8	759-94-4	Xn; R22	Xn R: 22 S: (2-)23		
006-031-00-6	formetanate (ISO); 3-[(EZ)-dimethylaminomethyleneamino]phenyl methylcarbamate	244-879-0	22259-30-9	T+; R26/28 R43 N; R50-53	T+; N R: 26/28-43-50/53 S: (1/2-)24-28-37/39-45-60-61		
006-032-00-1	monolinuron (ISO); 3-(4-chlorophenyl)-1-methoxy-1-methylurea	217-129-5	1746-81-2	Xn; R22-48/ 22 N; R50-53	Xn; N R: 22-48/22-50/53 S: (2-)22-60-61		
006-033-00-7	metoxuron (ISO); 3-(3-chloro-4-methoxyphenyl)-1,1-dimethylurea	243-433-2	19937-59-8	N; R50-53	N R: 50/53 S: 60-61		
006-034-00-2	pebulate (ISO); N-butyl-N-ethyl-S-propylthiocarbamate	214-215-4	1114-71-2	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)23-61		
006-035-00-8	pirimicarb (ISO); 5,6-dimethyl-2-dimethylamino-pyrimidin-4-yl N,N-dimethylcarbamate	245-430-1	23103-98-2	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)22-37-45-60-61		
006-036-00-3	benzthiazuron (ISO); 1-benzothiazol-2-yl-3-methylurea	217-685-9	1929-88-0	Xn; R22	Xn R: 22 S: (2-)24/25		
006-037-00-9	promecarb (ISO); 3-isopropyl-5-methylphenyl N-methylcarbamate	220-113-0	2631-37-0	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)24-37-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
006-038-00-4	sulfallate (ISO); 2-chloroallyl N,N-dimethyldithiocarbamate	202-388-9	95-06-7	Carc. Cat. 2; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61		E
006-039-00-X	tri-allate (ISO); S-2,3,3-trichloroallyl diisopropylthiocarbamate	218-962-7	2303-17-5	Xn; R22-48/ 22 R43 N; R50-53	Xn; N R: 22-43-48/22-50/ 53 S: (2-)24-37-60-61		
006-040-00-5	3-methylpyrazol-5-yl-dimethylcarbamate; monometilan	—	2532-43-6	T; R23/24/25	T R: 23/24/25 S: (1/2-)13-45		
006-041-00-0	dimethylcarbamoyl chloride	201-208-6	79-44-7	Carc. Cat. 2; R45 T; R23 Xn; R22 Xi; R36/37/ 38	T R: 45-22-23-36/37/ 38 S: 53-45	Carc. Cat. 2; R45: C ≥ 0,001 %	E
006-042-00-6	monuron (ISO); 3-(4-chlorophenyl)-1,1-dimethylurea	205-766-1	150-68-5	Carc. Cat. 3; R40 Xn; R22 N; R50-53	Xn; N R: 22-40-50/53 S: (2-)36/37-60-61		
006-043-00-1	3-(4-chlorophenyl)-1,1-dimethyluronium trichloroacetate; monuron-TCA	—	140-41-0	Xi; R36/38 Carc. Cat. 3; R40 N; R50-53	Xn; N R: 36/38-40-50/53 S: (2-)36/37-60-61		
006-044-00-7	isoproturon (ISO); 3-(4-isopropylphenyl)-1,1-dimethylurea	251-835-4	34123-59-6	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
006-045-00-2	methomyl (ISO); 1-(methylthio)ethylideneamino N-methylcarbamate	240-815-0	16752-77-5	T+;R28 N; R50-53	T+; N R: 28-50/53 S: (1/2-)22-36/37-45- 60-61		
006-046-00-8	bendiocarb (ISO); 2,2-dimethyl-1,3-benzodioxol-4-yl N-methylcarbamate	245-216-8	22781-23-3	T; R23/25 Xn; R21 N; R50-53	T; N R: 21-23/25-50/53 S: (1/2-)22-36/37-45- 60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
006-047-00-3	bufencarb (ISO); reaction mass of 3-(1-methylbutyl)phenyl N-methylcarbamate and 3-(1-ethylpropyl)phenyl N-methylcarbamate	—	8065-36-9	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)28-36/37-45-60-61		
006-048-00-9	ethiofencarb (ISO); 2-(ethylthiomethyl)phenyl N-methylcarbamate	249-981-9	29973-13-5	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
006-049-00-4	dixanthogen; O,O-diethyl dithiobis(thioformate)	207-944-4	502-55-6	Xn; R22	Xn R: 22 S: (2-)24		
006-050-00-X	1,1-dimethyl-3-phenyluronium trichloroacetate; fenuron-TCA	—	4482-55-7	Xi; R38 N; R50-53	Xi; N R: 38-50/53 S: (2-)60-61		
006-051-00-5	ferbam (ISO); iron tris(dimethyldithiocarbamate)	238-484-2	14484-64-1	Xi; R36/37/ 38 N; R50-53	Xi; N R: 36/37/38-50/53 S: (2-)60-61		
006-052-00-0	formetanate hydrochloride; 3-(N,N-dimethylaminomethyleneamino)phenyl N-methylcarbamate	245-656-0	23422-53-9	T+; R26/28 R43 N; R50-53	T+; N R: 26/28-43-50/53 S: (1/2-)24-28-37/39-45-60-61		
006-053-00-6	isoproc carb (ISO); 2-isopropylphenyl N-methylcarbamate	220-114-6	2631-40-5	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
006-054-00-1	mexacarb (ISO); 3,5-dimethyl-4-dimethylaminophenyl N-methylcarbamate	206-249-3	315-18-4	T+; R28 Xn; R21 N; R50-53	T+; N R: 21-28-50/53 S: (1/2-)36/37-45-60-61		
006-055-00-7	xylylcarb (ISO); 3,4-dimethylphenyl N-methylcarbamate; 3,4-xylyl methylcarbamate; MPMC	219-364-9	2425-10-7	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
006-056-00-2	metolcarb (ISO); m-tolyl methylcarbamate; MTMC	214-446-0	1129-41-5	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
006-057-00-8	nitrapyrin (ISO); 2-chloro-6-trichloromethylpyridine	217-682-2	1929-82-4	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)24-61		
006-058-00-3	noruron (ISO); 1,1-dimethyl-3-(perhydro-4,7-methanoinden-5-yl)urea	—	2163-79-3	Xn; R22	Xn R: 22 S: (2-)		
006-059-00-9	oxamyl (ISO); N',N'-dimethylcarbamoyl(methylthio)methylenamine N-methylcarbamate;	245-445-3	23135-22-0	T+; R26/28 Xn; R21 N; R51-53	T+; N R: 21-26/28-51/53 S: (1/2-)36/37-45-61		
006-060-00-4	oxycarboxin (ISO); 2,3-dihydro-6-methyl-5-(N-phenylcarbamoyl)-1,4-oxothiine 4,4-dioxide	226-066-2	5259-88-1	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
006-061-00-X	S-ethyl N-(dimethylaminopropyl)thiocarbamatehydrochloride; prothiocarb hydrochloride	243-193-9	19622-19-6	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
006-062-00-5	methyl 3,4-dichlorophenylcarbanilate; SWEP.	—	1918-18-9	Xn; R22	Xn R: 22 S: (2-)		
006-063-00-0	thiobencarb (ISO); S-4-chlorobenzyl diethylthiocarbamate;	248-924-5	28249-77-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
006-064-00-6	thiofanox (ISO); 3,3-dimethyl-1-(methylthio)butanone-O-(N-methylcarbamoyl)oxime;	254-346-4	39196-18-4	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)27-36/37-45-60-61		
006-065-00-1	3-chloro-6-cyano-bicyclo(2,2,1)heptan-2-one-O-(N-methylcarbamoyl)oxime; triamid	—	15271-41-7	T+; R28 T; R24 N; R51-53	T+; N R: 24-28-51/53 S: (1/2-)28-36/37-45-61		
006-066-00-7	vernolate (ISO); S-propyl dipropylthiocarbamate;	217-681-7	1929-77-7	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
006-067-00-2	XMC; 3,5-xylyl methylcarbamate	—	2655-14-3	Xn; R22	Xn R: 22 S: (2-)		
006-068-00-8	diazomethane	206-382-7	334-88-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		
006-069-00-3	thiophanate-methyl (ISO); 1,2-di-(3-methoxycarbonyl-2-thioureido)benzene	245-740-7	23564-05-8	Muta. Cat. 3; R68 Xn; R20 R43 N; R50-53	Xn; N R: 20-43-50/53-68 S: (2-)36/37-46-60-61		
006-070-00-9	furmecyclox (ISO); N-cyclohexyl-N-methoxy-2,5-dimethyl-3-furamide;	262-302-0	60568-05-0	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-60-61		
006-071-00-4	cyclooct-4-en-1-yl methyl carbonate	401-620-8	87731-18-8	R43	Xi R: 43 S: (2-)24-37		
006-072-00-X	prosulfocarb(ISO); S-benzyl N,N-dipropylthiocarbamate;	401-730-6	52888-80-9	Xn; R22 R43 N; R51-53	Xn; N R: 22-43-51/53 S: (2-)24-37-61		
006-073-00-5	3-(dimethylamino)propylurea	401-950-2	31506-43-1	Xi; R41	Xi R: 41 S: (2-)26-39		
006-074-00-0	2-(3-(prop-1-en-2-yl)phenyl)prop-2-yl isocyanate	402-440-2	2094-99-7	T+; R26 C; R34 Xn; R48/20 R42/43 N; R50-53	T+; N R: 26-34-42/43-48/ 20-50/53 S: (1/2-)7-15-28-36/ 37/39-38-45-60-61		
006-076-00-1	mancozeb (ISO)	—	8018-01-7	Xi; R37 R43	Xi R: 37-43 S: (2-)8-24/25-46		
006-077-00-7	maneb (ISO)	235-654-8	12427-38-2	Xi; R37 R43	Xi R: 37-43 S: (2-)8-24/25-46		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
006-078-00-2	zineb (ISO); zinc ethylenebis(dithiocarbamate) (polymeric)	235-180-1	12122-67-7	Xi; R37 R43	Xi R: 37-43 S: (2-)8-24/25-46		
006-079-00-8	disulfiram; tetraethylthiuramdisulfide	202-607-8	97-77-8	Xn; R22-48/ 22 R43 N; R50-53	Xn; N R: 22-43-48/22-50/ 53 S: (2-)24-37-60-61		
006-080-00-3	tetramethylthiuram monosulphide	202-605-7	97-74-5	Xn; R22 R43 N; R51-53	Xn; N R: 22-43-51/53 S: (2-)24-26-37-61		
006-081-00-9	zinc bis(dibutylthiocarbamate)	205-232-8	136-23-2	Xi; R36/37/ 38 R43 N; R50-53	Xi; N R: 36/37/38-43-50/ 53 S: (2-)24-37-60-61		
006-082-00-4	zinc bis(diethylthiocarbamate)	238-270-9	14324-55-1	Xn; R22 Xi; R36/37/ 38 R43 N; R50-53	Xn; N R: 22-36/37/38-43- 50/53 S: (2-)24-37-60-61		
006-083-00-X	butocarboxim (ISO); 3-(methylthio)-2-butanone O-[(methylamino)carbonyl]oxime	252-139-3	34681-10-2	R10 T; R23/24/25 Xi; R36 N; R50-53	T; N R: 10-23/24/25-36- 50/53 S: (1/2-)36/37-45-60- 61		
006-084-00-5	carbosulfan (ISO); 2,3-dihydro-2,2-dimethyl-7-benzofuryl [(dibutylamino)thio] methylcarbamate;	259-565-9	55285-14-8	T; R23/25 R43 N; R50-53	T; N R: 23/25-43-50/53 S: (1/2-)24-37-38-45- 60-61		
006-085-00-0	fenobucarb (ISO); 2-butylphenyl methylcarbamate;	223-188-8	3766-81-2	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
006-086-00-6	ethyl [2-(4-phenoxyphenoxy)ethyl]carbamate; fenoxycarb	276-696-7	72490-01-8	N; R50-53	N R: 50/53 S: 60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
006-087-00-1	2,3-dihydro-2,2-dimethyl-7-benzofuryl 2,4-dimethyl-6-oxa-5-oxo-3-thia-2,4-diazadecanoate; furathiocarb	265-974-3	65907-30-4	T+; R26 T; R25 Xn; R48/22 Xi; R36/38 R43 N; R50-53	T+; N R: 25-26-36/38-43-48/22-50/53 S: (1/2-)28-36/37-38-45-60-61		
006-088-00-7	benfuracarb; ethyl N-[2,3-dihydro-2,2-dimethylbenzofuran-7-yloxy-carbonyl(methyl)aminothio]-N-isopropyl- β-alaninate	—	82560-54-1	T; R23/25 N; R50-53	T; N R: 23/25-50/53 S: (1/2-)36/37-45-60-61		
006-089-00-2	chlorine dioxide	233-162-8	10049-04-4	O; R8 R6 T+; R26 C; R34 N; R50	O; T+; N R: 6-8-26-34-50 S: (1/2-)23-26-28-36/37/39-38-45-61	N; R50: C ≥ 0,02 %	5
006-089-01-X	chlorine dioxide . . . %	233-162-8	10049-04-4	T; R25 C; R34 N; R50	T; N R: 25-34-50 S: (1/2-)23-26-28-36/37/39-45-61	C; R34: C ≥ 10 % Xi; R36/37/38: 3 % ≤ C < 10 % Xi; R36: 0,3 % ≤ C < 3 % N; R50: C ≥ 3 %	B
006-090-00-8	2-(3-iodoprop-2-yn-1-yloxy)ethyl phenylcarbamate	408-010-0	88558-41-2	Xn; R20 Xi; R41 R52-53	Xn R: 20-41-52/53 S: (2-)22-26-39-61		
007-001-00-5	ammonia, anhydrous	231-635-3	7664-41-7	R10 \$ T; R23 C; R34 N; R50	T; N R: 10-23-34-50 S: (1/2-)9-16-26-36/37/39-45-61		
007-001-01-2	ammonia %	215-647-6	1336-21-6	C; R34 N; R50	C; N R: 34-50 S: (1/2-)26-36/37/39-45-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	B
007-002-00-0	nitrogen dioxide; [1] dinitrogen tetraoxide [2]	233-272-6 [1] 234-126-4 [2]	10102-44-0 [1] 10544-72-6 [2]	T+; R26 C; R34	T+ R: 26-34 S: (1/2-)9-26-28-36/37/39-45	T+; R26: C ≥ 10 % T; R23: 1 % ≤ C < 10 % Xn; R20: 0,1 % ≤ C < 1 %	5

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
007-003-00-6	chlormequat chloride (ISO); 2-chloroethyltrimethylammonium chloride	213-666-4	999-81-5	Xn; R21/22	Xn R: 21/22 S: (2-)36/37		
007-004-00-1	nitric acid ... %	231-714-2	7697-37-2	O; R8 C; R35	O; C R: 8-35 S: (1/2-)23-26-36-45	C; R35: C ≥ 20 % C; R34: 5 % ≤ C < 20 % Footnote: O; R8: C ≥ 70 %	B
007-006-00-2	ethyl nitrite	203-722-6	109-95-5	E; R2 Xn; R20/21/ 22	E; Xn R: 2-20/21/22 S: (2-)		
007-007-00-8	ethyl nitrate	210-903-3	625-58-1	E; R2 \$	E R: 2 S: (2-)23-24/25		
007-008-00-3	hydrazine	206-114-9	302-01-2	R10 Carc. Cat. 2; R45 T; R23/24/25 C; R34 R43 N; R50-53	T; N R: 45-10-23/24/25- 34-43-50/53 S: 53-45-60-61	C; R34: C ≥ 10 % Xi; R36/38: 3 % ≤ C < 10 %	E
007-009-00-9	dicyclohexylammonium nitrite	221-515-9	3129-91-7	Xn; R20/22	Xn R: 20/22 S: (2-)15-41	Xn; R20/22: C ≥ 10 %	
007-010-00-4	sodium nitrite	231-555-9	7632-00-0	O; R8 T; R25 N; R50	O; T; N R: 8-25-50 S: (1/2-)45-61	T; R25: C ≥ 5 % Xn; R22: 1 % ≤ C < 5 %	
007-011-00-X	potassium nitrite	231-832-4	7758-09-0	O; R8 T; R25 N; R50	O; T; N R: 8-25-50 S: (1/2-)45-61	T; R25: C ≥ 5 % Xn; R22: 1 % ≤ C < 5 %	
007-012-00-5	N,N-dimethylhydrazine	200-316-0	57-14-7	F; R11 Carc. Cat. 2; R45 T; R23/25 C; R34 N; R51-53	F; T; N R: 45-11-23/25-34- 51/53 S: 53-45-61		E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
007-013-00-0	1,2-dimethylhydrazine	—	540-73-8	Carc. Cat. 2; R45 T; R23/24/25 N; R51-53	T; N R: 45-23/24/25-51/ 53 S: 53-45-61	Carc. Cat. 2; R45: C ≥ 0,01 %	E
007-014-00-6	salts of hydrazine	—	—	Carc. Cat. 2; R45 T; R23/24/25 R43 N; R50-53	T; N R: 45-23/24/25-43- 50/53 S: 53-45-60-61		AE
007-015-00-1	O-ethylhydroxylamine	402-030-3	624-86-2	F; R11 T; R23/24/ 25-48/23 Xi; R36 R43 N; R50	F; T; N R: 11-23/24/25-36- 43-48/23-50 S: (1/2-)16-26-36/37/ 39-45-60-61		
007-016-00-7	butyl nitrite	208-862-1	544-16-1	F; R11 T; R23/25	F; T R: 11-23/25 S: (1/2-)16-24-45		
007-017-00-2	isobutyl nitrite	208-819-7	542-56-3	F; R11 Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xn; R20/22	F; T R: 11-20/22-45-68 S: 53-45		E
007-018-00-8	sec-butyl nitrite	213-104-8	924-43-6	F; R11 Xn; R20/22	F; Xn R: 11-20/22 S: (2-)16-24-46		
007-019-00-3	tert-butyl nitrite	208-757-0	540-80-7	F; R11 Xn; R20/22	F; Xn R: 11-20/22 S: (2-)16-24-46		
007-020-00-9	pentyl nitrite; [1] 'amyl nitrite', mixed isomers [2]	207-332-7 [1] 203-770-8 [2]	463-04-7 [1] 110-46-3 [2]	F; R11 Xn; R20/22	F; Xn R: 11-20/22 S: (2-)16-24-46		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
007-021-00-4	hydrazobenzene; 1,2-diphenylhydrazine	204-563-5	122-66-7	Carc. Cat. 2; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61		E
007-022-00-X	hydrazine bis(3-carboxy-4-hydroxybenzensulfonate)	405-030-1	—	Carc. Cat. 2; R45 Xn; R22 C; R34 R43 R52-53	T R: 45-22-34-43-52/ 53 S: 53-45-61		E
007-023-00-5	sodium 3,5-bis(3-(2,4-di-tert-pentylphenoxy)propylcarbamoyl)benzenesulfonate	405-510-0	—	Xi; R38 R43	Xi R: 38-43 S: (2-)24-37		
007-024-00-0	2-(decylthio)ethylammonium chloride	405-640-8	36362-09-1	Xn; R48/22 Xi; R38-41 N; R50-53	Xn; N R: 38-41-48/22-50/ 53 S: (2-)26-36/37/39- 60-61		
007-025-00-6	(4-hydrazinophenyl)-N-methylmethanesulfonamide hydrochloride	406-090-1	81880-96-8	Muta. Cat. 3; R68 T; R25-48/25 R43 N; R50-53	T; N R: 25-43-48/25-68- 50/53 S: (1/2-)22-36/37/39- 45-60-61		
007-026-00-1	oxo-((2,2,6,6-tetramethylpiperidin-4-yl)amino)carbonylaceto- hydrazide	413-230-5	122035-71-6	Xi; R41 R43	Xi R: 41-43 S: (2-)8-22-24-26-30- 37/39		
007-027-00-7	1,6-bis(3,3-bis((1-methylpentylidenimino)propyl)ureido) hexane	420-190-2	771478-66-1	C; R34 Xn; R21/22- 48/21 R43 N; R50-53	C; N R: 21/22-34-43-48/ 21-50/53 S: (1/2-)7-26-36/37/ 39-45-60-61		
008-001-00-8	oxygen	231-956-9	7782-44-7	O; R8	O R: 8 S: (2-)17		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
008-003-00-9	hydrogen peroxide solution ... %	231-765-0	7722-84-1	R5 O; R8 C; R35 Xn; R20/22	O; C R: 5-8-20/22-35 S: (1/2-)17-26-28-36/ 37/39-45	Xn; R20: $C \geq 50 \%$ Xn; R22: $C \geq 8 \%$ C; R35: $C \geq 70 \%$ C; R34: $50 \% \leq C < 70 \%$ Xi; R37/38: $35 \% \leq C < 50 \%$ Xi; R41: $8 \% \leq C < 50 \%$ Xi; R36: $5 \% \leq C < 8 \%$ Footnote: O; R8: $C \geq 50 \%$ R5: $C \geq 70 \%$	B
009-001-00-0	fluorine	231-954-8	7782-41-4	R7 \$ T+; R26 C; R35	T+; C R: 7-26-35 S: (1/2-)9-26-36/37/ 39-45		
009-002-00-6	hydrogen fluoride	231-634-8	7664-39-3	T+; R26/27/ 28 C; R35	T+; C R: 26/27/28-35 S: (1/2-)7/9-26-36/37/ 39-45		
009-003-00-1	hydrofluoric acid ... %	231-634-8	7664-39-3	T+; R26/27/ 28 C; R35	T+; C R: 26/27/28-35 S: (1/2-)7/9-26-36/ 37-45	C; R35: $C \geq 7 \%$ C; R34: $1 \% \leq C < 7 \%$ Xi; R36: $0,1 \% \leq C < 1 \%$	B
009-004-00-7	sodium fluoride	231-667-8	7681-49-4	T; R25 Xi; R36/38 R32	T R: 25-32-36/38 S: (1/2-)22-36-45		
009-005-00-2	potassium fluoride	232-151-5	7789-23-3	T; R23/24/25	T R: 23/24/25 S: (1/2-)26-45		
009-006-00-8	ammonium fluoride	235-185-9	12125-01-8	T; R23/24/25	T R: 23/24/25 S: (1/2-)26-45		
009-007-00-3	sodium bifluoride; sodium hydrogen difluoride	215-608-3	1333-83-1	T; R25 C; R34	T; C R: 25-34 S: (1/2-)22-26-37-45	T; R25: $C \geq 10 \%$ Xn; R22: $1 \% \leq C < 10 \%$ C; R34: $C \geq 1 \%$ Xi; R36/38: $0,1 \% \leq C < 1 \%$	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
009-008-00-9	potassium bifluoride; potassium hydrogen difluoride	232-156-2	7789-29-9	T; R25 C; R34	T; C R: 25-34 S: (1/2-)22-26-37-45	T; R25: C $\geq$ 10 % Xn; R22: 1 % $\leq$ C < 10 % C; R34: C $\geq$ 1 % Xi; R36/38: 0,1 % $\leq$ C < 1 %	
009-009-00-4	ammonium bifluoride; ammonium hydrogen difluoride	215-676-4	1341-49-7	T; R25 C; R34	T; C R: 25-34 S: (1/2-)22-26-37-45	T; R25: C $\geq$ 10 % Xn; R22: 1 % $\leq$ C < 10 % C; R34: C $\geq$ 1 % Xi; R36/38: 0,1 % $\leq$ C < 1 %	
009-010-00-X	fluoroboric acid ... %	240-898-3	16872-11-0	C; R34	C R: 34 S: (1/2-)26-27-45	C; R34: C $\geq$ 25 % Xi; R36/38: 10 % $\leq$ C < 25 %	B
009-011-00-5	fluorosilicic acid ... %	241-034-8	16961-83-4	C; R34	C R: 34 S: (1/2-)26-27-45		B
009-012-00-0	alkali fluorosilicates(Na); [1] alkali fluorosilicates(K); [2] alkali fluorosilicates(NH4) [3]	240-934-8 [1] 240-896-2 [2] 240-968-3 [3]	16893-85-9 [1] 16871-90-2 [2] 16919-19-0 [3]	T; R23/24/25	T R: 23/24/25 S: (1/2-)26-45	T; R23/24/25: C $\geq$ 10 % Xn; R20/21/22: 1 % $\leq$ C < 10 %	A
009-013-00-6	fluorosilicates, with the exception of those specified elsewhere in this annex	—	—	Xn; R22	Xn R: 22 S: (2-)13-24/25	Xn; R22: C $\geq$ 10 %	A
009-014-00-1	lead hexafluorosilicate	247-278-1	25808-74-6	Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R20/22 R33 N; R50-53	T; N R: 61-62-20/22-33- 50/53 S: 53-45-60-61		E 1
009-015-00-7	sulphuryl difluoride	220-281-5	2699-79-8	T; R23 Xn; R48/20 N; R50	T; N R: 23-48/20-50 S: (1/2-)45-63-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
009-016-00-2	trisodium hexafluoroaluminate; cryolite	237-410-6 239-148-8	13775-53-6 15096-52-3	T; R48/23/25 Xn; R20/22 N; R51-53	T; N R: 20/22-48/23/25-51/53 S: (1/2-)22-37-45-61		C
009-017-00-8	potassium mu-fluoro-bis(triethylaluminium)	400-040-2	12091-08-6	F; R11-14/15 C; R35 Xn; R20	F; C R: 11-14/15-20-35 S: (1/2-)16-30-36/39-43-45		
009-018-00-3	magnesium hexafluorosilicate	241-022-2	16949-65-8	T; R25	T R: 25 S: (1/2-)24/25-45	T; R25: C ≥ 10 % Xn; R22: 1 % ≤ C < 10 %	
011-001-00-0	sodium	231-132-9	7440-23-5	F; 15 R14 C; R34	F; C R: 14/15-34 S: (1/2-)5-8-43-45		
011-002-00-6	sodium hydroxide; caustic soda	215-185-5	1310-73-2	C; R35	C R: 35 S: (1/2-)26-37/39-45	C; R35: C ≥ 5 % C; R34: 2 % ≤ C < 5 % Xi; R36/38: 0,5 % ≤ C < 2 %	
011-003-00-1	sodium peroxide	215-209-4	1313-60-6	O; R8 C; R35	O; C R: 8-35 S: (1/2-)8-27-39-45		
011-004-00-7	sodium azide	247-852-1	26628-22-8	T+; R28 R32 N; R50-53	T+; N R: 28-32-50/53 S: (1/2-)28-45-60-61		
011-005-00-2	sodium carbonate	207-838-8	497-19-8	Xi; R36	Xi R: 36 S: (2-)22-26		
011-006-00-8	sodium cyanate	213-030-6	917-61-3	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)24/25-61		
011-007-00-3	propoxycarbazone-sodium	—	181274-15-7	N; R50-53	N R: 50/53 S: 60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
012-001-00-3	magnesium powder (pyrophoric)	231-104-6	7439-95-4	F; R15-17	F R: 15-17 S: (2-)7/8-43		
012-002-00-9	magnesium, powder or turnings	231-104-6	—	F; R11-15	F R: 11-15 S: (2-)7/8-43		
012-003-00-4	magnesium alkyls	—	—	R14 F; R17 C; R34	F; C R: 14-17-34 S: (1/2-)16-43-45		A
013-001-00-6	aluminium powder (pyrophoric)	231-072-3	7429-90-5	F; R15-17	F R: 15-17 S: (2-)7/8-43		
013-002-00-1	aluminium powder (stabilised)	231-072-3	—	F; R15 R10 \$	F R: 10-15 S: (2-)7/8-43		
013-003-00-7	aluminium chloride, anhydrous	231-208-1	7446-70-0	C; R34	C R: 34 S: (1/2-)7/8-28-45		
013-004-00-2	aluminium alkyls	—	—	R14 F; R17 C; R34	F; C R: 14-17-34 S: (1/2-)16-43-45		A
013-005-00-8	diethyl(ethyltrimethylsilanolato)aluminium	401-160-8	55426-95-4	F; R 15-17 R14 C; R35	F; C R: 14/15-17-35 S: (1/2-)6-16-30-36/ 39-43-45		
013-006-00-3	(ethyl-3-oxobutanoato-O'1,O'3)(2-dimethylaminoethanolato)(1-methoxypropan-2-olato)aluminium(III), dimerised	402-370-2	—	R10 Xi; R41	Xi R: 10-41 S: (2-)26-39		
013-007-00-9	poly(oxo(2-butoxyethyl-3-oxobutanoato-O'1,O'3)aluminium)	403-430-0	—	Xi; R41	Xi R: 41 S: (2-)26-39		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
013-008-00-4	di-n-octylaluminium iodide	408-190-0	7585-14-0	R14 F; R17 C; R34 N; R50-53	F; C; N R: 14-17-34-50/53 S: (1/2-)6-16-26-36/ 37/39-43-45-60-61		
013-009-00-X	sodium((n-butyl)x(ethyl)y-1,5-dihydro)aluminate) x = 0.5, y = 1.5	418-720-2	—	F; R11-15-17 R14 Xn; R20 C; R35	F; C R: 11-14/15-17-20- 35 S: (1/2-)6-16-26-30- 36/37/39-43-45		
014-001-00-9	trichlorosilane	233-042-5	10025-78-2	F+; R12 R14 F; R17 Xn; R20/22 R29 C; R35	F+; C R: 12-14-17-20/22- 29-35 S: (2-)7/9-16-26-36/ 37/39-43-45	Xn; R20/22: C ≥ 10 % C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
014-002-00-4	silicon tetrachloride	233-054-0	10026-04-7	R14 Xi; R36/37/ 38	Xi R: 14-36/37/38 S: (2-)7/8-26		
014-003-00-X	dimethyldichlorosilane	200-901-0	75-78-5	F; R11 Xi; R36/37/ 38	F; Xi R: 11-36/37/38 S: (2-)		
014-004-00-5	trichloro(methyl)silane; methyltrichlorosilane	200-902-6	75-79-6	R14 F; R11 Xi; R36/37/ 38	F; Xi R: 11-14-36/37/38 S: (2-)26-39	Xi; R36/37/38: C ≥ 1 %	
014-005-00-0	tetraethyl silicate; ethyl silicate	201-083-8	78-10-4	R10 Xn; R20 Xi; R36/37	Xn R: 10-20-36/37 S: (2-)		
014-006-00-6	bis(4-fluorophenyl)-methyl-(1,2,4-triazol-4-ylmethyl)silane hydrochloride	401-380-4	—	Xi; R36 N; R51-53	Xi; N R: 36-51/53 S: (2-)26-61		
014-007-00-1	triethoxyisobutylsilane	402-810-3	17980-47-1	Xi; R38	Xi R: 38 S: (2-)24		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
014-008-00-7	(chloromethyl)bis(4-fluorophenyl)methylsilane	401-200-4	85491-26-5	N; R51-53	N R: 51/53 S: 61		
014-009-00-2	isobutylisopropyldimethoxysilane	402-580-4	111439-76-0	R10 Xn; R20 Xi; R38	Xn R: 10-20-38 S: (2-)25-26-36/37		
014-010-00-8	disodium metasilicate	229-912-9	6834-92-0	C; R34 Xi; R37	C R: 34-37 S: (1/2-)13-24/25-36/ 37/39-45		
014-011-00-3	cyclohexyldimethoxymethylsilane	402-140-1	17865-32-6	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)24-61		
014-012-00-9	bis(3-(trimethoxysilyl)propyl)amine	403-480-3	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)24-26-39-61		
014-013-00-4	α -hydroxypoly(methyl-(3-(2,2,6,6-tetramethylpiperidin-4-yloxy)propyl)siloxane)	404-920-7	—	Xn; R21/22 C; R34 N; R51-53	C; N R: 21/22-34-51/53 S: (1/2-)26-36/37/39-45-61		
014-014-00-X	etacelasil (ISO); 6-(2-chloroethyl)-6-(2-methoxyethoxy)-2,5,7,10-tetraoxa-6-silaundecane;	253-704-7	37894-46-5	Repr. Cat. 2; R61 Xn; R22-48/ 22	T R: 61-22-48/22 S: 53-45		E
014-015-00-5	α -trimethylsilyl- ω -trimethylsiloxypoly[oxy(methyl-3-(2-(2-methoxypropoxy)propoxy)propylsilanediyl)- co-oxy(dimethylsilane)]	406-420-4	69430-40-6	R53	R: 53 S: 61		
014-016-00-0	reaction mass of: 1,3-dihex-5-en-1-yl-1,1,3,3-tetramethyldisiloxane; 1,3-dihex-n-en-1-yl-1,1,3,3-tetramethyldisiloxane	406-490-6	—	N; R51-53	N R: 51/53 S: 61		
014-017-00-6	flusilazole (ISO); bis(4-fluorophenyl)(methyl)(1H-1,2,4-triazol-1-ylmethyl)silane	—	85509-19-9	Carc. Cat. 3; R40 Repr. Cat. 2; R61 Xn; R22 N; R51-53	T; N R: 61-22-40-51/53 S: 53-45-61		E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
014-018-00-1	octamethylcyclotetrasiloxane	209-136-7	556-67-2	Repr. Cat. 3; R62 R53	Xn R: 53-62 S: (2-)36/37-46-51-61		
014-019-00-7	reaction mass of: 4-[[bis-(4-fluorophenyl)methylsilyl]methyl]-4H-1,2,4-triazole; 1-[[bis-(4-fluorophenyl)methylsilyl]methyl]-1H-1,2,4-triazole	403-250-2	—	Carc. Cat. 3; R40 Repr. Cat. 2; R61 Xn; R22 N; R51-53	T; N R: 61-22-40-51/53 S: 53-45-61		E
014-020-00-2	bis(1,1-dimethyl-2-propynyloxy)dimethylsilane	414-960-7	53863-99-3	Xn; R20	Xn R: 20 S: (2)		
014-021-00-8	tris(isopropenyloxy)phenyl silane	411-340-8	52301-18-5	N; R50-53	N R: 50/53 S: 60-61		
014-022-00-3	reaction product of: (2-hydroxy-4-(3-propenoxy)benzophenone and triethoxysilane) with (hydrolysis product of silica and methyltrimethoxysilane)	401-530-9	—	F; R11 T; R39/23/ 24/25 Xn; R20/21/ 22	F; T R: 11-20/21/22-39/ 23/24/25 S: (1/2-)16-29-36/37-45		
014-023-00-9	α,ω -dihydroxypoly(hex-5-en-1-ylmethylsiloxane)hoxysilane with (hydrolysis product of silica and methyltrimethoxysilane) iazole	408-160-7	125613-45-8	N; R51-53	N R: 51/53 S: 61		
014-024-00-4	1-((3-(3-chloro-4-fluorophenyl)propyl)dimethylsilyl)-4-ethoxybenzene	412-620-2	121626-74-2	N; R51-53	N R: 51/53 S: 61		
014-025-00-X	4-[3-(diethoxymethylsilyl)propoxy]-2,2,6,6-tetramethylpiperidine	411-400-3	102089-33-8	Xn; R22-48/ 21 Xi; R38-41 R52-53	Xn R: 22-38-41-48/21-52/53 S: (2-)26-36/37/39-61		
014-026-00-5	dichloro-(3-(3-chloro-4-fluorophenyl)propyl)methylsilane	407-180-3	770722-36-6	C; R35	C R: 35 S: (1/2-)26-36/37/39-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
014-027-00-0	chloro(3-(3-chloro-4-fluorophenyl)propyl)dimethylsilane	410-270-5	770722-46-8	C; R35	C R: 35 S: (1/2-)8-26-28-36/ 37/39-45		
014-028-00-6	α -[3-(1-oxoprop-2-enyl)-1-oxypropyl]dimethoxysilyloxy- ω -[3-(1-oxoprop-2-enyl)-1-oxypropyl]dimethoxysilyl poly(dimethylsiloxane)	415-290-8	193159-06-7	R43	Xi R: 43 S: (2-)24-37		
014-029-00-1	O,O'-(ethenylmethylsilylene)di[(4-methylpentan-2-one)oxime]	421-870-1	156145-66-3	Repr. Cat. 3; R62 Xn; R22-48/ 22	Xn R: 22-48/22-62 S: (2-)36/37		
014-030-00-7	[(dimethylsilylene)bis((1,2,3,3a,7a- η)-1H-inden-1-ylidene)dimethyl]hafnium	422-060-0	137390-08-0	T+; R28	T+ R: 28 S: (1/2-)6-22-28-36/ 37-45		
014-031-00-2	bis(1-methylethyl)-dimethoxysilane	421-540-7	18230-61-0	R10 Xi; R38 R43 R52-53	Xi R: 10-38-43-52/53 S: (2-)24-37-61		
014-032-00-8	dicyclopentylmethoxysilane	404-370-8	126990-35-0	Xi; R38-41 N; R50-53	Xi; N R: 38-41-50/53 S: (2-)26-37/39-60-61		
015-001-00-1	white phosphorus	231-768-7	12185-10-3	F; R17 T+; R26/28 C; R35 N; R50	F; T+; C; N R: 17-26/28-35-50 S: (1/2-)5-26-38-45- 61		
015-002-00-7	red phosphorus	231-768-7	7723-14-0	F; R11 R16 R52-53	F R: 11-16-52/53 S: (2-)7-43-61		
015-003-00-2	calcium phosphide; tricalcium diphosphide	215-142-0	1305-99-3	F; R15/29 T+; R28 N; R50	F; T+; N R: 15/29-28-50 S: (1/2-)22-43-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-004-00-8	aluminium phosphide	244-088-0	20859-73-8	F; R15/29 T+; R28 R32 N; R50	F; T+; N R: 15/29-28-32-50 S: (1/2-)3/9/14-30-36/ 37-45-61		
015-005-00-3	magnesium phosphide; trimagnesium diphosphide	235-023-7	12057-74-8	F; R15/29 T+; R28 N; R50	F; T+; N R: 15/29-28-50 S: (1/2-)22-43-45-61		
015-006-00-9	trizinc diphosphide; zinc phosphide	215-244-5	1314-84-7	F; R15/29 T+; R28 R32 N; R50-53	F; T+; N R: 15/29-28-32-50/ 53 S: (1/2-)3/9/14-30-36/ 37-45-60-61		
015-007-00-4	phosphorus trichloride	231-749-3	7719-12-2	R14 T+; R26/28 Xn; R48/20 C; R35 R29	T+; C R: 14-26/28-35-48/ 20 S: (1/2-)7/8-26-36/37/ 39-45		
015-008-00-X	phosphorus pentachloride	233-060-3	10026-13-8	R14 T+; R26 Xn; R22-48/ 20 C; R34 R29	T+ R: 14-22-26-34-48/ 20 S: (1/2-)7/8-26-36/37/ 39-45		
015-009-00-5	phosphoryl trichloride	233-046-7	10025-87-3	R14 T+; R26 T; R48/23 Xn; R22 C; R35 R29	T+; C R: 14-22-26-35-48/ 23 S: (1/2-)7/8-26-36/37/ 39-45		
015-010-00-0	phosphorus pentoxide	215-236-1	1314-56-3	C; R35	C R: 35 S: (1/2-)22-26-45		
015-011-00-6	phosphoric acid ... %, orthophosphoric acid ... %	231-633-2	7664-38-2	C; R34	C R: 34 S: (1/2-)26-45	C; R34: C ≥ 25 % Xi; R36/38: 10 % ≤ C < 25 %	B

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-012-00-1	tetraphosphorus trisulphide; phosphorus sesquisulphid	215-245-0	1314-85-8	F; R11 Xn; R22 N; R50	F; Xn; N R: 11-22-50 S: (2-)7-16-24/25-61		
015-013-00-7	triethyl phosphate	201-114-5	78-40-0	Xn; R22	Xn R: 22 S: (2-)25		
015-014-00-2	tributyl phosphate	204-800-2	126-73-8	Carc. Cat. 3; R40 Xn; R22 Xi; R38	Xn R: 22-38-40 S: (2-)36/37-46		
015-015-00-8	tricresyl phosphate (<i>o-o-o-</i> , <i>o-o-m-</i> , <i>o-o-p-</i> , <i>o-m-m-</i> , <i>o-m-p-</i> , <i>o-p-p-</i>); tritoyl phosphate (<i>o-o-o-</i> , <i>o-o-m-</i> , <i>o-o-p-</i> , <i>o-m-m-</i> , <i>o-m-p-</i> , <i>o-p-p-</i>);	201-103-5	78-30-8	T; R39/23/ 24/25 N; R51-53	T; N R: 39/23/24/25-51/ 53 S: (1/2-)20/21-28-45- 61	T; R39/23/24/25: C ≥ 1 % Xn; R68/20/21/22: 0,2 % ≤ C < 1 %	C
015-016-00-3	tricresyl phosphate (<i>m-m-m-</i> , <i>m-m-p-</i> , <i>m-p-p-</i> , <i>p-p-p-</i>); tritoyl phosphate (<i>m-m-m-</i> , <i>m-m-p-</i> , <i>m-p-p-</i> , <i>p-p-p-</i>);	201-105-6	78-32-0	Xn; R21/22 N; R51-53	Xn; N R: 21/22-51/53 S: (2-)28-61	Xn; R21/22: C ≥ 5 %	C
015-019-00-X	dichlorvos (ISO); 2,2-dichlorovinyl dimethyl phosphate	200-547-7	62-73-7	T+; R26 T; R24/25 R43 N; R50	T+; N R: 24/25-26-43-50 S: (1/2-)28-36/37-45- 61		
015-020-00-5	mevinphos (ISO); 2-methoxycarbonyl-1-methylvinyl dimethyl phosphate	232-095-1	7786-34-7	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)23-28-36/37- 45-60-61	N; R50-53: C ≥ 0,0025 % N; R51-53: 0,00025 % ≤ C < 0,0025 % R52-53: 0,000025 % ≤ C < 0,00025 %	
015-021-00-0	trichlorfon (ISO); dimethyl 2,2,2-trichloro-1-hydroxyethylphosphonate	200-149-3	52-68-6	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61	N; R50-53: C ≥ 0,025 % N; R51-53: 0,0025 % ≤ C < 0,025 % R52-53: 0,00025 % ≤ C < 0,0025 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-022-00-6	phosphamidon (ISO); 2-chloro-2-diethylcarbamoyl-1-methylvinyl dimethyl phosphate	236-116-5	13171-21-6	T+; R28 T; R24 Muta. Cat. 3; R68 N; R50-53	T+; N R: 24-28-50/53-68 S: (1/2-)23-36/37-45-60-61		
015-023-00-1	pyrazoxon; diethyl 3-methylpyrazol-5-yl phosphate	—	108-34-9	T+; R26/27/28	T+ R: 26/27/28 S: (1/2-)13-28-45		
015-024-00-7	triamiphos (ISO); 5-amino-3-phenyl-1,2,4-triazol-1-yl-N,N,N',N'-tetramethylphosphonic diamide	—	1031-47-6	T+; R27/28	T+ R: 27/28 S: (1/2-)22-28-36/37-45		
015-025-00-2	TEPP (ISO); tetraethyl pyrophosphate	203-495-3	107-49-3	T+; R27/28 N; R50	T+; N R: 27/28-50 S: (1/2-)36/37/39-38-45-61		
015-026-00-8	schradan (ISO); octamethylpyrophosphoramidate	205-801-0	152-16-9	T+; R27/28	T+ R: 27/28 S: (1/2-)36/37-38-45		
015-027-00-3	sulfotep (ISO); O,O,O,O-tetraethyl dithiopyrophosphate	222-995-2	3689-24-5	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)23-28-36/37-45-60-61	N; R50-53: $C \geq 0,025 \%$ N; R51-53: $0,0025 \% \leq C < 0,025 \%$ R52-53: $0,00025 \% \leq C < 0,0025 \%$	
015-028-00-9	demeton-O (ISO); O,O-diethyl-O-2-ethylthioethyl phosphorothioate	206-053-8	298-03-3	T+; R27/28 N; R50	T+; N R: 27/28-50 S: (1/2-)28-36/37-45-61		
015-029-00-4	demeton-S (ISO); diethyl-S-2-ethylthioethyl phosphorothioate	204-801-8	126-75-0	T+; R27/28	T+ R: 27/28 S: (1/2-)28-36/37-45		
015-030-00-X	demeton-O-methyl (ISO); O-2-ethylthioethyl O,O-dimethyl phosphorothioate	212-758-1	867-27-6	T; R25	T R: 25 S: (1/2-)24-36/37-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-031-00-5	demeton-S-methyl (ISO); S-2-ethylthioethyl dimethyl phosphorothioate	213-052-6	919-86-8	T; R24/25 N; R51-53	T; N R: 24/25-51/53 S: (1/2-)28-36/37-45-61		
015-032-00-0	prothoate (ISO); O,O-diethyl isopropylcarbamoylmethyl phosphorodithioate	218-893-2	2275-18-5	T+; R27/28 R52-53	T+ R: 27/28-52/53 S: (1/2-)28-36/37-45-61		
015-033-00-6	phorate (ISO); O,O-diethyl ethylthiomethyl phosphorodithioate	206-052-2	298-02-2	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)28-36/37-45-60-61	N; R50-53: $C \geq 0,025 \%$ N; R51-53: $0,0025 \% \leq C < 0,025 \%$ R52-53: $0,00025 \% \leq C < 0,0025 \%$	
015-034-00-1	parathion (ISO); O,O-diethyl O-4-nitrophenyl phosphorothioate	200-271-7	56-38-2	T+; R26/28 T; R24-48/25 N; R50-53	T+; N R: 24-26/28-48/25-50/53 S: (1/2-)28-36/37-45-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
015-035-00-7	parathion - methyl (ISO); O,O-dimethyl O-4-nitrophenyl phosphorothioate	206-050-1	298-00-0	R5 R10 T+; R26/28 T; R24 Xn; R48/22 N; R50-53	T+; N R: 5-10-24-26/28-48/22-50/53 S: (1/2-)28-36/37-45-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
015-036-00-2	O-ethyl O-4-nitrophenyl phenylphosphonothioate; EPN	218-276-8	2104-64-5	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)22-36/37-45-60-61		
015-037-00-8	phenkapton (ISO); S-(2,5-dichlorophenylthiomethyl) O,O-diethyl phosphorodithioate	218-892-7	2275-14-1	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)13-45-60-61		
015-038-00-3	coumaphos (ISO); O-3-chloro-4-methylcoumarin-7-yl O,O-diethyl phosphorothioate	200-285-3	56-72-4	T+; R28 Xn; R21 N; R50-53	T+; N R: 21-28-50/53 S: (1/2-)28-36/37-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-039-00-9	azinphos-methyl (ISO); O,O-dimethyl-4-oxobenzotriazin-3-ylmethyl phosphorodithioate	201-676-1	86-50-0	T+; R26/28 T; R24 R43 N; R50-53	T+; N R: 24-26/28-43-50/53 S: (1/2-)28-36/37-45-60-61		
015-040-00-4	diazinon (ISO); O,O-diethyl O-2-isopropyl-6-methylpyrimidin-4-yl phosphorothioate	206-373-8	333-41-5	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24/25-60-61		
015-041-00-X	malathion (ISO); 1,2-bis (ethoxycarbonyl) ethyl O,O-dimethyl phosphorodithioate	204-497-7	121-75-5	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
015-042-00-5	chlorthion O-(3-chloro-4-nitrophenyl) O,O-dimethyl phosphorothioate	207-902-5	500-28-7	Xn; R20/21/22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)13-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
015-043-00-0	phosnichlor (ISO); O-4-chloro-3-nitrophenyl O,O-dimethyl phosphorothioate	—	5826-76-6	Xn; R20/21/22	Xn R: 20/21/22 S: (2-)13		
015-044-00-6	carbophenothion (ISO); 4-chlorophenylthiomethyl O,O-diethyl phosphorodithioate	212-324-1	786-19-6	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)28-36/37-45-60-61		
015-045-00-1	mecarbam (ISO); N-ethoxycarbonyl-N-methylcarbamoylmethyl O,O-diethyl phosphorodithioate	219-993-9	2595-54-2	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)36/37-45-60-61		
015-046-00-7	oxydemeton-methyl; S-2-(ethylsulphinyl)ethyl O,O-dimethyl phosphorothioate	206-110-7	301-12-2	T; R24/25 N; R50	T; N R: 24/25-50 S: (1/2-)23-36/37-45-61		
015-047-00-2	ethion (ISO); O,O,O',O'-tetraethyl S,S'-methylenedi (phosphorodithioate); diethion	209-242-3	563-12-2	T; R25 Xn; R21 N; R50-53	T; N R: 21-25-50/53 S: (1/2-)25-36/37-45-60-61	N; R50-53: $C \geq 0,0025 \%$ N; R51-53: $0,00025 \% \leq C < 0,0025 \%$ R52-53: $0,000025 \% \leq C < 0,00025 \%$	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-048-00-8	fenthion (ISO); O,O-dimethyl-O-(4-methylthion- <i>m</i> -tolyl) phosphorothioate	200-231-9	55-38-9	Muta. Cat. 3; R68 T; R23-48/25 Xn; R21/22 N; R50-53	T; N R: 21/22-23-48/25-50/53-68 S: (1/2-)36/37-45-60-61		
015-049-00-3	endosulfon (ISO); S-5-methoxy-4-oxopyran-2-ylmethyl dimethyl phosphorothioate	220-472-3	2778-04-3	T; R24/25	T R: 24/25 S: (1/2-)36/37-45		
015-050-00-9	thiometon (ISO); S-2-ethylthioethyl O,O-dimethyl phosphorodithioate	211-362-6	640-15-3	T; R25 Xn; R21	T R: 21-25 S: (1/2-)36/37-45		
015-051-00-4	dimethoate (ISO); O,O-dimethyl methylcarbamoylmethyl phosphorodithioate	200-480-3	60-51-5	Xn; R21/22	Xn R: 21/22 S: (2-)36/37		
015-052-00-X	fenchlorphos (ISO); O,O-dimethyl O-2,4,5-trichlorophenyl phosphorothioate	206-082-6	299-84-3	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)25-36/37-60-61		
015-053-00-5	menazon (ISO); S-[(4,6-diamino-1,3,5-triazin-2-yl)methyl] O,O-dimethyl phosphorodithioate	201-123-4	78-57-9	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
015-054-00-0	fenitrothion (ISO); O,O-dimethyl O-4-nitro- <i>m</i> -tolyl phosphorothioate	204-524-2	122-14-5	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
015-055-00-6	naled (ISO); 1,2-dibromo-2,2-dichloroethyl dimethyl phosphate	206-098-3	300-76-5	Xn; R21/22 Xi; R36/38 N; R50	Xn; N R: 21/22-36/38-50 S: (2-)36/37-61	N; R50: C ≥ 0,025 %	
015-056-00-1	azinphos-ethyl (ISO); O,O-diethyl 4-oxobenzotriazin-3-ylmethyl phosphorodithioate	220-147-6	2642-71-9	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)28-36/37-45-60-61		
015-057-00-7	formothion (ISO); N-formyl-N-methylcarbamoylmethyl O,O-dimethyl phosphorodithioate	219-818-6	2540-82-1	Xn; R21/22	Xn R: 21/22 S: (2-)36/37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-058-00-2	morphothion (ISO); O,O-dimethyl-S-(morpholinocarbonylmethyl) phosphorodithioate	205-628-0	144-41-2	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)13-45-60-61		
015-059-00-8	vamidothion (ISO); O,O-dimethyl S-2-(1-methylcarbamoylethylthio) ethyl phosphorothioate	218-894-8	2275-23-2	T; R25 Xn; R21 N; R50	T; N R: 21-25-50 S: (1/2-)36/37-45-61		
015-060-00-3	disulfoton (ISO); O,O-diethyl 2-ethylthioethyl phosphorodithioate	206-054-3	298-04-4	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)28-36/37-45-60-61		
015-061-00-9	dimefox (ISO); tetramethylphosphorodiamidic fluoride	204-076-8	115-26-4	T+; R27/28	T+ R: 27/28 S: (1/2-)23-28-36/37-38-45		
015-062-00-4	mipafox (ISO); N,N'- di-isopropylphosphorodiamidic fluoride	206-742-3	371-86-8	T+; R39/26/ 27/28	T+ R: 39/26/27/28 S: (1/2-)13-45		
015-063-00-X	dioxathion (ISO); 1,4-dioxan-2,3-diyl-O,O',O'-tetraethyl di(phosphorodithioate)	201-107-7	78-34-2	T+; R26/28 T; R24 N; R50-53	T+; N R: 24-26/28-50/53 S: (1/2-)28-36/37-45-60-61	N; R50-53: $C \geq 0,025 \%$ N; R51-53: $0,0025 \% \leq C < 0,025 \%$ R52-53: $0,00025 \% \leq C < 0,0025 \%$	
015-064-00-5	bromophos-ethyl (ISO); O-4-bromo-2,5-dichlorophenyl O,O-diethyl phosphorothioate	225-399-0	4824-78-6	T; R25 Xn; R21 N; R50-53	T; N R: 21-25-50/53 S: (1/2-)28-36/37-45-60-61		
015-065-00-0	S-[2-(ethylsulphinyl)ethyl] O,O-dimethyl phosphorodithioate	—	2703-37-9	T+; R26/27/ 28 N; R51-53	T+; N R: 26/27/28-51/53 S: (1/2-)13-28-45-61		
015-066-00-6	omethoate (ISO); O,O-dimethyl S-methylcarbamoylmethyl phosphorothioate	214-197-8	1113-02-6	T; R25 Xn; R21 N; R50	T; N R: 21-25-50 S: (1/2-)23-36/37-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-067-00-1	phosalone (ISO); S-(6-chloro-2-oxobenzoxazolin-3-ylmethyl) O,O-diethyl phosphorodithioate	218-996-2	2310-17-0	T; R25 Xn; R21 N; R50-53	T; N R: 21-25-50/53 S: (1/2-)36/37-45-60-61		
015-068-00-7	dichlofenthion (ISO); O-2,4-dichlorophenyl O,O-diethyl phosphorothioate	202-564-5	97-17-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
015-069-00-2	methidathion (ISO); 2,3-dihydro-5-methoxy-2-oxo-1,3,4-thiadiazol-3-ylmethyl-O, O-dimethylphosphorodithioate	213-449-4	950-37-8	T+; R28 Xn; R21 N; R50-53	T+; N R: 21-28-50/53 S: (1/2-)22-28-36/37-45-60-61		
015-070-00-8	cyanthoate (ISO); S-(N-(1-cyano-1-methylethyl)carbamoylmethyl) O,O-diethyl phosphorothioate	223-099-4	3734-95-0	T+; R28 T; R24	T+ R: 24-28 S: (1/2-)36/37-45		
015-071-00-3	chlorfenvinphos (ISO); 2-chloro-1-(2,4 dichlorophenyl) vinyl diethyl phosphate	207-432-0	470-90-6	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)28-36/37-45-60-61		
015-072-00-9	monocrotophos (ISO); dimethyl-1-methyl-2-(methylcarbamoyl)vinyl phosphate	230-042-7	6923-22-4	Muta. Cat. 3; R68 T+; R26/28 T; R24 N; R50-53	T+; N R: 24-26/28-50/53-68 S: (1/2-)36/37-45-60-61		
015-073-00-4	dicrotophos (ISO); (Z)-2-dimethylcarbamoyl-1-methylvinyl dimethyl phosphate	205-494-3	141-66-2	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)28-36/37-45-60-61		
015-074-00-X	crufomate (ISO); 4-tert-butyl-2-chlorophenyl methyl methylphosphoramidate	206-083-1	299-86-5	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		
015-075-00-5	S-[2-(isopropylsulphinyl)ethyl] O,O-dimethyl phosphorothioate	—	2635-50-9	T; R23/24/25	T R: 23/24/25 S: (1/2-)13-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-076-00-0	potasan; O,O-diethyl O-(4-methylcoumarin-7-yl) phosphorothioate	—	299-45-6	T+; R26/27/28 N; R50-53	T+; N R: 26/27/28-50/53 S: (1/2-)13-28-45-60-61	N; R50-53: $C \geq 0,025 \%$ N; R51-53: $0,0025 \% \leq C < 0,025 \%$ R52-53: $0,00025 \% \leq C < 0,0025 \%$	
015-077-00-6	2,2-dichlorovinyl 2-ethylsulphinyloethyl methyl phosphate	—	7076-53-1	T; R23/24/25	T R: 23/24/25 S: (1/2-)13-45		
015-078-00-1	demeton-S-methylsulphon (ISO); S-2-ethylsulphonyloethyl dimethyl phosphorothioate	241-109-5	17040-19-6	T; R25 Xn; R21 N; R51-53	T; N R: 21-25-51/53 S: (1/2-)22-28-36/37-45-61		
015-079-00-7	acephate (ISO); O,S-dimethyl acetylphosphoramidothioate	250-241-2	30560-19-1	Xn; R22	Xn R: 22 S: (2-)36		
015-080-00-2	amidithion (ISO); 2-methoxyethylcarbamoylmethyl O,O-dimethyl phosphorodithioate	—	919-76-6	Xn; R22	Xn R: 22 S: (2-)24-36		
015-081-00-8	O,O,O',O'-tetrapropyl dithiopyrophosphate	221-817-0	3244-90-4	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		
015-082-00-3	azothoate (ISO); O-4-(4-chlorophenylazo)phenyl O,O-dimethyl phosphorothioate	227-419-3	5834-96-8	Xn; R20/22	Xn R: 20/22 S: (2-)13		
015-083-00-9	bensulide (ISO); O,O-diisopropyl 2-phenylsulphonylaminoethyl phosphorodithioate	212-010-4	741-58-2	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24-36-60-61		
015-084-00-4	chlorpyrifos (ISO); O,O-diethyl O-3,5,6-trichloro-2-pyridyl phosphorothioate	220-864-4	2921-88-2	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)45-60-61	N; R50-53: $C \geq 0,0025 \%$ N; R51-53: $0,00025 \% \leq C < 0,0025 \%$ R52-53: $0,000025 \% \leq C < 0,00025 \%$	
015-085-00-X	chlorphonium chloride (ISO); tributyl (2,4-dichlorobenzyl) phosphonium chloride	204-105-4	115-78-6	T; R25 Xn; R21 Xi; R36/38	T R: 21-25-36/38 S: (1/2-)36/37/39-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-086-00-5	coumithoate (ISO); O,O-diethyl O-7,8,9,10-tetrahydro-6-oxo-benzo(c)chromen-3-yl phosphorothioate	—	572-48-5	T; R25	T R: 25 S: (1/2-)28-36/37-45		
015-087-00-0	cyanophos (ISO); O-4-cyanophenyl O,O-dimethyl phosphorothioate	220-130-3	2636-26-2	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		
015-088-00-6	dialifos (ISO); 2-chloro-1-phthalimidoethyl O,O-diethyl phosphorodithioate	233-689-3	10311-84-9	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)28-36/37-45-60-61		
015-089-00-1	ethoate-methyl (ISO); ethylcarbamoylmethyl O,O-dimethyl phosphorodithioate	204-121-1	116-01-8	Xn; R21/22	Xn R: 21/22 S: (2-)36/37		
015-090-00-7	fensulfothion (ISO); O,O-diethyl O-4-methylsulfinylphenyl phosphorothioate	204-114-3	115-90-2	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)23-28-36/37-45-60-61		
015-091-00-2	fonofos (ISO); O-ethyl phenyl ethylphosphonodithioate	213-408-0	944-22-9	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)28-36/37-45-60-61		
015-092-00-8	phosacetim (ISO); O,O-bis(4-chlorophenyl) N-acetimidoylphosphoramidothioate	223-874-7	4104-14-7	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)28-36/37-45-60-61		
015-093-00-3	leptophos (ISO); O-4-bromo-2,5-dichlorophenyl O-methyl phenylphosphorothioate	244-472-8	21609-90-5	T; R25-39/25 Xn; R21 N; R50-53	T; N R: 21-25-39/25-50/53 S: (1/2-)25-36/37/39-45-60-61		
015-094-00-9	mephosfolan (ISO); diethyl 4-methyl-1,3-dithiolan-2-ylidenephosphoramidate	213-447-3	950-10-7	T+; R27/28 N; R51-53	T+; N R: 27/28-51/53 S: (1/2-)36/37/39-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-095-00-4	methamidophos (ISO); O,S-dimethyl phosphoramidothioate	233-606-0	10265-92-6	T+; R26/28 T; R24 N; R50	T+; N R: 24-26/28-50 S: (1/2-)28-36/37-45-61		
015-096-00-X	oxydisulfoton (ISO); O,O-diethyl S-2-ethylsulphinylethyl phosphorodithioate	219-679-1	2497-07-6	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)28-36/37-45-60-61	N; R50-53: $C \geq 2,5 \%$ N; R51-53: $0,25 \% \leq C < 2,5 \%$ R52-53: $0,025 \% \leq C < 0,25 \%$	
015-097-00-5	phenthoate (ISO); ethyl 2-(dimethoxyphosphinothioylthio)-2-phenylacetate	219-997-0	2597-03-7	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)22-36/37-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
015-098-00-0	trichloronate (ISO); O-ethyl O-2,4,5-trichlorophenyl ethylphosphonothioate	206-326-1	327-98-0	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)23-28-36/37-45-60-61		
015-099-00-6	pirimiphos-ethyl (ISO); O,O-diethyl O-2-diethylamino-6-methylpyrimidin-4-yl phosphorothioate	245-704-0	23505-41-1	T; R25 Xn; R21 N; R50-53	T; N R: 21-25-50/53 S: (1/2-)23-36/37-45-60-61		
015-100-00-X	phoxim (ISO); α -(diethoxyphosphinothioylimino) phenylacetonitrile	238-887-3	14816-18-3	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)36-60-61	N; R50-53: $C \geq 0,025 \%$ N; R51-53: $0,0025 \% \leq C < 0,025 \%$ R52-53: $0,00025 \% \leq C < 0,0025 \%$	
015-101-00-5	phosmet (ISO); O,O-dimethyl phthalimidomethyl S-phosphorodithioate	211-987-4	732-11-6	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)22-36/37-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
015-102-00-0	tris(2-chloroethyl) phosphate	204-118-5	115-96-8	Carc. Cat. 3; R40 Xn; R22 N; R51-53	Xn; N R: 22-40-51/53 S: (2-)36/37-61		
015-103-00-6	phosphorus tribromide	232-178-2	7789-60-8	R14 C; R34 Xi; R37	C R: 14-34-37 S: (1/2-)26-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-104-00-1	diphosphorus pentasulphide; phosphorus pentasulphide	215-242-4	1314-80-3	F; R11 R29 Xn; R20/22 N; R50	F; Xn; N R: 11-20/22-29-50 S: (2-)61		
015-105-00-7	triphenyl phosphite	202-908-4	101-02-0	Xi; R36/38 N; R50-53	Xi; N R: 36/38-50/53 S: (2-)28-60-61	Xi; R36/38: C ≥ 5 %	
015-106-00-2	hexamethylphosphoric triamide; hexamethylphosphoramide	211-653-8	680-31-9	Carc. Cat. 2; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45	Carc. Cat. 2; R45: C ≥ 0,01 %	
015-107-00-8	ethoprophos (ISO); ethyl-S,S-dipropyl phosphorodithioate	236-152-1	13194-48-4	T+; R26/27 T; R25 R43 N; R50-53	T+; N R: 25-26/27-43-50/ 53 S: (1/2-)27/28-36/37/ 39-45-60-61		
015-108-00-3	bromophos (ISO); O-4-bromo-2,5-dichlorophenyl O,O-dimethyl phosphorothioate	218-277-3	2104-96-3	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-) 46-60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	
015-109-00-9	crotoxyphos (ISO); 1-phenylethyl 3-(dimethoxyphosphinyloxy) isocrotonate	231-720-5	7700-17-6	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)28-36/37-45-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
015-110-00-4	cyanofenphos (ISO); O-4-cyanophenyl O-ethyl phenylphosphonothioate	—	13067-93-1	T; R25-39/25 Xn; R21 Xi; R36 N; R51-53	T; N R: 21-25-36-39/25-51/53 S: (1/2-)36/37-45-61		
015-111-00-X	phosfolan (ISO); diethyl 1,3-dithiolan-2-ylidenephosphoramidate	213-423-2	947-02-4	T+; R27/28	T+ R: 27/28 S: (1/2-)28-36/37-45		
015-112-00-5	thionazin (ISO); O,O-diethyl O-pyrazin-2-yl phosphorothioate;	206-049-6	297-97-2	T+; R27/28	T+ R: 27/28 S: (1/2-)36/37/39-38-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-114-00-6	chlormephos (ISO); S-chloromethyl O,O-diethyl phosphorodithioate	246-538-1	24934-91-6	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)28-36/37-45-60-61		
015-115-00-1	chlorthiophos (ISO)	244-663-6	21923-23-9	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)28-36/37-45-60-61		
015-116-00-7	demephion-O (ISO); O,O-dimethyl O-2-methylthioethyl phosphorothioate	211-666-9	682-80-4	T+; R28 T; R24	T+ R: 24-28 S: (1/2-)28-36/37-45		
015-117-00-2	demephion-S (ISO); O,O-dimethyl S-2-methylthioethyl phosphorothioate	219-971-9	2587-90-8	T+; R28 T; R24	T+ R: 24-28 S: (1/2-)28-36/37-45		
015-118-00-8	demeton	—	8065-48-3	T+; R27/28 N; R50	T+; N R: 27/28-50 S: (1/2-)28-36/37-45-61		
015-119-00-3	dimethyl 4-(methylthio)phenyl phosphate	—	3254-63-5	T+; R27/28	T+ R: 27/28 S: (1/2-)28-36/37-45		
015-120-00-9	ditalimfos (ISO); O,O-diethyl phthalimidophosphonothioate;	225-875-8	5131-24-8	Xi; R38 R43	Xi R: 38-43 S: (2-)36/37		
015-121-00-4	edifenphos (ISO); O-ethyl S,S-diphenyl phosphorodithioate	241-178-1	17109-49-8	T; R23/25 Xn; R21 R43 N; R50-53	T; N R: 21-23/25-43-50/53 S: (1/2-)36/37-45-60-61		
015-122-00-X	etrimfos (ISO); O-6-ethoxy-2-ethylpyrimidin-4-yl O,O-dimethylphosphorothioate;	253-855-9	38260-54-7	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-123-00-5	fenamiphos (ISO); ethyl-4-methylthio- <i>m</i> -tolyl isopropyl phosphoramidate	244-848-1	22224-92-6	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)23-28-36/37-45-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
015-124-00-0	fosthietan (ISO); diethyl 1,3-dithietan-2-ylidenephosphoramidate;	244-437-7	21548-32-3	T+; R27/28	T+ R: 27/28 S: (1/2-)36/37-45		
015-125-00-6	glyphosine (ISO); N,N-bis(phosphonomethyl)glycine	219-468-4	2439-99-8	Xi; R41	Xi R: 41 S: (2-)26		
015-126-00-1	heptenophos (ISO); 7-chlorobicyclo(3.2.0)hepta-2,6-dien-6-yl dimethyl phosphate	245-737-0	23560-59-0	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)23-28-37-45-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
015-127-00-7	iprobenfos (ISO); S-benzyl diisopropyl phosphorothioate	247-449-0	26087-47-8	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
015-128-00-2	IPSP; S-ethylsulphinylmethyl O,O-diisopropylphosphorodithioate	—	5827-05-4	T+; R27 T; R25 N; R50-53	T+; N R: 25-27-50/53 S: (1/2-)28-36/37-45-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
015-129-00-8	isofenphos (ISO); O-ethyl O-2-isopropoxycarbonylphenyl-isopropylphosphoramidothioate	246-814-1	25311-71-1	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)36/37-45-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
015-130-00-3	isothioate (ISO) S-2-isopropylthioethyl O,O-dimethyl phosphorodithioate;	—	36614-38-7	T; R24/25	T R: 24/25 S: (1/2-)28-36/37-45		
015-131-00-9	isoxathion (ISO); O,O-diethyl O-5-phenylisoxazol-3-ylphosphorothioate	242-624-8	18854-01-8	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)28-36/37-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-132-00-4	S-(chlorophenylthiomethyl) O,O-dimethylphosphorodithioate; methylcarbophenothione	—	953-17-3	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)28-36/37-45-60-61	N; R50-53: $C \geq 0,025 \%$ N; R51-53: $0,0025 \% \leq C < 0,025 \%$ R52-53: $0,00025 \% \leq C < 0,0025 \%$	
015-133-00-X	piperophos (ISO); S-2-methylpiperidinocarbonylmethyl-O,O-dipropyl phosphorodithioate	—	24151-93-7	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61	N; R50-53: $C \geq 2,5 \%$ N; R51-53: $0,25 \% \leq C < 2,5 \%$ R52-53: $0,025 \% \leq C < 0,25 \%$	
015-134-00-5	pirimiphos-methyl (ISO); O-(2-diethylamino-6-methylpyrimidin-4-yl) O,O-dimethyl phosphorothioate	249-528-5	29232-93-7	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
015-135-00-0	profenofos (ISO); O-(4-bromo-2-chlorophenyl) O-ethyl S-propyl phosphorothioate	255-255-2	41198-08-7	Xn; R20/21/22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)36/37-60-61	N; R50-53: $C \geq 0,025 \%$ N; R51-53: $0,0025 \% \leq C < 0,025 \%$ R52-53: $0,00025 \% \leq C < 0,0025 \%$	
015-136-00-6	<i>trans</i> -isopropyl-3-[[[(ethylamino)methoxyfosfinothioyl]oxy] crotonate; isopropyl 3-[[[(ethylamino)methoxyphosphinothioyl]oxy]isocrotonate; propetamphos (ISO)	250-517-2	31218-83-4	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)37-45-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
015-137-00-1	pyrazophos (ISO); O,O-diethyl O-(6-ethoxycarbonyl-5-methylpyrazolo[2,3-a] pyrimidin-2-yl) phosphorothioate	236-656-1	13457-18-6	Xn; R20/22 N; R50-53	Xn; N R: 20/22-50/53 S: (2-)36/37-46-60-61		
015-138-00-7	quinalphos (ISO); O,O-diethyl-O-quinoxalin-2-yl phosphorothioate	237-031-6	13593-03-8	T; R25 Xn; R21 N; R50-53	T; N R: 21-25-50/53 S: (1/2-)22-36/37-45-60-61	N; R50-53: $C \geq 0,025 \%$ N; R51-53: $0,0025 \% \leq C < 0,025 \%$ R52-53: $0,00025 \% \leq C < 0,0025 \%$	
015-139-00-2	terbufos (ISO) S- <i>tert</i> -butylthiomethyl O,O-diethylphosphorodithioate;	235-963-8	13071-79-9	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)36/37-45-60-61	N; R50-53: $C \geq 0,025 \%$ N; R51-53: $0,0025 \% \leq C < 0,025 \%$ R52-53: $0,00025 \% \leq C < 0,0025 \%$	
015-140-00-8	triazophos (ISO); O,O-diethyl-O-1-phenyl-1H,2,4-triazol-3-yl phosphorothioate	245-986-5	24017-47-8	T; R23/25 Xn; R21 N; R50-53	T; N R: 21-23/25-50/53 S: (1/2-)36/37-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-141-00-3	ethylenediammonium O,O-bis(octyl) phosphorodithioate, mixed isomers	400-520-1	—	C; R34 Xn; R22 N; R50-53	C; N R: 22-34-50/53 S: (1/2-)24/25-26-28-39-45-60-61		
015-142-00-9	butyl (dialkyloxy(dibutoxyphosphoryloxy))titanium (trialkyl- oxy)titanium phosphate	401-100-0	—	F; R11 Xi; R36 N; R51-53	F; Xi; N R: 11-36-51/53 S: (2-)7/9-16-26-43-61		
015-143-00-4	reaction mass of 2-chloroethyl chloropropyl 2-chloroethyl-phosphonate, mixture reaction mass of isomers and 2-chloroethyl chloropropyl 2-chloropropylphosphonate, reaction mass of isomers	401-740-0	—	Xn; R22	Xn R: 22 S: (2-)		
015-144-00-X	reaction mass of pentyl methylphosphinate and 2-methylbutyl methylphosphinate	402-090-0	87025-52-3	C; R34	C R: 34 S: (1/2-)26-36/37/39-45		
015-145-00-5	reaction mass of copper(I) O,O-diisopropyl phosphorodithioate and copper(I) O-isopropyl O-(4-methylpent-2-yl) phosphorodithioate and copper(I) O,O-bis(4-methylpent-2-yl) phosphorodithioate	401-520-4	—	N; R50-53	N R: 50/53 S: 60-61		
015-146-00-0	S-(tricyclo(5.2.1.0 ^{2,6})deca-3-en-8(or 9)-yl O-(isopropyl or isobutyl or 2-ethylhexyl) O-(isopropyl or isobutyl or 2-ethylhexyl) phosphorodithioate	401-850-9	—	N; R50-53	N R: 50/53 S: 60-61		
015-147-00-6	reaction mass of C ₁₂₋₁₄ -tert-alkylammonium diphenyl phosphorothioate and dinonyl sulphide (or disulphide)	400-930-0	—	Xi; R38-41 N; R51-53 R43	Xi; N R: 38-41-43-51/53 S: (2-)24-26-37/39-61		
015-148-00-1	2-(diphosphonomethyl)succinic acid	403-070-4	51395-42-7	C; R34 R43	C R: 34-43 S: (1/2-)26-36/37/39-45		
015-149-00-7	reaction mass of: hexyldioctylphosphineoxide; dihexyloctylphosphineoxide; trioctylphosphineoxide	403-470-9	—	C; R34 N; R50-53	C; N R: 34-50/53 S: (1/2-)26-36/37/39-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-150-00-2	(2-(1,3-dioxolan-2-yl)ethyl)triphenylphosphonium bromide	404-940-6	86608-70-0	Xn; R22 Xi; R41 R33 R52-53	Xn R: 22-33-41-52/53 S: (2-)22-26-39-61		
015-151-00-8	tris(isopropyl/ <i>tert</i> -butylphenyl) phosphate	405-010-2	—	N; R51-53	N R: 51/53 S: 61		
015-152-00-3	dioxabenzofos (ISO); 2-methoxy-4 <i>H</i> -1,3,2-benzodioxaphosphorin 2-sulphide;	223-292-3	3811-49-2	T; R24/25-39/25 N; R51-53	T; N R: 24/25-39/25-51/53 S: (1/2-)36/37-38-45-61		
015-153-00-9	isazofos (ISO); O-(5-chloro-1-isopropyl-1,2,4-triazol-3-yl) O,O-diethyl phosphorothioate;	255-863-8	42509-80-8	T+; R26 T; R24/25 Xn; R48/20 R43 N; R50-53	T+; N R: 24/25-26-43-48/20-50/53 S: (1/2-)28-36/37-38-45-59-61		
015-154-00-4	2-chloroethylphosphonic acid; ethephon	240-718-3	16672-87-0	Xn; R20/21 C; R34 R52-53	C R: 20/21-34-52/53 S: (1/2-)26-28-36/37/39-45-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
015-155-00-X	ammonium 2-amino-4-(hydroxymethylphosphinyl)butyrate; glufosinate ammonium	278-636-5	77182-82-2	Xn; R22	Xn R: 22 S: (2-)		
015-156-00-5	methyl 3-[(dimethoxyphosphinothioyl)oxy]methacrylate; [1] methacrifos (ISO); methyl (<i>E</i>)-3-[(dimethoxyphosphinothioyl)oxy]methacrylate [2]	250-366-9 [1] - [2]	30864-28-9 [1] 62610-77-9 [2]	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)36/37-60-61		
015-157-00-0	phosphonic acid; [1] phosphorous acid [2]	237-066-7 [1] 233-663-1 [2]	13598-36-2 [1] 10294-56-1 [2]	Xn; R22 C; R35	C R: 22-35 S: (1/2-)26-36/37/39-45		
015-158-00-6	(η-cyclopentadienyl)(η-cumenyl)iron(1+)hexafluorophosphate (1-)	402-340-9	32760-80-8	R52-53	R: 52/53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-159-00-1	hydroxyphosphonoacetic acid	405-710-8	23783-26-8	Xn; R22-48/22 C; R34 R43	C R: 22-34-43-48/22 S: (1/2-)22-26-36/37/39-45		
015-160-00-7	vanadyl pyrophosphate	406-260-5	58834-75-6	Xi; R36 R43 R52-53	Xi R: 36-43-52/53 S: (2-)24-26-37-61		
015-161-00-2	divanadyl pyrophosphate	407-130-0	65232-89-5	Xn; R22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-51/53 S: (2-)24-26-37/39-61		
015-162-00-8	vanadium(IV) oxide hydrogen phosphate hemihydrate, lithium, zinc, molybdenum, iron and chlorine-doped	407-350-7	—	Xn; R20-48/22 Xi; R41 N; R51-53	Xn; N R: 20-41-48/22-51/53 S: (2-)22-26-36/39-61		
015-163-00-3	bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentylphosphin-oxide	412-010-6	145052-34-2	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
015-164-00-9	calcium P,P'-(1-hydroxyethylene)bis(hydrogen phosphonate) dihydrate	400-480-5	36669-85-9	R52-53	R: 52/53 S: 61		
015-165-00-4	reaction mass of: thiobis(4,1-phenylene)-S,S,S',S'-tetraphenyl-disulfonium bishexafluorophosphate; diphenyl(4-phenylthiophenyl)sulfonium hexafluorophosphate	404-986-7	—	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)15-26-39-60-61		
015-166-00-X	3,9-bis(2,6-di-tert-butyl-4-methylphenoxy)-2,4,8,10-tetraoxa-3,9-diphosphaspiro[5.5]undecane	410-290-4	80693-00-1	R53	R: 53 S: 61		
015-167-00-5	3-(hydroxyphenylphosphinyl)propanoic acid	411-200-6	14657-64-8	Xi; R41	Xi R: 41 S: (2-)26-39		
015-168-00-0	fosthiazate (ISO); (RS)-S-sec-butyl-O-ethyl-2-oxo-1,3-thiazolidin-3-ylphosphonothioate	—	98886-44-3	T; R23/25-39 Xn; R21 Xi; R41 R43 N; R50-53	T; N R: 21-23/25-39-41-43-50/53 S: (1/2-)53-45-25-26-39-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-169-00-6	tributyltetradecylphosphonium tetrafluoroborate	413-520-1	—	Xn; R22-48/22 C; R34 R43 N; R50-53	C; N R: 22-34-43-48/22-50/53 S: (1/2-)26-28-36/37/39-45-60-61		
015-170-00-1	reaction mass of: di-(1-octane- <i>N,N,N</i> -trimethylammonium) octylphosphate; 1-octane- <i>N,N,N</i> -trimethylammonium di-octylphosphate; 1-octane- <i>N,N,N</i> -trimethylammonium octylphosphate	407-490-9	—	Xn; R21/22 C; R34	C R: 21/22-34 S: (1/2-)26-36/37/39-45		
015-171-00-7	O,O,O-tris(2(or 4)-C ₉₋₁₀ -isoalkylphenyl) phosphorothioate	406-940-1	—	N; R51-53	N R: 51/53 S: 61		
015-172-00-2	reaction mass of: bis(isotridecylammonium)mono(di-(4-methylpent-2-yloxy)thiophosphorothionylisopropyl)phosphate; isotridecylammonium bis(di-(4-methylpent-2-yloxy)thiophosphorothionylisopropyl)phosphate	406-240-6	—	R10 C; R34 N; R51-53	C; N R: 10-34-51/53 S: (1/2-)23-26-28-36/37/39-45-61		
015-173-00-8	methyl [2-(1,1-dimethylethyl)-6-methoxypyrimidin-4-yl] ethylphosphonothioate	414-080-3	117291-73-3	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)23-36-60-61		
015-174-00-3	1-chloro- <i>N,N</i> -diethyl-1,1-diphenyl-1-(phenylmethyl)phosphoramine	411-370-1	82857-68-9	T; R25 Xi; R41 N; R51-53	T; N R: 25-41-51/53 S: (1/2-)26-37/39-41-45-61		
015-175-00-9	<i>tert</i> -butyl (triphenylphosphoranylidene) acetate	412-880-7	35000-38-5	T; R25 Xn; R48/22 Xi; R36 R43 N; R51-53	T; N R: 25-36-43-48/22-51/53 S: (1/2-)26-36/37/39-45-61		
015-176-00-4	<i>P,P,P',P'</i> -tetrakis-(<i>o</i> -methoxyphenyl)propane-1,3-diphosphine	413-430-2	116163-96-3	N; R50-53	N R: 50/53 S: 60-61		
015-177-00-X	((4-phenylbutyl)hydroxyphosphoryl)acetic acid	412-170-7	83623-61-4	Xn; R48/22 Xi; R41 R43	Xn R: 41-43-48/22 S: (2-)22-26-36/37/39		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
015-178-00-5	(R)- α -phenylethylammonium (-)-(1R, 2S)-(1,2-epoxypropyl) phosphonate monohydrate	418-570-8	25383-07-7	Repr. Cat. 3; R62 N; R51-53	Xn; N R: 62-51/53 S: (2-)22-36/37-61		
015-179-00-0	UVCB condensation product of: tetrakis-hydroxymethylphosphonium chloride, urea and distilled hydrogenated C ₁₆₋₁₈ tallow alkylamine	422-720-8	166242-53-1	Carc. Cat. 3; R40 Xn; R22-48/ 22 C; R34 R43 N; R50-53	C; N R: 22-34-40-43-48/ 22-50/53 S: (1/2-)26-36/37/39- 45-60-61		
015-180-00-6	[R-(R*,S*)]-[[2-methyl-1-(1-oxopropoxy)propoxy]-(4-phenyl-butyl)phosphinyl] acetic acid, (-)-cinchonidine (1:1) salt	415-820-8	137590-32-0	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)24-26-37/39-61		
015-181-00-1	phosphine	232-260-8	7803-51-2	F+; R12 R17 T+; R26 C; R34 N; R50	F+; T+; N R: 12-17-26-34-50 S: (1/2-)28-36/37-45- 61-63		
015-184-00-8	Salts of glyphosate, with the exception of those specified elsewhere in this Annex	—	—	N; R51-53	N R: 51/53 S: 61		A
015-186-00-9	chlorpyrifos-methyl (ISO), O,O-dimethyl O-3,5,6-trichloro-2-pyridyl phosphorothioate	227-011-5	5598-13-0	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)36/37-60-61	N; R50-53: C $\geq$ 0,0025 % N; R51-53: 0,00025 % $\leq$ C < 0,0025 % R52-53: 0,000025 % $\leq$ C < 0,00025 %	
015-187-00-4	reaction mass of: tetrasodium(((2-hydroxyethyl)imino)bis(methylene))bisphosphonate, N-oxide; trisodium ((tetrahydro-2-hydroxy-4H-1,4,2-oxazaphosphorin-4-yl)-methyl)phosphonate, N-oxide, P-oxide	417-540-1	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
015-189-00-5	phenyl bis(2,4,6-trimethylbenzoyl)-phosphine oxide	423-340-5	162881-26-7	R43 R53	Xi R: 43-53 S: (2-)22-24-37-61		
016-001-00-4	hydrogen sulphide	231-977-3	7783-06-4	F+; R12 T+; R26 N; R50	F+; T+; N R: 12-26-50 S: (1/2-)9-16-36-38- 45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
016-002-00-X	barium sulphide	244-214-4	21109-95-5	R31 Xn; R20/22 N; R50	Xn; N R: 20/22-31-50 S: (2-)28-61		
016-003-00-5	barium polysulphides	256-814-3	50864-67-0	R31 Xi; R36/37/ 38 N; R50	Xi; N R: 31-36/37/38-50 S: (2-)28-61		
016-004-00-0	calcium sulphide	243-873-5	20548-54-3	R31 Xi; R36/37/ 38 N; R50	Xi; N R: 31-36/37/38-50 S: (2-)28-61		
016-005-00-6	calcium polysulphides	215-709-2	1344-81-6	R31 Xi; R36/37/ 38 N; R50	Xi; N R: 31-36/37/38-50 S: (2-)28-61		
016-006-00-1	dipotassium sulphide; potassium sulphide	215-197-0	1312-73-8	R31 C; R34 N; R50	C; N R: 31-34-50 S: (1/2-)26-45-61		
016-007-00-7	potassium polysulphides	253-390-1	37199-66-9	R31 C; R34 N; R50	C; N R: 31-34-50 S: (1/2-)26-45-61		
016-008-00-2	ammonium polysulphides	232-989-1	9080-17-5	R31 C; R34 N; R50	C; N R: 31-34-50 S: (1/2-)26-45-61	C; R34: C ≥ 5 % Xi; R36/38: 1 % ≤ C < 5 % R31: C ≥ 1 %	
016-009-00-8	disodium sulphide; sodium sulphide	215-211-5	1313-82-2	R31 C; R34 N; R50	C; N R: 31-34-50 S: (1/2-)26-45-61		
016-010-00-3	sodium polysulphides	215-686-9	1344-08-7	T; R25 R31 C; R34 N; R50	T; N R: 25-31-34-50 S: (1/2-)26-36/37/39- 45-61		
016-011-00-9	sulphur dioxide	231-195-2	7446-09-5	T; R23 C; R34	T R: 23-34 S: (1/2-)9-26-36/37/ 39-45	T; R23: C ≥ 20 % Xn; R20: 5 % ≤ C < 20 %	5

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
016-012-00-4	disulphur dichloride; sulfur monochloride	233-036-2	10025-67-9	R14 T; R25 Xn; R20 R29 C; R35 N; R50	T; C; N R: 14-20-25-29-35-50 S: (1/2-)26-36/37/39-45-61	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
016-013-00-X	sulphur dichloride	234-129-0	10545-99-0	R14 C; R34 Xi; R37 N; R50	C; N R: 14-34-37-50 S: (1/2-)26-45-61		
016-014-00-5	sulphur tetrachloride	—	13451-08-6	R14 C; R34 N; R50	C; N R: 14-34-50 S: (1/2-)26-45-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
016-015-00-0	thionyl dichloride; thionyl chloride	231-748-8	7719-09-7	R14 Xn; R20/22 R29 C; R35	C R: 14-20/22-29-35 S: (1/2-)26-36/37/39-45	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
016-016-00-6	sulphuryl chloride	232-245-6	7791-25-5	R14 C; R34 Xi; R37	C R: 14-34-37 S: (1/2-)26-45		
016-017-00-1	chlorosulphonic acid	232-234-6	7790-94-5	R14 C; R35 Xi; R37	C R: 14-35-37 S: (1/2-)26-45		
016-018-00-7	fluorosulphonic acid	232-149-4	7789-21-1	Xn; R20 C; R35	C R: 20-35 S: (1/2-)26-45		
016-019-00-2	oleum ... % SO ₃	—	—	R14 C; R35 Xi; R37	C R: 14-35-37 S: (1/2-)26-30-45		B
016-020-00-8	sulphuric acid ... %	231-639-5	7664-93-9	C; R35	C R: 35 S: (1/2-)26-30-45	C; R35: C ≥ 15 % Xi; R36/38: 5 % ≤ C < 15 %	B

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
016-021-00-3	methanethiol; methyl mercaptan	200-822-1	74-93-1	F+; R12 T; R23 N; R50-53	F+; T; N R: 12-23-50/53 S: (2-)16-25-60-61		
016-022-00-9	ethanethiol; ethyl mercaptan	200-837-3	75-08-1	F; R11 Xn; R20 N; R50-53	F; Xn; N R: 11-20-50/53 S: (2-)16-25-60-61		
016-023-00-4	dimethyl sulphate	201-058-1	77-78-1	Carc. Cat. 2; R45 Muta. Cat. 3; R68 T+; R26 T; R25 C; R34 R43	T+ R: 45-25-26-34-43-68 S: 53-45	Car. Cat. 2; R45: C ≥ 0,01 % Muta. Cat. 3, R68: C ≥ 0,01 % C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	E
016-024-00-X	dimexano (ISO); bis(methoxythiocarbonyl) disulphide	215-993-8	1468-37-7	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
016-025-00-5	disul (ISO); 2-(2,4-dichlorophenoxy)ethyl hydrogensulphate; 2,4-DES	205-259-5	149-26-8	Xn; R22 Xi; R38-41	Xn R: 22-38-41 S: (2-)26		
016-026-00-0	sulphamidic acid; sulphamic acid; sulfamic acid	226-218-8	5329-14-6	Xi; R36/38 R52-53	Xi R: 36/38-52/53 S: (2-)26-28-61		
016-027-00-6	diethyl sulphate	200-589-6	64-67-5	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Xn; R20/21/ 22 C; R34	T R: 45-46-20/21/22-34 S: 53-45		E
016-028-00-1	sodium dithionite; sodium hydrosulphite	231-890-0	7775-14-6	R7 R31 Xn; R22	Xn R: 7-22-31 S: (2-)7/8-26-28-43		
016-029-00-7	p-toluenesulphonic acid, containing more than 5 % H ₂ SO ₄	—	—	C; R34	C R: 34 S: (1/2-)26-37/39-45	C; R34: C ≥ 25 % Xi; R36/38: 10 % ≤ C < 25 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
016-030-00-2	p-toluenesulphonic acid (containing a maximum of 5 % H ₂ SO ₄)	203-180-0	104-15-4	Xi; R36/37/38	Xi R: 36/37/38 S: (2-)26-37		
016-031-00-8	tetrahydrothiophene-1,1-dioxide; sulpholane	204-783-1	126-33-0	Xn; R22	Xn R: 22 S: (2-)25		
016-032-00-3	1,3-propanesultone; 1,2-oxathiolane 2,2-dioxide	214-317-9	1120-71-4	Carc. Cat. 2; R45 Xn; R21/22	T R: 45-21/22 S: 53-45	Carc. Cat. 2; R45: C ≥ 0,01 %	E
016-033-00-9	dimethylsulfamoylchloride	236-412-4	13360-57-1	Carc. Cat. 2; R45 T+; R26 Xn; R21/22 C; R34	T+ R: 45-21/22-26-34 S: 53-45		E
016-034-00-4	tetrasodium 3,3'-(piperazine-1,4-diylbis((6-chloro-1,3,5-triazine-2,4-diyl)imino(2-acetamido)-4,1-phenyleneazo))bis (naphthalene-1,5-disulphonate)	400-010-9	81898-60-4	R43	Xi R: 43 S: (2-)22-24-37		
016-035-00-X	pentasodium 5-anilino-3-(4-(4-(6-chloro-4-(3-sulphonatoanilino)-1,3,5-triazin-2-ylamino)-2,5-dimethylphenylazo)-2,5-disulphonatophenylazo)-4-hydroxynaphthalene-2,7-disulphonate	400-120-7	—	Xi; R36	Xi R: 36 S: (2-)22-26		
016-036-00-5	tetrasodium 5-(4,6-dichloro-5-cyanopyrimidin-2-ylamino)-4-hydroxy-2,3-azodinaphthalene-1,2,5,7-disulphonate	400-130-1	—	R42 N; R51-53	Xn; N R: 42-51/53 S: (2-)22-61		
016-037-00-0	disodium 1-amino-4-(4-benzenesulphonamido-3-sulphonatoanilino)anthraquinone-2-sulphonate	400-350-8	85153-93-1	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
016-038-00-6	disodium 6-((4-chloro-6-(N-methyl)-2-toluidino)-1,3,5-triazin-2-ylamino)-1-hydroxy-2-(4-methoxy-2-sulphonatophenylazo)naphthalene-3-sulphonate	400-380-1	86393-35-3	R43	Xi R: 43 S: (2-)22-24-37		
016-039-00-1	tetrasodium 2-(6-chloro-4-(4-(2,5-dimethyl-4-(2,5-disulphonatophenylazo)phenylazo)-3-ureidoanilino)-1,3,5-triazin-2-ylamino)benzene-1,4-disulphonate	400-430-2	—	R43	Xi R: 43 S: (2-)22-24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
016-040-00-7	reaction mass of disodium 6-(2,4-dihydroxyphenylazo)-3-(4-(4-(2,4-dihydroxyphenylazo)anilino)-3-sulphonatophenylazo)-4-hydroxynaphthalene-2-sulphonate and disodium 6-(2,4-diaminophenylazo)-3-(4-(4-(2,4-diaminophenylazo)anilino)-3-sulphonatophenylazo)-4-hydroxynaphthalene-2-sulphonate and trisodium 6-(2,4-dihydroxyphenylazo)-3-(4-(4-(7-(2,4-dihydroxyphenylazo)-1-hydroxy-3-sulphonato-2-naphthylazo)anilino)-3-sulphonatophenylazo)-4-hydroxynaphthalene-2-sulphonate	400-570-4	—	Xi; R36	Xi R: 36 S: (2-)26		
016-041-00-2	calcium 2,5-dichloro-4-(4-((5-chloro-4-methyl-2-sulphonatophenyl)azo)-5-hydroxy-3-methylpyrazol-1-yl)benzenesulphonate	400-710-4	—	Xn; R20	Xn R: 20 S: (2-)		
016-042-00-8	tetrasodium 5-benzamido-3-(5-(4-fluoro-6-(1-sulphonato-2-naphthylamino)-1,3,5-triazin-2-ylamino)-2-sulphonatophenylazo)-4-hydroxynaphthalene-2,7-disulphonate	400-790-0	85665-97-0	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)22-24/25-37		
016-043-00-3	dilithium 6-acetamido-4-hydroxy-3-(4-((2-sulphonatooxy)ethylsulphonyl)phenylazo)naphthalene-2-sulphonate	401-010-1	—	R43	Xi R: 43 S: (2-)24-37		
016-044-00-9	disodium S,S-hexane-1,6-diyl di(thiosulphate) dihydrate	401-320-7	—	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
016-045-00-4	lithium sodium hydrogen 4-amino-6-(5-(5-chloro-2,6-difluoropyrimidin-4-ylamino)-2-sulphonatophenylazo)-5-hydroxy-3-(4-(2-(sulphonatooxy)ethylsulphonyl)phenylazo)naphthalene-2,7-disulphonate	401-560-2	108624-00-6	R43	Xi R: 43 S: (2-)22-24-37		
016-046-00-X	sodium hydrogensulphate	231-665-7	7681-38-1	Xi; R41	Xi R: 41 S: (2-)24-26		
016-047-00-5	hexasodium 7-(4-(4-(4-(2,5-disulphonatoanilino)-6-fluoro-1,3,5-triazin-2-ylamino)-2-methylphenylazo)-7-sulphonatophenylazo)naphthalene-1,3,5-trisulphonate	401-650-1	85665-96-9	R43	Xi R: 43 S: (2-)22-24-37		
016-048-00-0	sodium 3,5-dichloro-2-(5-cyano-2,6-bis(3-hydroxypropylamino)-4-methylpyridin-3-ylazo)benzenesulphonate	401-870-8	—	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
016-049-00-6	calcium octadecylxylenesulphonate	402-040-8	—	C; R34 N; R51-53	C; N R: 34-51/53 S: (1/2-)26-28-36/37/ 39-45-61		
016-050-00-1	potassium sodium 5-(4-chloro-6-(N-(4-(4-chloro-6-(5-hydroxy-2,7-disulphonato-6-(2-sulphonatophenylazo)-4-naphthylamino)-1,3,5-triazin-2-ylamino) phenyl-N-methyl) amino)-1,3,5-triazin-2-ylamino)-4-hydroxy-3-(2-sulphonato-phenylazo)naphthalene-2,7-disulphonat	402-150-6	—	Xi; R36 R43	Xi R: 36-43 S: (2-)22-24-26-37		
016-051-00-7	trisodium 7-(4-(6-fluoro-4-(2-(2-vinylsulphonylethoxy)ethylamino)-1,3,5-triazin-2-ylamino)-2-ureidophenylazo)naphthalene-1,3,6- trisulphonate	402-170-5	106359-91-5	R43	Xi R: 43 S: (2-)22-24-37		
016-052-00-2	benzyltributylammonium 4-hydroxynaphthalene-1-sulphonate	402-240-5	102561-46-6	Xn; R20 N; R51-53	Xn; N R: 20-51/53 S: (2-)22-61		
016-053-00-8	(C ₁₆ or C ₁₈ -n-alkyl)(C ₁₆ or C ₁₈ -n-alkyl)ammonium 2-((C ₁₆ or C ₁₈ -n-alkyl)(C ₁₆ or C ₁₈ -n-alkyl)carbamoyl)benzenesulphonate	402-460-1	—	Xi; R38 R43 R53	Xi R: 38-43-53 S: (2-)24-37-61		
016-054-00-3	sodium 4-(2,4,4-trimethylpentylcarbonyloxy)benzenesulfonate	400-030-8	—	T; R23-48/23 Xn; R22 Xi; R36/37 R43	T R: 22-23-36/37-43-48/23 S: (1/2-)22-24-36-45		
016-055-00-9	tetrasodium 4-amino-3,6-bis(5-(6-chloro-4-(2-hydroxyethylamino)-1,3,5-triazin-2-ylamino)-2-sulfonatophenylazo)-5-hydroxynaphthalene-2,7-sulfonate (containing > 35 % sodium chloride and sodium acetate)	400-510-7	—	Xi; R41 R43	Xi R: 41-43 S: (2-)22-24-26-37/39		
016-056-00-4	potassium hydrogensulphate	231-594-1	7646-93-7	C; R34 Xi; R37	C R: 34-37 S: (1/2-)26-36/37/39-45		
016-057-00-X	styrene-4-sulfonyl chloride	404-770-2	2633-67-2	Xi; R38-41 R43	Xi R: 38-41-43 S: (2-)24-26-37/39		
016-058-00-5	thionyl chloride, reaction products with 1,3,4-thiadiazol-2,5-dithiol, <i>tert</i> -nonanethiol and C ₁₂₋₁₄ - <i>tert</i> -alkylamine	404-820-3	—	Xi; R38 R43 R52-53	Xi R: 38-43-52/53 S: (2-)36/37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
016-059-00-0	N,N,N',N'-tetramethyldithiobis(ethylene)diamine dihydrochloride	405-300-9	17339-60-5	Xn; R22 Xi; R36 R43 N; R50-53	Xn; N R: 22-36-43-50/53 S: (2-)26-36/37-60-61		
016-060-00-6	diammonium peroxodisulphate; ammonium persulphate	231-786-5	7727-54-0	O; R8 Xn; R22 Xi; R36/37/ 38 R42/43	O; Xn R: 8-22-36/37/38-42/ 43 S: (2-)22-24-26-37		
016-061-00-1	dipotassium peroxodisulphate; potassium persulphate	231-781-8	7727-21-1	O; R8 Xn; R22 Xi; R36/37/ 38 R42/43	O; Xn R: 8-22-36/37/38-42/ 43 S: (2-)22-24-26-37		
016-062-00-7	bensultap (ISO); 1,3-bis(phenylsulfonylthio)-2-(N,N-dimethylamino)propane	—	17606-31-4	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
016-063-00-2	sodium metabisulphite	231-673-0	7681-57-4	Xn; R22 Xi; R41 R31	Xn R: 22-31-41 S: (2-)26-39-46		
016-064-00-8	sodium hydrogensulphite . . . %; sodium bisulphite . . . %	231-548-0	7631-90-5	Xn; R22 R31	Xn R: 22-31 S: (2-)25-46		B
016-065-00-3	sodium 1-amino-4-[2-methyl-5-(4-methylphenylsulfonylamino)phenylamino]anthraquinone-2-sulfonate	400-100-8	84057-97-6	N; R51-53	N R: 51/53 S: 61		
016-066-00-9	tetrasodium [5-((4-amino-6-chloro-1,3,5-triazin-2-yl)amino)-2-((2-hydroxy-3,5-disulfonatophenylazo)-2-sulfonatobenzylidenehydrazino)benzoate]copper(II)	404-070-7	116912-62-0	R52-53	R: 52/53 S: 61		
016-067-00-4	(4-methylphenyl)mesitylene sulfonate	407-530-5	67811-06-7	R53	R: 53 S: 61		
016-068-00-X	sodium 3,5-bis(tetradecyloxycarbonyl)benzenesulfinate	407-720-8	155160-86-4	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
016-069-00-5	3,5-bis-(tetradecyloxycarbonyl)benzenesulfinic acid	407-990-7	141915-64-2	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
016-070-00-0	4-benzyloxy-4'-(2,3-epoxy-2-methylprop-1-yloxy)diphenyl-sulfone	408-220-2	—	R53	R: 53 S: 61		
016-071-00-6	trisodium 3-amino-6,13-dichloro-10-((3-((4-chloro-6-(2-sul-fophenylamino)-1,3,5-triazin-2-yl)amino)propyl) amino)-4,11-triphenoxydioxazinedisulfonate	410-130-3	136248-03-8	R43	Xi R: - 43 S: (2-)22-24-37		
016-072-00-1	3-amino-4-hydroxy-N-(2-methoxyethyl)-benzenesulfonamide	411-520-6	112195-27-4	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)24-26-37/39-61		
016-073-00-7	tetrakis(phenylmethyl)thioperoxydi(carbothioamide)	404-310-0	10591-85-2	R53	R: 53 S: 61		
016-074-00-2	6-fluoro-2-methyl-3-(4-methylthiobenzyl)indene	405-410-7	—	Xi; R38-41 R43 N; R51-53	Xi; N R: 38-41-43-51/53 S: (2-)26-36/37/39-61		
016-075-00-8	2,2'-diallyl-4,4'-sulfonyldiphenol	411-570-9	41481-66-7	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
016-076-00-3	2,3-bis((2-mercaptoethyl)thio)-1-propanethiol	411-290-7	131538-00-6	Xn; R22-48/ 22 N; R50-53	Xn; N R: 22-48/22-50/53 S: (2-)23-24/25-36-60-61		
016-077-00-9	2-chloro-p-toluenesulfochloride	412-890-1	42413-03-6	C; R34 R43 R52-53	C R: 34-43-52/53 S: (1/2-)23-26-36/37/ 39-45-61		
016-078-00-4	4-methyl-N,N-bis(2-(((4-methylphenyl)sulfonyl)amino)ethyl) benzenesulfonamide	413-300-5	56187-04-3	R53	R: 53 S: 61		
016-079-00-X	N,N-bis(2-(p-toluenesulfonyloxy)ethyl)-p-toluenesulfonamide	412-920-3	16695-22-0	R43 R53	Xi R: 43-53 S: (2-)24-37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
016-080-00-5	sodium 2-anilino-5-(2-nitro-4-(N-phenylsulfamoyl))anilino-benzenesulfonate	412-320-1	31 361-99-6	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
016-081-00-0	hexahydrocyclopenta[c]pyrrole-1-(1H)-ammonium N-ethoxy-carbonyl-N-(p-tolylsulfonyl)azanide	418-350-1	—	Muta. Cat. 3; R68 Xn; R22 Xi; R36 R43 N; R51-53	Xn; N R: 22-36-43-68-51/ 53 S: (2-)26-36/37-61		
016-082-00-6	ethoxysulfuron (ISO); 1-(4,6-dimethoxypyrimidin-2-yl)-3-(2-ethoxyphenoxysulfo-nyl)urea	—	126801-58-9	N; R50-53	N R: 50/53 S: 60-61		
016-083-00-1	acibenzolar-S-methyl; benzo[1,2,3]thiadiazole-7-carbothioic acid S-methyl ester	420-050-0	135158-54-2	Xi; R36/37/ 38 R43 N; R50-53	Xi; N R: 36/37/38-43-50/ 53 S: (2-)24/25-37-46- 59-60-61		
016-084-00-7	prosulfuron; 1-(4-methoxy-6-methyl-1,3,5-triazin-2-yl)-3-[2-(3,3,3-trifluoropropyl)phenylsulfonyl]urea	—	94125-34-5	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
016-085-00-2	flazasulfuron (ISO); 1-(4,6-dimethoxypyrimidin-2-yl)-3-(3-trifluoromethyl-2-pyri-dylsulfonyl)urea	—	104040-78-0	N; R50-53	N R: 50/53 S: 60-61		
016-086-00-8	tetrasodium 10-amino-6,13-dichloro-3-(3-(4-(2,5-disulfona-toanilino)-6-fluoro-1,3,5-triazin-2-ylamino)prop-3-ylamino)-5,12-dioxa-7,14-diazapentacene-4,11-disulfonate	402-590-9	109125-56-6	Xi; R41	Xi R: 41 S: (2-)22-26-39		
016-087-00-3	reaction mass of: thiobis(4,1-phenylene)-S,S,S',S'-tetraphenyl-disulfonium bishexafluorophosphate; diphenyl(4-phenylthiophenyl)sulfonium hexafluorophos-phate; propylene carbonate	403-490-8	104558-95-4	Xi; R36 R43 N; R50-53	Xi; N R: 36-43-50/53 S: (2-)24-26-37-60- 61		
016-088-00-9	4-(bis(4-(diethylamino)phenyl)methyl)benzene-1,2-dimetha-nesulfonic acid	407-280-7	71297-11-5	R52-53	R: 52/53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
016-089-00-4	reaction mass of esters of 5,5',6,6',7,7'-hexahydroxy-3,3,3',3'-tetramethyl-1,1'-spirobiindan and 2-diazo-1,2-dihydro-1-oxo-5-sulfonaphthalene	413-840-1	—	E; R2 F; R11 R53	E R: 2-11-53 S: (2-)33-35-40-61		
016-090-00-X	4-methyl-N-(methylsulfonyl)benzenesulfonamide	415-040-8	14653-91-9	Xn; R22 Xi; R37-41	Xn R: 22-37-41 S: (2-)26-39		
016-091-00-5	C ₁₂₋₁₄ -tert-alkyl ammonium 1-amino-9,10-dihydro-9,10-dioxo-4-(2,4,6-trimethylanilino)-anthracen-2-sulfonate	414-110-5	—	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		
016-093-00-6	reaction mass of: 4-(7-hydroxy-2,4,4-trimethyl-2-chromanyl)resorcinol-4-yl-tris(6-diazo-5,6-dihydro-5-oxonaphthalen-1-sulfonate); 4-(7-hydroxy-2,4,4-trimethyl-2-chromanyl)resorcinolbis(6-diazo-5,6-dihydro-5-oxonaphthalen-1-sulfonate) (2:1)	414-770-4	140698-96-0	F; R11 Carc. Cat. 3; R40	F; Xn R: 11-40 S: (2-)7-36/37		
016-095-00-7	reaction mass of: reaction product of 4,4'-methylenebis[2-(4-hydroxybenzyl)-3,6-dimethylphenol] and 6-diazo-5,6-dihydro-5-oxo-naphthalenesulfonate (1:2); Reaction product of 4,4'-methylenebis[2-(4-hydroxybenzyl)-3,6-dimethylphenol] and 6-diazo-5,6-dihydro-5-oxo-naphthalenesulfonate (1:3)	417-980-4	—	F; R11 Carc. Cat. 3; R40	F; Xn R: 11-40 S: (2-)7-36/37		
016-096-00-2	thifensulfuron-methyl (ISO); methyl 3-(4-methoxy-6-methyl-1,3,5-triazin-2-ylcarbamoyl-sulfamoyl)thiophene-2-carboxylate	—	79277-27-3	N; R50-53	N R: 50/53 S: 60-61		
017-001-00-7	chlorine	231-959-5	7782-50-5	T; R23 Xi; R36/37/38 N; R50	T; N R: 23-36/37/38-50 S: (1/2-)9-45-61		
017-002-00-2	hydrogen chloride	231-595-7	7647-01-0	T; R23 C; R35	T; C R: 23-35 S: (1/2-)9-26-36/37/39-45		5
017-002-01-X	hydrochloric acid ... %	231-595-7	—	C; R34 Xi; R37	C R: 34-37 S: (1/2-)26-45	C; R34-37: C ≥ 25 % Xi; R36/37/38: 10 % ≤ C < 25 %	B

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
017-003-00-8	barium chlorate	236-760-7	13477-00-4	O; R9 Xn; R20/22 N; R51-53	O; Xn; N R: 9-20/22-51/53 S: (2-)13-27-61		
017-004-00-3	potassium chlorate	223-289-7	3811-04-9	O; R9 Xn; R20/22 N; R51-53	O; Xn; N R: 9-20/22-51/53 S: (2-)13-16-27-61		
017-005-00-9	sodium chlorate	231-887-4	7775-09-9	O; R9 Xn; R22 N; R51-53	O; Xn; N R: 9-22-51/53 S: (2-)13-17-46-61		
017-006-00-4	perchloric acid ... %	231-512-4	7601-90-3	R5 O; R8 C; R35	O; C R: 5-8-35 S: (1/2-)23-26-36-45	C; R35: $C \geq 50 \%$ C; R34: $10 \% \leq C < 50 \%$ Xi; R36/38: $1 \% \leq C < 10 \%$ Footnote O; R5-8: $C > 50 \%$	B
017-007-00-X	barium perchlorate	236-710-4	13465-95-7	O; R9 Xn; R20/22	O; Xn R: 9-20/22 S: (2-)27		
017-008-00-5	potassium perchlorate	231-912-9	7778-74-7	O; R9 Xn; R22	O; Xn R: 9-22 S: (2-)13-22-27		
017-009-00-0	ammonium perchlorate	232-235-1	7790-98-9	O; R9 R44 \$	O R: 9-44 S: (2-)14-16-27-36/37		G
017-010-00-6	sodium perchlorate	231-511-9	7601-89-0	O; R9 Xn; R22	O; Xn R: 9-22 S: (2-)13-22-27		
017-011-00-1	sodium hypochlorite, solution ... % Cl active	231-668-3	7681-52-9	C; R34 R31 N; R50	C; N R: 31-34-50 S: (1/2-)28-45-50-61	R31: $C \geq 5 \%$	B
017-012-00-7	calcium hypochlorite	231-908-7	7778-54-3	O; R8 \$ Xn; R22 R31 C; R34 N; R50	O; C; N R: 8-22-31-34-50 S: (1/2-)26-36/37/39-45-61	C; R34: $C \geq 10 \%$ Xi; R37/38-41: $3 \% \leq C < 10 \%$ Xi; R36: $0,5 \% \leq C < 3 \%$	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
017-013-00-2	calcium chloride	233-140-8	10043-52-4	Xi; R36	Xi R: 36 S: (2-)22-24		
017-014-00-8	ammonium chloride	235-186-4	12125-02-9	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)22		
017-015-00-3	(2-(aminomethyl)phenyl)acetylchloride hydrochloride	417-410-4	61807-67-8	Xn; R22 C; R35 R43	C R: 22-35-43 S: (1/2-)26-36/37/39-45		
017-016-00-9	methyltriphenylphosphonium chloride	418-400-2	1031-15-8	Xn; R21/22 Xi; R38-41 N; R51-53	Xn; N R: 21/22-38-41-51/53 S: (2-)22-26-36/37/39-61		
017-017-00-4	(Z)-1 3-docosenyl-N,N-bis(2-hydroxyethyl)-N-methyl-ammonium-chloride	426-210-6	120086-58-0	C; R34 N; R50-53	C; N R: 34-50/53 S: (2-)26-36/37/39-45-60-61		
017-018-00-X	N,N,N-trimethyl-2,3-bis(stearoyloxy)propylammonium chloride	405-660-7	—	N; R51-53	N R: 51/53 S: 61		
017-019-00-5	(R)-1,2,3,4-tetrahydro-6,7-dimethoxy-1-veratrylisoquinoline hydrochloride	415-110-8	54417-53-7	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-61		
017-020-00-0	ethyl propoxy aluminium chloride	421-790-7	13014-29-4	F; R15 R 14 C; R35	F; C R: 14/15-35 S: (1/2-)16-23-26-30-36/37/39-43-45		
017-021-00-6	behenamidopropyl-dimethyl-(dihydroxypropyl) ammonium chloride	423-420-1	136920-10-0	Xi; R41 R43 N; R50-53	Xi; N R: 41-43-50/53 S: (2-)26-36/37/39-60-61		
019-001-00-2	potassium	231-119-8	7440-09-7	F; R15 R14 C; R34	F; C R: 14/15-34 S: (1/2-)5-8-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
019-002-00-8	potassium hydroxide; caustic potash	215-181-3	1310-58-3	Xn; R22 C; R35	C R: 22-35 S: (1/2-)26-36/37/39-45	C; R35: $C \geq 5\%$ C; R34: $2\% \leq C < 5\%$ Xi; R36/38: $0.5\% \leq C < 2\%$	
020-001-00-X	calcium	231-179-5	7440-70-2	F; R15	F R: 15 S: (2-)8-24/25-43		
020-002-00-5	calcium cyanide	209-740-0	592-01-8	T+; R28 R32 N; R50-53	T+; N R: 28-32-50/53 S: (1/2-)7/8-23-36/37-45-60-61		
020-003-00-0	reaction mass of: dicalcium (bis(2-hydroxy-5-tetra-propenyl-phenylmethyl)methylamine)dihydroxide; tri-calcium (tris(2-hydroxy-5-tetra-propenylphenylmethyl)methylamine)tri-hydroxide; poly[calcium ((2-hydroxy-5-tetra-propenyl-phenylmethyl)methylamine)hydroxide]	420-470-4	—	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)24-26-37		
022-001-00-5	titanium tetrachloride	231-441-9	7550-45-0	R14 C; R34	C R: 14-34 S: (1/2-)7/8-26-36/37/39-45		
022-002-00-0	titanium(4+) oxalate	403-260-7	—	Xi; R41	Xi R: 41 S: (2-)26-39		
022-003-00-6	bis(η^5 -cyclopentadienyl)-bis(2,6-difluoro-3-[pyrrol-1-yl]-phenyl)titanium	412-000-1	125051-32-3	F; R11 Repr. Cat. 3; R62 Xn; R48/22 N; R51-53	F; Xn; N R: 11-48/22-62-51/53 S: (2-)7-22-33-36/37-61		
023-001-00-8	divanadium pentaoxide; vanadium pentoxide	215-239-8	1314-62-1	Muta. Cat. 3; R68 Repr. Cat. 3; R63 T; R48/23 Xn; R20/22 Xi; R37 N; R51-53	T; N R: 20/22-37-48/23-51/53-63-68 S: (1/2-)36/37-38-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
024-001-00-0	chromium (VI) trioxide	215-607-8	1333-82-0	O; R9 Carc. Cat. 1; R45 Muta. Cat. 2; R46 Repr. Cat. 3; R62 T+; R26 T; R24/25-48/23 C; R35 R42/43 N; R50-53	O; T+; N R: 45-46-9-24/25-26-35-42/43-48/23-62-50/53 S: 53-45-60-61	C: R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	E
024-002-00-6	potassium dichromate	231-906-6	7778-50-9	O; R8 Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/23 Xn; R21 C; R34 R42/43 N; R50-53	T+; N; O R: 45-46-60-61-8-21-25-26-34-42/43-48/23-50/53 S: 53-45-60-61	C; R34: C ≥ 10 %; Xi; R36/37/38: 5 % ≤ C < 10 %	E 3
024-003-00-1	ammonium dichromate	232-143-1	7789-09-5	E; R2 O; R8 Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/23 Xn; R21 C; R34 R42/43 N; R50-53	E; T+; N R: 45-46-60-61-2-8-21-25-26-34-42/43-48/23-50/53 S: 53-45-60-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 % R42/43: C ≥ 0,2 %	E 3

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
024-004-00-7	sodium dichromate anhydrate	234-190-3	10588-01-9	O; R8 Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/23 Xn; R21 C; R34 R42/43 N; 50-53	T+; N; O R: 45-46-60-61-8-21- 25-26-34-42/43-48/ 23-50/53 S: 53-45-60-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 % R42/43: C ≥ 0,2 %	E 3
024-004-01-4	sodium dichromate, dihydrate	234-190-3	7789-12-0	O; R8 Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/23 Xn; R21 C; R34 R42/43 N; R50-53	T+; N; O R: 45-46-60-61-8-21- 25-26-34-42/43-48/ 23-50/53 S: 53-45-60-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 % R42/43: C ≥ 0,2 %	E 3
024-005-00-2	chromyl dichloride; chromic oxychloride	239-056-8	14977-61-8	O; R8 Carc. Cat. 2; R49 Muta. Cat. 2; R46 C; R35 R43 N; R50-53	O; T; C; N R: 49-46-8-35-43-50/ 53 S: 53-45-60-61	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 0,5 % ≤ C < 5 % R43: C ≥ 0,5 %	3
024-006-00-8	potassium chromate	232-140-5	7789-00-6	Carc. Cat. 2; R49 Muta. Cat. 2; R46 Xi; R36/37/ 38 R43 N; R50-53	T; N R: 49-46-36/37/38- 43-50/53 S: 53-45-60-61	R43: C ≥ 0,5 %	3

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
024-007-00-3	zinc chromates including zinc potassium chromate	—	—	Carc. Cat. 1; R45 Xn; R22 R43 N; R50-53	T; N R: 45-22-43-50/53 S: 53-45-60-61		AE
024-008-00-9	calcium chromate	237-366-8	13765-19-0	Carc. Cat. 2; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61		E
024-009-00-4	strontium chromate	232-142-6	7789-06-2	Carc. Cat. 2; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61		E
024-010-00-X	dichromium tris(chromate); chromium III chromate; chromic chromate	246-356-2	24613-89-6	O; R8 Carc. Cat. 2; R45 C; R35 R43 N; R50-53	O; T; C; N R: 45-8-35-43-50/53 S: 53-45-60-61		
024-011-00-5	ammonium bis(1-(3,5-dinitro-2-oxidophenylazo)-3-(N-phenylcarbamoyl)-2-naphtholato)chromate(1-)	400-110-2	109125-51-1	F; R11 N; R50-53	F; N R: 11-50/53 S: (2-)33-60-61		
024-012-00-0	trisodium bis(7-acetamido-2-(4-nitro-2-oxidophenylazo)-3-sulphonato-1-naphtholato)chromate(1-)	400-810-8	—	Muta. Cat. 3; R68	Xn R: 68 S: (2-)22-36/37		
024-013-00-6	trisodium (6-anilino-2-(5-nitro-2-oxidophenylazo)-3-sulphonato-1-naphtholato)(4-sulphonato-1,1'-azodi-2,2'naphtholato)chromate(1-)	402-500-8	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
024-014-00-1	trisodium bis(2-(5-chloro-4-nitro-2-oxidophenylazo)-5-sulphonato-1-naphtholato)chromate(1-)	402-870-0	93952-24-0	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
024-015-00-7	disodium (3-methyl-4-(5-nitro-2-oxidophenylazo)-1-phenylpyrazololato)(1-(3-nitro-2-oxido-5-sulfonatophenylazo)-2-naphtholato)chromate(1-)	404-930-1	—	Xn; R20 Xi; R41 N; R51-53	Xn; N R: 20-41-51/53 S: (2-)26-39-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
024-016-00-2	tetradecylammonium bis(1-(5-chloro-2-oxidophenylazo)-2-naphtholato)chromate(1-)	405-110-6	88377-66-6	Xn; R48/22 R53	Xn R: 48/22-53 S: (2-)22-36-61		
024-017-00-8	Chromium (VI) compounds, with the exception of barium chromate and of compounds specified elsewhere in this Annex	—	—	Carc. Cat. 2; R49 R43 N; R50-53	T; N R: 49-43-50/53 S: 53-45-60-61		A
024-018-00-3	sodium chromate	231-889-5	7775-11-3	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/23 Xn; R21 C; R34 R42/43 N; R50-53	T+; N R: 45-46-60-61-21- 25-26-34-42/43-48/ 23-50/53 S: 53-45-60-61	R42/43: C ≥ 0,2 %	E 3
024-019-00-9	Main component: acetoacetic acid anilide / 3-amino-1-hydroxybenzene (ATAN-MAP): trisodium {6-[(2 or 3 or 4)-amino-(4 or 5 or 6)-hydroxyphenylazo]-5'-(phenylsulfamoyl)-3-sulfonatonaphthalene-2-azobenzene-1,2'-diolato}-{6"-[1-(phenylcarbamoylethylazo)-5"--(phenylsulfamoyl)-3"-sulfonatonaphthalene-2"-azobenzene-1",2"-diolato]chromate (III); by-product 1: acetoacetic acid anilide / acetoacetic acid anilide (ATAN-ATAN): trisodium bis{6-[1-(phenylcarbamoylethylazo)-5'-(phenylsulfonyl)-3-sulfonatonaphthalene-2-azobenzene-1,2'-diolato]chromate (III); by-product 2: 3-amino-1-hydroxybenzene / 3-amino-1-hydroxybenzene (MAP-MAP): trisodium bis{6-[(2 or 3 or 4)-amino-(4 or 5 or 6)-hydroxyphenylazo]-5'-(phenylsulfamoyl)-3-sulfonatonaphthalene-2-azobenzene-1,2'-diolato} chromate (III)	419-230-1	—	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
024-020-00-4	trisodium bis[(3'-nitro-5'-sulfonato(6-amino-2-[4-(2-hydroxy-1-naphthylazo)phenylsulfonylamino]pyrimidin-5-azo)benzene-2',4'-diolato)]chromate(III)	418-220-4	—	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
025-001-00-3	manganese dioxide	215-202-6	1313-13-9	Xn; R20/22	Xn R: 20/22 S: (2-)25		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
025-002-00-9	potassium permanganate	231-760-3	7722-64-7	O; R8 Xn; R22 N; R50-53	O; Xn; N R: 8-22-50/53 S: (2-)60-61		
025-003-00-4	manganese sulphate	232-089-9	7785-87-7	Xn; R48/20/22 N; R51-53	Xn; N R: 48/20/22-51/53 S: (2-)22-61		
025-004-00-X	bis(N,N',N''-trimethyl-1,4,7-triazacyclononane)-trioxo-dimanganese (IV) di(hexafluorophosphate) monohydrate	411-760-1	116633-53-5	N; R51-53	N R: 51/53 S: 61		
025-005-00-5	reaction mass of: tri-sodium [29H, 31H-phthalocyanine-C,C,C-trisulfonato (6-)-N29,N30,N31,N32] manganate (3-); tetrasodium [29H,31H-phthalocyanine-C,C,C,C-tetrasulfonato (6-)-N29,N30,N31,N32], manganate (3-); pentasodium [29H,31H-phthalocyanine-C,C,C,C,C-pentasulfonato (6-)-N29,N30,N31,N32] manganate (3-)	417-660-4	—	N; R50-53	N R: 50/53 S: 60-61		
026-001-00-6	(η-cumene)-(η-cyclopentadienyl)iron(II) hexafluoroantimonate	407-840-0	100011-37-8	Xn; R22 Xi; R41 R52-53	Xn R: 22-41-52/53 S: (2-)22-26-39-61		
026-002-00-1	(η-cumene)-(η-cyclopentadienyl)iron(II) trifluoromethane-sulfonate	407-880-9	117549-13-0	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)26-61		
027-001-00-9	cobalt	231-158-0	7440-48-4	R42/43 R53	Xn R: 42/43-53 S: (2-)22-24-37-61		
027-002-00-4	cobalt oxide	215-154-6	1307-96-6	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
027-003-00-X	cobalt sulphide	215-273-3	1317-42-6	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
027-004-00-5	cobalt dichloride	231-589-4	7646-79-9	Carc. Cat. 2; R49 Xn; R22 R42/43 N; R50-53	T; N R: 49-22-42/43-50/53 S: (2-)22-53-45-60-61	Carc. Cat. 2; R49: C ≥ 0,01 % Xn; R22: C ≥ 2,5 %	E 1

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
027-005-00-0	cobalt sulphate	233-334-2	10124-43-3	Carc. Cat. 2; R49 Xn; R22 R42/43 N; R50-53	T; N R: 49-22-42/43-50/ 53 S: (2-)22-53-45-60- 61	Carc. Cat. 2; R49: C ≥ 0,01 %	E 1
028-001-00-1	tetracarbonylnickel; nickel tetracarbonyl	236-669-2	13463-39-3	F; R11 Carc. Cat. 3; R40 Repr. Cat. 2; R61 T+; R26 N; R50-53	F; T+; N R: 61-11-26-40-50/ 53 S: 53-45-60-61		E
028-002-00-7	nickel	231-111-4	7440-02-0	Carc. Cat. 3; R40 R43	Xn R: 40-43 S: (2-)22-36		
028-003-00-2	nickel monoxide	215-215-7	1313-99-1	Carc. Cat. 1; R49 R43 R53	T R: 49-43-53 S: 53-45-61		
028-004-00-8	nickel dioxide	234-823-3	12035-36-8	Carc. Cat. 1; R49 R43 R53	T R: 49-43-53 S: 53-45-61		
028-005-00-3	dinickel trioxide	215-217-8	1314-06-3	Carc. Cat. 1; R49 R43 R53	T R: 49-43-53 S: 53-45-61		
028-006-00-9	nickel sulphide	240-841-2	16812-54-7	Carc. Cat. 1; R49 R43 N; R50-53	T; N R: 49-43-50/53 S: 53-45-60-61		
028-007-00-4	nickel subsulphide; trinickel disulphide	234-829-6	12035-72-2	Carc. Cat. 1; R49 R43 N; R51-53	T; N R: 49-43-51/53 S: 53-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
028-008-00-X	nickel dihydroxide	235-008-5	12054-48-7	Carc. Cat. 3; R40 Xn; R20/22 R43 N; R50-53	Xn; N R: 20/22-40-43-50/ 53 S: (2-)22-36-60-61		
028-009-00-5	nickel sulphate	232-104-9	7786-81-4	Carc. Cat. 3; R40 Xn; R22 R42/43 N; R50-53	Xn; N R: 22-40-42/43-50/ 53 S: (2-)22-36/37-60-61		
028-010-00-0	nickel carbonate	222-068-2	3333-67-3	Carc. Cat. 3; R40 Xn; R22 R43 N; R50-53	Xn; N R: 22-40-43-50/53 S: (2-)22-36/37-60-61		
029-001-00-4	copper chloride; copper (I) chloride; cuprous chloride	231-842-9	7758-89-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)22-60-61		
029-002-00-X	dicopper oxide; copper (I) oxide	215-270-7	1317-39-1	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)22-60-61		
029-003-00-5	Naphthenic acids, copper salts; copper naphthenate	215-657-0	1338-02-9	R10 Xn; R22 N; R50-53	Xn; N R: 10-22-50/53 S: (2-)60-61		
029-004-00-0	copper sulphate	231-847-6	7758-98-7	Xn; R22 Xi; R36/38 N; R50-53	Xn; N R: 22-36/38-50/53 S: (2-)22-60-61		
029-005-00-6	(tris(chloromethyl)phthalocyaninato)copper(II), reaction products with N-methylpiperazine and methoxyacetic acid	401-260-1	—	Xi; R36	Xi R: 36 S: (2-)26		
029-006-00-1	tris(octadec-9-enylammonium) (trisulfonatophthalocyaninato) copper(II)	403-210-4	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)22-26-39-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
029-007-00-7	(trisodium (2-((3-(6-(2-chloro-5-sulfonato)anilino)-4-(3-carboxypyridinio)-1,3,5-triazin-2-ylamino)-2-oxido-5-sulfonato-phenylazo)phenylmethylazo)-4-sulfonatobenzoato)copper(3-)) hydroxide	404-670-9	89797-01-3	E; R2 R43	E; Xi R: 2-43 S: (2-)22-24-35-37		
029-008-00-2	copper(II) methanesulfonate	405-400-2	54253-62-2	Xn; R22 Xi; R41 N; R50-53	Xn; N R: 22-41-50/53 S: (2-)26-36/37/39-60-61		
029-009-00-8	phthalocyanine-N-[3-(diethylamino)propyl]sulfonamide copper complex	413-650-9	93971-95-0	R52-53	R: 52/53 S: 61		
029-010-00-3	reaction mass of compounds from (dodecakis(p-tolylthio) phthalocyaninato)copper(II) to (hexadecakis(p-tolylthio) phthalocyaninato)copper(II)	407-700-9	101408-30-4	R43	Xi R: 43 S: (2-)24-37		
029-011-00-9	sodium [29H,31H-phthalocyaninato-(2-)-N29,N30,N31,N32]-((3-(N-methyl-N-(2-hydroxyethyl)amino)propyl)amino) sulfonyl-sulfonato, copper complex	412-730-0	150522-10-4	C; R34	C R: 34 S: (1/2-)22-26-36/37/39-45		
029-012-00-4	sodium ((N-(3-trimethylammonio)propyl)sulfamoyl)methylsulfonatophthalocyaninato)copper(II)	407-340-2	124719-24-0	Xi; R41	Xi R: 41 S: (2-)26-39		
029-013-00-X	trisodium(2-(α-(3-(4-chloro-6-(2-(2-(vinylsulfonyl)ethoxy)ethylamino)-1,3,5-triazin-2-ylamino)-2-oxido-5-sulfonato-phenylazo)benzylidenehydrazino)-4-sulfonatobenzoato)copper(II)	407-580-8	130201-51-3	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)24-37-61		
030-001-00-1	zinc powder - zinc dust (pyrophoric)	231-175-3	7440-66-6	F; R15-17 N; R50-53	F; N R: 15-17-50/53 S: (2-)43-46-60-61		
030-001-01-9	zinc powder - zinc dust (stabilised)	231-175-3	7440-66-6	N; R50-53	N R: 50/53 S: 60-61		
030-003-00-2	zinc chloride	231-592-0	7646-85-7	C; R34 Xn; R22 N; R50-53	C; N R: 22-34-50/53 S: (1/2-)26-36/37/39-45-60-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
030-004-00-8	dimethylzinc; [1] diethylzinc [2]	208-884-1 [1] 209-161-3 [2]	544-97-8 [1] 557-20-0 [2]	F; R17 R14 C; R34 N; R50-53	F; C; N R: 14-17-34-50/53 S: (1/2-)16-43-45-60-61		
030-005-00-3	diamminediisocyanatozinc	401-610-3	—	Xn; R22 Xi; R41 R42/43 N; R50	Xn; N R: 22-41-42/43-50 S: (2-)22-26-36/37/ 39-41-61		
030-006-00-9	zinc sulphate (hydrous) (mono-, hexa- and hepta hydrate); [1] zinc sulphate (anhydrous) [2]	231-793-3 [1] 231-793-3 [2]	7446-19-7 [1] 7733-02-0 [2]	Xn; R22 Xi; R41 N; R50-53	Xn; N R: 22-41-50/53 S: (2-)22-26-39-46-60-61		
030-007-00-4	bis(3,5-di- <i>tert</i> -butylsalicylato-O ¹ ,O ²)zinc	403-360-0	42405-40-3	F; R11 Xn; R22 N; R50-53	F; Xn; N R: 11-22-50/53 S: (2-)7-22-60-61		
030-008-00-X	hydroxo(2-(benzenesulfonamido)benzoato)zinc(II)	403-750-0	113036-91-2	Xn; R20 N; R51-53	Xn; N R: 20-51/53 S: (2-)22-57-61		
030-011-00-6	trizinc bis(orthophosphate)	231-944-3	7779-90-0	N; R50-53	N R: 50/53 S: 60-61		
030-013-00-7	zinc oxide	215-222-5	1314-13-2	N; R50-53	N R: 50/53 S: 60-61		
033-001-00-X	arsenic	231-148-6	7440-38-2	T; R23/25 N; R50-53	T; N R: 23/25-50/53 S: (1/2-)20/21-28-45-60-61		
033-002-00-5	arsenic compounds, with the exception of those specified elsewhere in this Annex	—	—	T; R23/25 N; R50-53	T; N R: 23/25-50/53 S: (1/2-)20/21-28-45-60-61	T; R23/25: C ≥ 0,2 % Xn; R20/22: 0,1 % ≤ C < 0,2 %	A 1

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
033-003-00-0	diarsenic trioxide; arsenic trioxide	215-481-4	1327-53-3	Carc. Cat. 1; R45 T+; R28 C; R34 N; R50-53	T+; N R: 45-28-34-50/53 S: 53-45-60-61		E
033-004-00-6	diarsenic pentaoxide; arsenic pentoxide; arsenic oxide	215-116-9	1303-28-2	Carc. Cat. 1; R45 T; R23/25 N; R50-53	T; N R: 45-23/25-50/53 S: 53-45-60-61		E
033-005-00-1	arsenic acid and its salts	—	—	Carc. Cat. 1; R45 T; R23/25 N; R50-53	T; N R: 45-23/25-50/53 S: 53-45-60-61		AE
033-006-00-7	arsine	232-066-3	7784-42-1	F+; R12 T+; R26 Xn; R48/20 N; R50-53	F+; T+; N R: 12-26-48/20-50/ 53 S: (1/2-)9-16-28-33- 36/37-45-60-61		
033-007-00-2	tert-butylarsine	423-320-6	4262-43-5	F; R17 T+; R26	F; T+ R: 17-26 S: (1/2-)9-28-36/37- 43-45		
034-001-00-2	selenium	231-957-4	7782-49-2	T; R23/25 R33 R53	T R: 23/25-33-53 S: (1/2-)20/21-28-45- 61		
034-002-00-8	selenium compounds except cadmium sulphoselenide	—	—	T; R23/25 R33 N; R50-53	T; N R: 23/25-33-50/53 S: (1/2-)20/21-28-45- 60-61		A
034-003-00-3	sodium selenite	233-267-9	10102-18-8	T+; R28 T; R23 R31 R43 N; R51-53	T+; N R: 23-28-31-43-51/ 53 S: (1/2-)28-36/37-45- 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
035-001-00-5	bromine	231-778-1	7726-95-6	T+; R26 C; R35 N; R50	T+; C; N R: 26-35-50 S: (1/2-)7/9-26-45-61		
035-002-00-0	hydrogen bromide	233-113-0	10035-10-6	C; R35 Xi; R37	C R: 35-37 S: (1/2-)7/9-26-45		
035-002-01-8	hydrobromic acid ... %	—	—	C; R34 Xi; R37	C R: 34-37 S: (1/2-)7/9-26-45	C; R34: C ≥ 40 % Xi; R36/38: 10 % ≤ C < 40 % Xi; R37: C ≥ 10 %	B
035-003-00-6	potassium bromate	231-829-8	7758-01-2	O; R9 Carc. Cat. 2; R45 T; R25	T; O R: 45-9-25 S: 53-45		E
035-004-00-1	2-hydroxyethylammonium perbromide	407-440-6	—	O; R8 Xn; R22 C; R35 R43 N; R50	O; C; N R: 8-22-35-43-50 S: (1/2-)3/7-14-26-36/37/39-45-60-61		
040-001-00-3	zirconium powder (pyrophoric)	231-176-9	7440-67-7	F; R15-17	F R: 15-17 S: (2-)7/8-43		
040-002-00-9	zirconium powder (non pyrophoric)	—	—	F; R15	F R: 15 S: (2-)7/8-43		
042-001-00-9	molybdenum trioxide	215-204-7	1313-27-5	Xn; R48/20/22 Xi; R36/37	Xn R: 36/37-48/20/22 S: (2-)22-25		
042-002-00-4	tetrakis(dimethylditetradecylammonium) hexa-μ-oxotetra-μ3-oxodi-μ5-oxotetradecaooctamolybdate(4-)	404-760-8	117342-25-3	T; R23 Xi; R41 R53	T R: 23-41-53 S: (1/2-)26-37/39-45-61		
042-003-00-X	tetrakis(trimethylhexadecylammonium) hexa-mu-oxotetra-mu3-oxodi-mu5-oxotetradecaooctamolybdate(4-)	404-860-1	116810-46-9	F; R11 Xi; R41 N; R50-53	F; Xi; N R: 11-41-50/53 S: (2-)26-39-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
042-004-00-5	Reaction product of ammonium molybdate and C ₁₂ -C ₂₄ -diethoxylated alkylamine (1:5-1:3)	412-780-3	—	Xi; R38 R43 N; R51-53	Xi; N R: 38-43-51/53 S: 24/25-37-61		
047-001-00-2	silver nitrate	231-853-9	7761-88-8	⊗ C; R34 N; R50-53	C; N R: 34-50/53 S: (1/2-)26-45-60-61		
048-001-00-5	cadmium compounds, with the exception of cadmium sulphoselenide (xCdS.yCdSe), reaction mass of cadmium sulphide with zinc sulphide (xCdS.yZnS), reaction mass of cadmium sulphide with mercury sulphide (xCdS.yHgS), and those specified elsewhere in this Annex	—	—	Xn; R20/21/22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)60-61	Xn; R20/21/22: C ≥ 0,1 %	A 1
048-002-00-0	cadmium (non-pyrophoric); [1] cadmium oxide (non-pyrophoric) [2]	231-152-8 [1] 215-146-2 [2]	7440-43-9 [1] 1306-19-0 [2]	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62-63 T+; R26 T; R48/23/25 N; R50-53	T+; N R: 45-26-48/23/25-62-63-68-50/53 S: 53-45-60-61		E
048-003-00-6	cadmium diformate; cadmiumformate	224-729-0	4464-23-7	T; R23/25 R33 Xn; R68 N; R50-53	T; N R: 23/25-33-68-50/53 S: (1/2-)22-45-60-61	T; R23/25: C ≥ 10 % Xn; R20/22: 0,25 % ≤ C < 10 % R33: C ≥ 0,25 %	
048-004-00-1	cadmium cyanide	208-829-1	542-83-6	T+; R26/27/28 R32 R33 Xn; R68 N; R50-53	T+; N R: 26/27/28-32-33-68-50/53 S: (1/2-)7-28-29-45-60-61	R32: C ≥ 1 % R33: C ≥ 0,1 %	
048-005-00-7	cadmiumhexafluorosilicate(2-); cadmium fluorosilica	241-084-0	17010-21-8	T; R23/25 R33 Xn; R68 N; R50-53	T; N R: 23/25-33-68-50/53 S: (1/2-)22-45-60-61	T; R23/25: C ≥ 10 % Xn; R20/22: 0,1 % ≤ C < 10 % R33: C ≥ 0,1 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
048-006-00-2	cadmium fluoride	232-222-0	7790-79-6	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/ 23/25 N; R50-53	T+; N R: 45-46-60-61-25- 26-48/23/25-50/53 S: 53-45-60-61	Carc. Cat. 2; R45: C ≥ 0,01 % T; R25: C ≥ 10 % Xn; R22: 0,1 % ≤ C < 10 % T; R48/23/25: C ≥ 7 % Xn; R48/20/22: 0,1 % ≤ C < 7 %	E
048-007-00-8	cadmium iodide	232-223-6	7790-80-9	T; R23/25 R33 Xn; R68 N; R50-53	T; N R: 23/25-33-68-50/ 53 S: (1/2-)22-45-60-61	T; R23/25: C ≥ 10 % Xn; R20/22: 0.1 % ≤ C < 10 % R33: C ≥ 0.1 %	
048-008-00-3	cadmium chloride	233-296-7	10108-64-2	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/ 23/25 N; R50-53	T+; N R: 45-46-60-61-25- 26-48/23/25-50/53 S: 53-45-60-61	Carc. Cat. 2; R45: C ≥ 0,01 % T; R25: C ≥ 10 % Xn; R22: 0,1 % ≤ C < 10 % T; R48/23/25: C ≥ 7 % Xn; R48/20/22: 0,1 % ≤ C < 7 %	E
048-009-00-9	cadmium sulphate	233-331-6	10124-36-4	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/ 23/25 N; R50-53	T+; N R: 45-46-60-61-25- 26-48/23/25-50/53 S: 53-45-60-61	Carc. Cat. 2; R45: C ≥ 0,01 % T; R25: C ≥ 10 % Xn; R22: 0,1 % ≤ C < 10 % T; R48/23/25: C ≥ 7 % Xn; R48/20/22: 0,1 % ≤ C < 7 %	E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
048-010-00-4	cadmium sulphide	215-147-8	1306-23-6	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62-63 T; R48/23/25 Xn; R22 R53	T; R: 45-22-48/23/25- 62-63-68-53 S: 53-45-61	Xn; R22: C ≥ 10 % T; R48/23/25: C ≥ 10 % Xn; R48/20/22: 0,1 % ≤ C < 10 %	E 1
048-011-00-X	cadmium (pyrophoric)	231-152-8	7440-43-9	F; R17 Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62-63 T+; R26 T; R48/23/25 N; R50-53	F; T+; N R: 45-17-26-48/23/ 25-62-63-68-50/53 S: 53-45-7/8-43-60- 61		E
050-001-00-5	tin tetrachloride; stannic chloride	231-588-9	7646-78-8	C; R34 R52-53	C R: 34-52/53 S: (1/2-)7/8-26-45-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
050-002-00-0	cyhexatin (ISO); hydroxytricyclohexylstannane; tri(cyclohexyl)tin hydroxide	236-049-1	13121-70-5	Xn; R20/21/ 22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)13-60-61		
050-003-00-6	fentin acetate (ISO); triphenyltin acetate	212-984-0	900-95-8	Carc. Cat. 3; R40 Repr. Cat. 3; R63 T+; R26 T; R24/25- 48/23 Xi; R37/38- 41 N; R50-53	T+; N R: 24/25-26-37/38- 40-41-48/23-50/53- 63 S: (1/2-)26-28-36/37/ 39-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
050-004-00-1	fentin hydroxide (ISO); triphenyltin hydroxide	200-990-6	76-87-9	Carc. Cat. 3; R40 Repr. Cat. 3; R63 T+; R26 T; R24/25- 48/23 Xi; R37/38- 41 N; R50-53	T+; N R: 24/25-26-37/38- 40-41-48/23-50/53- 63 S: (1/2-)26-28-36/37/ 39-45-60-61		
050-005-00-7	trimethyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	T+; R26/27/ 28 N; R50-53	T+; N R: 26/27/28-50/53 S: (1/2-)26-27-28-45- 60-61	T+; R26/27/28: C ≥ 0,5 % T; R23/24/25: 0,1 % ≤ C < 0,5 % Xn; R20/21/22: 0,05 % ≤ C < 0,1 %	A 1
050-006-00-2	triethyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	T+; R26/27/ 28 N; R50-53	T+; N R: 26/27/28-50/53 S: (1/2-)26-27-28-45- 60-61	T+; R26/27/28: C ≥ 0,5 % T; R23/24/25: 0,1 % ≤ C < 0,5 % Xn; R20/21/22: 0,05 % ≤ C < 0,1 %	A 1
050-007-00-8	tripropyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)26-27-28-45- 60-61	T; R23/24/25: C ≥ 0,5 % Xn; R20/21/22: 0,1 % ≤ C < 0,5 %	A 1
050-008-00-3	tributyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	T; R25-48/ 23/25 Xn; R21 Xi; R36/38 N; R50-53	T; N R: 21-25-36/38-48/ 23/25-50/53 S: (1/2-)35-36/37/39- 45-60-61	T; R25: C ≥ 1 % Xn; R22: 0,25 % ≤ C < 1 % T; R48/23/25: C ≥ 1 % Xn; R48/20/22: 0,25 % ≤ C < 1 % Xn; R21: C ≥ 1 % Xi; R36/38: C ≥ 1 %	A 1
050-009-00-9	fluorotripentylstannane; [1] hexapentylstannoxane [2]	243-546-7 [1] 247-143-7 [2]	20153-49-5 [1] 25637-27-8 [2]	Xn; R20/21/ 22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)26-28-60-61	Xn; R20/21/22: C ≥ 1 %	1
050-010-00-4	fluorotrihexylstannane	243-547-2	20153-50-8	Xn; R20/21/ 22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)26-28-60-61	Xn; R20/21/22: C ≥ 1 %	1

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
050-011-00-X	triphenyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)26-27-28-45-60-61	T; R23/24/25: C ≥ 1 % Xn; R20/21/22: 0,25 % ≤ C < 1 %	A 1
050-012-00-5	tetracyclohexylstannane; [1] chlorotricyclohexylstannane; [2] butyltricyclohexylstannane [3]	215-910-5 [1] 221-437-5 [2] 230-358-5 [3]	1449-55-4 [1] 3091-32-5 [2] 7067-44-9 [3]	Xn; R20/21/ 22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)26-28-60-61	Xn; R20/21/22: C ≥ 1 %	A 1
050-013-00-0	triocetyl tin compounds, with the exception of those specified elsewhere in this Annex	—	—	Xi; R36/37/ 38 R53	Xi R: 36/37/38-53 S: (2-)61	Xi; R36/37/38: C ≥ 1 %	A 1
050-017-00-2	fenbutatin oxide (ISO); bis(tris(2-methyl-2-phenylpropyl)tin)oxide	236-407-7	13356-08-6	T+; R26 Xi; R36/38 N; R50-53	T+; N R: 26-36/38-50/53 S: (1/2-)28-36/37-45-60-61		
050-018-00-8	tin(II) methanesulphonate	401-640-7	53408-94-9	C; R34 Xn; R22 R43	C R: 22-34-43 S: (1/2-)22-26-36/37/ 39-45		
050-019-00-3	azocyclotin (ISO); 1-(tricyclohexylstannyl)-1H-1,2,4-triazole;	255-209-1	41083-11-8	T+; R26 T; R25 Xi; R37/38-41 N; R50-53	T+; N R: 25-26-37/38-41-50/53 S: (1/2-)26-28-36/37/ 39-38-45-60-61		
050-020-00-9	triocetyl stannane	413-320-4	869-59-0	T; R48/25 Xi; R38 R53	T R: 38-48/25-53 S: (1/2-)23-36/37-45-61		
051-001-00-8	antimony trichloride	233-047-2	10025-91-9	C; R34 N; R51-53	C; N R: 34-51/53 S: (1/2-)26-45-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
051-002-00-3	antimony pentachloride	231-601-8	7647-18-9	C; R34 N; R51-53	C; N R: 34-51/53 S: (1/2-)26-45-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
051-003-00-9	antimony compounds, with the exception of the tetroxide (Sb ₂ O ₄), pentoxide (Sb ₂ O ₅), trisulphide (Sb ₂ S ₃), pentasulphide (Sb ₂ S ₅) and those specified elsewhere in this Annex	—	—	Xn; R20/22 N; R51-53	Xn; N R: 20/22-51/53 S: (2-)61	Xn; R20/22: C ≥ 0,25 %	A 1
051-004-00-4	antimony trifluoride	232-009-2	7783-56-4	T; R23/24/25 N; R51-53	T; N R: 23/24/25-51/53 S: (1/2-)7-26-45-61		
051-005-00-X	antimony trioxide	215-175-0	1309-64-4	Carc. Cat. 3; R40	Xn R: 40 S: (2-)22-36/37		
051-006-00-5	diphenyl(4-phenylthiophenyl)sulfonium hexafluoroantimonate	403-500-0	—	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
051-007-00-0	bis(4-dodecylphenyl)iodonium hexafluoroantimonate	404-420-9	71786-70-4	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
053-001-00-3	iodine	231-442-4	7553-56-2	Xn; R20/21 N; R50	Xn; N R: 20/21-50 S: (2-)23-25-61		
053-002-00-9	hydrogen iodide	233-109-9	10034-85-2	C; R35	C R: 35 S: (1/2-)9-26-36/37/ 39-45	C; R35: C ≥ 10 % C; R34: 0,2 % ≤ C < 10 % Xi; R36/37/38: 0,02 % ≤ C < 0,2 %	5
053-002-01-6	hydriodic acid ... %	—	—	C; R34	C R: 34 S: (1/2-)26-45	C; R34: C ≥ 25 % Xi; R36/38: 10 % ≤ C < 25 %	B
053-003-00-4	iodoxybenzene	—	696-33-3	E; R1 ⊗	E R: 1 S: (2-)35		
053-004-00-X	calcium iodoxybenzoate	—	—	E; R1 ⊗	E R: 1 S: (2-)35		C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
053-005-00-5	(4-(1-methylethyl)phenyl)-(4-methylphenyl)iodonium tetrakis (pentafluorophenyl)borate (1-)	422-960-3	178233-72-2	Xn; R21/22-48/22 N; R50-53	Xn; N R: 21/22-48/22-50/53 S: (2-)22-36/37-60-61		
056-001-00-1	barium peroxide	215-128-4	1304-29-6	O; R8 Xn; R20/22	O; Xn R: 8-20/22 S: (2-)13-27		
056-002-00-7	barium salts, with the exception of barium sulphate, salts of 1-azo-2-hydroxynaphthalenyl aryl sulphonic acid, and of salts specified elsewhere in this Annex	—	—	Xn; R20/22	Xn R: 20/22 S: (2-)28	Xn; R20/22: C ≥ 1 %	A 1
056-003-00-2	barium carbonate	208-167-3	513-77-9	Xn; R22	Xn R: 22 S: (2-)24/25		
056-004-00-8	barium chloride	233-788-1	10361-37-2	T; R25 Xn; R20	T R: 20-25 S: (1/2-)45		
072-001-00-4	hafnium tetra- <i>n</i> -butoxide	411-740-2	22411-22-9	Xi; R41 R43	Xi R: 41-43 S: (2-)24/25-26-37/39		
074-001-00-X	hexasodium tungstate hydrate	412-770-9	12141-67-2	Xn; R22 Xi; R41 R52-53	Xn R: 22-41-52/53 S: (2-)22-26-39-61		
074-002-00-5	Reaction products of tungsten hexachloride with 2-methylpropan-2-ol, nonylphenol and pentane-2,4-dione	408-250-6	—	F; R11 Xn; R20 C; R34 R43 N; R50-53	F; C; N R: 11-20-34-43-50/53 S: (1/2-)16-26-29-33-36/37/39-45-60-61		
076-001-00-5	osmium tetroxide; osmic acid	244-058-7	20816-12-0	T+; R26/27/28 C; R34	T+ R: 26/27/28-34 S: (1/2-)7/9-26-45		
078-001-00-0	tetrachloroplatinates with the exception of those specified elsewhere in this Annex	—	—	T; R25 Xi; R41 R42/43	T R: 25-41-42/43 S: (2-)22-26-36/37/39-45		A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
078-002-00-6	diammonium tetrachloroplatinate	237-499-1	13820-41-2	T; R25 Xi; R38-41 R42/43	T R: 25-38-41-42/43 S: (2-)22-26-36/37/ 39-45		
078-003-00-1	disodium tetrachloroplatinate	233-051-4	10026-00-3	T; R25 Xi; R38-41 R42/43	T R: 25-38-41-42/43 S: (2-)22-26-36/37/ 39-45		
078-004-00-7	dipotassium tetrachloroplatinate	233-050-9	10025-99-7	T; R25 Xi; R38-41 R42/43	T R: 25-38-41-42/43 S: (2-)22-26-36/37/ 39-45		
078-005-00-2	hexachloroplatinates with the exception of those specified elsewhere in this Annex	—	—	T; R25 Xi; R41 R42/43	T R: 25-41-42/43 S: (1/2-)22-26-36/37/ 39-45		A
078-006-00-8	disodium hexachloroplatinate	240-983-5	16923-58-3	T; R25 Xi; R41 R42/43	T R: 25-41-42/43 S: (1/2-)22-26-36/37/ 39-45		
078-007-00-3	dipotassium hexachloroplatinate	240-979-3	16921-30-5	T; R25 Xi; R41 R42/43	T R: 25-41-42/43 S: (1/2-)22-26-36/37/ 39-45		
078-008-00-9	diammonium hexachloroplatinate	240-973-0	16919-58-7	T; R25 Xi; R41 R42/43	T R: 25-41-42/43 S: (1/2-)22-26-36/37/ 39-45		
078-009-00-4	hexachloroplatinic acid	241-010-7	16941-12-1	T; R25 C; R34 R42/43	T R: 25-34-42/43 S: (1/2-)22-26-36/37/ 39-45		
080-001-00-0	mercury	231-106-7	7439-97-6	T; R23 R33 N; R50-53	T; N R: 23-33-50/53 S: (1/2-)7-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
080-002-00-6	inorganic compounds of mercury with the exception of mercuric sulphide and those specified elsewhere in this Annex	—	—	T+; R26/27/28 R33 N; R50-53	T+; N R: 26/27/28-33-50/53 S: (1/2-)13-28-45-60-61	T+; R26/27/28: C ≥ 2 % T; R23/24/25: 0,5 % ≤ C < 2 % Xn; R20/21/22: 0,1 % ≤ C < 0,5 % R33: C ≥ 0,1 %	A 1
080-003-00-1	dimercury dichloride; mercurous chloride; calomel	233-307-5	10112-91-1	Xn; R22 Xi; R36/37/38 N; R50-53	Xn; N R: 22-36/37/38-50/53 S: (2-)13-24/25-46-60-61		
080-004-00-7	organic compounds of mercury with the exception of those specified elsewhere in this Annex	—	—	T+; R26/27/28 R33 N; R50-53	T+; N R: 26/27/28-33-50/53 S: (1/2-)13-28-36-45-60-61	T+; R26/27/28: C ≥ 2 % T; R23/24/25: 0,5 % ≤ C < 2 % Xn; R20/21/22: 0,05 % ≤ C < 0,5 % R33: C ≥ 0,05 %	A 1
080-005-00-2	mercury difulminate; mercuric fulminate; fulminate of mercury	211-057-8	628-86-4	E; R3 T; R23/24/25 R33 N; R50-53	E; T; N R: 3-23/24/25-33-50/53 S: (1/2-)3-45-60-61		
080-006-00-8	dimercury dicyanide oxide; mercuric oxycyanide	215-629-8	1335-31-5	E; R3 T; R23/24/25 R33 N; R50-53	E; T; N R: 3-23/24/25-33-50/53 S: (1/2-)28-35-45-60-61		
080-007-00-3	dimethylmercury; [1] diethylmercury [2]	209-805-3 [1] 211-000-7 [2]	593-74-8 [1] 627-44-1 [2]	T+; R26/27/28 R33 N; R50-53	T+; N R: 26/27/28-33-50/53 S: (1/2-)13-28-36-45-60-61	T+; R26/27/28: C ≥ 0,5 % T; R23/24/25: 0,1 % ≤ C < 0,5 % Xn; R20/21/22: 0,05 % ≤ C < 0,1 % R33: C ≥ 0,05 %	1
080-008-00-9	phenylmercury nitrate; [1] phenylmercury hydroxide; [2] basic phenylmercury nitrate [3]	200-242-9 [1] 202-866-7 [2] - [3]	55-68-5 [1] 100-57-2 [2] 8003-05-2 [3]	T; R25-48/24/25 C; R34 N; R50-53	T; N R: 25-34-48/24/25-50/53 S: (1/2-)23-24/25-37-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
080-009-00-4	2-methoxyethylmercury chloride	204-659-7	123-88-6	T; R25-48/25 C; R34 N; R50-53	T; N R: 25-34-48/25-50/ 53 S: (1/2-)36/37/39-45- 60-61		
080-010-00-X	mercury dichloride; mercuric chloride	231-299-8	7487-94-7	T+; R28 T; R48/24/25 C; R34 N; R50-53	T+; N R: 28-34-48/24/25- 50/53 S: (1/2-)36/37/39-45- 60-61		
080-011-00-5	phenylmercury acetate	200-532-5	62-38-4	T; R25-48/ 24/25 C; R34 N; R50-53	T; N R: 25-34-48/24/25- 50/53 S: (1/2-)23-24/25-37- 45-60-61		
081-001-00-3	thallium	231-138-1	7440-28-0	T+; R26/28 R33 R53	T+ R: 26/28-33-53 S: (1/2-)13-28-45-61		
081-002-00-9	thallium compounds, with the exception of those specified elsewhere in this Annex	—	—	T+; R26/28 R33 N; R51-53	T+; N R: 26/28-33-51/53 S: (1/2-)13-28-45-61		A
081-003-00-4	dithallium sulphate; thallic sulphate	231-201-3	7446-18-6	T+; R28 T; R48/25 Xi; R38 N; R51-53	T+; N R: 28-38-48/25-51/ 53 S: (1/2-)13-36/37-45- 61		
082-001-00-6	lead compounds with the exception of those specified elsewhere in this Annex	—	—	Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R20/22 R33 N; R50-53	T; N R: 61-20/22-33-62- 50/53 S: 53-45-60-61	Repr. Cat. 3; R62: C ≥ 2,5 % Xn; R20/22: C ≥ 1 % R33: C ≥ 0,5 %	AE 1

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
082-002-00-1	lead alkyls	—	—	Repr. Cat. 1; R61 Repr. Cat. 3; R62 T+; R26/27/ 28 R33 N; R50-53	T+; N R: 61-26/27/28-33- 62-50/53 S: 53-45-60-61	Repr. Cat. 1; R61: C ≥ 0,1 % T+; R26/27/28: C ≥ 0,25 % T; R23/24/25: 0,1 % ≤ C < 0,25 % Xn; R20/21/22: 0,05 % ≤ C < 0,1 % R33: C ≥ 0,05 %	AE 1
082-003-00-7	lead diazide; lead azide	236-542-1	13424-46-9	E; R3 Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R20/22 R33 N; R50-53	E; T; N R: 61-3-20/22-33-50/ 53-62 S: 53-45-60-61		E 1
082-004-00-2	lead chromate	231-846-0	7758-97-6	Carc. Cat. 3; R40 Repr. Cat. 1; R61 Repr. Cat. 3; R62 R33 N; R50-53	T; N R: 61-33-40-50/53- 62 S: 53-45-60-61		1
082-005-00-8	lead di(acetate)	206-104-4	301-04-2	Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R48/22 R33 N; R50-53	T; N R: 61-33-48/22-50/ 53-62 S: 53-45-60-61		E 1
082-006-00-3	trilead bis(orthophosphate)	231-205-5	7446-27-7	Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R48/22 R33 N; R50-53	T; N R: 61-33-48/22-50/ 53-62 S: 53-45-60-61		E 1

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
082-007-00-9	lead acetate, basic;	215-630-3	1335-32-6	Carc. Cat. 3; R40 Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R48/22 R33 N; R50-53	T; N R: 61-33-40-48/22-50/53-62 S: 53-45-60-61		E 1
082-008-00-4	lead(II) methanesulphonate	401-750-5	17570-76-2	Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R20/22-48/20/22 Xi; R38-41 N; R58 R33	T; N R: 61-62-20/22-33-38-41-48/20/22-58 S: 53-45-57-61		E 1
082-009-00-X	Lead sulfochromate yellow; C.I. Pigment Yellow 34; [This substance is identified in the Colour Index by Colour Index Constitution Number, C.I. 77603.]	215-693-7	1344-37-2	Carc. Cat. 3; R40 Repr. Cat. 1; R61 Repr. Cat. 3; R62 R33 N; R50-53	T; N R: 61-33-40-50/53-62 S: 53-45-60-61		1
082-010-00-5	Lead chromate molybdate sulfate red; C.I. Pigment Red 104; [This substance is identified in the Colour Index by Colour Index Constitution Number, C.I. 77605.]	235-759-9	12656-85-8	Carc. Cat. 3; R40 Repr. Cat. 1; R61 Repr. Cat. 3; R62 R33 N; R50-53	T; N R: 61-33-40-50/53-62 S: 53-45-60-61		1

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
082-011-00-0	lead hydrogen arsenate	232-064-2	7784-40-9	Carc. Cat. 1; R45 Repr. Cat. 1; R61 Repr. Cat. 3; R62 T; R23/25 R33 N; R50-53	T; N R: 45-61-23/25-33-50/53-62 S: 53-45-60-61		E 1
092-001-00-8	uranium	231-170-6	7440-61-1	T+; R26/28 R33 R53	T+ R: 26/28-33-53 S: (1/2-)20/21-45-61		
092-002-00-3	uranium compounds	—	—	T+; R26/28 R33 N; R51-53	T+; N R: 26/28-33-51/53 S: (1/2-)20/21-45-61		A
601-001-00-4	methane	200-812-7	74-82-8	F+; R12	F+ R: 12 S: (2-)9-16-33		
601-002-00-X	ethane	200-814-8	74-84-0	F+; R12	F+ R: 12 S: (2-)9-16-33		
601-003-00-5	propane	200-827-9	74-98-6	F+; R12	F+ R: 12 S: (2-)9-16		
601-004-00-0	butane; [1] and isobutane [2]	203-448-7 [1] 200-857-2 [2]	106-97-8 [1] 75-28-5 [2]	F+; R12	F+ R: 12 S: (2-)9-16		C
601-004-01-8	butane (containing ≥ 0.1 % butadiene (203-450-8)); [1] isobutane (containing ≥ 0.1 % butadiene (203-450-8)) [2]	203-448-7 [1] 200-857-2 [2]	106-97-8 [1] 75-28-5 [2]	F+; R12 Carc. Cat. 1; R45 Muta. Cat. 2; R46	F+; T R: 45-46-12 S: 53-45		CS
601-005-00-6	2,2-dimethylpropane; neopentane	207-343-7	463-82-1	F+; R12 N; R51-53	F+; N R: 12-51/53 S: (2-)9-16-33-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
601-006-00-1	pentane; [1] isopentane; 2-methylbutane [2]	203-692-4 [1] 201-142-8 [2]	109-66-0 [1] 78-78-4 [2]	F+; R12 Xn; R65 R66 R67 N; R51-53	F+; Xn; N R: 12-51/53-65-66- 67 S: (2-)9-16-29-33-61- 62		C
601-007-00-7	hexane, reaction mass of isomers (containing < 5 % <i>n</i> -hexane (203-777-6))	—	—	F; R11 Xn; R65 Xi; R38 R67 N; R51-53	F; Xn; N R: 11-38-51/53-65- 67 S: (2-)9-16-29-33-61- 62		C
601-008-00-2	heptane [and isomers] [1]	205-563-8 [1] 203-548-0 [2] 207-346-3 [3] 209-230-8 [4] 209-280-0 [5] 209-643-3 [6] 209-680-5 [7] 209-730-6 [8] 210-529-0 [9] 250-610-8 [10]	142-82-5 [1] 108-08-7 [2] 464-06-2 [3] 562-49-2 [4] 565-59-3 [5] 589-34-4 [6] 590-35-2 [7] 591-76-4 [8] 617-78-7 [9] 31394-54-4 [10]	F; R11 Xn; R65 Xi; R38 R67 N; R50-53	F; Xn; N R: 11-38-50/53-65- 67 S: (2-)9-16-29-33-60- 61-62		C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
601-009-00-8	octane [and isomers] [1]	203-892-1 [1] 208-759-1 [2] 209-207-2 [3] 209-243-9 [4] 209-266-4 [5] 209-292-6 [6] 209-504-7 [7] 209-547-1 [8] 209-649-6 [9] 209-650-1 [10] 209-660-6 [11] 209-689-4 [12]	111-65-9 [1] 540-84-1 [2] 560-21-4 [3] 563-16-6 [4] 564-02-3 [5] 565-75-3 [6] 583-48-2 [7] 584-94-1 [8] 589-43-5 [9] 589-53-7 [10] 589-81-1 [11] 590-73-8 [12] 592-13-2 [13] 592-27-8 [14] 594-82-1 [15] 609-26-7 [16] 619-99-8 [17] 1067-08-9 [18] 26635-64-3 [19]	F; R11 Xn; R65 Xi; R38 R67 N; R50-53	F; Xn; N R: 11-38-50/53-65-67 S: (2-)9-16-29-33-60-61-62		C
		209-745-8 [13] 209-747-9 [14] 209-855-6 [15] 210-187-2 [16] 210-621-0 [17] 213-923-0 [18] 247-861-0 [19]					

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
601-010-00-3	ethylene	200-815-3	74-85-1	F+; R12 R67	F+ R: 12-67 S: (2-)9-16-33-45		
601-011-00-9	propene; propylene	204-062-1	115-07-1	F+; R12	F+ R: 12 S: (2-)9-16-33		
601-012-00-4	but-1-ene; [1] butene, mixed-1-and-2-isomers; [2] 2-methylpropene; [3] (Z)-but-2-ene; [4] (E)-but-2-ene [5]	203-449-2 [1] 203-452-9 [2] 204-066-3 [3] 209-673-7 [4] 210-855-3 [5]	106-98-9 [1] 107-01-7 [2] 115-11-7 [3] 590-18-1 [4] 624-64-6 [5]	F+; R12	F+ R: 12 S: (2-)9-16-33		C
601-013-00-X	1,3-butadiene; buta-1,3-diene	203-450-8	106-99-0	F+; R12 Carc. Cat. 1; R45 Muta. Cat. 2; R46	F+; T R: 45-46-12 S: 53-45		D
601-014-00-5	isoprene (stabilised) 2-methyl-1,3-butadiene	201-143-3	78-79-5	F+; R12 Carc. Cat. 2; R45 Muta. Cat. 3; R68 R52-53	F+; T R: 45-12-68-52/53 S: 53-45-61		D
601-015-00-0	acetylene; ethyne	200-816-9	74-86-2	R5 R6 F+; R12	F+ R: 5-6-12 S: (2-)9-16-33		
601-016-00-6	cyclopropane	200-847-8	75-19-4	F+; R12	F+ R: 12 S: (2-)9-16-33		
601-017-00-1	cyclohexane	203-806-2	110-82-7	F; R11 Xn; R65 Xi; R38 R67 N; R50-53	F; Xn; N R: 11-38-65-67-50/ 53 S: (2-)9-16-25-33-60- 61-62		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
601-018-00-7	methylcyclohexane	203-624-3	108-87-2	F; R11 Xn; R65 Xi; R38 R67 N; R51-53	F; Xn; N R: 11-38-51/53-65-67 S: (2-)9-16-33-61-62		
601-019-00-2	1,4-dimethylcyclohexane	209-663-2	589-90-2	F; R11 Xn; R65 Xi; R38 R67 N; R51-53	F; Xn; N R: 11-38-51/53-65-67 S: (2-)9-16-33-61-62		
601-020-00-8	benzene	200-753-7	71-43-2	F; R11 Carc. Cat. 1; R45 Muta. Cat. 2; R46 T; R48/23/ 24/25 Xn; R65 Xi; R36/38	F; T R: 45-46-11-36/38-48/23/24/25-65 S: 53-45		E
601-021-00-3	toluene	203-625-9	108-88-3	F; R11 Repr. Cat. 3; R63 Xn; R48/20-65 Xi; R38 R67	F; Xn R: 11-38-48/20-63-65-67 S: (2-)36/37-46-62		
601-022-00-9	<i>o</i> -xylene; [1] <i>p</i> -xylene; [2] <i>m</i> -xylene; [3] xylene [4]	202-422-2 [1] 203-396-5 [2] 203-576-3 [3] 215-535-7 [4]	95-47-6 [1] 106-42-3 [2] 108-38-3 [3] 1330-20-7 [4]	R10 Xn; R20/21 Xi; R38	Xn R: 10-20/21-38 S: (2-)25	Xn; R20/21: C ≥ 12,5 %	C
601-023-00-4	ethylbenzene	202-849-4	100-41-4	F; R11 Xn; R20	F; Xn R: 11-20 S: (2-)16-24/25-29		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
601-024-00-X	cumene; [1] propylbenzene [2]	202-704-5 [1] 203-132-9 [2]	98-82-8 [1] 103-65-1 [2]	R10 Xn; R65 Xi; R37 N; R51-53	Xn; N R: 10-37-51/53-65 S: (2-)24-37-61-62		C
601-025-00-5	mesitylene; 1,3,5-trimethylbenzene	203-604-4	108-67-8	R10 Xi; R37 N; R51-53	Xi; N R: 10-37-51/53 S: (2-)61	Xi; R37: C ≥ 25 %	
601-026-00-0	styrene	202-851-5	100-42-5	R10 Xn; R20 Xi; R36/38	Xn R: 10-20-36/38 S: (2-)23	Xn; R20: C ≥ 12,5 % Xi; R36/38: C ≥ 12,5 %	D
601-027-00-6	2-phenylpropene; α-methylstyrene	202-705-0	98-83-9	R10 Xi; R36/37 N; R51-53	Xi; N R: 10-36/37-51/53 S: (2-)61	Xi; R36/37: C ≥ 25 %	
601-028-00-1	2-methylstyrene; 2-vinyltoluene	210-256-7	611-15-4	Xn; R20 N; R51-53	Xn; N R: 20-51/53 S: (2-)24-61		
601-029-00-7	dipentene; limonene; [1] (R)-p-mentha-1,8-diene; d-limonene; [2] (S)-p-mentha-1,8-diene; l-limonene; [3] trans-1-methyl-4-(1-methylvinyl)cyclohexene; [4] (±)-1-methyl-4-(1-methylvinyl)cyclohexene [5]	205-341-0 [1] 227-813-5 [2] 227-815-6 [3] 229-977-3 [4] 231-732-0 [5]	138-86-3 [1] 5989-27-5 [2] 5989-54-8 [3] 6876-12-6 [4] 7705-14-8 [5]	R10 Xi; R38 R43 N; R50-53	Xi; N R: 10-38-43-50/53 S: (2-)24-37-60-61		C
601-030-00-2	cyclopentane	206-016-6	287-92-3	F; R11 R52-53	F R: 11-52/53 S: (2-)9-16-29-33-61		
601-031-00-8	2,4,4-trimethylpent-1-ene	203-486-4	107-39-1	F; R11 N; R51-53	F; N R: 11-51/53 S: (2-)9-16-29-33-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
601-032-00-3	benzo[a]pyrene; benzo[def]chrysene	200-028-5	50-32-8	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 R43 N; R50-53	T; N R: 45-46-60-61-43- 50/53 S: 53-45-60-61	Carc. Cat. 2; R45: C ≥ 0,01 %	
601-033-00-9	benz[a]anthracene	200-280-6	56-55-3	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61		
601-034-00-4	benz[e]acephenanthrylene	205-911-9	205-99-2	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61		
601-035-00-X	benzo[j]fluoranthene	205-910-3	205-82-3	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61		
601-036-00-5	benzo[k]fluoranthene	205-916-6	207-08-9	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61		
601-037-00-0	n-hexane	203-777-6	110-54-3	F; R11 Repr. Cat. 3; R62 Xn; R65-48/ 20 Xi; R38 R67 N; R51-53	F; Xn; N R: 11-38-48/20-62- 65-67-51/53 S: (2-)9-16-29-33-36/ 37-61-62	Xn; R48/20: C ≥ 5 %	
601-041-00-2	dibenz[a,h]anthracene	200-181-8	53-70-3	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61	Carc. Cat. 2; R45: C ≥ 0,01 %	
601-042-00-8	biphenyl; diphenyl	202-163-5	92-52-4	Xi; R36/37/ 38 N; R50-53	Xi; N R: 36/37/38-50/53 S: (2-)23-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
601-043-00-3	1,2,4-trimethylbenzene	202-436-9	95-63-6	R10 Xn; R20 Xi; R36/37/ 38 N; R51-53	Xn; N R: 10-20-36/37/38- 51/53 S: (2-)26-61		
601-044-00-9	3a,4,7,7a-tetrahydro-4,7-methanoindene	201-052-9	77-73-6	F; R11 Xn; R20/22 Xi; R36/37/ 38 N; R51-53	F; Xn; N R: 11-20/22-36/37/ 38-51/53 S: (2-)36/37-61		
601-045-00-4	1,2,3,4-tetrahydronaphthalene	204-340-2	119-64-2	R19 Xi; R36/38 N; R51-53	Xi; N R: 19-36/38-51/53 S: (2-)26-28-61		
601-046-00-X	7-methylocta-1,6-diene	404-210-7	42152-47-6	R10 N; R50-53	N R: 10-50/53 S: (2-)60-61		
601-047-00-5	<i>m</i> -mentha-1,3(8)-diene	404-150-1	17092-80-7	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
601-048-00-0	chrysene	205-923-4	218-01-9	Carc. Cat. 2; R45 Muta. Cat. 3; R68 N; R50-53	T; N R: 45-68-50/53 S: 53-45-60-61		
601-049-00-6	benzo[<i>e</i>]pyrene	205-892-7	192-97-2	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61		
601-051-00-7	4-phenylbut-1-ene	405-980-7	768-56-9	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
601-052-00-2	naphthalene	202-049-5	91-20-3	Carc. Cat. 3; R40 Xn; R22 N; R50-53	Xn; N R: 22-40-50/53 S: (2-)36/37-46-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
601-053-00-8	nonylphenol; [1] 4-nonylphenol, branched [2]	246-672-0 [1] 284-325-5 [2]	25154-52-3 [1] 84852-15-3 [2]	Repr. Cat. 3; R62-63 Xn; R22 C; R34 N; R50-53	C; N R: 22-34-62-63-50/ 53 S: (1/2-)26-36/37/39- 45-46-60-61		
601-054-00-3	reaction mass of isomers of: dibenzylbenzene; dibenzyl(methyl)benzene; dibenzyl(dimethyl)benzene; dibenzyl(trimethyl)benzene	405-570-8	—	N; R50-53	N R: 50/53 S: 60-61		
601-055-00-9	reaction mass of isomers of: mono-(2-tetradecyl)naphthalenes; di-(2-tetradecyl)naphthalenes; tri-(2-tetradecyl)naphthalenes	410-190-0	132983-41-6	Xi; R36 R53	Xi R: 36-53 S: (2-)26-61		
601-056-00-4	reaction mass of isomers of: methyldiphenylmethane; dimethyldiphenylmethane	405-470-4	73807-39-3	Xi; R38 N; R50-53	Xi; N R: 38-50/53 S: (2-)37-60-61		
601-057-00-X	N-dodecyl-[3-(4-(dimethylamino)benzamido)-propyl]dime- thylammonium tosylate	421-130-8	156679-41-3	Xi; R41 R43 N; R50-53	Xi; N R: 41-43-50/53 S: (2-)24-26-37/39- 60-61		
601-058-00-5	di-L-para-menthene	417-870-6	83648-84-4	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)23-24-37-60- 61		
601-059-00-0	methyl 2-benzylidene-3-oxobutyrate	420-940-9	15768-07-7	Xi; R36/38 N; R51-53	Xi; N R: 36/38-51/53 S: (2-)26-37/39-61		
601-060-00-6	1,2-bis[4-fluoro-6-(4-sulfo-5-(2-(4-sulfonaphthalene-3-ylazo)- 1-hydroxy-3,6-disulfo-8-aminonaphthalene-7-ylazo)phenyla- mino)-1,3,5-triazin-2ylamino]ethane;x-sodium, y-potassium salts x = 7,755 y = 0,245	417-610-1	155522-09-1	R43	Xi R: 43 S: (2-)22-24-37		
601-061-00-1	(ethyl-1,2-ethanediy)[-2-[[[(2-hydroxyethyl)methylamino]ace- tyl]-propyl]ω-(nonylphenoxy)poly]oxy-(methyl-1,2-ethane- diyl)	418-960-8	—	C; R34 R43 N; R51-53	C; N R: 34-43-51/53 S: (1/2-)26-28-36/37/ 39-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
601-062-00-7	reaction mass of: branched triacontane; branched dotriacontane; branched tetratriacontane; branched hexatriacontane	417-030-9	151006-59-6	R53	R: 53 S: 61		
601-063-00-2	reaction mass of isomers of branched tetracosane	417-060-2	151006-61-0	Xn; R20 R53	Xn R: 20-53 S: (2-)61		
601-064-00-8	branched hexatriacontane	417-070-7	151006-62-1	R53	R: 53 S: 61		
601-065-00-3	reaction mass of: (1'- α ,3'- α ,6'- α -2,2,3',7',7'-pentamethylspiro(1,3-dioxane-5,2'-norcarane); (1' α ,3' β ,6' α)-2,2,3',7',7'-pentamethylspiro(1,3-dioxane-5,2'-norcarane)	416-930-9	—	Xn; R48/22 Xi; R41 N; R51-53	Xn; N R: 41-48/22-51/53 S: (2-)22-26-37/39-61		
601-066-00-9	1-(4-(<i>trans</i> -4-heptylcyclohexyl)phenyl)ethanone	426-820-2	78531-60-9	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
601-067-00-4	triethyl arsenate	427-700-2	15606-95-8	Carc. Cat. 1; R45 T; R23/25 N; R50-53	T; N R: 45-23/25-50/53 S: 53-45-60-61		E
601-068-00-X	1,2-diacetoxybut-3-ene	421-720-5	18085-02-4	Xn; R22	Xn R: 22 S: (2-)		
601-069-00-5	2-ethyl-1-(2-(1,3-dioxanyl)ethyl)-pyridinium bromide	422-680-1	287933-44-2	R52-53	R: 52/53 S: 61		
601-071-00-6	1-dimethoxymethyl-2-nitro-benzene	423-830-9	20627-73-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
601-073-00-7	1-bromo-3,5-difluorobenzene	416-710-2	461-96-1	R10 Xn; R22-48/ 22 Xi; R38 R43 N; R50-53	Xn; N R: 10-22-38-43-48/ 22-50/53 S: (2-)24-36/37-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
601-074-00-2	reaction mass of: 4-(2,2,3-trimethylcyclopent-3-en-1-yl)-1-methyl-2-oxabicyclo[2.2.2]octane; 1-(2,2,3-trimethylcyclopent-3-en-1-yl)-5-methyl-6-oxabicyclo[3.2.1]octane; spiro[cyclohex-3-en-1-yl-[(4,5,6,6a-tetrahydro-3,6',6',6'a-tetramethyl)-1,3'(3'aH)-[2H]cyclopenta[b]furan]; spiro[cyclohex-3-en-1-yl-[4,5,6,6a-tetrahydro-4,6',6',6'a-tetramethyl)-1,3'(3'aH)-[2H]cyclopenta[b]furan]	422-040-1	—	Xi; R36/38 N; R51-53	Xi; N R: 36/38-51/53 S: (2-)26-37-61		
602-001-00-7	chloromethane; methyl chloride	200-817-4	74-87-3	F+; R12 Carc. Cat. 3; R40 Xn; R48/20	F+; Xn R: 12-40-48/20 S: (2-)9-16-33		
602-002-00-2	bromomethane; methylbromide	200-813-2	74-83-9	Muta. Cat. 3; R68 T; R23/25 Xn; R48/20 Xi; R36/37/ 38 N; R50 N; R59	T; N R: 23/25-36/37/38- 48/20-50-59-68 S: (1/2-)15-27-36/39- 38-45-59-61		
602-003-00-8	dibromomethane	200-824-2	74-95-3	Xn; R20 R52-53	Xn R: 20-52/53 S: (2-)24-61	Xn; R20: C ≥ 12,5 %	
602-004-00-3	dichloromethane; methylene chloride	200-838-9	75-09-2	Carc. Cat. 3; R40	Xn R: 40 S: (2-)23-24/25-36/37		
602-005-00-9	methyl iodide; iodomethane	200-819-5	74-88-4	Carc. Cat. 3; R40 Xn; R21 T; R23/25 Xi; R37/38	T R: 21-23/25-37/38- 40 S: (1/2-)36/37-38-45		
602-006-00-4	trichloromethane; chloroform	200-663-8	67-66-3	Xn; R22-48/ 20/22 Xi; R38 Carc. Cat. 3; R40	Xn R: 22-38-40-48/20/ 22 S: (2-)36/37	Xn; R22: C ≥ 5 % Xn; R48/20/22: C ≥ 5 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
602-007-00-X	bromoform; tribromomethane	200-854-6	75-25-2	T; R23 Xi; R36/38 N; R51-53	T; N R: 23-36/38-51/53 S: (1/2-)28-45-61		
602-008-00-5	carbon tetrachloride; tetrachloromethane	200-262-8	56-23-5	Carc. Cat. 3; R40 T; R23/24/ 25-48/23 N; R59 R52-53	T; N R: 23/24/25-40-48/ 23-59-52/53 S: (1/2-)23-36/37-45- 59-61	T; R23/24/25: C ≥ 1 % Xn; R20/21/22: 0,2 % ≤ C < 1 % T; R48/23: C ≥ 1 % Xn; R48/20: 0,2 % ≤ C < 1 %	
602-009-00-0	chloroethane	200-830-5	75-00-3	F+; R12 Carc. Cat. 3; R40 R52-53	F+; Xn R: 12-40-52/53 S: (2-)9-16-33-36/37- 61		
602-010-00-6	1,2-dibromoethane	203-444-5	106-93-4	Carc. Cat. 2; R45 T; R23/24/25 Xi; R36/37/ 38 N; R51-53	T; N R: 45-23/24/25-36/ 37/38-51/53 S: 53-45-61	T; R23/24/25: C ≥ 1 % Xn; R20/21/22: 0,1 % ≤ C < 1 %	E
602-011-00-1	1,1-dichloroethane	200-863-5	75-34-3	F; R11 Xn; R22 Xi; R36/37 R52-53	F; Xn R: 11-22-36/37-52/ 53 S: (2-)16-23-61	Xn; R22: C ≥ 12,5 %	
602-012-00-7	1,2-dichloroethane; ethylene dichloride	203-458-1	107-06-2	F; R11 Carc. Cat. 2; R45 Xn; R22 Xi; R36/37/ 38	F; T R: 45-11-22-36/37/ 38 S: 53-45		E
602-013-00-2	1,1,1-trichloroethane; methyl chloroform	200-756-3	71-55-6	Xn; R20 N; R59	Xn; N R: 20-59 S: (2-)24/25-59-61		F
602-014-00-8	1,1,2-trichloroethane	201-166-9	79-00-5	Carc. Cat. 3; R40 Xn; R20/21/ 22 R66	Xn R: 20/21/22-40-66 S: (2-)9-36/37-46	Xn; R20/21/22: C ≥ 5 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
602-015-00-3	1,1,2,2-tetrachloroethane	201-197-8	79-34-5	T+; R26/27 N; R51-53	T+; N R: 26/27-51/53 S: (1/2-)38-45-61		
602-016-00-9	1,1,2,2-tetrabromoethane	201-191-5	79-27-6	T+; R26 Xi; R36 R52-53	T+ R: 26-36-52/53 S: (1/2-)24-27-45-61		
602-017-00-4	pentachloroethane	200-925-1	76-01-7	Carc. Cat. 3; R40 T; R48/23 N; R51-53	T; N R: 40-48/23-51/53 S: (1/2-)23-36/37-45-61	T; R48/23: C ≥ 1 % Xn; R48/20: 0,2 % ≤ C < 1 %	
602-018-00-X	1-chloropropane; [1] 2-chloropropane [2]	208-749-7 [1] 200-858-8 [2]	540-54-5 [1] 75-29-6 [2]	F; R11 Xn; R20/21/ 22	F; Xn R: 11-20/21/22 S: (2-)9-29		C
602-019-00-5	1-bromopropane; n-propyl bromide	203-445-0	106-94-5	F; R11 Repr. Cat. 2; R60 Repr. Cat. 3; R63 Xn; R48/20 Xi; R36/37/ 38 R67	F; T R: 60-11-36/37/38-48/20-63-67 S: 53-45		E
602-020-00-0	1,2-dichloropropane; propylene dichloride	201-152-2	78-87-5	F; R11 Xn; R20/22	F; Xn R: 11-20/22 S: (2-)16-24		
602-021-00-6	1,2-dibromo-3-chloropropane	202-479-3	96-12-8	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 1; R60 T; R25 Xn; R48/20/ 22 R52-53	T R: 45-46-60-25-48/ 20/22-52/53 S: 53-45-61		E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
602-022-00-1	1-chloropentane; [1] 2-chloropentane; [2] 3-chloropentane [3]	208-846-4 [1] 210-885-7 [2] 210-467-4 [3]	543-59-9 [1] 625-29-6 [2] 616-20-6 [3]	F; R11 Xn; R20/21/ 22	F; Xn R: 11-20/21/22 S: (2-)9-29		C
602-023-00-7	vinyl chloride; chloroethylene	200-831-0	75-01-4	F+; R12 Carc. Cat. 1; R45	F+; T R: 45-12 S: 53-45		D
602-024-00-2	bromoethylene	209-800-6	593-60-2	F+; R12 Carc. Cat. 2; R45	F+; T R: 45-12 S: 53-45		
602-025-00-8	1,1-dichloroethylene; vinylidene chloride	200-864-0	75-35-4	F+; R12 Carc. Cat. 3; R40 Xn; R20	F+; Xn R: 12-20-40 S: (2-)7-16-29-36/37- 46	Xn; R20: C ≥ 12,5 %	D
602-026-00-3	1,2-dichloroethylene; [1] <i>cis</i> -dichloroethylene; [2] <i>trans</i> -dichloroethylene [3]	208-750-2 [1] 205-859-7 [2] 205-860-2 [3]	540-59-0 [1] 156-59-2 [2] 156-60-5 [3]	F; R11 Xn; R20 R52-53	F; Xn R: 11-20-52/53 S: (2-)7-16-29-61	Xn; R20: C ≥ 12,5 %	C
602-027-00-9	trichloroethylene; trichloroethene	201-167-4	79-01-6	Carc. Cat. 2; R45 Muta. Cat. 3; R68 R67 Xi; R36/38 R52-53	T R: 45-36/38-52/53- 67 S: 53-45-61		
602-028-00-4	tetrachloroethylene	204-825-9	127-18-4	Carc. Cat. 3; R40 N; R51-53	Xn; N R: 40-51/53 S: (2-)23-36/37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
602-029-00-X	3-chloropropene; allyl chloride	203-457-6	107-05-1	F; R11 Carc. Cat. 3; R40 Muta. Cat. 3; R68 Xn; R20/21/ 22-48/20 Xi; R36/37/ 38 N; R50	F; Xn; N R: 11-20/21/22-36/ 37/38-40-48/20-68- 50 S: (2-)16-25-26-36/ 37-46-61		D
602-030-00-5	1,3-dichloropropene; [1] (Z)-1,3-dichloropropene [2]	208-826-5 [1] 233-195-8 [2]	542-75-6 [1] 10061-01-5 [2]	R10 T; R25 Xn; R20/21 Xi; R36/37/ 38 R43 N; R50-53	T; N R: 10-20/21-25-36/ 37/38-43-50/53 S: (1/2-)36/37-45-60- 61		DC
602-031-00-0	1,1-dichloropropene	209-253-3	563-58-6	F; R11 T; R25 R52-53	F; T R: 11-25-52/53 S: (1/2-)16-29-33-45- 61		
602-032-00-6	3-chloro-2-methylpropene	209-251-2	563-47-3	F; R11 Xn; R20/22 C; R34 R43 N; R51-53	F; C; N R: 11-20/22-34-43- 51/53 S: (2-)9-16-26-29-36/ 37/39-45-61		
602-033-00-1	chlorobenzene	203-628-5	108-90-7	R10 Xn; R20 N; R51-53	Xn; N R: 10-20-51/53 S: (2-)24/25-61	Xn; R20: C ≥ 5 %	
602-034-00-7	1,2-dichlorobenzene; o-dichlorobenzene	202-425-9	95-50-1	Xn; R22 Xi; R36/37/ 38 N; R50-53	Xn; N R: 22-36/37/38-50/ 53 S: (2-)23-60-61	Xn; R22: C ≥ 5 %	
602-035-00-2	1,4-dichlorobenzene; p-dichlorobenzene	203-400-5	106-46-7	Carc. Cat. 3; R40 Xi; R36 N; R50-53	Xn; N R: 36-40-50/53 S: (2-)36/37-46-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
602-036-00-8	chloroprene (stabilised); 2-chlorobuta-1,3-diene (stabilised)	204-818-0	126-99-8	F; R11 Carc. Cat. 2; R45 Xn; R20/22- 48/20 Xi; R36/37/ 38	F; T R: 45-11-20/22-36/ 37/38-48/20 S: 53-45		D E
602-037-00-3	α-chlorotoluene; benzyl chloride	202-853-6	100-44-7	Carc. Cat. 2; R45 T; R23 Xn; R22-48/ 22 Xi; R37/38- 41	T R: 45-22-23-37/38- 41-48/22 S: 53-45		E
602-038-00-9	α,α,α-trichlorotoluene; benzotrichloride	202-634-5	98-07-7	Carc. Cat. 2; R45 T; R23 Xn; R22 Xi; R37/38- 41	T R: 45-22-23-37/38- 41 S: 53-45		E
602-039-00-4	polychlorobiphenyls; PCB	215-648-1	1336-36-3	R33 N; R50-53	N R: 33-50/53 S: (2-)-60-61	R33: C ≥ 0,005 %	C
602-040-00-X	2-chlorotoluene; [1] 3-chlorotoluene; [2] 4-chlorotoluene; [3] chlorotoluene [4]	202-424-3 [1] 203-580-5 [2] 203-397-0 [3] 246-698-2 [4]	95-49-8 [1] 108-41-8 [2] 106-43-4 [3] 25168-05-2 [4]	Xn; R20 N; R51-53	Xn; N R: 20-51/53 S: (2-)24/25-61		C
602-041-00-5	pentachloronaphthalene	215-320-8	1321-64-8	Xn; R21/22 Xi; R36/38 N; R50-53	Xn; N R: 21/22-36/38-50/ 53 S: (2-)-60-61		C
602-042-00-0	1,2,3,4,5,6-hexachlorcyclohexanes with the exception of those specified elsewhere in this Annex	—	—	Carc. Cat. 3; R40 T; R25 Xn; R21 N; R50-53	T; N R: 21-25-40-50/53 S: (1/2-)22-36/37-45- 60-61		A C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
602-043-00-6	lindane (ISO) γ -HCH or γ -BHC; γ -1,2,3,4,5,6-hexachlorocyclohexane;	200-401-2	58-89-9	T; R25 Xn; R20/21-48/22 R64 N; R50-53	T; N R: 20/21-25-48/22-64-50/53 S: (1/2-)36/37-45-60-61	N; R50-53: $C \geq 2,5 \%$ N; R51-53: $0,25 \% \leq C < 2,5 \%$ R52-53: $0,025 \% \leq C < 0,25 \%$	
602-044-00-1	camphechlor (ISO) toxaphene;	232-283-3	8001-35-2	Carc. Cat. 3; R40 T; R25 Xn; R21 Xi; R37/38 N; R50-53	T; N R: 21-25-37/38-40-50/53 S: (1/2-)36/37-45-60-61		
602-045-00-7	DDT (ISO); clofenotane (INN); dicophane; 1,1,1-trichloro-2,2-bis(4-chlorophenyl)ethane; dichlorodiphenyltrichloroethane	200-024-3	50-29-3	T; R25-48/25 Carc. Cat. 3; R40 N; R50-53	T; N R: 25-40-48/25-50/53 S: (1/2-)22-36/37-45-60-61		
602-046-00-2	heptachlor (ISO); 1,4,5,6,7,8,8-heptachloro-3a,4,7,7a-tetrahydro-4,7-methanoindene	200-962-3	76-44-8	T; R24/25 Carc. Cat. 3; R40 R33 N; R50-53	T; N R: 24/25-33-40-50/53 S: (1/2-)36/37-45-60-61		
602-047-00-8	chlordan (ISO); 1,2,4,5,6,7,8,8-octachloro-3a,4,7,7a-tetrahydro-4,7-methanoindan	200-349-0	57-74-9	Carc. Cat. 3; R40 Xn; R21/22 N; R50-53	Xn; N R: 21/22-40-50/53 S: (2-)36/37-60-61		
602-048-00-3	aldrin (ISO)	206-215-8	309-00-2	T; R24/25-48/24/25 Carc. Cat. 3; R40 N; R50-53	T; N R: 24/25-40-48/24/25-50/53 S: (1/2-)22-36/37-45-60-61		
602-049-00-9	dieldrin (ISO)	200-484-5	60-57-1	T+; R27 T; R25-48/25 Carc. Cat. 3; R40 N; R50-53	T+; N R: 25-27-40-48/25-50/53 S: (1/2-)22-36/37-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
602-050-00-4	(1 α ,4 α ,4 $\alpha\beta$,5 β ,8 β ,8 $\alpha\beta$)-1,2,3,4,10,10-hexachloro-1,4,4a,5,8,8a-hexahydro-1,4:5,8-dimethanonaphthalene; isodrin	207-366-2	465-73-6	T+; R26/27/28 N; R50-53	T+; N R: 26/27/28-50/53 S: (1/2-)13-28-45-60-61		
602-051-00-X	endrin (ISO); 1,2,3,4,10,10-hexachloro-6,7-epoxy-1,4,4a,5,6,7,8,8a-octa-hydro-1,4:5,8-dimethanonaphthalene	200-775-7	72-20-8	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)22-36/37-45-60-61		
602-052-00-5	endosulfan (ISO); 1,2,3,4,7,7-hexachloro-8,9,10-trinorborn-2-en-5,6-ylenedi-methyl sulphite	204-079-4	115-29-7	T; R24/25 Xi; R36 N; R50-53	T; N R: 24/25-36-50/53 S: (1/2-)28-36/37-45-60-61		
602-053-00-0	isobenzan (ISO); 1,3,4,5,6,7,8,8-octachloro-1,3,3a,4,7,7a-hexahydro-4,7-methanoisobenzofuran	206-045-4	297-78-9	T+; R27/28 N; R50	T+; N R: 27/28-50 S: (1/2-)28-36/37-45-61		
602-054-00-6	3-iodpropene; allyl iodide	209-130-4	556-56-9	R10 C; R34	C R: 10-34 S: (1/2-)7-26-45		
602-055-00-1	bromoethane; ethyl bromide	200-825-8	74-96-4	F; R11 Carc. Cat. 3; R40 Xn; R20/22	F; Xn R: 11-20/22-40 S: (2-)36/37		
602-056-00-7	α,α,α -trifluorotoluene; benzotrifluoride	202-635-0	98-08-8	F; R11 N; R51-53	F; N R: 11-51/53 S: (2-)16-23-61		
602-057-00-2	α -bromotoluene; benzyl bromide	202-847-3	100-39-0	Xi; R36/37/38	Xi R: 36/37/38 S: (2-)39		
602-058-00-8	α,α -dichlorotoluene; benzylidene chloride; benzal chloride	202-709-2	98-87-3	Carc. Cat. 3; R40 T; R23 Xn; R22 Xi; R37/38-41	T R: 22-23-37/38-40-41 S: (1/2-)36/37-38-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
602-059-00-3	1-chlorobutane; butyl chloride	203-696-6	109-69-3	F; R11	F R: 11 S: (2-)9-16-29		
602-060-00-9	bromobenzene	203-623-8	108-86-1	R10 Xi; R38 N; R51-53	Xi; N R: 10-38-51/53 S: (2-)61		
602-061-00-4	hexafluoropropene; hexafluoropropylene	204-127-4	116-15-4	Xn; R20 Xi; R37	Xn R: 20-37 S: (2-)41		
602-062-00-X	1,2,3-trichloropropane	202-486-1	96-18-4	Carc. Cat. 2; R45 Repr. Cat. 2; R60 Xn; R20/21/ 22	T R: 45-60-20/21/22 S: 53-45		E D
602-063-00-5	heptachlor epoxide; 2,3-epoxy-1,4,5,6,7,8,8-heptachloro-3a,4,7,7a-tetrahydro- 4,7-methanoindane	213-831-0	1024-57-3	T; R25 Carc. Cat. 3; R40 R33 N; R50-53	T; N R: 25-33-40-50/53 S: (1/2-)36/37-45-60- 61		
602-064-00-0	1,3-dichloro-2-propanol	202-491-9	96-23-1	Carc. Cat. 2; R45 T; R25 Xn; R21	T R: 45-21-25 S: 53-45		E
602-065-00-6	hexachlorobenzene	204-273-9	118-74-1	Carc. Cat. 2; R45 T; R48/25 N; R50-53	T; N R: 45-48/25-50/53 S: 53-45-60-61		E
602-066-00-1	tetrachloro-p-benzoquinone	204-274-4	118-75-2	Xi; R36/38 N; R50-53	Xi; N R: 36/38-50/53 S: (2-)37-60-61		
602-067-00-7	1,3-dichlorbenzene	208-792-1	541-73-1	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
602-068-00-2	ethylene bis(trichloroacetate)	219-732-9	2514-53-6	Xi; R38	Xi R: 38 S: (2-)		
602-069-00-8	dichloroacetylene	—	7572-29-4	E; R2 Carc. Cat. 3; R40 Xn; R48/20	E; Xn R: 2-40-48/20 S: (2-)36/37		
602-070-00-3	3-chloro-4,5,α,α,α-pentafluorotoluene	401-930-3	77227-99-7	R10 Xn; R20/22 N; R50-58	Xn; N R: 10-20/22-50-58 S: (2-)51-60-61		
602-071-00-9	bromobenzylbromotoluene, reaction mass of isomers	402-210-1	99688-47-8	Xn; R48/22 R43 N; R50-53	Xn; N R: 43-48/22-50/53 S: (2-)24-37-41-60-61		
602-072-00-4	dichloro [(dichlorophenyl)methyl]methylbenzene, reaction mass of isomers; (dichlorophenyl)(dichlorotolyl)methane, reaction mass of isomers (IUPAC)	278-404-3	76253-60-6	N; R50-53	N R: 50/53 S: 60-61		
602-073-00-X	1,4-dichlorobut-2-ene	212-121-8	764-41-0	Carc. Cat. 2; R45 T+; R26 T; R24/25 C; R34 N; R50-53	T+; N R: 45-24/25-26-34-50/53 S: 53-45-60-61	Carc. Cat. 2; R45: C ≥ 0,01 % C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	E
602-074-00-5	pentachlorobenzene	210-172-0	608-93-5	F; R11 Xn; R22 N; R50-53	F; Xn; N R: 11-22-50/53 S: (2-)41-46-50-60-61		
602-075-00-0	4,4,5,5-tetrachloro-1,3-dioxolan-2-one	404-060-2	22432-68-4	T+; R26 Xn; R22 C; R34	T+ R: 22-26-34 S: (1/2-)9-26-28-36/37/39-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
602-076-00-6	2,3,4-trichlorobut-1-ene	219-397-9	2431-50-7	Carc. Cat. 3; R40 T; R23 Xn; R22 Xi; R36/37/ 38 N; R50-53	T; N R: 22-23-36/37/38- 40-50/53 S: (1/2-)36/37-45-60- 61	Carc. Cat. 3; R40: C ≥ 0,1 %	
602-077-00-1	dodecachloropentacyclo[5.2.1.0 ^{2,6} .0 ^{3,9} .0 ^{5,8}]decane; mirex	219-196-6	2385-85-5	Carc. Cat. 3; R40 Repr. Cat. 3; R62-63 R64 Xn; R21/22 N; R50/53	Xn; N R: 21/22-40-50/53- 62-63-64 S: (2-)13-36/37-46- 60-61		
602-078-00-7	hexachlorocyclopentadiene	201-029-3	77-47-4	T+; R26 T; R24 Xn; R22 C; R34 N; R50-53	T+; N R: 22-24-26-34-50/ 53 S: (1/2-)25-39-45-53- 60-61		
602-079-00-2	2,3-dichloropropene; 2,3-dichloropropylene	201-153-8	78-88-6	F; R11 Muta. Cat. 3; R68 Xn; R20/21/ 22 Xi; R37/38- 41 R52-53	F; Xn R: 11-20/21/22-37/ 38-41-52/53-68 S: (2-)9-16-23-26-36/ 37/39-61		
602-080-00-8	alkanes, C ₁₀₋₁₃ , chloro	287-476-5	85535-84-8	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)24-36/37-60-61		
602-081-00-3	2-chloro-4,5-difluorobenzoic acid	405-380-5	—	Xn; R21/22 Xi; R41 R43	Xn R: 21/22-41-43 S: (2-)26-36/37/39		
602-082-00-9	2,2,6,6-tetrakis(bromomethyl)-4-oxaheptane-1,7-diol	408-020-5	109678-33-3	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-41- 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
602-083-00-4	diphenyl ether, pentabromo derivative pentabromodiphenyl ether	251-084-2	32534-81-9	Xn; R48/21/22 R64 N; R50-53	Xn; N R: 48/21/22-50/53-64 S: (1/2-)36/37-45-60-61		
602-084-00-X	1,1-dichloro-1-fluoroethane	404-080-1	1717-00-6	R52-53 N; R59	N R: 52/53-59 S: 59-61		
602-085-00-5	2-bromopropane	200-855-1	75-26-3	F; R11 Repr. Cat. 1; R60 Xn; R48/20 R66	F; T R: 60-11-48/20-66 S: 53-45		E
602-086-00-0	trifluoriodomethane; trifluoromethyl iodide	219-014-5	2314-97-8	Muta. Cat. 3; R68	Xn R: 68 S: (2-)36/37		
602-087-00-6	1,2,4-trichlorobenzene	204-428-0	120-82-1	Xn; R22 Xi; R38 N; R50-53	Xn; N R: 22-38-50/53 S: (2-)23-37/39-60-61		
602-088-00-1	2,3-dibromopropan-1-ol; 2,3-dibromo-1-propanol	202-480-9	96-13-9	Carc. Cat. 2; R45 Repr. Cat. 3; R62 T; R24 Xn; R20/22 R52-53	T R: 45-20/22-24-52/ 53-62 S: 53-45-61		E
602-089-00-7	4-bromo-2-chlorofluorobenzene	405-580-2	60811-21-4	Xn; R22 Xi; R38 N; R50-53	Xn; N R: 22-38-50/53 S: (2-)26-36/37-60-61		
602-090-00-2	1-allyl-3-chloro-4-fluorobenzene	406-630-6	121626-73-1	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)23-37-61		
602-091-00-8	1,3-dichloro-4-fluorobenzene	406-160-1	1435-48-9	Xn; R22-48/ 20/22 Xi; R38 N; R51-53	Xn; N R: 22-38-48/20/22- 51/53 S: (2-)36/37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
602-092-00-3	1-bromo-3,4,5-trifluorobenzene	418-480-9	138526-69-9	R10 Carc. Cat. 3; R40 Xi; R38-41 N; R51-53	Xn; N R: 10-38-40-41-51/ 53 S: (2-)23-26-36/37/ 39-61		
602-093-00-9	$\alpha,\alpha,\alpha,4$ -tetrachlorotoluene; <i>p</i> -chlorobenzotrithloride	226-009-1	5216-25-1	Carc. Cat. 2; R45 Repr. Cat. 3; R62 T; R48/23 Xn; R21/22 Xi; R37/38	T R: 45-21/22-37/38- 48/23-62 S: 53-45		E
602-094-00-4	diphenylether; octabromo derivate	251-087-9	32536-52-0	Repr. Cat. 2; R61 Repr. Cat. 3; R62	T R: 61-62 S: 53-45		
602-096-00-5	malachite green hydrochloride; [1] malachite green oxalate [2]	209-322-8 [1] 219-441-7 [2]	569-64-2 [1] 2437-29-8 [2]	Repr. Cat. 3; R63 Xn; R22 Xi; R41 N; R50-53	Xn; N R: 22-41-63-50/53 S: (2-)26-36/37-39- 46-60-61		
602-097-00-0	1-bromo-9-(4,4,5,5,5-pentafluoropentylthio)nonane	422-850-5	148757-89-5	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
603-001-00-X	methanol	200-659-6	67-56-1	F; R11 T; R23/24/ 25-39/23/ 24/25	F; T R: 11-23/24/25-39/ 23/24/25 S: (1/2-)7-16-36/37- 45	T; R23/24/25: C $\geq$ 20 % Xn; R20/21/22: 3 % $\leq$ C < 20 % T; R39/23/24/25: C $\geq$ 10 % Xn; R68/20/21/22: 3 % $\leq$ C < 10 %	
603-002-00-5	ethanol; ethyl alcohol	200-578-6	64-17-5	F; R11	F R: 11 S: (2-)7-16		
603-003-00-0	propan-1-ol; <i>n</i> -propanol	200-746-9	71-23-8	F; R11 Xi; R41 R67	F; Xi R: 11-41-67 S: (2-)7-16-24-26-39		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-004-00-6	butan-1-ol; <i>n</i> -butanol	200-751-6	71-36-3	R10 Xn; R22 Xi; R37/38-41 R67	Xn R: 10-22-37/38-41-67 S: (2-)7/9-13-26-37/39-46		
603-005-00-1	2-methylpropan-2-ol; <i>tert</i> -butyl alcohol	200-889-7	75-65-0	F; R11 Xn; R20	F; Xn R: 11-20 S: (2-)9-16		
603-006-00-7	pentanol isomers, with the exception fo those specified elsewhere in this Annex	250-378-8		R10 Xn; R20 Xi; R37 R66	Xn R: 10-20-37-66 S: (2-)46		C
603-007-00-2	2-methylbutan-2-ol; <i>tert</i> -pentanol	200-908-9	75-85-4	F; R11 Xn; R20 Xi; R37/38	F; Xn R: 11-20-37/38 S: (2-)46		
603-008-00-8	4-methylpentan-2-ol; methyl isobutyl carbinol	203-551-7	108-11-2	R10 Xi; R37	Xi R: 10-37 S: (2-)24/25	Xi; R37: C ≥ 25 %	
603-009-00-3	cyclohexanol	203-630-6	108-93-0	Xn; R20/22 Xi; R37/38	Xn R: 20/22-37/38 S: (2-)24/25		
603-010-00-9	2-methylcyclohexanol, mixed isomers; [1] <i>cis</i> -2-methylcyclohexanol; [2] <i>trans</i> -2-methylcyclohexanol [3]	209-512-0 [1] 231-187-9 [2] 231-186-3 [3]	583-59-5 [1] 7443-70-1 [2] 7443-52-9 [3]	Xn; R20	Xn R: 20 S: (2-)24/25		C
603-011-00-4	2-methoxyethanol; ethylene glycol monomethyl ether	203-713-7	109-86-4	R10 Repr. Cat. 2; R60-61 Xn; R20/21/22	T R: 60-61-10-20/21/22 S: 53-45		E
603-012-00-X	2-ethoxyethanol; ethylene glycol monoethyl ether	203-804-1	110-80-5	R10 Repr. Cat. 2; R60-61 Xn; R20/21/22	T R: 60-61-10-20/21/22 S: 53-45		E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-013-00-5	2-isopropoxyethanol; ethylene glycol monoisopropyl ether	203-685-6	109-59-1	Xn; R20/21 Xi; R36	Xn R: 20/21-36 S: (2-)24/25		
603-014-00-0	2-butoxyethanol; ethylene glycol monobutyl ether; butyl cellosolve	203-905-0	111-76-2	Xn; R20/21/ 22 Xi; R36/38	Xn R: 20/21/22-36/38 S: (2-)36/37-46		
603-015-00-6	allyl alcohol	203-470-7	107-18-6	R10 T; R23/24/25 Xi; R36/37/ 38 N; R50	T; N R: 10-23/24/25-36/ 37/38-50 S: (1/2-)36/37/39-38- 45-61		
603-016-00-1	4-hydroxy-4-methylpentan-2-one; diacetone alcohol	204-626-7	123-42-2	Xi; R36	Xi R: 36 S: (2-)24/25	Xi; R36: C ≥ 10 %	
603-018-00-2	furfuryl alcohol	202-626-1	98-00-0	Xn; R20/21/ 22	Xn R: 20/21/22 S: (2-)	Xn; R20/21/22: C ≥ 5 %	
603-019-00-8	dimethyl ether	204-065-8	115-10-6	F+; R12	F+ R: 12 S: (2-)9-16-33		
603-020-00-3	ethyl methyl ether	—	540-67-0	F+; R12	F+ R: 12 S: (2-)9-16-33		
603-021-00-9	methyl vinyl ether	203-475-4	107-25-5	F+; R12	F+ R: 12 S: (2-)9-16-33		D
603-022-00-4	diethyl ether; ether	200-467-2	60-29-7	F+; R12 R19 Xn; R22 R66 R67	F+; Xn R: 12-19-22-66-67 S: (2-)9-16-29-33		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-023-00-X	ethylene oxide; oxirane	200-849-9	75-21-8	F+; R12 ☒ Carc. Cat. 2; R45 Muta. Cat. 2; R46 T; R23 Xi; R36/37/ 38	F+; T R: 45-46-12-23-36/ 37/38 S: 53-45		E
603-024-00-5	1,4-dioxane	204-661-8	123-91-1	F; R11-19 Carc. Cat. 3; R40 Xi; R36/37 R66	F; Xn R: 11-19-36/37-40- 66 S: (2-)9-16-36/37-46		D
603-025-00-0	tetrahydrofuran	203-726-8	109-99-9	F; R11-19 Xi; R36/37	F; Xi R: 11-19-36/37 S: (2-)16-29-33	Xi; R36/37: C ≥ 25 %	
603-026-00-6	1-chloro-2,3-epoxypropane; epichlorhydrin	203-439-8	106-89-8	R10 Carc. Cat. 2; R45 T; R23/24/25 C; R34 R43	T R: 45-10-23/24/25- 34-43 S: 53-45	T; R23/24/25: C ≥ 1 % Xn; R20/21/22: 0,1 % ≤ C < 1 %	E
603-027-00-1	ethanediol; ethylene glycol	203-473-3	107-21-1	Xn; R22	Xn R: 22 S: (2-)		
603-028-00-7	2-chloroethanol; ethylene chlorohydrin	203-459-7	107-07-3	T+; R26/27/ 28	T+ R: 26/27/28 S: (1/2-)7/9-28-45		
603-029-00-2	bis(2-chloroethyl) ether	203-870-1	111-44-4	R10 ☒ Carc. Cat. 3; R40 T+; R26/27/ 28	T+ R: 10-26/27/28-40 S: (1/2-)7/9-27-28- 36/37-45		
603-030-00-8	2-aminoethanol; ethanolamine	205-483-3	141-43-5	Xn; R20/21/ 22 C; R34	C R: 20/21/22-34 S: (1/2-)26-36/37/39- 45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-031-00-3	1,2-dimethoxyethane; ethylene glycol dimethyl ether; EGDME	203-794-9	110-71-4	F; R11 R19 Repr. Cat. 2; R60 Repr. Cat. 2; R61 Xn; R20	F; T R: 60-61-11-19-20 S: 53-45		E
603-032-00-9	ethylene dinitrate; ethylene glycol dinitrate	211-063-0	628-96-6	E; R2 ⊗ T+; R26/27/ 28 R33	E; T+ R: 2-26/27/28-33 S: (1/2-)33-35-36/37- 45		
603-033-00-4	oxydiethylene dinitrate; diethylene glycol dinitrate; digol dinitrate	211-745-8	693-21-0	E; R3 T+; R26/27/ 28 R33 R52-53	E; T+ R: 3-26/27/28-33-52/ 53 S: (1/2-)33-35-36/37- 45-61		
603-034-00-X	glycerol trinitrate; nitroglycerine	200-240-8	55-63-0	E; R3 T+; R26/27/ 28 R33 N; R51-53	E; T+; N R: 3-26/27/28-33-51/ 53 S: (1/2-)33-35-36/37- 45-61		
603-035-00-5	pentaerythritol tetranitrate; P.E.T.N.	201-084-3	78-11-5	E; R3	E R: 3 S: (2-)35		
603-036-00-0	mannitol hexanitrate; nitromannite	239-924-6	15825-70-4	E; R3	E R: 3 S: (2-)35		
603-037-00-6	cellulose nitrate; nitrocellulose, containing more than 12,6 % nitrogen	—	—	E; R3 ⊗ R1	E R: 1-3 S: (2-)35		
603-037-01-3	cellulose nitrate; nitrocellulose, containing a maximum of 12,6 % nitrogen	—	—	F; R11 ⊗	F R: 11 S: (2-)16-33-37/39		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-038-00-1	allyl glycidyl ether; allyl 2,3-epoxypropyl ether; prop-2-en-1-yl 2,3-epoxypropyl ether	203-442-4	106-92-3	R10 Carc. Cat. 3; R40 Muta. Cat. 3; R68 Repr. Cat. 3; R62 Xn; R20/22 Xi; R37/38-41 R43 R52-53	Xn R: 10-20/22-37/38-40-41-43-52/53-62-68 S: (2-)24/25-26-36/37/39-61		
603-039-00-7	butyl glycidyl ether; butyl 2,3-epoxypropyl ether	219-376-4	2426-08-6	R10 Carc. Cat. 3; R40 Muta. Cat. 3; R68 Xn; R20/22 Xi; R37 R43 R52-53	Xn R: 10-20/22-37-40-43-52/53-68 S: (2-)24/25-36/37-61		
603-040-00-2	sodium methanolate; sodium methoxide; [1] potassium methanolate; potassium methoxide; [2] lithium methanolate; lithium methoxide [3]	204-699-5 [1] 212-736-1 [2] 212-737-7 [3]	124-41-4 [1] 865-33-8 [2] 865-34-9 [3]	F; R11 C; R34 R14	F; C R: 11-14-34 S: (1/2-)8-16-26-43-45		
603-041-00-8	potassium ethanolate; potassium ethoxide; [1] sodium ethanolate; sodium ethoxide [2]	213-029-0 [1] 205-487-5 [2]	917-58-8 [1] 141-52-6 [2]	F; R11 C; R34 R14	F; C R: 11-14-34 S: (1/2-)8-16-26-43-45		
603-042-00-3	aluminium-tri-isopropoxide	209-090-8	555-31-7	F; R11	F R: 11 S: (2-)8-16		
603-043-00-9	triarimol (ISO); 2,4-dichloro- α -(pyrimidin-5-yl) benzhydryl alcohol	—	26766-27-8	Xn; R22	Xn R: 22 S: (2-)		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-044-00-4	dicofol (ISO); 2,2,2-trichloro-1,1-bis(4-chlorophenyl)ethanol	204-082-0	115-32-2	Xn; R21/22 Xi; R38 R43 N; R50-53	Xn; N R: 21/22-38-43-50/ 53 S: (2-)36/37-60-61		
603-045-00-X	diisopropyl ether; [1] dipropyl ether [2]	203-560-6 [1] 203-869-6 [2]	108-20-3 [1] 111-43-3 [2]	F; R11 R19 R66 R67	F R: 11-19-66-67 S: (2-)9-16-29-33		C
603-046-00-5	bis (chloromethyl) ether; oxybis(chloromethane)	208-832-8	542-88-1	R10 ⊗ Carc. Cat. 1; R45 T+; R26 T; R24 Xn; R22	T+ R: 45-10-22-24-26 S: 53-45	Carc. Cat. 1; R45: C ≥ 0,001 %	E
603-047-00-0	2-dimethylaminoethanol; N,N-dimethylethanolamine	203-542-8	108-01-0	R10 Xn; R20/21/ 22 C; R34	C R: 10-20/21/22-34 S: (1/2-)25-26-36/37/ 39-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
603-048-00-6	2-diethylaminoethanol; N,N-diethylethanolamine	202-845-2	100-37-8	R10 Xn; R20/21/ 22 C; R34	C R: 10-20/21/22-34 S: (1/2-)25-26-36/37/ 39-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
603-049-00-1	chlorfenethol (ISO); 1,1-bis (4-chlorophenyl) ethanol	201-246-3	80-06-8	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)36-61		
603-050-00-7	1-(2-Butoxypropoxy)propan-2-ol	246-011-6	24083-03-2	Xn; R21/22	Xn R: 21/22 S: (2-)		
603-051-00-2	2-ethylbutan-1-ol	202-621-4	97-95-0	Xn; R21/22	Xn R: 21/22 S: (2-)		
603-052-00-8	3-butoxypropan-2-ol; propylene glycol monobutyl ether	225-878-4	5131-66-8	Xi; R36/38	Xi R: 36/38 S: (2-)		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-053-00-3	2-methylpentane-2,4-diol	203-489-0	107-41-5	Xi; R36/38	Xi R: 36/38 S: (2-)	Xi; R36/38: C ≥ 10 %	
603-054-00-9	di- <i>n</i> -butyl ether; dibutyl ether	205-575-3	142-96-1	R10 Xi; R36/37/ 38 R52-53	Xi R: 10-36/37/38-52/ 53 S: (2-)61	Xi; R36/37/38: C ≥ 10 %	
603-055-00-4	propylene oxide; 1,2-epoxypropane; methyloxirane	200-879-2	75-56-9	F+; R12 Carc. Cat. 2; R45 Muta. Cat. 2; R46 Xn; R20/21/ 22 Xi; R36/37/ 38	F+; T R: 45-46-12-20/21/ 22-36/37/38 S: 53-45		E
603-056-00-X	[(<i>p</i> -tolyloxy)methyl]oxirane; [1] [(<i>m</i> -tolyloxy)methyl]oxirane; [2] 2,3-epoxypropyl <i>o</i> -tolyl ether; [3] [(tolyloxy)methyl]oxirane; cresyl glycidyl ether [4]	218-574-8 [1] 218-575-3 [2] 218-645-3 [3] 247-711-4 [4]	2186-24-5 [1] 2186-25-6 [2] 2210-79-9 [3] 26447-14-3 [4]	Muta. Cat. 3; R68 Xi; R38 R43 N; R51-53	Xn; N R: 38-43-51/53-68 S: (2-)36/37-61		C
603-057-00-5	benzyl alcohol	202-859-9	100-51-6	Xn; R20/22	Xn R: 20/22 S: (2-)26		
603-058-00-0	1,3-propylene oxide	207-964-3	503-30-0	F; R11 Xn; R20/21/ 22	F; Xn R: 11-20/21/22 S: (2-)9-16-26-29		
603-059-00-6	hexan-1-ol	203-852-3	111-27-3	Xn; R22	Xn R: 22 S: (2-)24/25		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-060-00-1	2,2'-bioxirane; 1,2:3,4-diepoxybutane	215-979-1	1464-53-5	Carc. Cat. 2; R45 Muta. Cat. 2; R46 T+; R26 T; R24/25 C; R34	T+ R: 45-46-24/25-26-34 S: 53-45		E
603-061-00-7	tetrahydro-2-furylmethanol; tetrahydrofurfuryl alcohol	202-625-6	97-99-4	Xi; R36	Xi R: 36 S: (2-)39	Xi; R36: C ≥ 10 %	
603-062-00-2	tetrahydrofuran-2,5-diylldimethanol	203-239-0	104-80-3	Xi; R36/37/38	Xi R: 36/37/38 S: (2-)39	Xi; R36/37/38: C ≥ 10 %	
603-063-00-8	2,3-epoxypropan-1-ol; glycidol; oxiranemethanol	209-128-3	556-52-5	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 2; R60 T; R23 Xn; R21/22 Xi; R36/37/38	T R: 45-60-21/22-23-36/37/38-68 S: 53-45		E
603-064-00-3	1-methoxy-2-propanol; monopropylene glycol methyl ether	203-539-1	107-98-2	R10	R: 10 S: (2-)24		
603-065-00-9	resorcinol diglycidyl ether; 1,3-bis(2,3-epoxypropoxy)benzene	202-987-5	101-90-6	Carc. Cat. 3; R40 Muta. Cat. 3; R68 Xn; R21/22 Xi; R36/38 R43 R52-53	Xn R: 21/22-36/38-40-43-52/53-68 S: (2-)23-36/37-61		
603-066-00-4	1,2-epoxy-4-epoxyethylcyclohexane; vinylcyclohexane diepoxide	203-437-7	106-87-6	T; R23/24/25 Xn; R68	T R: 23/24/25-68 S: (1/2-)23-24-45	T; R23/24/25: C ≥ 1 %: Xn; R20/21/22: 0,1 % ≤ C < 1 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-067-00-X	phenyl glycidyl ether; 2,3-epoxypropyl phenyl ether; 1,2-epoxy-3-phenoxypropane	204-557-2	122-60-1	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xn; R20 Xi; R37/38 R43 R52-53	T R: 45-20-37/38-43- 68-52/53 S: 53-45-61		E
603-068-00-5	2,3-epoxypropyl-2-ethylcyclohexyl ether; ethylcyclohexylglycidyl ether	—	130014-35-6	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)26-28-37/39		
603-069-00-0	2,4,6-tris(dimethylaminomethyl)phenol	202-013-9	90-72-2	Xn; R22 Xi; R36/38	Xn R: 22-36/38 S: (2-)26-28		
603-070-00-6	2-amino-2-methylpropanol	204-709-8	124-68-5	Xi; R36/38 R52-53	Xi R: 36/38-52/53 S: (2-)61	Xi; R36/38: C ≥ 10 %	
603-071-00-1	2,2'-iminodiethanol; diethanolamine	203-868-0	111-42-2	Xn; R22-48/ 22 Xi; R38-41	Xn R: 22-38-41-48/22 S: (2-)26-36/37/39-46		
603-072-00-7	1,4-bis(2,3 epoxypropoxy)butane; butanedioldiglycidyl ether	219-371-7	2425-79-8	Xn; R20/21 Xi; R36/38 R43	Xn R: 20/21-36/38-43 S: (2-)26-28-37/39		
603-073-00-2	bis-[4-(2,3-epoxipropoxy)phenyl]propane	216-823-5	1675-54-3	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)28-37/39	Xi; R36/38: C ≥ 5 %	
603-074-00-8	reaction product: bisphenol-A-(epichlorhydrin); epoxy resin (number average molecular weight ≤ 700)	500-033-5	25068-38-6	Xi; R36/38 R43 N; R51-53	Xi; N R: 36/38-43-51/53 S: (2-)28-37/39-61	Xi; R36/38: C ≥ 5 %	
603-075-00-3	chlormethyl methyl ether; chlorodimethyl ether	203-480-1	107-30-2	F; R11 Carc. Cat. 1; R45 Xn; R20/21/ 22	F; T R: 45-11-20/21/22 S: 53-45		E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-076-00-9	but-2-yne-1,4-diol; 2-butyne-1,4-diol	203-788-6	110-65-6	C; R34 T; R23/25 Xn; R21-48/ 22 R43	C; T R: 21-23/25-34-43- 48/22 S: (1/2-)25-26-36/37/ 39-45-46	C; R34: C ≥ 50 % Xi; R36/38: 25 % ≤ C < 50 %	D
603-077-00-4	1-dimethylaminopropan-2-ol; dimepranol (INN)	203-556-4	108-16-7	R10 Xn; R22 C; R34	C R: 10-22-34 S: (1/2-)23-26-36-45		
603-078-00-X	prop-2-yn-1-ol; propargyl alcohol	203-471-2	107-19-7	R10 T; R23/24/25 C; R34 N; R51-53	T; N R: 10-23/24/25-34- 51/53 S: (1/2-)26-28-36-45- 61		
603-079-00-5	2,2'-(methylimino)diethanol; N-methyldiethanolamine	203-312-7	105-59-9	Xi; R36	Xi R: 36 S: (2-)24		
603-080-00-0	2-methylaminoethanol; N-methylethanolamine; N-methyl-2-ethanolamine; N-methyl-2-amino ethanol; 2-(methylamino)ethanol	203-710-0	109-83-1	Xn; R21/22 C; R34	C R: 21/22-34 S: (1/2-)26-36/37/39- 45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
603-081-00-6	2,2'-thiodiethanol; thiodiglycol	203-874-3	111-48-8	Xi; R36	Xi R: 36 S: (2-)		
603-082-00-1	1-aminopropan-2-ol; isopropanolamine	201-162-7	78-96-6	C; R34	C R: 34 S: (1/2-)23-26-36-45		
603-083-00-7	1,1'-iminodipropan-2-ol; di-isopropanolamine	203-820-9	110-97-4	Xi; R36	Xi R: 36 S: (2-)26		
603-084-00-2	styrene oxide; (epoxyethyl)benzene; phenyloxirane	202-476-7	96-09-3	Carc. Cat. 2; R45 Xn; R21 Xi; R36	T R: 45-21-36 S: 53-45		E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-085-00-8	bronopol (INN); 2-bromo-2-nitropropane-1,3-diol	200-143-0	52-51-7	Xn; R21/22 Xi; R37/38-41 N; R50	Xn; N R: 21/22-37/38-41-50 S: (2-)26-37/39-61		
603-086-00-3	ethirimol (ISO); 5-butyl-2-ethylamino-6-methylpyrimidin-4-ol	245-949-3	23947-60-6	Xn; R21	Xn R: 21 S: (2-)36/37		
603-087-00-9	2-ethylhexane-1,3-diol; octylene glycol; ethoexadiol	202-377-9	94-96-2	Xi; R41	Xi R: 41 S: (2-)25-26-39-46		
603-088-00-4	2-(octylthio)ethanol; 2-hydroxyethyl octyl sulphide	222-598-4	3547-33-9	Xi; R41	Xi R: 41 S: (2-)26		
603-089-00-X	7,7-dimethyl-3-oxa-6-azaoctan-1-ol	400-390-6	—	C; R35 Xn; R22	C R: 22-35 S: (1/2-)26-28-36/37/39-45		
603-090-00-5	2-(2-bromoethoxy)anisole	402-010-4	4463-59-6	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-61		
603-091-00-0	exo-1-methyl-4-(1-methylethyl)-7-oxabicyclo[2.2.1]heptan-2-ol	402-470-6	87172-89-2	Xn; R22 Xi; R41	Xn R: 22-41 S: (2-)26-39		
603-092-00-6	2-methyl-4-phenylpentanol	402-770-7	92585-24-5	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
603-093-00-1	cinmethylin (ISO) exo-(±)-1-methyl-2-(2-methylbenzyloxy)-4-isopropyl-7-oxabicyclo(2.2.1)heptane	402-410-9	87818-31-3	Xn; R20 N; R51-53	Xn; N R: 20-51/53 S: (2-)23-61		
603-094-00-7	1,3-bis(2,3-epoxypropoxy)-2,2-dimethylpropane	241-536-7	17557-23-2	Xi; R38 R43	Xi R: 38-43 S: (2-)24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-095-00-2	2-(propyloxy)ethanol; EGPE	220-548-6	2807-30-9	Xn; R21 Xi; R36	Xn R: 21-36 S: (2-)26-36/37-46		
603-096-00-8	2-(2-butoxyethoxy)ethanol; diethylene glycol monobutyl ether	203-961-6	112-34-5	Xi; R36	Xi R: 36 S: (2-)24-26		
603-097-00-3	1,1',1''-nitrilotripropan-2-ol; triisopropanolamine	204-528-4	122-20-3	Xi; R36 R52-53	Xi R: 36-52/53 S: (2-)26-61		
603-098-00-9	2-phenoxyethanol	204-589-7	122-99-6	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)26		
603-099-00-4	3-(N-methyl-N-(4-methylamino-3-nitrophenyl)amino)propane-1,2-diol hydrochloride	403-440-5	93633-79-5	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
603-100-00-8	1,2-dimethoxypropane	404-630-0	7778-85-0	F; R11-19	F R: 11-19 S: (2-)9-16-24/25-33		
603-101-00-3	tetrahydro-2-isobutyl-4-methylpyran-4-ol, mixed isomers (cis and trans)	405-040-6	—	Xi; R36	Xi R: 36 S: (2-)25-26		
603-102-00-9	1,2-epoxybutane	203-438-2	106-88-7	F; R11 Carc. Cat. 3; R40 Xn; R20/21/ 22 Xi; R36/37/ 38 R52-53	F; Xn R: 11-20/21/22-36/ 37/38-40-52/53 S: (2-)9-16-29-36/37-61		
603-103-00-4	oxirane, mono[(C ₁₂₋₁₄ -alkyloxy)methyl] derivs.	271-846-8	68609-97-2	Xi; R38 R43	Xi R: 38-43 S: (2-)24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-104-00-X	fenarimol (ISO); 2,4'-dichloro- α -(pyrimidin-5-yl)benzhydryl alcohol	262-095-7	60168-88-9	Repr. Cat. 3; R62-63 R64 N; R51-53	Xn; N R: 51/53-62-63-64 S: (2-)36/37-61		
603-105-00-5	furan	203-727-3	110-00-9	F+; R12 R19 Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xn; R20/22- 48/22 Xi; R38 R52-53	F+; T R: 45-12-19-20/22- 38-48/22-68-52/53 S: 53-45-61		E
603-106-00-0	2-methoxypropanol	216-455-5	1589-47-5	R10 Repr. Cat. 2; R61 Xi; R37/38- 41	T R: 61-10-37/38-41 S: 53-45		
603-107-00-6	2-(2-methoxyethoxy)ethanol; diethylene glycol monomethyl ether	203-906-6	111-77-3	Repr. Cat. 3; R63	Xn R: 63 S: (2-)36/37		
603-108-00-1	2-methylpropan-1-ol; iso-butanol	201-148-0	78-83-1	R10 Xi; R37/38- 41 R67	Xi R: 10-37/38-41-67 S: (2-)7/9-13-26-37/ 39-46		
603-117-00-0	propan-2-ol; isopropyl alcohol; isopropanol	200-661-7	67-63-0	F; R11 Xi; R36 R67	F; Xi R: 11-36-67 S: (2-)7-16-24/25-26		
603-118-00-6	6-dimethylaminohexan-1-ol	404-680-3	1862-07-3	Xn; R22 C; R34 R52-53	C R: 22-34-52/53 S: (1/2-)26-36/37/39- 45-61		
603-119-00-1	1,1'-(1,3-phenylenedioxy)bis(3-(2-(prop-2-enyl)phenoxy)propan-2-ol)	405-840-5	—	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-120-00-7	2-methyl-5-phenylpentanol	405-890-8	25634-93-9	Xi; R36/38	Xi R: 36/38 S: (2-)26-37		
603-121-00-2	4-[4-(1,3-dihydroxyprop-2-yl)phenylamino]-1,8-dihydroxy-5-nitroanthraquinone	406-057-1	114565-66-1	Carc. Cat. 3; R40 R43 R53	Xn R: 40-43-53 S: (2-)36/37-61		
603-122-00-8	sodium 2-ethylhexanoate	406-150-7	38411-13-1	F; R11 C; R34 R52-53	F; C R: 11-34-52/53 S: (1/2-)7-26-36/37/ 39-45-61		
603-123-00-3	4-methyl-8-methylenetricyclo[3.3.1.1 ^{3,7}]decan-2-ol	406-330-5	122760-84-3	Xi; R38 R43 N; R51-53	Xi; N R: 38-43-51/53 S: (2-)24-37-61		
603-124-00-9	1,4-bis[2-(vinylxy)ethoxy]benzene	406-900-3	84563-49-5	N; R50-53	N R: 50/53 S: 60-61		
603-125-00-4	2-(2,4-dichlorophenyl)-1-(1H-1,2,4-triazol-1-yl)pent-4-en-2-ol	407-850-5	89544-40-1	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)26-39-61		
603-126-00-X	2-((4-methyl-2-nitrophenyl)amino)ethanol	408-090-7	100418-33-5	Xn; R22 R43 R52-53	Xn R: 22-43-52/53 S: (2-)36/37-61		
603-127-00-5	butan-2-ol; [1] (S)-butan-2-ol; [2] (R)-butan-2-ol; [3] (±)-butan-2-ol [4]	201-158-5 [1] 224-168-1 [2] 238-967-8 [3] 240-029-8 [4]	78-92-2 [1] 4221-99-2 [2] 14898-79-4 [3] 15892-23-6 [4]	R10 Xi; R36/37 R67	Xi R: 10-36/37-67 S: (2-)7/9-13-24/25- 26-46		C
603-128-00-0	2-(phenylmethoxy)naphthalene	405-490-3	613-62-7	R53	R: 53 S: 61		
603-129-00-6	1-tert-butoxypropan-2-ol	406-180-0	57018-52-7	R10 Xi; R41	Xi R: 10-41 S: (2-)26-39		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-130-00-1	reaction mass of isomers of: α-((dimethyl)biphenyl)-ω-hydroxypoly(oxyethylene)	406-325-8	—	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)39-61		
603-131-00-7	reaction mass of: 1-deoxy-1-[methyl-(1-oxododecyl)amino]-D-glucitol; 1-deoxy-1-[methyl-(1-oxotetradecyl)amino]-D-glucitol (3:1)	407-290-1	—	Xi; R41	Xi R: 41 S: (2-)26-39		
603-132-00-2	2-hydroxymethyl-9-methyl-6-(1-methylethyl)-1,4-dioxaspiro [4.5]decane	408-200-3	63187-91-7	Xi; R38-41 R52-53	Xi R: 38-41-52/53 S: (2-)26-37/39-61		
603-133-00-8	reaction mass of: 3-[(4-amino-2-chloro-5-nitrophenyl)amino]-propane-1,2-diol; 3,3'-(2-chloro-5-nitro-1,4-phenylenediimino)bis(propan-1,2-diol)	408-240-1	—	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-36-61		
603-134-00-3	reaction mass of substituted dodecyl and/or tetradecyl, diphenyl ethers. The substance is produced by the Friedel Crafts reaction. The catalyst is removed from the reaction product. Diphenyl ether is substituted by C ₁ -C ₁₀ alkyl groups. The alkyl groups are bonded randomly between C ₁ and C ₆ . Linear C ₁₂ and C ₁₄ , 50/50 used.	410-450-3	—	R53	R: 53 S: 61		
603-135-00-9	bis[[2,2',2''-nitrilotris-[ethanolato]]-1-N,O]-bis[2-(2-methoxyethoxy)ethoxy]-titanium	410-500-4	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
603-136-00-4	3-((4-(bis(2-hydroxyethyl)amino)-2-nitrophenyl)amino)-1-propanol	410-910-3	104226-19-9	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
603-137-00-X	reaction mass of: 1-deoxy-1-[methyl-(1-oxohexadecyl)amino]-D-glucitol; 1-deoxy-1-[methyl-(1-oxooctadecyl)amino]-D-glucitol	411-130-6	—	Xi; R41	Xi R: 41 S: (2-)26-39		
603-138-00-5	3-(2,2-dimethyl-3-hydroxypropyl)toluene; (alt.): 2,2-dimethyl-3-(3-methylphenyl)propanol	403-140-4	103694-68-4	R52-53	R: 52/53 S: 61		
603-139-00-0	bis(2-methoxyethyl) ether	203-924-4	111-96-6	R10 R19 Repr. Cat. 2; R60-61	T R: 60-61-10-19 S: 53-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-140-00-6	2,2' -oxybisethanol; diethylene glycol	203-872-2	111-46-6	Xn; R22	Xn R: 22 S: (2-)46		
603-141-00-1	reaction mass of: dodecyloxy-1-methyl-1-[oxy-poly-(2-hydroxymethylethanoxy)]pentadecane; dodecyloxy-1-methyl-1-[oxy-poly-(2-hydroxymethylethanoxy)]heptadecane	413-780-6	—	R52-53	R: 52/53 S: 61		
603-142-00-7	2-(2-(2-hydroxyethoxy)ethyl)-2-aza-bicyclo[2.2.1]heptane	407-360-1	116230-20-7	Xn; R21/22-48/20 Xi; R38-41	Xn R: 21/22-38-41-48/20 S: (2-)26-36/37/39		
603-143-00-2	R-2,3-epoxy-1-propanol	404-660-4	57044-25-4	E; R2 Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 2; R60 T; R23 Xn; R21/22 C; R34	E; T R: 45-60-2-21/22-23-34-68 S: 53-45		E
603-144-00-8	reaction mass of: 2,6,9-trimethyl-2,5,9-cyclododecatrien-1-ol; 6,9-dimethyl-2-methylen-5,9-cyclododecadien-1-ol	413-530-6	111850-00-1	N; R51-53	N R: 51/53 S: 61		
603-145-00-3	2-isopropyl-2-(1-methylbutyl)-1,3-dimethoxypropane	406-970-5	129228-11-1	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)36/37-61		
603-146-00-9	2-[(2-[2-(dimethylamino)ethoxy]ethyl)methylamino]ethanol	406-080-7	83016-70-0	Xn; R22 C; R34 R52-53	C R: 22-34-52/53 S: (1/2-)23-26-36/37/39-45-61		
603-147-00-4	(-)-trans-4-(4'-fluorophenyl)-3-hydroxymethyl-N-methylpiperidine	406-030-4	105812-81-5	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)22-24-26-37/39-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-148-00-X	1,4-bis[(vinyl)oxy]methyl)cyclohexane	413-370-7	17351-75-6	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
603-149-00-5	reaction mass of diastereoisomers of 1-(1-hydroxyethyl)-4-(1-methylethyl)cyclohexane	407-640-3	63767-86-2	Xi; R36/38 N; R51-53	Xi; N R: 36/38-51/53 S: (2-)26-37-61		
603-150-00-0	(±) <i>trans</i> -3,3-dimethyl-5-(2,2,3-trimethyl-cyclopent-3-en-1-yl)-pent-4-en-2-ol	411-580-3	107898-54-4	Xi; R38 N; R50-53	Xi; N R: 38-50/53 S: (2-)24/25-37-60-61		
603-151-00-6	(±)-2-(2,4-dichlorophenyl)-3-(1 <i>H</i> -1,2,4-triazol-1-yl)propan-1-ol	413-570-4	—	R52-53	R: 52/53 S: 61		
603-152-00-1	2-(4- <i>tert</i> -butylphenyl)ethanol	410-020-5	5406-86-0	Repr. Cat. 3; R62 Xn; R48/22 Xi; R41 N; R51-53	Xn; N R: 41-48/22-62-51/ 53 S: (2-)26-36/37/39-61		
603-153-00-7	3-((2-nitro-4-(trifluoromethyl)phenyl)amino)propane-1,2-diol	410-010-0	104333-00-8	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-61		
603-154-00-2	1-[(2- <i>tert</i> -butyl)cyclohexyloxy]-2-butanol	412-300-2	139504-68-0	N; R51-53	N R: 51/53 S: 61		
603-155-00-8	Reaction products of 2-(4,6-bis(2,4-dimethylphenyl)-1,3,5-triazin-2-yl)-5-hydroxyphenol with ((C ₁₀₋₁₆ , rich in C ₁₂₋₁₃ alkyloxy)methyl)oxyrane	410-560-1	—	N; R50-53	N R: 50/53 S: 60-61		
603-156-00-3	2-(2,4-dichlorophenyl)-2-(2-propenyl)oxirane	411-210-0	89544-48-9	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)24-37-60-61		
603-157-00-9	6,9-bis(hexadecyloxymethyl)-4,7-dioxanonane-1,2,9-triol	411-450-6	143747-72-2	R53	R: 53 S: 61		
603-158-00-4	reaction mass of 4 diastereoisomers of 2,7-dimethyl-10-(1-methylethyl)-1-oxaspiro[4.5]deca-3,6-diene	412-460-3	—	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-159-00-X	2-cyclododecylpropan-1-ol	411-410-8	118562-73-5	N; R50-53	N R: 50/53 S: 60-61		
603-160-00-5	1,2-diethoxypropane	412-180-1	10221-57-5	F; R11 R19	F R: 11-19 S: (2-)9-16-24-33		
603-161-00-0	1,3-diethoxypropane	413-140-6	3459-83-4	R10	R: 10 S: (2-)9-24		
603-162-00-6	α [2-[[[(2-hydroxyethyl)methylamino]acetyl]amino]propyl]- ω -(nonylphenoxy)poly[oxo(methyl-1,2-ethanediy)]	413-420-8	144736-29-8	C; R34 R43 N; R51-53	C; N R: 34-43-51/53 S: (1/2-)26-28-36/37/ 39-45-61		
603-163-00-1	2-phenyl-1,3-propanediol	411-810-2	1570-95-2	Xi; R41	Xi R: 41 S: (2-)26-39		
603-164-00-7	2-butyl-4-chloro-4,5-dihydro-5-hydroxymethyl-1-[2'-(2-triphenylmethyl-1,2,3,4-2 <i>H</i> -tetrazol-5-yl)-1,1'-biphenyl-4-methyl]-1 <i>H</i> -imidazole	412-420-5	133909-99-6	R53	R: 53 S: 61		
603-165-00-2	reaction mass of: 4-allyl-2,6-bis(2,3-epoxypropyl)phenol; 4-allyl-6-[3-[6-[3-[6-[3-(4-allyl-2,6-bis(2,3-epoxypropyl)phenoxy)-2-hydroxypropyl]-4-allyl-2-(2,3-epoxypropyl)phenoxy]-2-hydroxypropyl]-4-allyl-2-(2,3-epoxypropyl)phenoxy]-2-hydroxypropyl]-2-(2,3-epoxypropyl)phenol; 4-allyl-6-[3-(4-allyl-2,6-bis(2,3-epoxypropyl)phenoxy)-2-hydroxypropyl]-2-(2,3-epoxypropyl)phenol; 4-allyl-6-[3-[6-[3-[6-[3-(4-allyl-2,6-bis(2,3-epoxypropyl)phenoxy)-2-hydroxypropyl]-4-allyl-2-(2,3-epoxypropyl)phenoxy]-2-hydroxypropyl]-4-allyl-2-(2,3-epoxypropyl)phenol	417-470-1	—	Muta. Cat. 3; R68 R43	Xn R: 43-68 S: (2-)36/37		
603-166-00-8	R-1-chloro-2,3-epoxypropane	424-280-2	51594-55-9	R10 Carc. Cat. 2; R45 T; R23/24/25 C; R34 R43	T R: 45-10-23/24/25- 34-43 S: 53-45		E
603-167-00-3	3,3',5,5'-tetra- <i>tert</i> -butylbiphenyl-2,2'-diol	407-920-5	6390-69-8	R53	R: 53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-168-00-9	3-(2-ethylhexyloxy)propane-1,2-diol	408-080-2	70445-33-9	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
603-169-00-4	(±)- <i>trans</i> -4-(4-fluorophenyl)-3-hydroxymethyl- <i>N</i> -methylpiperidine	415-550-0	109887-53-8	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)22-26-39-61		
603-170-00-X	reaction mass of: 2-methyl-1-(6-methylbicyclo[2.2.1]hept-5-en-2-yl)pent-1-en-3-ol; 2-methyl-1-(1-methylbicyclo[2.2.1]hept-5-en-2-yl)-pent-1-en-3-ol; 2-methyl-1-(5-methylbicyclo[2.2.1]hept-5-en-2-yl)pent-1-en-3-ol	415-990-3	67739-11-1	Xi; R36 N; R51-53	Xi; N R: 36-51/53 S: (2-)26-61		
603-171-00-5	5-thiazolylmethanol	414-780-9	38585-74-9	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
603-172-00-0	mono-2-[2-(4-dibenzo[<i>b,f</i>][1,4]thiazepin-11-yl)piperazinium-1-yl]ethoxy)ethanol <i>trans</i> -butenedioate	415-180-1	773058-82-5	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)22-26-39-61		
603-173-00-6	4,4-dimethyl-3,5,8-trioxabicyclo[5.1.0]octane	421-750-9	57280-22-5	Xi; R36 R43	Xi R: 36-43 S: (2-)26-36/37		
603-174-00-1	4-cyclohexyl-2-methyl-2-butanol	420-630-3	83926-73-2	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
603-175-00-7	2-(2-hexyloxyethoxy)ethanol; DEGHE; diethylene glycol monohexyl ether; 3,6-dioxo-1-dodecanol; hexyl carbitol; 3,6-dioxadodecan-1-ol	203-988-3	112-59-4	Xn; R21 Xi; R41	Xn R: 21-41 S: (2-)26-36/37/39-46		
603-176-00-2	1,2-bis(2-methoxyethoxy)ethane; TEGDME; triethylene glycol dimethyl ether; triglyme	203-977-3	112-49-2	R19 Repr. Cat. 2; R61 Repr. Cat. 3; R62	T R: 61-19-62 S: 53-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-177-00-8	1-ethoxypropan-2-ol; 2PG1EE; 1-ethoxy-2-propanol; propylene glycol monoethyl ether; [1] 2-ethoxy-1-methylethyl acetate; 2PG1EEA [2]	216-374-5 [1] 259-370-9 [2]	1569-02-4 [1] 54839-24-6 [2]	R10 R67	R: 10-67 S: (2-)24		
603-178-00-3	2-hexyloxyethanol; ethylene glycol monoethyl ether; n-hexylglycol	203-951-1	112-25-4	Xn; R21/22 C; R34	C R: 21/22-34 S: (1/2-)26-36/37/39-45		
603-179-00-9	ergocalciferol (ISO); Vitamin D2	200-014-9	50-14-6	T+; R26 T; R24/25-48/25	T+ R: 24/25-26-48/25 S: (1/2-)28-36/37-45		
603-180-00-4	colecalfiferol; Vitamin D3	200-673-2	67-97-0	T+; R26 T; R24/25-48/25	T+ R: 24/25-26-48/25 S: (1/2-)28-36/37-45		
603-181-00-X	<i>tert</i> -butyl methyl ether; MTBE; 2-methoxy-2-methylpropane	216-653-1	1634-04-4	F; R11 Xi; R38	F; Xi R: 11-38 S: (2-)9-16-24		
603-183-00-0	2-[2-(2-butoxyethoxy)ethoxy]ethanol; TEGBE; triethylene glycol monobutyl ether; butoxytriethylene glycol	205-592-6	143-22-6	Xi; R41	Xi R: 41 S: (2-)26-39-46	Xi; R41: C ≥ 30 % Xi; R36: 20 % ≤ C < 30 %	
603-184-00-6	2-(hydroxymethyl)-2-[[2-hydroxy-3-(isooctadecyloxy)propoxy]methyl]-1,3-propanediol	416-380-1	146925-83-9	N; R50-53	N R: 50/53 S: 60-61		
603-185-00-1	2,4-dichloro-3-ethyl-6-nitrophenol	420-740-1	99817-36-4	T; R25 Xi; R41 R43 N; R50-53	T; N R: 25-41-43-50/53 S: (1/2-)26-36/37/39-45-60-61		
603-186-00-7	trans-(5RS,6SR)-6-amino-2,2-dimethyl-1,3-dioxepan-5-ol	419-050-3	79944-37-9	R43	Xi R: 43 S: (2-)22-24/25-26-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
603-187-00-2	2-((4,6-bis(4-(2-(1-methylpyridinium-4-yl)vinyl)phenylamino)-1,3,5-triazin-2-yl)(2-hydroxyethyl)amino)ethanol dichloride	419-360-9	163661-77-6	N; R50-53	N R: 50/53 S: 60-61		
603-189-00-3	reaction mass of complexes of: titanium, 2,2'-oxydiethanol, ammonium lactate, nitrilotris(2-propanol) and ethylene glycol	405-250-8	—	N; R51-53	N R: 51/53 S: 61		
603-191-00-4	2-(4,6-bis(2,4-dimethylphenyl)-1,3,5-triazin-2-yl)-5-(3-((2-ethylhexyl)oxy)-2-hydroxypropoxy)phenol	419-740-4	137658-79-8	R53	R: 53 S: 61		
603-195-00-6	2-[4-(4-methoxyphenyl)-6-phenyl-1,3,5-triazin-2-yl]-phenol	430-810-3	154825-62-4	R52-53	R: 52/53 S: 61		
603-196-00-1	2-(7-ethyl-1H-indol-3-yl)ethanol	431-020-1	41340-36-7	Xn; 22-48/22 N; R51-53	Xn; N R: 22-48/22-51/53 S: (2-)36/37/39-61		
603-197-00-7	tebuconazole (ISO); 1-(4-chlorophenyl)-4,4-dimethyl-3-(1,2,4-triazol-1-ylmethyl)pentan-3-ol	403-640-2	107534-96-3	Repr. Cat. 3; R63 Xn; R22 N; R51-53	Xn; N R: 22-51/53-63 S: (2-)22-36/37-61		
603-199-00-8	etoxazol (ISO); (RS)-5-tert-butyl-2-[2-(2,6-difluorophenyl)-4,5-dihydro-1,3-oxazol-4-yl]phenetole	—	153233-91-1	N; R50-53	N R: 50/53 S: 60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	
604-001-00-2	phenol; carbolic acid; monohydroxybenzene; phenylalcohol	203-632-7	108-95-2	Muta. Cat. 3; R68 T; R23/24/25 Xn; R48/20/ 21/22 C; R34	T; R: 23/24/25-34-48/ 20/21/22-68 S: (1/2-)24/25-26-28- 36/37/39-45	T; R23/24/25: C ≥ 10 % Xn; R20/21/22: 3 % ≤ C < 10 % C; R34: C ≥ 3 % Xi; R36/38: 1 % ≤ C < 3 %	
604-002-00-8	pentachlorophenol	201-778-6	87-86-5	Carc. Cat. 3; R40 T+; R26 T; R24/25 Xi; R36/37/ 38 N; R50-53	T+; N R: 24/25-26-36/37/ 38-40-50/53 S: (1/2-)22-36/37-45- 52-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
604-003-00-3	sodium pentachlorophenolate; [1] potassium pentachlorophenolate [2]	205-025-2 [1] 231-911-3 [2]	131-52-2 [1] 7778-73-6 [2]	Carc. Cat. 3; R40 T+; R26 T; R24/25 Xi; R36/37/38 N; R50-53	T+; N R: 24/25-26-36/37/38-40-50/53 S: (1/2-)22-28-36/37-45-52-60-61		
604-004-00-9	<i>m</i> -cresol; [1] <i>o</i> -cresol; [2] <i>p</i> -cresol; [3] mix-cresol [4]	203-577-9 [1] 202-423-8 [2] 203-398-6 [3] 215-293-2 [4]	108-39-4 [1] 95-48-7 [2] 106-44-5 [3] 1319-77-3 [4]	T; R24/25 C; R34	T R: 24/25-34 S: (1/2-)36/37/39-45	T; R24/25: C ≥ 5 % Xn; R21/22: 1 % ≤ C < 5 % C; R34: C ≥ 5 % Xi; R36/38: 1 % ≤ C < 5 %	C
604-005-00-4	1,4-dihydroxybenzene; hydroquinone; quinol	204-617-8	123-31-9	Carc. Cat. 3; R40 Muta. Cat. 3; R68 Xn; R22 Xi; R41 R43 N; R50	Xn; N R: 22-40-41-43-50-68 S: (2-)26-36/37/39-61		
604-006-00-X	3,4-xilenol; [1] 2,5-xilenol; [2] 2,4-xilenol; [3] 2,3-xilenol; [4] 2,6-xilenol; [5] xilenol; [6] 2,4(or 2,5)-xilenol [7]	202-439-5 [1] 202-461-5 [2] 203-321-6 [3] 208-395-3 [4] 209-400-1 [5] 215-089-3 [6] 276-245-4 [7]	95-65-8 [1] 95-87-4 [2] 105-67-9 [3] 526-75-0 [4] 576-26-1 [5] 1300-71-6 [6] 71975-58-1 [7]	T; R24/25 C; R34 N; R51-53	T; N R: 24/25-34-51/53 S: (1/2-)26-36/37/39-45-61		C
604-007-00-5	2-naphthol	205-182-7	135-19-3	Xn; R20/22 N; R50	Xn; N R: 20/22-50 S: (2-)24/25-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
604-008-00-0	2-chlorophenol; [1] 4-chlorophenol; [2] 3-chlorophenol; [3] chlorophenol [4]	202-433-2 [1] 203-402-6 [2] 203-582-6 [3] 246-691-4 [4]	95-57-8 [1] 106-48-9 [2] 108-43-0 [3] 25167-80-0 [4]	Xn; R20/21/22 N; R51-53	Xn; N R: 20/21/22-51/53 S: (2-)28-61		C
604-009-00-6	pyrogallol; 1,2,3-trihydroxybenzene	201-762-9	87-66-1	Muta. Cat. 3; R68 Xn; R20/21/22 R52-53	Xn R: 20/21/22-68-52/53 S: (2-)36/37-61	Xn; R20/21/22: C ≥ 10 %	
604-010-00-1	resorcinol; 1,3-benzenediol	203-585-2	108-46-3	Xn; R22 Xi; R36/38 N; R50	Xn; N R: 22-36/38-50 S: (2-)26-61	Xn; R22: C ≥ 10 %	
604-011-00-7	2,4-dichlorophenol	204-429-6	120-83-2	T; R24 Xn; R22 C; R34 N; R51-53	T; N R: 22-24-34-51/53 S: (1/2-)26-36/37/39-45-61		
604-012-00-2	4-chloro- <i>o</i> -cresol; 4-chloro-2-methyl phenol	216-381-3	1570-64-5	T; R23 C; R35 N; R50	T; C; N R: 23-35-50 S: (1/2-)26-36/37/39-45-61	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
604-013-00-8	2,3,4,6-tetrachlorophenol	200-402-8	58-90-2	T; R25 Xi; R36/38 N; R50-53	T; N R: 25-36/38-50/53 S: (1/2-)26-28-37-45-60-61	T; R25: C ≥ 5 % Xn; R22: 0,5 % ≤ C < 5 % Xi; R36/38: C ≥ 5 %	
604-014-00-3	chlorocresol; 4-chloro- <i>m</i> -cresol; 4-chloro-3-methylphenol	200-431-6	59-50-7	Xn; R21/22 Xi; R41 R43 N; R50	Xn; N R: 21/22-41-43-50 S: (2-)26-36/37/39-61	Xn; R21/22: C ≥ 10 %	
604-015-00-9	2,2'-methylenebis-(3,4,6-trichlorophenol); hexachlorophene	200-733-8	70-30-4	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)20-37-45-60-61	T; R24/25: C ≥ 2 % Xn; R21/22: 0,2 % ≤ C < 2 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
604-016-00-4	1,2-dihydroxybenzene; pyrocatechol	204-427-5	120-80-9	Xn; R21/22 Xi; R36/38	Xn R: 21/22-36/38 S: (2-)22-26-37		
604-017-00-X	2,4,5-trichlorophenol	202-467-8	95-95-4	Xn; R22 Xi; R36/38 N; R50-53	Xn; N R: 22-36/38-50/53 S: (2-)26-28-60-61	Xn; R22: C ≥ 20 % Xi; R36/38: C ≥ 5 %	
604-018-00-5	2,4,6-trichlorophenol	201-795-9	88-06-2	Carc. Cat. 3; R40 Xn; R22 Xi; R36/38 N; R50-53	Xn; N R: 22-36/38-40-50/ 53 S: (2-)36/37-60-61		
604-019-00-0	dichlorophen (ISO)	202-567-1	97-23-4	Xn; R22 Xi; R36 N; R50-53	Xn; N R: 22-36-50/53 S: (2-)26-60-61		
604-020-00-6	2-phenylphenol (ISO); biphenyl-2-ol; 2-hydroxybiphenyl;	201-993-5	90-43-7	Xi; R36/37/ 38 N; R50	Xi; N R: 36/37/38-50 S: (2-)22-61		
604-021-00-1	sodium 2-biphenylate; 2-phenylphenol, sodium salt	205-055-6	132-27-4	Xn; R22 Xi; R37/38- 41 N; R50	Xn; N R: 22-37/38-41-50 S: (2-)22-26-61		
604-022-00-7	2,2-dimethyl-1,3-benzodioxol-4-ol	400-900-7	22961-82-6	Xi; R41	Xi R: 41 S: (2-)24-26-39		
604-023-00-2	2,4-dichloro-3-ethylphenol	401-060-4	—	C; R34 N; R50-53	C; N R: 34-50/53 S: (1/2-)26-36/39-45- 60-61		
604-024-00-8	4,4-isobutylethylidenediphenol	401-720-1	6807-17-6	Repr. Cat. 2; R60 Xi; R36 N; R50-53	T; N R: 60-36-50/53 S: 53-45-60-61		
604-025-00-3	2,5-bis(1,1-dimethylbutyl)hydroquinone	400-220-0	—	N; R51-53	N R: 51/53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
604-026-00-9	2,2-spirobi(6-hydroxy-4,4,7-trimethylchromane)	400-270-3	—	N; R51-53	N R: 51/53 S: 61		
604-027-00-4	2-methyl-5-(1,1,3,3-tetramethylbutyl)hydroquinone	400-530-6	—	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)24/25-26-37-61		
604-028-00-X	4-amino-3-fluorophenol	402-230-0	399-95-1	Carc. Cat. 2; R45 Xn; R22 R43 N; R51-53	T; N R: 45-22-43-51/53 S: 53-45-61		E
604-029-00-5	1-naphtol	201-969-4	90-15-3	Xn; R21/22 Xi; R37/38-41	Xn R: 21/22-37/38-41 S: (2-)22-26-37/39		
604-030-00-0	bisphenol A; 4,4'-isopropylidenediphenol	201-245-8	80-05-7	Repr. Cat. 3; R62 Xi; R37-41 R43	Xn R: 37-41-43-62 S: (2-)26-36/37-39-46		
604-031-00-6	guaiacol	201-964-7	90-05-1	Xn; R22 Xi; R36/38	Xn R: 22-36/38 S: (2-)26		
604-032-00-1	thymol	201-944-8	89-83-8	Xn; R22 C; R34 N; R51-53	C; N R: 22-34-51/53 S: (1/2-)26-28-36/37/ 39-45-61		
604-033-00-7	isobutyl but-3-enoate	401-170-2	24342-03-8	R10	R: 10 S: (2-)		
604-034-00-2	4,4'-thiodi-o-cresol	403-330-7	24197-34-0	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		
604-035-00-8	4-nonylphenol, reaction products with formaldehyde and dodecane-1-thiol	404-160-6	—	R43 R53	X R: 43-53 S: (2-)24-37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
604-036-00-3	4,4'-oxybis(ethylenethio)diphenol	404-590-4	90884-29-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
604-037-00-9	3,5-xylenol; 3,5-dimethylphenol	203-606-5	108-68-9	T; R24/25 C; R34	T R: 24/25-34 S: (1/2-)26-28-36/37/ 39-45		
604-038-00-4	4-chloro-3,5-dimethylphenol; [1] chloroxylenol [2]	201-793-8 [1] 215-316-6 [2]	88-04-0 [1] 1321-23-9 [2]	Xn; R22 Xi; R36/38 R43	Xn R: 22-36/38-43 S: (2-)24-37		
604-039-00-X	ethyl 2-[4-[(6-chlorobenzoxazol-2-yl)oxy]phenoxy]propionate; fenoxaprop-ethyl	266-362-9	66441-23-4	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
604-040-00-5	fomesafen (ISO); 5-[2-chloro-4-(trifluoromethyl)phenoxy]-N-(methylsulphonyl)-2-nitrobenzamide	276-439-9	72178-02-0	Xn; R22	Xn R: 22 S: (2-)		
604-041-00-0	acifluorfen (ISO); 5-[2-chloro-4-(trifluoromethyl)phenoxy]-2-nitrobenzoic acid [1] sodium 5-[2-chloro-4-(trifluoromethyl) phenoxy]-2-nitrobenzoate; acifluorfen-sodium [2]	256-634-5 [1] 263-560-7 [2]	50594-66-6 [1] 62476-59-9 [2]	Xn; R22 Xi; R38-41 N; R50-53	Xn; N R: 22-38-41-50/53 S: (2-)24-39-60-61		
604-042-00-6	4-nitrosophenol	203-251-6	104-91-6	Muta. Cat. 3; R68 Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53-68 S: (2-)26-36/37/39- 47-49-61		
604-043-00-1	monobenzene; 4-hydroxyphenyl benzyl ether; hydroquinone monobenzyl ether	203-083-3	103-16-2	Xi; R36 R43	Xi R: 36-43 S: (2-)24/25-26-37		
604-044-00-7	mequinol; 4-methoxyphenol; hydroquinone monomethyl ether	205-769-8	150-76-5	Xn; R22 Xi; R36 R43	Xn R: 22-36-43 S: (2-)24/25-26-37/ 39-46		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
604-045-00-2	2,3,5-trimethylhydroquinone	211-838-3	700-13-0	Xn; R20 Xi; R37/38-41 R43 N; R50-53	Xn; N R: 20-37/38-41-43-50/53 S: (2-)24-26-37/39-60-61		
604-046-00-8	4-(4-isopropoxyphenylsulfonyl)phenol	405-520-5	95235-30-6	N; R51-53	N R: 51/53 S: 61		
604-047-00-3	4-(4-tolyloxy)biphenyl	405-730-7	51601-57-1	Xn; R48/22 R53	Xn R: 48/22-53 S: (2-)22-36-61		
604-048-00-9	4,4',4''-(ethan-1,1,1-triyl)triphenol	405-800-7	27955-94-8	N; R51-53	N R: 51/53 S: 61		
604-049-00-4	4-4'-methylenebis(oxyethylenethio)diphenol	407-480-4	93589-69-6	N; R51-53	N R: 51/53 S: 61		
604-051-00-5	3,5-bis((3,5-di- <i>tert</i> -butyl-4-hydroxy)benzyl)-2,4,6-trimethylphenol	401-110-5	87113-78-8	R52-53	R: 52/53 S: 61		
604-052-00-0	2,2'-methylenebis(6-(2 <i>H</i> -benzotriazol-2-yl)-4-(1,1,3,3-tetramethylbutyl)phenol)	403-800-1	103597-45-1	R53	R: 53 S: 61		
604-053-00-6	2-methyl-4-(1,1-dimethylethyl)-6-(1-methyl-pentadecyl)-phenol	410-760-9	157661-93-3	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)24-37-60-61		
604-054-00-1	reaction mass of: 2-methoxy-4-(tetrahydro-4-methylene-2 <i>H</i> -pyran-2-yl)-phenol; 4-(3,6-dihydro-4-methyl-2 <i>H</i> -pyran-2-yl)-2-methoxyphenol	412-020-0	—	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
604-055-00-7	2,2'-((3,3',5,5'-tetramethyl-(1,1'-biphenyl)-4,4'-diyl)-bis(oxy-methylene))-bis-oxirane	413-900-7	85954-11-6	Muta. Cat. 3; R68	Xn R: 68 S: (2-)22-36-37		
604-056-00-2	2-(2-hydroxy-3,5-dinitroanilino)ethanol	412-520-9	99610-72-7	F; R11 Repr. Cat. 3; R62 Xn; R22	F; Xn R: 11-22-62 S: (2-)22-33-36/37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
604-057-00-8	reaction mass of: isomers of 2-(2H-benzotriazol-2-yl)-4-methyl-(n)-dodecylphenol; isomers of 2-(2H-benzotriazol-2-yl)-4-methyl-(n)-tetracosylphenol; isomers of 2-(2H-benzotriazol-2-yl)-4-methyl-5,6-didodecylphenol. n=5 or 6	401-680-5	—	N; R51-53	N R: 51/53 S: 61		
604-058-00-3	1,2-bis(3-methylphenoxy)ethane	402-730-9	54914-85-1	N; R50-53	N R: 50/53 S: 60-61		
604-059-00-9	2-n-hexadecylhydroquinone	406-400-5	—	Xn; R48/22 Xi; R38 R43 R53	Xn R: 38-43-48/22-53 S: (2-)22-36/37-61		
604-060-00-4	9,9-bis(4-hydroxyphenyl)fluorene	406-950-6	3236-71-3	Xi; R36-38 N; R50-53	Xi; N R: 36/38-50/53 S: (2-)26-37-60-61		
604-061-00-X	reaction mass of: 2-chloro-5-sec-tetradecylhydroquinones where sec-tetradecyl= 1-methyltridecyl; 1-ethyldodecyl; 1-propylundecyl; 1-butyldecyl; 1-pentylononyl; 1-hexyloctyl	407-740-7	—	Xi; R38 R43 R52-53	Xi R: 38-43-52/53 S: (2-)24-37-61		
604-062-00-5	2,4-dimethyl-6-(1-methyl-pentadecyl)phenol	411-220-5	—	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)24-37-60-61		
604-063-00-0	5,6-dihydroxyindole	412-130-9	3131-52-0	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)22-26-36/37/39-61		
604-064-00-6	2-(4,6-diphenyl-1,3,5-triazin-2-yl)-5-((hexyl)oxy)-phenol	411-380-6	147315-50-2	R53	R: 53 S: 61		
604-065-00-1	4,4',4''-(1-methylpropan-1-yl-3-ylidene)tris(2-cyclohexyl-5-methylphenol)	407-460-5	111850-25-0	N; R51-53	N R: 51/53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
604-066-00-7	reaction mass of: phenol, 6-(1,1-dimethylethyl)-4-tetrapropyl-2-[(2-hydroxy-5-tetra-propylphenyl)methyl (C ₄₁ -compound) and methane, 2,2'-bis[6-(1,1-dimethyl-ethyl)-1-hydroxy-4-tetrapropyl-phenyl]]- (C ₄₅ -compound); 2,6-bis(1,1-dimethylethyl)-4-tetra-propyl-phenol and 2-(1,1-dimethylethyl)-4-tetrapropyl-phenol; 2,6-bis[(6-(1,1-dimethylethyl)-1-hydroxy-4-tetrapropylphenyl)methyl]-4-(tetrapropyl)phenol and 2-[(6-(1,1-dimethylethyl)-1-hydroxy-4-tetrapropylphenyl)methyl]-6-[1-hydroxy-4-tetrapropylphenyl)methyl]-4-(tetrapropyl)phenol	414-550-8	—	N; R50-53	N R: 50/53 S: 60-61		
604-067-00-2	reaction mass of: 2,2'-[[[(2-hydroxyethyl)imino]bis(methylene) bis[4-dodecylphenol]; formaldehyde, oligomer with 4-dodecyl phenol and 2-aminoethanol(n = 2); formaldehyde, oligomer with 4-dodecyl phenol and 2-aminoethanol(n = 3, 4 and higher)	414-520-4	—	Xi; R38-41 N; R50-53	Xi; N R: 38-41-50/53 S: (2-)26-37/39-60-61		
604-068-00-8	(±)-4-[2-[[3-(4-hydroxyphenyl)-1-methylpropyl]amino]-1-hydroxyethyl]phenol hydrochloride	415-170-5	90274-24-1	Xn; R20/22 R43	Xn R: 20/22-43 S: (2-)24-26-37		
604-069-00-3	2-(1-methylpropyl)-4-tert-butylphenol	421-740-4	51390-14-8	C; R34 N; R51-53	C; N R: 34-51/53 S: (1/2-)26-36/37/39-45-61		
604-070-00-9	triclosan; 2,4,4'-trichloro-2'-hydroxy-diphenyl-ether; 5-chloro-2-(2,4-dichlorophenoxy)phenol	222-182-2	3380-34-5	Xi; R36/38 N; R50-53	Xi; N R: 36/38-50/53 S: 26-39-46-60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	
605-001-00-5	formaldehyde ... %	200-001-8	50-00-0	Carc. Cat. 3; R40 T; R23/24/25 C; R34 R43	T R: 23/24/25-34-40-43 S: (1/2-)26-36/37/39-45-51	T; R23/24/25: C ≥ 25 % Xn; R20/21/22: 5 % ≤ C < 25 % C; R34: C ≥ 25 % Xi; R36/37/38: 5 % ≤ C < 25 % R43: C ≥ 0,2 %	B D
605-002-00-0	1,3,5-trioxan; trioxymethylene	203-812-5	110-88-3	F; R11 Repr. Cat. 3; R63 Xi; R37	F; Xn R: 11-37-63 S: (2-)36/37-46		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
605-003-00-6	acetaldehyde; ethanal	200-836-8	75-07-0	F+; R12 Carc. Cat. 3; R40 Xi; R36/37	F+; Xn R: 12-36/37-40 S: (2-)16-33-36/37		
605-004-00-1	2,4,6-trimethyl-1,3,5-trioxan; paraldehyde	204-639-8	123-63-7	F; R11 ⊗	F R: 11 S: (2-)9-16-29-33		
605-005-00-7	2,4,6,8-tetramethyl-1,3,5,7-tetraoxacyclooctane; metaldehyde	203-600-2	108-62-3	R10 ⊗ Xn; R22	Xn R: 10-22 S: (2-)13-25-46		
605-006-00-2	butyraldehyde	204-646-6	123-72-8	F; R11	F R: 11 S: (2-)9-29-33		
605-007-00-8	1,1-dimethoxyethane; dimethyl acetal	208-589-8	534-15-6	F; R11	F R: 11 S: (2-)9-16-33		
605-008-00-3	acrylaldehyde; acrolein; prop-2-enal	203-453-4	107-02-8	F; R11 T+; R26 T; R24/25 C; R34 N; R50	F; T+; N R: 11-24/25-26-34-50 S: 23-26-28-36/37/ 39-45-61		D
605-009-00-9	crotonaldehyde; 2-butenal; [1] (E)-2-butenal; (E)-crotonaldehyde [2]	224-030-0 [1] 204-647-1 [2]	4170-30-3 [1] 123-73-9 [2]	F; R11 Muta. Cat. 3; R68 T+; R26 T; R24/25 Xn; R48/22 Xi; R37/38-41 N; R50	F; T+; N R: 11-24/25-26-37/ 38-41-48/22-50-68 S: (1/2-)26-28-36/37/ 39-45-61		
605-010-00-4	2-furaldehyde	202-627-7	98-01-1	Carc. Cat. 3; R40 T; R23/25 Xn; R21 Xi; R36/37	T R: 21-23/25-36/37-40 S: (1/2-)26-36/37/39-45	T; R23/25: C ≥ 5 % Xn; R20/22: 1 % ≤ C < 5 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
605-011-00-X	2-chlorobenzaldehyde; o-chlorobenzaldehyde	201-956-3	89-98-5	C; R34	C R: 34 S: (1/2-)26-45		
605-012-00-5	benzaldehyde	202-860-4	100-52-7	Xn; R22	Xn R: 22 S: (2-)24		
605-013-00-0	chloralose (INN); (R)-1,2-O-(2,2,2-trichloroethylidene)- α -D-glucofuranose; glucochloralose; anhydroglucochloral	240-016-7	15879-93-3	Xn; R20/22	Xn R: 20/22 S: (2-)16-24/25-28		
605-014-00-6	chloral hydrate; 2,2,2-trichloroethane-1,1-diol	206-117-5	302-17-0	T; R25 Xi; R36/38	T R: 25-36/38 S: (1/2-)25-45		
605-015-00-1	1,1-diethoxyethane; acetal	203-310-6	105-57-7	F; R11 Xi; R36/38	F; Xi R: 11-36/38 S: (2-)9-16-33	Xi; R36/38: C $\geq$ 10 %	
605-016-00-7	glyoxal... %; ethandial... %	203-474-9	107-22-2	Muta. Cat. 3; R68 Xn; R20 Xi; R36/38 R43	Xn R: 20-36/38-43-68 S: (2-)36/37	Xn; R20: C $\geq$ 10 % Xi; R36/38: C $\geq$ 10 %	B
605-017-00-2	1,3-dioxolane	211-463-5	646-06-0	F; R11	F R: 11 S: (2-)16		
605-018-00-8	propanal; propionaldehyde	204-623-0	123-38-6	F; R11 Xi; R36/37/ 38	F; Xi R: 11-36/37/38 S: (2-)9-16-29		
605-019-00-3	citral	226-394-6	5392-40-5	Xi; R38 R43	Xi R: 38-43 S: (2-)24/25-37		
605-020-00-9	safrole; 5-allyl-1,3-benzodioxole	202-345-4	94-59-7	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xn; R22	T R: 45-22-68 S: 53-45		E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
605-021-00-4	formaldehyde, reaction products with butylphenol	294-145-9	91673-30-2	R43	Xi R: 43 S: (2-)24-37		
605-022-00-X	glutaral; glutaraldehyde; 1,5-pentanedial	203-856-5	111-30-8	T; R23/25 C; R34 R42/43 N; R50	T; N R: 23/25-34-42/43-50 S: (1/2-)26-36/37/39-45-61	T; R25: C ≥ 50 % Xn; R22: 2 % ≤ C < 50 % T; R23: C ≥ 25 % Xn; R20: 2 % ≤ C < 25 % C; R34: C ≥ 10 % Xi; R37/38-41: 2 % ≤ C < 10 % Xi; R36/37/38: 0,5 % ≤ C < 2 % R43: C ≥ 0,5 %	
605-025-00-6	chloroacetaldehyde	203-472-8	107-20-0	Carc. Cat. 3; R40 T+; R26 T; R24/25 C; R34 N; R50	T+; N R: 24/25-26-34-40-50 S: (1/2-)26-28-36/37/39-45-61		
605-026-00-1	2,5,7,7-tetramethyloctanal	405-690-0	114119-97-0	Xi; R38 R43 N; R51-53	Xi; N R: 38-43-51/53 S: (2-)24-37-61		
605-027-00-7	reaction mass of: 3a,4,5,6,7,7a-hexahydro-4,7-methano-1H-indene-6-carboxaldehyde; 3a,4,5,6,7,7a-hexahydro-4,7-methano-1H-indene-5-carboxaldehyde	410-480-7	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
605-028-00-2	β-methyl-3-(1-methylethyl)-benzenepropanal	412-050-4	125109-85-5	N; R51-53	N R: 51/53 S: 61		
605-029-00-8	2-cyclohexylpropanal	412-270-0	2109-22-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
605-030-00-3	1-(p-methoxyphenyl)acetaldehyde oxime	411-510-1	3353-51-3	R43	Xi R: 43 S: (2-)24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
605-031-00-9	reaction mass of: 2,2-dimethoxyethanal [(this component is considered to be anhydrous in terms of identity, structure and composition. However, 2,2-dimethoxyethanal will exist in a hydrated form. 60 % anhydrous is equivalent to 70.4 % hydrate; water(Including free water and water in hydrated 2,2-dimethoxyethanal)]	421-890-0	—	R43	Xi R: 43 S: (2-)24-37		
606-001-00-8	acetone; propan-2-one; propanone	200-662-2	67-64-1	F; R11 Xi; R36 R66 R67	F; Xi R: 11-36-66-67 S: (2-)9-16-26		
606-002-00-3	butanone; ethyl methyl ketone	201-159-0	78-93-3	F; R11 Xi; R36 R66 R67	F; Xi R: 11-36-66-67 S: (2-)9-16		
606-003-00-9	heptan-3-one; butyl ethyl ketone	203-388-1	106-35-4	R10 Xn; R20 Xi; R36	Xn R: 10-20-36 S: (2-)24		
606-004-00-4	4-methylpentan-2-one; isobutyl methyl ketone	203-550-1	108-10-1	F; R11 Xn; R20 Xi; R36/37 R66	F; Xn R: 11-20-36/37-66 S: (2-)9-16-29		
606-005-00-X	2,6-dimethylheptan-4-one; di-isobutyl ketone	203-620-1	108-83-8	R10 Xi; R37	Xi R: 10-37 S: (2-)24	Xi; R37: C ≥ 10 %	
606-006-00-5	pentan-3-one; diethyl ketone	202-490-3	96-22-0	F; R11 Xi; R37 R66 R67	F; Xi R: 11-37-66-67 S: (2-)9-16-25-33		
606-007-00-0	3-methylbutan-2-one; methyl isopropyl ketone	209-264-3	563-80-4	F; R11	F R: 11 S: (2-)9-16-33		
606-009-00-1	4-methylpent-3-en-2-one; mesityl oxide	205-502-5	141-79-7	R10 Xn; R20/21/ 22	Xn R: 10-20/21/22 S: (2-)25	Xn; R20/21/22: C ≥ 5 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
606-010-00-7	cyclohexanone	203-631-1	108-94-1	R10 Xn; R20	Xn R: 10-20 S: (2-)25		
606-011-00-2	2-methylcyclohexanone	209-513-6	583-60-8	R10 Xn; R20	Xn R: 10-20 S: (2-)25		
606-012-00-8	3,5,5-trimethylcyclohex-2-enone; isophorone	201-126-0	78-59-1	Carc. Cat. 3; R40 Xn; R21/22 Xi; R36/37	Xn R: 21/22-36/37-40 S: (2-)13-23-36/37/ 39-46	Xi; R36/37: C ≥ 10 %	
606-013-00-3	p-benzoquinone; quinone	203-405-2	106-51-4	T; R23/25 Xi; R36/37/ 38 N; R50	T; N R: 23/25-36/37/38- 50 S: (1/2-)26-28-45-61		
606-014-00-9	chlorophacinone (ISO); 2-(2-(4-chlorophenyl)phenylacetyl)indan-1,3-dione	223-003-0	3691-35-8	T+; R27/28 T; R23-48/ 24/25 N; R50-53	T+; N R: 23-27/28-48/24/ 25-50/53 S: (1/2-)36/37-45-60- 61		
606-016-00-X	pindone (ISO); 2-pivaloylindan-1,3-dione	201-462-8	83-26-1	T; R25-48/25 N; R50-53	T; N R: 25-48/25-50/53 S: (1/2-)37-45-60-61		
606-017-00-5	diketene; diketen	211-617-1	674-82-8	R10 Xn; R20	Xn R: 10-20 S: (2-)3		D
606-018-00-0	dichlone (ISO); 2,3-dichloro-1,4-naphthoquinone	204-210-5	117-80-6	Xn; R22 Xi; R36/38 N; R50-53	Xn; N R: 22-36/38-50/53 S: (2-)26-60-61		
606-019-00-6	chlordecone (ISO); perchloropentacyclo[5,3,0,0 ^{2,6} ,0 ^{3,9} ,0 ^{4,8}]decan-5-one; decachloropentacyclo[5,2,1,0 ^{2,6} ,0 ^{3,9} ,0 ^{5,8}]decan-4-one	205-601-3	143-50-0	Carc. Cat. 3; R40 T; R24/25 N; R50-53	T; N R: 24/25-40-50/53 S: (1/2-)22-36/37-45- 60-61		
606-020-00-1	5-methylheptan-3-one	208-793-7	541-85-5	R10 Xi; R36/37	Xi R: 10-36/37 S: (2-)23	Xi; R36/37: C ≥ 10 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
606-021-00-7	N-methyl-2-pyrrolidone	212-828-1	872-50-4	Xi; R36/38	Xi R: 36/38 S: (2-)41	Xi; R36/38: C ≥ 10 %	
606-022-00-2	1-phenyl-3-pyrazolidone	202-155-1	92-43-3	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
606-023-00-8	4-methoxy-4-methylpentan-2-one	203-512-4	107-70-0	R10 Xn; R20	Xn R: 10-20 S: (2-)23-24/25		
606-024-00-3	heptan-2-one; methyl amyl ketone	203-767-1	110-43-0	R10 Xn; R20/22	Xn R: 10-20/22 S: (2-)24/25		
606-025-00-9	cyclopentanone	204-435-9	120-92-3	R10 Xi; R36/38	Xi R: 10-36/38 S: (2-)23		
606-026-00-4	5-methylhexan-2-one; isoamyl methyl ketone	203-737-8	110-12-3	R10 Xn; R20	Xn R: 10-20 S: (2-)23-24/25		
606-027-00-X	heptan-4-one; di-n-propyl ketone	204-608-9	123-19-3	R10 Xn; R20	Xn R: 10-20 S: (2-)24/25		
606-028-00-5	2,4-dimethylpentan-3-one; di-isopropyl ketone	209-294-7	565-80-0	F; R11 Xn; R20	F; Xn R: 11-20 S: (2-)9-16-24/25		
606-029-00-0	pentane-2,4-dione; acetylacetone	204-634-0	123-54-6	R10 Xn; R22	Xn R: 10-22 S: (2-)21-23-24/25		
606-030-00-6	hexan-2-one; methyl butyl ketone; butyl methyl ketone; methyl-n-butyl ketone	209-731-1	591-78-6	R10 Repr. Cat. 3; R62 T; R48/23 R67	T R: 10-48/23-62-67 S: (1/2-)36/37-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
606-031-00-1	3-propanolide; 1,3-propiolactone	200-340-1	57-57-8	Carc. Cat. 2; R45 T+; R26 Xi; R36/38	T+ R: 45-26-36/38 S: 53-45		E
606-032-00-7	hexachloroacetone	204-129-5	116-16-5	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)24/25-61		
606-033-00-2	2-(3,4-dichlorophenyl)-4-methyl-1,2,4-oxadiazolidinedione; methazole	243-761-6	20354-26-1	Xn; R21/22 Xi; R36/38 N; R51-53	Xn; N R: 21/22-36/38-51/ 53 S: (2-)36/37-61		
606-034-00-8	metribuzin (ISO); 4-amino-6- <i>tert</i> -butyl-3-methylthio-1,2,4-triazin-5(4 <i>H</i>)-one; 4-amino-4,5-dihydro-6-(1,1-dimethylethyl)-3-methylthio- 1,2,4-triazin-5-one	244-209-7	21087-64-9	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
606-035-00-3	chloridazon (ISO); 5-amino-4-chloro-2-phenylpyridazine-3-(2 <i>H</i>)-one; pyrazon	216-920-2	1698-60-8	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
606-036-00-9	quinomethionate; chinomethionat (ISO); 6-methyl-1,3-dithiolo(4,5- <i>b</i>)quinoxalin-2-one	219-455-3	2439-01-2	Repr. Cat. 3; R62 Xn; R20/21/ 22-48/22 Xi; R36 R43 N; R50-53	Xn; N R: 20/21/22-36-43- 48/22-50/53-62 S: (2-)24-37-60-61		
606-037-00-4	triadimefon (ISO); 1-(4-chlorophenoxy)-3,3-dimethyl-1-(1,2,4-triazol-1-yl)buta- none	256-103-8	43121-43-3	Xn; R22 R43 N; R51-53	Xn; N R: 22-43-51/53 S: (2-)24-37-61		
606-038-00-X	diphacinone (ISO); 2-diphenylacetylindan-1,3-dione	201-434-5	82-66-6	T+; R28 T; R48/23/ 24/25	T+ R: 28-48/23/24/25 S: (1/2-)36/37-45		
606-039-00-5	5(or 6)- <i>tert</i> -butyl-2'-chloro-6'-ethylamino-3',7'-dimethylspiro (isobenzofuran-1(1 <i>H</i>),9'-xanthene)-3-one	400-680-2	—	Xn; R20 N; R50-53	Xn; N R: 20-50/53 S: (2-)60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
606-040-00-0	(N-benzyl-N-ethyl)amino-3-hydroxyacetophenone hydrochloride	401-840-4	55845-90-4	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
606-041-00-6	2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one	400-600-6	71868-10-5	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)22-61		
606-042-00-1	acetophenone	202-708-7	98-86-2	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)26		
606-043-00-7	2,4-di- <i>tert</i> -butylcyclohexanone	405-340-7	13019-04-0	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
606-044-00-2	2,4,6-trimethylbenzophenone	403-150-9	954-16-5	Xn; R22 Xi; R36 N; R50-53	Xn; N R: 22-36-50/53 S: (2-)26-60-61		
606-045-00-8	oxadiazon (ISO); 3-[2,4-dichloro-5-(1-methylethoxy)phenyl]-5-(1,1-dimethylethyl)-1,3,4-oxadiazol-2(3H)-one	243-215-7	19666-30-9	N; R50-53	N R: 50/53 S: 60-61		
606-046-00-3	reaction mass of <i>cis</i> - and <i>trans</i> -cyclohexadec-8-en-1-one	401-700-2	3100-36-5	N; R50-53	N R: 50/53 S: 60-61		
606-047-00-9	2-benzyl-2-dimethylamino-4-morpholinobutyrophenone	404-360-3	119313-12-1	N; R50-53	N R: 50/53 S: 60-61		
606-048-00-4	2'-anilino-3'-methyl-6'-dipentylaminospiro(isobenzofuran-1(1H),9'-xanthen)-3-one	406-480-1	—	R53	R: 53 S: 61		
606-049-00-X	4-(<i>trans</i> -4-propylcyclohexyl)acetophenone	406-700-6	78531-61-0	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
606-050-00-5	6-anilino-1-benzoyl-4-(4- <i>tert</i> -pentylphenoxy)naphto[1,2,3-de]quinoline-2,7-(3H)-dione	412-480-2	72453-58-8	N; R51-53	N R: 51/53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
606-051-00-0	4-pentylcyclohexanone	406-670-4	61203-83-6	N; R51-53	N R: 51/53 S: 61		
606-052-00-6	4-(N,N-dibutylamino)-2-hydroxy-2'-carboxybenzophenone	410-410-5	54574-82-2	R52-53	R: 52/53 S: 61		
606-053-00-1	flurtamone (ISO); (RS)-5-methylamino-2-phenyl-4-(α,α,α -trifluoro- <i>m</i> -tolyl) furan-3(2 <i>H</i>)-one	—	96525-23-4	N; R50-53	N R: 50/53 S: 60-61		
606-054-00-7	isoxaflutole (ISO); 5-cyclopropyl-1,2-oxazol-4-yl α,α,α -trifluoro-2-mesyl- <i>p</i> -tolyl ketone	—	141112-29-0	Repr. Cat. 3; R63 N; R50-53	Xn; N R: 50/53-63 S: (2-)36/37-60-61		
606-055-00-2	1-(2,3-dihydro-1,3,3,6-tetramethyl-1-(1-methylethyl)-1 <i>H</i> - inden-5-yl)ethanone	411-180-9	92836-10-7	Xn; R22-48/ 22 N; R51-53	Xn; N R: 22-48/22-51/53 S: (2-)24-36-61		
606-056-00-8	4-chloro-3',4'-dimethoxybenzophenone	404-610-1	116412-83-0	N; R50-53	N R: 50/53 S: 60-61		
606-057-00-3	4-propylcyclohexanone	406-810-4	40649-36-3	Xi; R38 R52-53	Xi R: 38-52/53 S: (2-)25-37-61		
606-058-00-9	4'-fluoro-2,2-dimethoxyacetophenone	407-500-1	21983-80-2	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
606-059-00-4	2,4-difluoro- α -(1 <i>H</i> -1,2,4-triazol-1-yl)acetophenone hydroch- loride	412-390-3	86386-75-6	Xn; R22 Xi; R41 R43	Xn R: 22-41-43 S: (2-)22-26-36/37/39		
606-060-00-X	reaction mass of: <i>trans</i> -2,4-dimethyl-2-(5,6,7,8-tetrahydro- 5,5,8,8-tetramethyl-naphthalene-2-yl)-1,3-dioxolane; <i>cis</i> -2,4-dimethyl-2-(5,6,7,8-tetrahydro-5,5,8,8-tetramethyl- naphthalene-2-yl)-1,3-dioxolane	412-950-7	—	N; R50-53	N R: 50/53 S: 60-61		
606-061-00-5	(3-chlorophenyl)-(4-methoxy-3-nitrophenyl)methanone	423-290-4	66938-41-8	Muta. Cat. 3; R68 N; R50-53	Xn; N R: 68-50/53 S: (2-)22-36/37-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
606-062-00-0	tetrahydrothiopyran-3-carboxaldehyde	407-330-8	61571-06-0	Repr. Cat. 2; R61 Xi; R41 R52-53	T R: 61-41-52/53 S: 53-45-61		
606-063-00-6	(E)-3-(2-chlorophenyl)-2-(4-fluorophenyl)propenal	410-980-5	112704-51-5	Xi; R36 R43	Xi R: 36-43 S: (2-)24-26-37		
606-064-00-1	pregn-5-ene-3,20-dione bis(ethylene ketal)	407-450-0	7093-55-2	R53	R: 53 S: 61		
606-065-00-7	1-(4-morpholinophenyl)butan-1-one	413-790-0	—	N; R51-53	N R: 51/53 S: 61		
606-066-00-2	(E)-5[(4-chlorophenyl)methylene]-2,2-dimethylcyclopentanone	410-440-9	164058-20-2	N; R51-53	N R: 51/53 S: 61		
606-067-00-8	reaction mass of: 1-(2,3,6,7,8,9-hexahydro-1,1-dimethyl-1H-benz(g)inden-4-yl)ethanone; 1-(2,3,5,6,7,8-hexahydro-1,1-dimethyl-1H-benz(f)inden-4-yl)ethanone; 1-(2,3,6,7,8,9-hexahydro-1,1-dimethyl-1H-benz(g)inden-5-yl)ethanone; 1-(2,3,6,7,8,9-hexahydro-3,3-dimethyl-1H-benz(g)inden-5-yl)ethanone	414-870-8	96792-67-5	N; R50-53	N R: 50/53 S: 60-61		
606-068-00-3	2,7,11-trimethyl-13-(2,6,6-trimethylcyclohex-1-en-1-yl)tridecahexaen-2,4,6,8,10,12-al	415-770-7	1638-05-7	Xn; R48/22 R43 R52-53	Xn R: 43-48/22-52/53 S: (2-)22-36/37-61		
606-069-00-9	spiro[1,3-dioxolane-2,5'-(4',4',8',8'-tetramethyl-hexahydro-3',9'-methanonaphthalene)]	415-460-1	154171-76-3	N; R51-53	N R: 51/53 S: 24-61		
606-070-00-4	butoxydim (ISO); 5-(3-butyryl-2,4,6-trimethylphenyl)-2-[1-(ethoxyimino)propyl]-3-hydroxycyclohex-2-en-1-one	414-790-3	138164-12-2	Repr. Cat. 3; R62-63 Xn; R22 Xi; R38 N; R50-53	Xn; N R: 22-38-62-63-50/53 S: (2-)22-36/37-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
606-071-00-X	17-spiro(5,5-dimethyl-1,3-dioxan-2-yl)androsta-1,4-diene-3-one	421-050-3	13258-43-0	N; R50-53	N R: 50/53 S: 22-60-61		
606-072-00-5	3-acetyl-1-phenyl-pyrrolidine-2,4-dione	421-600-2	719-86-8	Xn; R48/22 N; R51-53	Xn; N R: 48/22-51/53 S: (2-)22-36/37-61		
606-073-00-0	4,4'-bis(dimethylamino)benzophenone; Michler's ketone	202-027-5	90-94-8	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xi; R41	T R: 45-41-68 S: 53-45		
606-075-00-1	1-benzyl-5-ethoxyimidazolidine-2,4-dione	417-340-4	65855-02-9	Xn; R22	Xn R: 22 S: (2-)22		
606-076-00-7	1-((2-quinolinyl-carbonyl)oxy)-2,5-pyrrolidinedione	418-630-3	136465-99-1	Xi; R41 R43	Xi R: 41-43 S: (2-)24-26-37/39		
606-077-00-2	(3S,4S)-3-hexyl-4-[(R)-2-hydroxytridecyl]-2-oxetanone	418-650-2	104872-06-2	N; R50-53	N R: 50/53 S: 60-61		
606-078-00-8	1-octylazepin-2-one	420-040-6	59227-88-2	C; R34 R43 N; R51-53	C; N R: 34-43-51/53 S: (1/2-)26-36/37/39-45-61		
606-079-00-3	2-n-butyl-benzo[d]isothiazol-3-one	420-590-7	4299-07-4	C; R34 R43 N; R50-53	C; N R: 34-43-50/53 S: (1/2-)26-36/37/39-45-60-61		
606-080-00-9	Reaction product of: 3-hydroxy-5,7-di-tert-butylbenzofuran-2-one with o-xylene	417-100-9	—	R53	R: 53 S: 61		
606-081-00-4	(3β, 5α, 6β)-3-(acetyloxy)-5-bromo-6-hydroxy-androstan-17-one	419-790-7	4229-69-0	R43 R52-53	Xi R: 43-52/53 S: (2-)22-36/37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
606-082-00-X	reaction mass of: butan-2-one oxime; syn-O,O'-di(butan-2-one oxime)diethoxysilane	406-930-7		T; R48/25 R43 R52-53	T R: 43-48/25-52/53 S: (1/2-)25-36/37-45-61		
606-083-00-5	2-chloro-5- <i>sec</i> -hexadecylhydroquinone	407-750-1	137193-60-3	Xi; R36/38 R43 R52-53	Xi R: 36/38-43-52/53 S: (2-)24-26-37-61		
606-084-00-0	1-(4-methoxy-5-benzofuranyl)-3-phenyl-1,3-propanedione	414-540-3	484-33-3	N; R50-53	N R: 50/53 S: 60-61		
606-085-00-6	(1R,4S)-2-azabicyclo[2.2.1]hept-5-en-3-one	418-530-1	79200-56-9	Xn; R22 Xi; R41 R43	Xn R: 22-41-43 S: (2-)24-26-37/39		
606-086-00-1	1-(3,3-dimethylcyclohexyl)pent-4-en-1-one	422-330-8	56973-87-6	N; R51-53	N R: 51/53 S: 61		
606-087-00-7	6-ethyl-5-fluoro-4(3 <i>H</i>)-pyrimidone	422-460-5	137234-87-8	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
606-088-00-2	2,4,4,7-tetramethyl-6-octen-3-one	422-520-0	74338-72-0	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
606-089-00-8	reaction mass of: 1,4-diamino-2-chloro-3-phenoxyanthraquinone; 1,4-diamino-2,3-bis-phenoxyanthraquinone	423-220-2	12223-77-7	R53	R: 53 S: 61		
606-091-00-9	6-chloro-5-(2-chloroethyl)-1,3-dihydroindol-2-one	421-320-0	118289-55-7	N; R50-53	N R: 50/53 S: 60-61		
606-092-00-4	reaction mass of: (E)-oxacyclohexadec-12-en-2-one; (E)-oxacyclohexadec-13-en-2-one; a) (Z)-oxacyclohexadec-(12)-en-2-one and b) (Z)-oxacyclohexadec-(13)-en-2-one	422-320-3		N; R50-53	N R: 50/53 S: 60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-001-00-0	formic acid ... %	200-579-1	64-18-6	C; R35	C R: 35 S: (1/2-)23-26-45	C; R35: C ≥ 90 % C; R34: 10 % ≤ C < 90 % Xi; R36/38: 2 % ≤ C < 10 %	B
607-002-00-6	acetic acid ... %	200-580-7	64-19-7	R10 C; R35	C R: 10-35 S: (1/2-)23-26-45	C; R35: C ≥ 90 % C; R34: 25 % ≤ C < 90 % Xi; R36/38: 10 % ≤ C < 25 %	B
607-003-00-1	chloroacetic acid	201-178-4	79-11-8	T; R25 C; R34 N; R50	T; N R: 25-34-50 S: (1/2-)23-37-45-61		
607-004-00-7	TCA (ISO); trichloroacetic acid	200-927-2	76-03-9	C; R35 N; R50-53	C; N R: 35-50/53 S: (1/2-)26-36/37/39-45-60-61	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
607-005-00-2	TCA-sodium (ISO); sodium trichloroacetate	211-479-2	650-51-1	Xi; R37 N; R50-53	Xi; N R: 37-50/53 S: (2-)46-60-61		
607-006-00-8	oxalic acid	205-634-3	144-62-7	Xn; R21/22	Xn R: 21/22 S: (2-)24/25	Xn; R21/22: C ≥ 5 %	
607-007-00-3	salts of oxalic acid	—	—	Xn; R21/22	Xn R: 21/22 S: (2-)24/25	Xn; R21/22: C ≥ 5 %	A
607-008-00-9	acetic anhydride	203-564-8	108-24-7	R10 Xn; R20/22 C; R34	C R: 10-20/22-34 S: (1/2-)26-36/37/39-45	C; R34: C ≥ 25 % Xi; R37/38-41: 5 % ≤ C < 25 % Xi; R36: 1 % ≤ C < 5 %	
607-009-00-4	phthalic anhydride	201-607-5	85-44-9	Xn; R22 Xi; R37/38-41 R42/43	Xn R: 22-37/38-41-42/43 S: (2-)23-24/25-26-37/39-46		
607-010-00-X	propionic anhydride	204-638-2	123-62-6	C; R34	C R: 34 S: (1/2-)26-45	C; R34: C ≥ 25 % Xi; R36/38: 10 % ≤ C < 25 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-011-00-5	acetyl chloride	200-865-6	75-36-5	F; R11 R14 C; R34	F; C R: 11-14-34 S: (1/2-)9-16-26-45		
607-012-00-0	benzoyl chloride	202-710-8	98-88-4	C; R34	C R: 34 S: (1/2-)26-45		
607-013-00-6	dimethyl carbonate	210-478-4	616-38-6	F; R11	F R: 11 S: (2-)9-16		
607-014-00-1	methyl formate	203-481-7	107-31-3	F+; R12 Xn; R20/22 Xi; R36/37	F+; Xn R: 12-20/22-36/37 S: (2-)9-16-24-26-33		
607-015-00-7	ethyl formate	203-721-0	109-94-4	F; R11 Xn; R20/22 Xi; R36/37	F; Xn R: 11-20/22-36/37 S: (2-)9-16-24-26-33		
607-016-00-2	propyl formate; [1] isopropyl formate [2]	203-798-0 [1] 210-901-2 [2]	110-74-7 [1] 625-55-8 [2]	F; R11 Xi; R36/37 R67	F; Xi R: 11-36/37-67 S: (2-)9-16-24-33		C
607-017-00-8	butyl formate; [1] tert-butyl formate; [2] isobutyl formate [3]	209-772-5 [1] 212-105-0 [2] 208-818-1 [3]	592-84-7 [1] 762-75-4 [2] 542-55-2 [3]	F; R11 Xi; R36/37	F; Xi R: 11-36/37 S: (2-)9-16-24-33		C
607-018-00-3	isopentyl formate; [1] pentyl formate; [2] 2-methylbutyl formate [3]	203-769-2 [1] 211-340-6 [2] 252-343-2 [3]	110-45-2 [1] 638-49-3 [2] 35073-27-9 [3]	R10 Xi; R36/37	Xi R: 10-36/37 S: (2-)24		C
607-019-00-9	methyl chloroformate	201-187-3	79-22-1	F; R11 T+; R26 Xn; R21/22 C; R34	F; T+ R: 11-21/22-26-34 S: (1/2-)14-26-28-36/ 37/39-45-46-63		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-020-00-4	ethyl chloroformate	208-778-5	541-41-3	F; R11 T+; R26 Xn; R22 C; R34	F; T+ R: 11-22-26-34 S: (1/2-)9-16-26-28-33-36/37/39-45		
607-021-00-X	methyl acetate	201-185-2	79-20-9	F; R11 Xi; R36 R66 R67	F; Xi R: 11-36-66-67 S: (2-)16-26-29-33		
607-022-00-5	ethyl acetate	205-500-4	141-78-6	F; R11 Xi; R36 R66 R67	F; Xi R: 11-36-66-67 S: (2-)16-26-33		
607-023-00-0	vinyl acetate	203-545-4	108-05-4	F; R11	F R: 11 S: (2-)16-23-29-33		D
607-024-00-6	propyl acetate; [1] isopropyl acetate [2]	203-686-1 [1] 203-561-1 [2]	109-60-4 [1] 108-21-4 [2]	F; R11 Xi; R36 R66 R67	F; Xi R: 11-36-66-67 S: (2-)16-26-29-33		C
607-025-00-1	<i>n</i> -butyl acetate	204-658-1	123-86-4	R10 R66 R67	R: 10-66-67 S: (2-)25		
607-026-00-7	<i>sec</i> -butyl acetate; [1] <i>isobutyl</i> acetate; [2] <i>tert</i> -butyl acetate [3]	203-300-1 [1] 203-745-1 [2] 208-760-7 [3]	105-46-4 [1] 110-19-0 [2] 540-88-5 [3]	F; R11 R66	F R: 11-66 S: (2-)16-23-25-29-33		C
607-027-00-2	methyl propionate	209-060-4	554-12-1	F; R11 Xn; R20	F; Xn R: 11-20 S: (2-)16-24-29-33		
607-028-00-8	ethyl propionate	203-291-4	105-37-3	F; R11	F R: 11 S: (2-)16-23-24-29-33		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-029-00-3	<i>n</i> -butyl propionate; [1] <i>sec</i> -butyl propionate; [2] <i>tert</i> -butyl propionate; [3] iso-butyl propionate [4]	209-669-5 [1] - [2] -[3] 208-746-0 [4]	590-01-2 [1] 591-34-4 [2] 20487-40-5 [3] 540-42-1 [4]	R10	R: 10 S: (2-)		C
607-030-00-9	propyl propionate	203-389-7	106-36-5	R10 Xn; R20	Xn R: 10-20 S: (2-)24		
607-031-00-4	butyl butyrate	203-656-8	109-21-7	R10	R: 10 S: (2-)		C
607-032-00-X	ethyl acrylate	205-438-8	140-88-5	F; R11 Xn; R20/21/ 22 Xi; R36/37/ 38 R43	F; Xn R: 11-20/21/22-36/ 37/38-43 S: (2-)9-16-33-36/37	Xi; 36/37/38: C ≥ 5 %	D
607-033-00-5	<i>n</i> -butyl methacrylate	202-615-1	97-88-1	R10 Xi; R36/37/ 38 R43	Xi R: 10-36/37/38-43 S: (2-)		D
607-034-00-0	methyl acrylate; methyl propenoate	202-500-6	96-33-3	F; R11 Xn; R20/21/ 22 Xi; R36/37/ 38 R43	F; Xn R: 11-20/21/22-36/ 37/38-43 S: (2-)9-25-26-33-36/ 37-43		D
607-035-00-6	methyl methacrylate; methyl 2-methylprop-2-enoate; methyl 2-methylpropenoate	201-297-1	80-62-6	F; R11 Xi; R37/38 R43	F; Xi R: 11-37/38-43 S: (2-)24-37-46		D
607-036-00-1	2-methoxyethyl acetate; methylglycol acetate	203-772-9	110-49-6	Repr. Cat. 2; R60-61 Xn; R20/21/ 22	T R: 60-61-20/21/22 S: 53-45		E
607-037-00-7	2-ethoxyethyl acetate; ethylglycol acetate	203-839-2	111-15-9	⊗ Repr. Cat. 2; R60-61 Xn; R20/21/ 22	T R: 60-61-20/21/22 S: 53-45		E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-038-00-2	2-butoxyethyl acetate; butylglycol acetate	203-933-3	112-07-2	Xn; R20/21	Xn R: 20/21 S: (2-)24		
607-039-00-8	2,4-D (ISO); 2,4-dichlorophenoxyacetic acid	202-361-1	94-75-7	Xn; R22 Xi; R37-41 R43 R52-53	Xn R: 22-37-41-43-52/ 53 S: (2-)24/25-26-36/ 37/39-46-61		
607-040-00-3	salts of 2,4-D	—	—	Xn; R22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-51/53 S: (2-)24/25-26-36/ 37/39-46-61		A
607-041-00-9	2,4,5-T (ISO); 2,4,5-trichlorophenoxy acetic acid	202-273-3	93-76-5	Xn; R22 Xi; R36/37/ 38 N; R50-53	Xn; N R: 22-36/37/38-50/ 53 S: (2-)24-60-61		
607-042-00-4	salts and esters of 2,4,5-T; salts and esters of 2,4,5-trichlorophenoxy acetic acid	—	—	Xn; R22 Xi; R36/37/ 38 N; R50-53	Xn; N R: 22-36/37/38-50/ 53 S: (2-)24-60-61		A
607-043-00-X	dicamba (ISO); 2,5-dichloro-6-methoxybenzoic acid; 3,6-dichloro-2-methoxybenzoic acid	217-635-6	1918-00-9	Xn; R22 Xi; R41 R52-53	Xn R: 22-41-52/53 S: (2-)26-61		
607-044-00-5	3,6-dichloro- <i>o</i> -anisic acid, compound with dimethylamine (1:1); [1] potassium 3,6-dichloro- <i>o</i> -anisate [2]	218-951-7 [1] 233-002-7 [2]	2300-66-5 [1] 10007-85-9 [2]	Xi; R36 R52-53	Xi R: 36-52/53 S: (2-)26-61		
607-045-00-0	dichlorprop (ISO); 2-(2,4-dichlorophenoxy) propionic acid	204-390-5	120-36-5	Xn; R21/22 Xi; R38-41	Xn R: 21/22-38-41 S: (2-)26-36/37		
607-046-00-6	salts of dichlorprop	—	—	Xn; R20/21/ 22	Xn R: 20/21/22 S: (2-)13		A
607-047-00-1	fenoprop (ISO); 2-(2,4,5-trichlorophenoxy)propionic acid	202-271-2	93-72-1	Xn; R22 Xi; R38 N; R50-53	Xn; N R: 22-38-50/53 S: (2-)37-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-048-00-7	salts of fenoprop; salts of 2-(2,4,5-trichlorophenoxy)propionic acid	—	—	Xn; R20/21/ 22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)13-60-61		A
607-049-00-2	mecoprop (ISO); 2-(4-chloro- <i>o</i> -tolylxy) propionic acid; (<i>RS</i>)-2-(4-chloro- <i>o</i> -tolylxy)propionic acid; [1] 2-(4-chloro-2-methylphenoxy)propionic acid [2]	230-386-8 [1] 202-264-4 [2]	7085-19-0 [1] 7085-19-0 [2]	Xn; R22 Xi; R38-41 N; R50-53	Xn; N R: 22-38-41-50/53 S: (2-)13-26-37/39- 60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	
607-050-00-8	salts of mecoprop	—	—	Xn; R22 Xi; R38-41 N; R50-53	Xn; N R: 22-38-41-50/53 S: (2-)13-26-37/39- 60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	A
607-051-00-3	MCPA (ISO); 4-chloro- <i>o</i> -tolylxyacetic acid	202-360-6	94-74-6	Xn; R22 Xi; R38-41	Xn R: 22-38-41 S: (2-)26-37-39		
607-052-00-9	salts and esters of MCPA	—	—	Xn; R20/21/ 22	Xn R: 20/21/22 S: (2-)13		A
607-053-00-4	MCPB (ISO); 4-(4-chloro- <i>o</i> -tolylxy) butyric acid	202-365-3	94-81-5	N; R50-53	N R: 50/53 S: 60-61		
607-054-00-X	salts and esters of MCPB	—	—	Xn; R22	Xn R: 22 S: (2-)24/25		A
607-055-00-5	endothal-sodium (ISO); disodium 7-oxabicyclo(2,2,1)heptane-2,3-dicarboxylate	204-959-8	129-67-9	T; R25 Xn; R21 Xi; R36/37/ 38	T R: 21-25-36/37/38 S: (1/2-)36/37/39-45		
607-056-00-0	warfarin (ISO); [1] (<i>S</i>)-4-hydroxy-3-(3-oxo-1-phenylbutyl)-2-benzopyrone; [2] (<i>R</i>)-4-hydroxy-3-(3-oxo-1-phenylbutyl)-2-benzopyrone [3]	201-377-6 [1] 226-907-3 [2] 226-908-9 [3]	81-81-2 [1] 5543-57-7 [2] 5543-58-8 [3]	Repr. Cat. 1; R61 T; R48/25 R52-53	T R: 61-48/25-52/53 S: 53-45-61		E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-057-00-6	coumachlor (ISO); 3-[1-(4-chlorophenyl)-3-oxobutyl]-4-hydroxycoumarin	201-378-1	81-82-3	Xn; R48/22 R52-53	Xn R: 48/22-52/53 S: (2-)37-61		
607-058-00-1	coumafuryl (ISO); fumarin; (RS)-3-(1-(2-furyl)-3-oxobutyl)-4-hydroxycoumarin; 4-hydroxy-3-[3-oxo-1-(2-furyl) butyl]coumarin	204-195-5	117-52-2	T; R25-48/25 R52-53	T R: 25-48/25-52/53 S: (1/2-)37-45-61		
607-059-00-7	coumatetrayl; 4-hydroxy-3-(1,2,3,4-tetrahydro-1-naphthyl)coumarin	227-424-0	5836-29-3	T+; R27/28 T; R48/24/25 R52-53	T+ R: 27/28-48/24/25-52/53 S: (1/2-)28-36/37-45-61		
607-060-00-2	dicoumarol; 4,4'-dihydroxy-3,3'-methylenebis(2H-chromen-2-one)	200-632-9	66-76-2	T; R48/25 Xn; R22 N; R51-53	T; N R: 22-48/25-51/53 S: (1/2-)37-45-61		
607-061-00-8	acrylic acid; prop-2-enoic acid	201-177-9	79-10-7	R10 Xn; R20/21/ 22 C; R35 N; R50	C; N R: 10-20/21/22-35-50 S: (1/2-)26-36/37/39-45-61	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	D
607-062-00-3	n-butyl acrylate	205-480-7	141-32-2	R10 Xi; R36/37/ 38 R43	Xi R: 10-36/37/38-43 S: (2-)9		D
607-063-00-9	isobutyric acid	201-195-7	79-31-2	Xn; R21/22	Xn R: 21/22 S: (2-)		
607-064-00-4	benzyl chloroformate	207-925-0	501-53-1	C; R34 N; R50-53	C; N R: 34-50/53 S: (1/2-)26-45-60-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
607-065-00-X	bromoacetic acid	201-175-8	79-08-3	T; R23/24/25 C; R35 N; R50	T; C; N R: 23/24/25-35-50 S: (1/2-)26-36/37/39-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-066-00-5	dichloroacetic acid	201-207-0	79-43-6	C; R35 N; R50	C; N R: 35-50 S: (1/2-)26-45-61		
607-067-00-0	dichloroacetyl chloride	201-199-9	79-36-7	C; R35 N; R50	C; N R: 35-50 S: (1/2-)9-26-45-61		
607-068-00-6	iodoacetic acid	200-590-1	64-69-7	T; R25 C; R35	T; C R: 25-35 S: (1/2-)22-36/37/39-45		
607-069-00-1	ethyl bromoacetate	203-290-9	105-36-2	T+; R26/27/28	T+ R: 26/27/28 S: (1/2-)7/9-26-45		
607-070-00-7	ethyl chloroacetate	203-294-0	105-39-5	T; R23/24/25 N; R50	T; N R: 23/24/25-50 S: (1/2-)7/9-45-61		
607-071-00-2	ethyl methacrylate	202-597-5	97-63-2	F; R11 Xi; R36/37/38 R43	F; Xi R: 11-36/37/38-43 S: (2-)9-16-29-33		D
607-072-00-8	2-hydroxyethyl acrylate	212-454-9	818-61-1	T; R24 C; R34 R43 N; R50	T; N R: 24-34-43-50 S: (1/2-)26-36/39-45-61	T; R24: C ≥ 2 % Xn; R21: 0,2 % ≤ C < 2 % R43: C ≥ 0,2 %	D
607-073-00-3	4-CPA (ISO); 4-chlorophenoxyacetic acid	204-581-3	122-88-3	Xn; R22	Xn R: 22 S: (2-)		
607-074-00-9	chlorfenac (ISO); 2,3,6-trichlorophenylacetic acid	201-599-3	85-34-7	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)36-61		
607-075-00-4	chlorfenprop-methyl; methyl 2-chloro-3-(4-chlorophenyl)propionate	238-413-5	14437-17-3	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-076-00-X	dodine (ISO); dodecylguanidinium acetate	219-459-5	2439-10-3	Xn; R22 Xi; R36/38 N; R50-53	Xn; N R: 22-36/38-50/53 S: (2-)26-60-61		
607-077-00-5	erbon (ISO); 2-(2,4,5-trichlorophenoxy)ethyl 2,2-dichloropropionate	—	136-25-4	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
607-078-00-0	fluenetil (ISO); 2-fluoroethyl biphenyl-4-ylacetate	—	4301-50-2	T+; R27/28	T+ R: 27/28 S: (1/2-)28-36/ 37-45		
607-079-00-6	kelevan (ISO); ethyl 5-(perchloro-5-hydroxypentacyclo[5,3,0,0 ^{2,6} ,0 ^{3,9} ,0 ^{4,8}] decan-5-yl)-4-oxopentanoate; ethyl 5-(1,2,3,5,6,7,8,9,10,10-decachloro-4-hydroxypentacy- clo(5,2,1,0 ^{2,6} ,0 ^{3,9} ,0 ^{3,8})dec-4-yl)-4-oxovalerate	—	4234-79-1	T; R24 Xn; R22 N; R51-53	T; N R: 22-24-51/53 S: (1/2-)36/37-45-61		
607-080-00-1	chloroacetyl chloride	201-171-6	79-04-9	R14 R29 T; R23/24/ 25-48/23 C; R35 N; R50	T; C; N R: 14-23/24/25-29- 35-48/23-50 S: (1/2-)7/8-9-26-36/ 37/39-45-61		
607-081-00-7	fluoroacetic acid	205-631-7	144-49-0	T+; R28 N; R50	T+; N R: 28-50 S: (1/2-)20-22-26-45- 61		
607-082-00-2	fluoroacetates, soluble	—	—	T+; R28 N; R50	T+; N R: 28-50 S: (1/2-)20-22-26-45- 61		A
607-083-00-8	2,4-DB (ISO); 4-(2,4-dichlorophenoxy)butyric acid	202-366-9	94-82-6	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)25-29-46-61		
607-084-00-3	salts of 2,4-DB	—	—	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)26-29-39-46- 61		A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-085-00-9	benzyl benzoate	204-402-9	120-51-4	Xn; R22	Xn R: 22 S: (2-)25		
607-086-00-4	diallyl phthalate	205-016-3	131-17-9	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24/25-60-61		
607-088-00-5	methacrylic acid; 2-methylpropenoic acid	201-204-4	79-41-4	Xn; R21/22 C; R35	C R: 21/22-35 S: (1/2-)26-36/37/39-45	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	D
607-089-00-0	propionic acid ... %	201-176-3	79-09-4	C; R34	C R: 34 S: (1/2-)23-36-45	C; R34: C ≥ 25 % Xi; R36/37/38: 10 % ≤ C < 25 %	B
607-090-00-6	thioglycolic acid	200-677-4	68-11-1	T; R23/24/25 C; R34	T R: 23/24/25-34 S: (1/2-)25-27-28-45	T; R23/24/25: C ≥ 2 % Xn; R20/21/22: 0,2 % ≤ C < 2 %	
607-091-00-1	trifluoroacetic acid . . . %	200-929-3	76-05-1	Xn; R20 C; R35 R52-53	C R: 20-35-52/53 S: (1/2-)9-26-27-28-45-61	Xn; R20: C ≥ 10 %	B
607-092-00-7	methyl lactate; [1] methyl (±)-lactate; [2] methyl (R)-lactate; [3] methyl (S)-(-)-lactate [4]	208-930-0 [1] 218-449-8 [2] 241-420-6 [3] 248-704-9 [4]	547-64-8 [1] 2155-30-8 [2] 17392-83-5 [3] 27871-49-4 [4]	R10 Xi; R36/37	Xi R: 10-36/37 S: (2-)24		C
607-093-00-2	propionyl chloride	201-170-0	79-03-8	F; R11 R14 C; R34	F; C R: 11-14-34 S: (1/2-)9-16-26-45		B D
607-094-00-8	peracetic acid . . . %	201-186-8	79-21-0	R10 O; R7 Xn; R20/21/22 C; R35 N; R50	O; C; N R: 7-10-20/21/22-35-50 S: (1/2-)3/7-14-36/37/39-45-61	Xn; R20/21/22: C ≥ 10 % C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	B D

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-095-00-3	maleic acid	203-742-5	110-16-7	Xn; R22 Xi; R36/37/38	Xn R: 22-36/37/38 S: (2-)26-28-37		
607-096-00-9	maleic anhydride	203-571-6	108-31-6	Xn; R22 C; R34 R42/43	C R: 22-34-42/43 S: (2-)22-26-36/37/39-45		
607-097-00-4	benzene-1,2,4-tricarboxylic acid 1,2-anhydride; trimellitic anhydride	209-008-0	552-30-7	Xi; R37-41 R42/43	Xn R: 37-41-42/43 S: (2-)22-26-36/37/39		
607-098-00-X	benzene-1,2:4,5-tetracarboxylic dianhydride; benzene-1,2:4,5-tetracarboxylic dianhydride; pyromellitic dianhydride	201-898-9	89-32-7	Xi; R41 R42/43	Xn R: 41-42/43 S: (2-)22-24-26-37/39		
607-099-00-5	1,2,3,6-tetrahydrophthalic anhydride; [1] cis-1,2,3,6-tetrahydrophthalic anhydride; [2] 3,4,5,6-tetrahydrophthalic anhydride; [3] tetrahydrophthalic anhydride [4]	201-605-4 [1] 213-308-7 [2] 219-374-3 [3] 247-570-9 [4]	85-43-8 [1] 935-79-5 [2] 2426-02-0 [3] 26266-63-7 [4]	Xi; R41 R42/43 R52-53	Xn R: 41-42/43-52/53 S: (2-)22-24-26-37/39-61		C
607-100-00-9	benzophenone-3,3',4,4'-tetracarboxylic dianhydride; 4,4'-carbonyldi(phthalic anhydride)	219-348-1	2421-28-5	Xi; R36/37	Xi R: 36/37 S: (2-)25	Xi; R36/37: C ≥ 1 %	
607-101-00-4	1,4,5,6,7,7-hexachlorobicyclo [2,2,1]hept-5-ene-2,3-dicarboxylic anhydride chlorendic anhydride	204-077-3	115-27-5	Xi; R36/37/38	Xi R: 36/37/38 S: (2-)25	Xi; R36/37/38: C ≥ 1 %	
607-102-00-X	cyclohexane-1,2-dicarboxylic anhydride; [1] cis-cyclohexane-1,2-dicarboxylic anhydride; [2] trans-cyclohexane-1,2-dicarboxylic anhydride [3]	201-604-9 [1] 236-086-3 [2] 238-009-9 [3]	85-42-7 [1] 13149-00-3 [2] 14166-21-3 [3]	Xi; R41 R42/43	Xn R: 41-42/43 S: (2-)23-24-26-37/39		C
607-103-00-5	succinic anhydride	203-570-0	108-30-5	Xi; R36/37	Xi R: 36/37 S: (2-)25	Xi; R36/37: C ≥ 1 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-104-00-0	cyclopentane-1,2,3,4-tetracarboxylic dianhydride	227-964-7	6053-68-5	Xi; R36/37	Xi R: 36/37 S: (2-)25	Xi; R36/37: C ≥ 1 %	
607-105-00-6	8,9,10-trinorborn-5-ene-2,3-dicarboxylic anhydride; [1] 1,2,3,6-tetrahydro-3,6-methanophthalic anhydride; [2] (1α,2α,3β,6β)-1,2,3,6-tetrahydro-3,6-methanophthalic anhy- dride [3]	204-957-7 [1] 212-557-9 [2] 220-384-5 [3]	129-64-6 [1] 826-62-0 [2] 2746-19-2 [3]	Xi; R41 R42/43	Xn R: 41-42/43 S: (2-)22-24-26-37/39		C
607-106-00-1	8,9-dinorborn-5-ene-2,3-dicarboxylic anhydride	—	123748-85-6	Xn; R22 Xi; R36/37/ 38 R42	Xn R: 22-36/37/38-42 S: (2-)39	Xi; R36/37/38: C ≥ 10 %	C
607-107-00-7	2-ethylhexyl acrylate	203-080-7	103-11-7	Xi; R37/38 R43	Xi R: 37/38-43 S: (2-)36/37-46		D
607-108-00-2	2-hydroxy-1-methylethylacrylate; [1] 2-hydroxypropylacrylate; [2] acrylic acid, monoester with propane-1,2-diol [3]	220-852-9 [1] 213-663-8 [2] 247-118-0 [3]	2918-23-2 [1] 999-61-1 [2] 25584-83-2 [3]	T; R23/24/25 C; R34 R43	T R: 23/24/25-34-43 S: (1/2-)26-36/37/39- 45	T; R23/24/25: C ≥ 2 % Xn; R20/21/22: 0,2 % ≤ C < 2 % R43: C ≥ 0,2 %	C D
607-109-00-8	hexamethylene diacrylate; hexane-1,6-diol diacrylate	235-921-9	13048-33-4	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)39		D
607-110-00-3	pentaerythritol triacrylate	222-540-8	3524-68-3	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)39		D
607-111-00-9	2,2-bis(acryloyloxymethyl)butyl acrylate; trimethylolpropane triacrylate	239-701-3	15625-89-5	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)39		D
607-112-00-4	2,2-dimethyltrimethylene diacrylate; neopentyl glycol diacrylate	218-741-5	2223-82-7	T; R24 Xi; R36/38 R43	T R: 24-36/38-43 S: (1/2-)28-39-45	T; R24: C ≥ 5 % Xn; R21: 0,2 % ≤ C < 5 %	D

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-113-00-X	isobutyl methacrylate	202-613-0	97-86-9	R10 Xi; R36/37/38 R43 N; R50	Xi; N R: 10-36/37/38-43-50 S: (2-)24-37-61		D
607-114-00-5	ethylene dimethacrylate	202-617-2	97-90-5	Xi; R37 R43	Xi R: 37-43 S: (2-)24-37	Xi; R37: C ≥ 10 %	D
607-115-00-0	isobutyl acrylate	203-417-8	106-63-8	R10 Xn; R20/21 Xi; R38 R43	Xn R: 10-20/21-38-43 S: (2-)9-24-37	Xi; R38: C ≥ 10 %	D
607-116-00-6	cyclohexyl acrylate	221-319-3	3066-71-5	Xi; R37/38 N; R51-53	Xi; N R: 37/38-51/53 S: (2-)61	Xi; R37/38: C ≥ 10 %	D
607-117-00-1	2,3-epoxypropyl acrylate; glycidyl acrylate	203-440-3	106-90-1	T; R23/24/25 C; R34 R43	T R: 23/24/25-34-43 S: (1/2-)26-36/37/39-45	T; R23/24/25: C ≥ 2 % Xn; R20/21/22: 0,2 % ≤ C < 2 % R43: C ≥ 0,2 %	D
607-118-00-7	1-methyltrimethylene diacrylate; 1,3-butylene glycol diacrylate	243-105-9	19485-03-1	Xn; R21 C; R34 R43	C R: 21-34-43 S: (1/2-)26-36/37/39-45		D
607-119-00-2	tetramethylene diacrylate; 1,4-butyleneglycol diacrylate	213-979-6	1070-70-8	Xn; R21 C; R34 R43	C R: 21-34-43 S: (1/2-)26-36/37/39-45		D
607-120-00-8	2,2'-oxydiethyl diacrylate; diethylene glycol diacrylate	223-791-6	4074-88-8	T; R24 Xi; R36/38 R43	T R: 24-36/38-43 S: (1/2-)28-39-45	T; R24: C ≥ 2 % Xn; R21: 0,2 % ≤ C < 2 % R43: C ≥ 0,2 %	D
607-121-00-3	8,9,10-trinorborn-2-yl acrylate	—	10027-06-2	Xn; R21 Xi; R38 R43	Xn R: 21-38-43 S: (2-)28	Xi; R38: C ≥ 10 %	D

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-122-00-9	pentaerythritol tetraacrylate	225-644-1	4986-89-4	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)26-39		D
607-123-00-4	2,3-epoxypropyl methacrylate; glycidyl methacrylate	203-441-9	106-91-2	Xn; R20/21/ 22 Xi; R36/38 R43	Xn R: 20/21/22-36/38- 43 S: (2-)26-28	Xi; R36/38: C ≥ 10 %	D
607-124-00-X	2-hydroxyethyl methacrylate	212-782-2	868-77-9	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)26-28		D
607-125-00-5	2-hydroxypropyl methacrylate; [1] 3-hydroxypropyl methacrylate [2]	213-090-3 [1] 220-426-2 [2]	923-26-2 [1] 2761-09-3 [2]	Xi; R36 R43	Xi R: 36-43 S: (2-)24/25-26-37/39		C D
607-126-00-0	2,2'-(ethylenedioxy)diethyl diacrylate; triethylene glycol diacrylate	216-853-9	1680-21-3	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)26-28		D
607-127-00-6	2-diethylaminoethyl methacrylate	203-275-7	105-16-8	Xn; R20 Xi; R36/38 R43	Xn R: 20-36/38-43 S: (2-)26	Xi; R36/38: C ≥ 10 %	D
607-128-00-1	2-tert-butylaminoethyl methacrylate	223-228-4	3775-90-4	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)26		D
607-129-00-7	ethyl lactate; ethyl DL-lactate; [1] ethyl (S)-2-hydroxypropionate; ethyl L-lactate; ethyl-(S)-lactate [2]	202-598-0 [1] 211-694-1 [2]	97-64-3 [1] 687-47-8 [2]	R10 Xi; R37-41	Xi R: 10-37-41 S: (2-)24-26-39		C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-130-00-2	pentyl acetate; [1] isopentyl acetate; [2] 1-methylbutyl acetate; [3] 2-methylbutyl acetat; [4] 2(or 3)-methylbutyl acetate [5]	211-047-3 [1] 204-662-3 [2] 210-946-8 [3] 210-843-8 [4] 282-263-3 [5]	628-63-7 [1] 123-92-2 [2] 626-38-0 [3] 624-41-9 [4] 84145-37-9 [5]	R10 R66	R: 10-66 S: (2-)23-25		C
607-131-00-8	isopentyl propionate; [1] pentyl propionate; [2] 2-methylbutyl propionate [3]	203-322-1 [1] 210-852-7 [2] 219-449-0 [3]	105-68-0 [1] 624-54-4 [2] 2438-20-2 [3]	R10	R: 10 S: (2-)23-24		C
607-132-00-3	2-dimethylaminoethyl methacrylate	220-688-8	2867-47-2	Xn; R21/22 Xi; R36/38 R43	Xn R: 21/22-36/38-43 S: (2-)26-28	Xi; R36/38: C ≥ 10 %	D
607-133-00-9	monoalkyl or monoaryl or monoalkylaryl esters of acrylic acid with the exception of those specified elsewhere in this Annex	—	—	Xi; R36/37/38 N; R51-53	Xi; N R: 36/37/38-51/53 S: (2-)26-28-61	Xi; R36/37/38: C ≥ 10 %	A
607-134-00-4	monoalkyl or monoaryl or monoalkylaryl esters of methacrylic acid with the exception of those specified elsewhere in this Annex	—	—	Xi; R36/37/38	Xi R: 36/37/38 S: (2-)26-28	Xi; R36/37/38: C ≥ 10 %	A
607-135-00-X	butyric acid	203-532-3	107-92-6	C; R34	C R: 34 S: (1/2-)26-36-45		
607-136-00-5	butyryl chloride	205-498-5	141-75-3	F; R11 C; R34	F; C R: 11-34 S: (1/2-)16-23-26-36-45		
607-137-00-0	methyl acetoacetate	203-299-8	105-45-3	Xi; R36	Xi R: 36 S: (2-)26		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-138-00-6	butyl chloroformate; chloroformic acid butyl ester	209-750-5	592-34-7	R10 T; R23 C; R34	T R: 10-23-34 S: (1/2-)26-36-45		
607-139-00-1	2-chloropropionic acid	209-952-3	598-78-7	Xn; R22 C; R35	C R: 22-35 S: (1/2-)23-26-28-36-45		
607-140-00-7	isobutyl chloride	201-194-1	79-30-1	F; R11 C; R35	F; C R: 11-35 S: (1/2-)16-23-26-36-45		
607-141-00-2	oxydiethylene bis(chloroformate)	203-430-9	106-75-2	Xn; R22 Xi; R38-41 N; R51-53	Xn; N R: 22-38-41-51/53 S: (2-)23-26-61		
607-142-00-8	propyl chloroformate; chloroformic acid propylester; <i>n</i> -propyl chloroformate	203-687-7	109-61-5	R10 ☉ T; R23 C; R34	T R: 10-23-34 S: (1/2-)26-36-45		
607-143-00-3	valeric acid	203-677-2	109-52-4	C; R34 R52-53	C R: 34-52/53 S: (1/2-)26-36-45-61		
607-144-00-9	adipic acid	204-673-3	124-04-9	Xi; R36	Xi R: 36 S: (2-)		
607-145-00-4	methanesulphonic acid	200-898-6	75-75-2	C; R34	C R: 34 S: (1/2-)26-36-45		
607-146-00-X	fumaric acid	203-743-0	110-17-8	Xi; R36	Xi R: 36 S: (2-)26		
607-147-00-5	oxalic acid diethylester; diethyl oxalate	202-464-1	95-92-1	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)23		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-148-00-0	guanidinium chloride; guanadine hydrochloride	200-002-3	50-01-1	Xn; R22 Xi; R36/38	Xn R: 22-36/38 S: (2-)22		
607-149-00-6	urethane (INN); ethyl carbamate	200-123-1	51-79-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		
607-150-00-1	endothal (ISO); 7-oxabicyclo(2,2,1)heptane-2,3-dicarboxylic acid	205-660-5	145-73-3	T; R25 Xn; R21 Xi; R36/37/ 38	T R: 21-25-36/37/38 S: (1/2-)36/37/39-45		
607-151-00-7	propargite (ISO); 2-(4- <i>tert</i> -butylphenoxy) cyclohexyl prop-2-ynyl sulphite	219-006-1	2312-35-8	Carc. Cat. 3; R40 T; R23 Xi; R38-41 N; R50-53	T; N R: 23-38-40-41-50/ 53 S: (1/2-)26-36/37/39- 45-60-61	N; R50-53: $C \geq 2,5 \%$ N; R51-53: $0,25 \% \leq C < 2,5 \%$ R52-53: $0,025 \% \leq C < 0,25 \%$	
607-152-00-2	2,3,6-TBA (ISO); 2,3,6-trichlorobenzoic acid	200-026-4	50-31-7	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
607-153-00-8	benazolin (ISO); 4-chloro-2,3-dihydro-2-oxo-1,3-benzothiazol-3-ylacetic acid	223-297-0	3813-05-6	Xi; R36/38 R52-53	Xi R: 36/38-52/53 S: (2-)22-61		
607-154-00-3	ethyl N-benzoyl-N-(3,4-dichlorophenyl)-DL-alaninate; benzoylprop-ethyl (ISO)	244-845-5	22212-55-1	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24-60-61		
607-155-00-9	3-(3-amino-5-(1-methylguanidino)-1-oxopentylamino-6-(4-amino-2-oxo-2,3-dihydro-pyrimidin-1-yl)-2,3-dihydro-(6H)-pyran-2-carboxylic acid; blasticidin-s	—	2079-00-7	T+; R28	T+ R: 28 S: (1/2-)24/25-36/37- 45		
607-156-00-4	chlorfenson (ISO); 4-chlorophenyl 4-chlorobenzenesulfonate	201-270-4	80-33-1	Xn; R22 Xi; R38 N; R50-53	Xn; N R: 22-38-50/53 S: (2-)37-60-61		
607-157-00-X	3-(3-biphenyl-4-yl-1,2,3,4-tetrahydro-1-naphthyl)-4-hydroxy-coumarin; difenacoum	259-978-4	56073-07-5	T+; R28 T; R48/25 N; R50-53	T+; N R: 28-48/25-50/53 S: (1/2-)36/37-45-60- 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-158-00-5	sodium salt of chloroacetic acid; sodium chloroacetate	223-498-3	3926-62-3	T; R25 Xi; R38 N; R50	T; N R: 25-38-50 S: (1/2-)22-37-45-61		
607-159-00-0	chlorobenzilate (ISO); ethyl 2,2-di(4-chlorophenyl)-2-hydroxyacetate; ethyl 4,4'-dichlorobenzilate	208-110-2	510-15-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
607-160-00-6	isobutyl 2-(4-(4-chlorophenoxy)phenoxy)propionate; clofop-isobutyl (ISO)	—	51337-71-4	Xn; R22	Xn R: 22 S: (2-)		
607-161-00-1	diethanolamine salt of 4-CPA	—	—	Xn; R22	Xn R: 22 S: (2-)		
607-162-00-7	2,2-dichloropropionic acid; dalapon	200-923-0	75-99-0	Xn; R22 Xi; R38-41 R52-53	Xn R: 22-38-41-52/53 S: (2-)26-39-61		
607-163-00-2	3-acetyl-6-methyl-2H-pyran-2,4(3H)-dione; dehydracetic acid	208-293-9	520-45-6	Xn; R22	Xn R: 22 S: (2-)		
607-164-00-8	sodium 1-(3,4-dihydro-6-methyl-2,4-dioxo-2H-pyran-3-ylidene)ethonolate; sodium dehydracetate	224-580-1	4418-26-2	Xn; R22	Xn R: 22 S: (2-)		
607-165-00-3	diclofop-methyl (ISO); methyl 2-(4-(2,4-dichlorophenoxy)phenoxy)propionate; methyl (RS)-2-[4-(2,4-dichlorophenoxy)phenoxy]propionate;	257-141-8	51338-27-3	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
607-166-00-9	medinoterb acetate (ISO); 6-tert-butyl-3-methyl-2,4-dinitrophenyl acetate	219-634-6	2487-01-6	T; R25 Xn; R21	T R: 21-25 S: (1/2-)36/37-45		
607-167-00-4	sodium 3-chloroacrylate	—	4312-97-4	Xn; R21/22	Xn R: 21/22 S: (2-)36/37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-168-00-X	dipropyl 6,7-methylenedioxy-1,2,3,4-tetrahydro-3-methyl-naphthalene-1,2-dicarboxylate; propylisome	—	83-59-0	T; R24 Xn; R22 N; R50-53	T; N R: 22-24-50/53 S: (1/2-)36/37-45-60-61		
607-169-00-5	sodium fluoroacetate	200-548-2	62-74-8	T+; R26/27/28 N; R50	T+; N R: 26/27/28-50 S: (1/2-)13-22-36/37-45-61		
607-170-00-0	bis(1,2,3-trithiacyclohexyldimethylammonium) oxalate; thiocyclam-oxalate	250-859-2	31895-22-4	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-46-60-61		
607-172-00-1	4-hydroxy-3-(3-(4'-bromo-4-biphenyl)-1,2,3,4-tetrahydro-1-naphthyl)coumarin; brodifacoum	259-980-5	56073-10-0	T+; R27/28 T; R48/24/25 N; R50-53	T+; N R: 27/28-48/24/25-50/53 S: (1/2-)36/37-45-60-61		
607-173-00-7	dimethyl (3-methyl-4-(5-nitro-3-ethoxycarbonyl-2-thienyl)azo)phenylnitrilodipropionate	400-460-6	—	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
607-174-00-2	reaction mass of dodecyl 3-(2,2,4,4-tetramethyl-21-oxo-7-oxa-3,20-diazadispiro(5,1,11,2)henicosan-20-yl)propionate and tetradecyl 3-(2,2,4,4-tetramethyl-21-oxo-7-oxa-3,20-diazadispiro(5,1,11,2)henicosan-20-yl)propionate	400-580-9	—	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)28-61		
607-175-00-8	methyl 2-(2-nitrobenzylidene)acetoacetate	400-650-9	39562-27-1	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
607-176-00-3	reaction mass of α-3-(3-(2H-benzotriazol-2-yl)-5-tert-butyl-4-hydroxyphenyl)propionyl-ω-hydroxypoly(oxyethylene) and α-3-(3-(2H-benzotriazol-2-yl)-5-tert-butyl-4-hydroxyphenyl)propionyl-ω-3-(3-(2H-benzotriazol-2-yl)-5-tert-butyl-4-hydroxyphenyl)propionyloxypoly(oxyethylene)	400-830-7	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)36/37-61		
607-177-00-9	methyl 2-(3-(4-methoxy-6-methyl-1,3,5-triazin-2-yl)3-methylureidosulphonyl)benzoate	401-190-1	101200-48-0	R43	Xi R: 43 S: (2-)22-24-37		
607-178-00-4	methyl α-((4,6-dimethoxypyrimidin-2-yl)ureidosulphonyl)-o-toluate	401-340-6	83055-99-6	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-179-00-X	(benzothiazol-2-ylthio)succinic acid	401-450-4	95154-01-1	R43	Xi R: 43 S: (2-)24-37		
607-180-00-5	potassium 2-hydroxycarbazole-1-carboxylate	401-630-2	96566-70-0	Xn; R22 Xi; R36/37 R52-53	Xn R: 22-36/37-52/53 S: (2-)22-26-61		
607-181-00-0	3,5-dichloro-2,4-difluorobenzoyl fluoride	401-800-6	101513-70-6	T; R23 C; R34 Xn; R22 R29 R43 R52-53	T; C R: 22-23-29-34-43-52/53 S: (1/2-)26-36/37/39-45-61		
607-182-00-6	methyl 3-sulphamoyl-2-thenoate	402-050-2	—	R43	Xi R: 43 S: (2-)24-37		
607-183-00-1	zinc 2-hydroxy-5-C ₁₃₋₁₈ alkylbenzoate	402-280-3	—	Xi; R36/38 N; R51-53	Xi; N R: 36/38-51/53 S: (2-)26-61		
607-184-00-7	S-(3-trimethoxysilyl)propyl 19-isocyanato-11-(6-isocyanato-hexyl)-10,12-dioxo-2,9,11,13-tetraazonadecanethioate	402-290-8	85702-90-5	R10 R42/43	Xn R: 10-42/43 S: (2-)23-24-37		
607-185-00-2	ethyl <i>trans</i> -3-dimethylaminoacrylate	402-650-4	1117-37-9	R43	Xi R: 43 S: (2-)24-37		
607-186-00-8	quinclorac (ISO); 3,7-dichloroquinoline-8-carboxylic acid	402-780-1	84087-01-4	R43	Xi R: 43 S: (2-)24-37		
607-187-00-3	bis(2,2,6,6-tetramethyl-4-piperidyl) succinate	402-940-0	62782-03-0	Xi; R36 R52-53	Xi R: 36-52/53 S: (2-)26-61		
607-188-00-9	hydrogen sodium N-carboxylatoethyl-N-octadec-9-enylmaleamate	402-970-4	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-189-00-4	trimethylenediaminetetraacetic acid	400-400-9	1939-36-2	Xn; R22 Xi; R41 N; R50-53	Xn; N R: 22-41-50/53 S: (2-)22-26-39-60-61		
607-190-00-X	methyl acrylamidomethoxyacetate (containing ≥ 0,1 % acrylamid)	401-890-7	77402-03-0	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Xn; R22 Xi; R36	T R: 45-46-22-36 S: 53-45		E
607-191-00-5	isobutyl 3,4-epoxybutyrate	401-920-9	100181-71-3	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)24-28-36/37-60-61		
607-192-00-0	disodium N-carboxymethyl-N-(2-(2-hydroxyethoxy)ethyl)glycinate	402-360-8	92511-22-3	Xi; R41	Xi R: 41 S: (2-)26-39		
607-194-00-1	propylene carbonate	203-572-1	108-32-7	Xi; R36	Xi R: 36 S: (2-)		
607-195-00-7	2-methoxy-1-methylethyl acetate	203-603-9	108-65-6	R10 Xi; R36	Xi R: 10-36 S: (2-)25		
607-196-00-2	heptanoic acid	203-838-7	111-14-8	C; R34	C R: 34 S: (1/2-)26-28-36/37/39-45		
607-197-00-8	nonanoic acid	203-931-2	112-05-0	C; R34	C R: 34 S: (1/2-)26-28-36/37/39-45		
607-198-00-3	propyl 3,4,5-trihydroxybenzoate	204-498-2	121-79-9	Xn; R22 R43	Xn R: 22-43 S: (2-)24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-199-00-9	octyl 3,4,5-trihydroxybenzoate	213-853-0	1034-01-1	Xn; R22 R43	Xn R: 22-43 S: (2-)24-37		
607-200-00-2	dodecyl 3,4,5-trihydroxybenzoate	214-620-6	1166-52-5	R43	Xi R: 43 S: (2-)24-37		
607-201-00-8	thiocarbonyl chloride	207-341-6	463-71-8	T; R23 Xn; R22 Xi; R36/37/ 38	T R: 22-23-36/37/38 S: (1/2-)7-9-36/37-45		
607-203-00-9	2-ethylhexyl[[[3,5-bis(1,1-dimethylethyl)-4-hydroxyphenyl]methyl]thio]acetate	279-452-8	80387-97-9	Repr. Cat. 2; R61 R43 R52-53	T R: 61-43-52/53 S: 53-45-61		
607-204-00-4	(chlorophenyl)(chlorotolyl)methane, mixed isomers	400-140-6	—	N; R50-53	N R: 50/53 S: 60-61		
607-205-00-X	methyl chloroacetate	202-501-1	96-34-4	R10 T; R23/25 Xi; R37/38- 41	T R: 10-23/25-37/38- 41 S: (1/2-)26-37/39-45		
607-206-00-5	isopropyl chloroacetate	203-301-7	105-48-6	R10 T; R25 Xi; R36/37/ 38	T R: 10-25-36/37/38 S: (1/2-)26-37/39-45		
607-207-00-0	haloxyfop-etotyl (ISO) 2-ethoxyethyl 2-(4-(3-chloro-5-trifluoromethyl-2-pyridyloxy)phenoxy)propionate; haloxyfop-(2-ethoxyethyl)	402-560-5	87237-48-7	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)22-36-60-61		
607-208-00-6	4,8,12-trimethyltrideca-3,7,11-trienoic acid, mixed isomers	403-000-2	91853-67-7	Xi; R38 N; R50-53	Xi; N R: 38-50/53 S: (2-)37/39-60-61		
607-209-00-1	reaction mass of O,O'-diisopropyl (pentathio)dithioformate and O,O'-diisopropyl (trithio)dithioformate and O,O'-diisopropyl (tetrathio)dithioformate	403-030-6	—	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)36/37-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-210-00-7	methyl acrylamidoglycolate (containing $\geq 0,1$ % acrylamide)	403-230-3	77402-05-2	Carc. Cat. 2; R45 Muta. Cat. 2; R46 C; R34 R43	T R: 45-46-34-43 S: 53-45		
607-211-00-2	methyl 3-(3- <i>tert</i> -butyl-4-hydroxy-5-methylphenyl)propionate	403-270-1	6386-39-6	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)36-61		
607-212-00-8	poly(oxypropylenecarbonyl-co-oxy(ethylethylene)carbonyl), containing 27 % hydroxyvalerate	403-300-3	—	R43	Xi R: 43 S: (2-)24-37		
607-213-00-3	ethyl 3,3-bis(<i>tert</i> -pentylperoxy)butyrate	403-320-2	67567-23-1	E; R2 $\otimes$ O; R7 R10 N; R51-53	E; N R: 2-7-10-51/53 S: (2-)3/7-14-33-36/ 37/39-61		
607-214-00-9	N,N-hydrazinodiacetic acid	403-510-5	19247-05-3	T; R25 Xn; R48/22 R43 R52-53	T R: 25-43-48/22-52/ 53 S: (1/2-)26-36/37/39- 45-61		
607-215-00-4	3-(3- <i>tert</i> -butyl-4-hydroxyphenyl)propionic acid	403-920-4	107551-67-7	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)25-26-36		
607-216-00-X	glutamic acid, reaction products with N-(C ₁₂₋₁₄ alkyl)propylene-diamine	403-950-8	—	T+; R26 Xn; R22 C; R34 N; R50-53	T+; N R: 22-26-34-50/53 S: (1/2-)26-36/37/39- 38-45-60-61		
607-217-00-5	2-ethoxyethyl 2-(4-(2,6-dihydro-2,6-dioxo-7-phenyl-1,5-dioxaindacen-3-yl)phenoxy)acetate	403-960-2	—	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
607-218-00-0	dichlorprop-P (ISO); (+)-R-2-(2,4-dichlorophenoxy)propionic acid	403-980-1	15165-67-0	Xn; R22 Xi; R38-41 R43	Xn R: 22-38-41-43 S: (2-)24-26-37/39		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-219-00-6	bis(2-ethylhexyl) dithiodiacetate	404-510-8	62268-47-7	Xn; R22 R43 N; R51-53	Xn; N R: 22-43-51/53 S: (2-)24/25-37-61		
607-221-00-7	6-docosyloxy-1-hydroxy-4-(1-(4-hydroxy-3-methylphenanthren-1-yl)-3-oxo-2-oxaphenalen-1-yl)naphthalene-2-carboxylic acid	404-550-6	—	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
607-222-00-2	6-(2,3-dimethylmaleimido)hexyl methacrylate	404-870-6	63740-41-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
607-223-00-8	transfluthrin (ISO); 2,3,5,6-tetrafluorobenzyl <i>trans</i> -2-(2,2-dichlorovinyl)-3,3-dimethylcyclopropanecarboxylate	405-060-5	118712-89-3	Xi; R38 N; R50-53	Xi; N R: 38-50/53 S: (2-)36/37-60-61		
607-224-00-3	methyl 2-(3-nitrobenzylidene)acetoacetate	405-270-7	39562-17-9	Xi; R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
607-225-00-9	3-azidosulfonylbenzoic acid	405-310-3	15980-11-7	E; R2 Xn; R48/22 Xi; R41 R43	E; Xn R: 2-41-43-48/22 S: (2-)22-26-35-36/ 37/39		
607-226-00-4	reaction mass of 2-acryloyloxyethyl hydrogen cyclohexane-1,2-dicarboxylate and 2-methacryloyloxyethyl hydrogen cyclohexane-1,2-dicarboxylate	405-360-6	—	Xi; R38-41 R43 R52-53	Xi R: 38-41-43-52/53 S: (2-)24-26-37/39-61		
607-227-00-X	potassium 2-amino-2-methylpropionate octahydrate	405-560-3	120447-91-8	Xn; R22 C; R35	C R: 22-35 S: (1/2-)26-28-36/37/ 39-45		
607-228-00-5	bis(2-methoxyethyl) phthalate	204-212-6	117-82-8	Repr. Cat. 2; R61 Repr. Cat. 3; R62	T R: 61-62 S: 53-45		
607-229-00-0	diethylcarbamoyl chloride	201-798-5	88-10-8	Carc. Cat. 3; R40 Xn; R20/22 Xi; R36/37/ 38	Xn R: 20/22-36/37/38- 40 S: (2-)26-36/37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-230-00-6	2-ethylhexanoic acid	205-743-6	149-57-5	Repr. Cat. 3; R63	Xn R: 63 S: (2-)36/37		
607-231-00-1	3,6-dichloropyridine-2-carboxylic acid; clopuralid	216-935-4	1702-17-6	Xi; R41 N; R51-53	X; N R: 41-51/53 S: (2-)26-39-61		
607-232-00-7	pyridate (ISO); O-(6-chloro-3-phenylpyridazin-4-yl) S-octyl thiocarbonate	259-686-7	55512-33-9	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)24-37-60-61		
607-233-00-2	hexyl acrylate	219-698-5	2499-95-8	Xi; R36/37/ 38 R43 N; R51-53	Xi; N R: 36/37/38-43-51/ 53 S: (2-)24-26-37-61		
607-234-00-8	flurenol (ISO); 9-hydroxy-9H-fluorene-9-carboxylic acid	207-397-1	467-69-6	N; R51-53	N R: 51/53 S: 61		
607-235-00-3	mecrilate; methyl 2-cyanoacrylate	205-275-2	137-05-3	Xi; R36/37/ 38	Xi R: 36/37/38 S: (2-)23-24/25-26	Xi; R36/37/38: C ≥ 10 %	
607-236-00-9	ethyl 2-cyanoacrylate	230-391-5	7085-85-0	Xi; R36/37/ 38	Xi R: 36/37/38 S: (2-)23-24/25-26	Xi; R36/37/38: C ≥ 10 %	
607-237-00-4	benzyl 2-chloro-4-(trifluoromethyl)thiazole-5-carboxylate; flurazole	276-942-3	72850-64-7	N; R51-53	N R: 51/53 S: 61		
607-238-00-X	tau-fluvalinate (ISO); cyano-(3-phenoxyphenyl)methyl N-[2-chloro-4-(trifluoromethyl)phenyl]-D-valinate	—	102851-06-9	Xn; R22 Xi; R38 N; R50-53	Xn; N R: 22-38-50/53 S: (2-)24-59-61		
607-239-00-5	fenprothrin (ISO); α-cyano-3-phenoxybenzyl 2,2,3,3-tetramethylcyclopropane-carboxylate;	254-485-0	39515-41-8	T+; R26 T; R25 Xn; R21 N; R50-53	T+; N R: 21-25-26-50/53 S: (1/2-)28-36/37-38- 45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-240-00-0	cis-1,2,3,6-tetrahydro-4-methylphthalic anhydride; [1] 1,2,3,6-tetrahydro-4-methylphthalic anhydride; [2] 1,2,3,6-tetrahydro-3-methylphthalic anhydride; [3] tetrahydromethylphthalic anhydride; [4] 1,2,3,6-tetrahydromethylphthalic anhydride; [5] tetrahydro-4-methylphthalic anhydride; [6] 2,3,5,6-tetrahydro-2-methylphthalic anhydride [7]	216-906-6 [1] 222-323-8 [2] 226-247-6 [3] 234-290-7 [4] 247-830-1 [5] 251-823-9 [6] 255-853-3 [7]	1694-82-2 [1] 3425-89-6 [2] 5333-84-6 [3] 11070-44-3 [4] 26590-20-5 [5] 34090-76-1 [6] 42498-58-8 [7]	Xi; R41 R42/43	Xn R: 41-42/43 S: (2-)22-24-26-37/39		C
607-241-00-6	hexahydro-4-methylphthalic anhydride; [1] hexahydromethylphthalic anhydride; [2] hexahydro-1-methylphthalic anhydride; [3] hexahydro-3-methylphthalic anhydride [4]	243-072-0 [1] 247-094-1 [2] 256-356-4 [3] 260-566-1 [4]	19438-60-9 [1] 25550-51-0 [2] 48122-14-1 [3] 57110-29-9 [4]	Xi; R41 R42/43	Xn R: 41-42/43 S: (2-)22-24-26-37/39		C
607-242-00-1	tetrachlorophthalic anhydride	204-171-4	117-08-8	Xi; R41 R42/43 N; R50-53	Xn; N R: 41-42/43-50/53 S: (2-)22-24-26-37/39-60-61		
607-243-00-7	sodium 3,6-dichloro- <i>o</i> -anisate; [1] 3,6-dichloro- <i>o</i> -anisic acid, compound with 2,2'-iminodiethanol (1:1); [2] 3,6-dichloro- <i>o</i> -anisic acid, compound with 2-aminoethanol (1:1) [3]	217-846-3 [1] 246-590-5 [2] 258-527-9 [3]	1982-69-0 [1] 25059-78-3 [2] 53404-28-7 [3]	R52-53	R: 52/53 S: 61		
607-244-00-2	isooctyl acrylate	249-707-8	29590-42-9	Xi; R36/37/38 N; R50-53	Xi; N R: 36/37/38-50/53 S: (2-)26-28-60-61	Xi; R36/37/38: C ≥ 10 %	
607-245-00-8	<i>tert</i> -butyl acrylate	216-768-7	1663-39-4	F; R11 Xn; R20/21/22 Xi; R37/38 R43 N; R52-53	F; Xn R: 11-20/21/22-37/38-43-52/53 S: (2-)16-25-37-61		D

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-246-00-3	allyl methacrylate; 2-methyl-2-propenoic acid 2-propenyl ester	202-473-0	96-05-9	R10 T; R23 Xn; R21/22 N; R50	T; N R: 10-21/22-23-50 S: (1/2-)36/37-45-61		
607-247-00-9	dodecyl methacrylate	205-570-6	142-90-5	Xi; 36/37/38 N; R50-53	Xi; N R: 36/37/38-50/53 S: (2-)26-28-60-61	Xi; R36/37/38: C ≥ 10 %	
607-248-00-4	naptalam-sodium (ISO);; sodium N-naphth-1-ylphthalamate	205-073-4	132-67-2	Xn; R22	Xn R: 22 S: (2-)		
607-249-00-X	(1-methyl-1,2-ethanediyl)bis[oxy(methyl-2,1-ethanediyl)] diacrylate	256-032-2	42978-66-5	Xi; R36/37/38 R43 N; R51-53	Xi; N R: 36/37/38-43-51/53 S: (2-)24-37-61	Xi; R36/37/38: C ≥ 10 %	
607-250-00-5	4 <i>H</i> -3,1-benzoxazine-2,4(1 <i>H</i>)-dione	204-255-0	118-48-9	Xi; R36 R43	Xi R: 36-43 S: (2-)24-26-37		
607-251-00-0	2-methoxypropyl acetate	274-724-2	70657-70-4	R10 Repr. Cat. 2; R61 Xi; R37	T R: 61-10-37 S: 53-45		
607-252-00-6	lambda-cyhalothrin (ISO); reaction mass of (S)-α-cyano-3-phenoxybenzyl(Z)-(1R)-cis-3-(2-chloro-3,3,3-trifluoropropenyl)-2,2-dimethylcyclopropanecarboxylate and (R)-α-cyano-3-phenoxybenzyl (Z)-(1S)-cis-3-(2-chloro-3,3,3-trifluoropropenyl)-2,2-dimethylcyclopropanecarboxylate (1:1)	415-130-7	91465-08-6	T+; R26 T; R25 Xn; R21 N; R50-53	T+; N R: 21-25-26-50/53 S: (1/2-)28-36/37/39-38-45-60-61		
607-253-00-1	α-cyano-4-fluoro-3-phenoxybenzyl-3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate; cyfluthrin	269-855-7	68359-37-5	T+; R28 T; R23 N; R50-53	T+; N R: 23-28-50/53 S: (1/2-)36/37/39-45-60-61		
607-254-00-7	α-cyano-4-fluoro-3-phenoxybenzyl-3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate; beta-cyfluthrin	269-855-7	68359-37-5	T+; R26/28 N; R50-53	T+; N R: 26/28-50/53 S: (1/2-)36/37/39-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-255-00-2	fluroxypyr (ISO); 4-amino-3,5-dichloro-6-fluoro-2-pyridyloxyacetic acid	—	69377-81-7	R52-53	R: 52/53 S: 61		
607-256-00-8	azoxystrobin (ISO); methyl (E)-2-[2-[6-(2-cyanophenoxy)pyrimidin-4-yloxy]phenyl]-3-methoxyacrylate	—	131860-33-8	T; R23 N; 50-53	T; N R: 23-50/53 S: (1/2-)22-45-60-61		
607-257-00-3	isopropyl propionate	211-300-8	637-78-5	F; R11	F R: 11 S: (2-)16-23-24-29-33		
607-258-00-9	dodecyl 3-(2-(3-benzyl-4-ethoxy-2,5-dioximidazolidin-1-yl)-3-(4-methoxybenzoyl)acetamido)-4-chlorobenzoate	403-990-6	70950-45-7	R53	R: 53 S: 61		
607-259-00-4	methyl 2R,3S-(-)-3-(4-methoxyphenyl)oxiranecarboxylate	404-130-2	105560-93-8	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)24-26-37/39-61		
607-260-00-X	ethyl 2-(3-nitrobenzylidene)acetoacetate	404-490-0	39562-16-8	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)24-26-37/39-61		
607-261-00-5	iso(C ₁₀ -C ₁₄)alkyl (3,5-di- <i>tert</i> -butyl-4-hydroxyphenyl)methyl-thioacetate	404-800-4	118832-72-7	N; R50-53	N R: 50/53 S: 60-61		
607-262-00-0	7-chloro-1-cyclopropyl-6-fluoro-1,4-dihydro-4-oxoquinoline-3-carboxylic acid	405-050-0	86393-33-1	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-61		
607-263-00-6	potassium iron(III) 1,3-propanediamine- <i>N,N,N',N'</i> -tetraacetate hemihydrate	405-680-6	—	E; R2 N; R51-53	E; N R: 2-51/53 S: (2-)35-61		
607-264-00-1	2-chloro-4-(methylsulfonyl)benzoic acid	406-520-8	53250-83-2	Xi; R41	Xi R: 41 S: (2-)26-39		
607-265-00-7	ethyl-2-chloro-2,2-diphenylacetate	406-580-5	52460-86-3	Xi; R38 R52-53	Xi R: 38-52/53 S: (2-)37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-266-00-2	reaction mass of: hydroxyaluminium bis[2-hydroxy-3,5-di- <i>tert</i> -butylbenzoate]; 3,5-di- <i>tert</i> -butyl-salicylic acid	406-890-0	130296-87-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)22-60-61		
607-267-00-8	<i>tert</i> -butyl (5 <i>S</i> ,6 <i>R</i> ,7 <i>R</i>)-3-bromomethyl-5,8-dioxo-7-(2-(2-phenylacetamido)-5-thia-1-azabicyclo[4.2.0] oct-2-ene-2-carboxylate	407-620-4	33610-13-8	R42/43 R52-53	Xn R: 42/43-52/53 S: (2-)22-24-37-61		
607-268-00-3	2-methylpropyl (R)-2-hydroxypropanoate	407-770-0	61597-96-4	Xi; R36	Xi R: 36 S: (2-)26		
607-269-00-9	(R)-2-(4-hydroxyphenoxy)propanoic acid	407-960-3	94050-90-5	Xi; R41	Xi R: 41 S: (2-)26-39		
607-270-00-4	3,9-bis(2-(3-(3- <i>tert</i> -butyl-4-hydroxy-5-methylphenyl)propionyloxy-1,1-dimethylethyl)-2,4,8,10- tetraoxaspiro[5.5]undecane	410-730-5	90498-90-1	Xn; R21	Xn R: 21 S: (2-)36/37		
607-271-00-X	2-isopropyl-5-methylcyclohexyloxycarbonyloxy-2-hydroxypropane	417-420-9	156324-82-2	Xi; R36 N; R51-53	Xi; N R: 36-51/53 S: (2-)26-61		
607-272-00-5	fluroxypyr-meptyl (ISO); methylheptyl, O-(4-amino-3,5-dichloro-6-fluoro-2-pyridyloxy) acetate; [1] fluroxypyr-butometyl (ISO); 2-butoxy-1-methylethyl, O-(4-amino-3,5-dichloro-6-fluoro-2-pyridyloxy) acetate [2]	279-752-9 [1] - [2]	81406-37-3 [1] 154486-27-8 [2]	N; R50-53	N R: 50/53 S: 60-61		
607-273-00-0	ammonium 7-(2,6-dimethyl-8-(2,2-dimethylbutyryloxy)-1,2,6,7,8,8a-hexahydro-1-naphthyl)-3,5-dihydroxyheptanoate	404-520-2	—	R52-53	R: 52/53 S: 61		
607-274-00-6	2-(N-benzyl-N-methylamino)ethyl 3-amino-2-butenate	405-350-1	54527-73-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
607-275-00-1	sodium benzoxyloxybenzene-4-sulfonate	405-450-5	66531-87-1	R43	Xi R: 43 S: (2-)24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-276-00-7	bis[(1-methylimidazol)-(2-ethyl-hexanoate)], zinc complex	405-635-0	—	Xi; R38-41 N; R50-53	Xi; N R: 38-41-50/53 S: (2-)26-37/39-60-61		
607-277-00-2	reaction mass of: 2-(hexylthio)ethylamine hydrochloride; sodium propionate	405-720-2	—	Xn; R22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-51/53 S: (2-)24-26-37/39-61		
607-278-00-8	reaction mass of isomers of: sodium phenethylnaphthalene-sulfonate; sodium naphthylethylbenzenesulfonate	405-760-0	—	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)24-26-37/39-61		
607-279-00-3	reaction mass of <i>n</i> -octadecylaminodiethyl bis(hydrogen maleate); <i>n</i> -octadecylaminodiethyl hydrogen maleate hydrogenphthalate	405-960-8	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
607-280-00-9	sodium 4-chloro-1-hydroxybutane-1-sulfonate	406-190-5	54322-20-2	Xn; R22 Xi; R36 R43	Xn R: 22-36-43 S: (2-)22-26-36/37		
607-281-00-4	reaction mass of branched and linear C ₇ -C ₉ alkyl 3-[3-(2H-benzotriazol-2-yl)-5-(1,1-dimethylethyl)-4-hydroxyphenyl] propionates	407-000-3	127519-17-9	N; R51-53	N R: 51/53 S: 61		
607-282-00-X	2-acetoxymethyl-4-benzyloxybut-1-yl acetate	407-140-5	131266-10-9	R52-53	R: 52/53 S: 61		
607-283-00-5	<i>E</i> -ethyl-4-oxo-4-phenylcrotonate	408-040-4	15121-89-8	Xn; R21/22 Xi; R38-41 R43 N; R50-53	Xn; N R: 21/22-38-41-43-50/53 S: (2-)26-36/37/39-60-61		
607-284-00-0	reaction mass of: sodium 3,3'-(1,4-phenylenebis(carbonylimino-3,1-propanediylimino))bis(10-amino-6,13-dichloro-4,11-triphenodioxazinedisulfonate); lithium 3,3'-(1,4-phenylenebis-(carbonylimino-3,1-propanediyl-imino))bis(10-amino-6,13-dichloro-4,11-triphenodioxazinedisulfonate (9:1)	410-040-4	136213-76-8	N; R51-53	N R: 51/53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-285-00-6	reaction mass of: 7-(((3-aminophenyl)sulfonyl)amino)-naphthalene-1,3-disulfonic acid; sodium 7-(((3-aminophenyl)sulfonyl)amino)-naphthalene-1,3-disulfonate; potassium 7-(((3-aminophenyl)sulfonyl)amino)-naphthalene-1,3-disulfonate	410-065-0	—	R43	Xi R: 43 S: (2-)22-24-37		
607-286-00-1	reaction mass of: sodium/potassium 7-[[[3-[[4-((2-hydroxy-naphthyl)azo)phenyl]azo]phenyl]sulfonyl]amino]-naphthalene-1,3-disulfonate	410-070-8	141880-36-6	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
607-287-00-7	O'-methyl O-(1-methyl-2-methacryloyloxy-ethyl)-1,2,3,6-tetrahydrophthalate	410-140-8	—	R52-53	R: 52/53 S: 61		
607-288-00-2	Tetrasodium (c-(3-(1-(3-(ε-6-dichloro-5-cyanopyrimidin-f-yl(methyl)amino)propyl)-1,6-dihydro-2-hydroxy-4-methyl-6-oxo-3-pyridylazo)-4-sulfonatophenylsulfamoyl)phthalocyanine-a,b,d-trisulfonato(6-))nickelato II, where a is 1 or 2 or 3 or 4, b is 8 or 9 or 10 or 11, c is 15 or 16 or 17 or 18, d is 22 or 23 or 24 or 25 and where ε and f together are 2 and 4 or 4 and 2 respectively	410-160-7	148732-74-5	Xi; R36 R43 R52-53	Xi R: 36-43-52/53 S: (2-)22-26-36/37-61		
607-289-00-8	3-(3-(4-(2,4-bis(1,1-dimethylpropyl)phenoxy)butylaminocarbonyl-4-hydroxy-1-naphthalenyl)thio)propanoic acid	410-370-9	105488-33-3	R53	R: 53 S: 61		
607-290-00-3	reaction mass (ratio not known) of: ammonium 1-C ₁₄ -C ₁₈ -alkyloxycarbonyl-2-(3-allyloxy-2-hydroxypropoxycarbonyl)ethane-1-sulfonate; ammonium 2-C ₁₄ -C ₁₈ -alkyloxycarbonyl-1-(3-allyloxy-2-hydroxypropoxycarbonyl)ethane-1-sulfonate	410-540-2	—	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)24-37-60-61		
607-291-00-9	dodecyl-ω-(C ₅ /C ₆ -cycloalkyl)alkyl carboxylate	410-630-1	104051-92-5	R53	R: 53 S: 61		
607-292-00-4	reaction mass of: [1-(methoxymethyl)-2-(C ₁₂ -alkoxy)-ethoxy]acetic acid; [1-(methoxymethyl)-2-(C ₁₄ -alkoxy)-ethoxy]acetic acid	410-640-6	—	Xi; R38-41 N; R50-53	Xi; N R: 38-41-50/53 S: (2-)26-37/39-60-61		
607-293-00-X	reaction mass of: N-aminoethylpiperazonium mono-2,4,6-trimethylnonyldiphenyl ether di-sulfonate; N-aminoethylpiperazonium di-2,4,6-trimethylnonyldiphenyl ether di-sulfonate	410-650-0	—	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)26-36/37/39-61		
607-294-00-5	sodium 2-benzoyloxy-1-hydroxyethane-sulfonate	410-680-4	—	R43	Xi R: 43 S: (2-)24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-295-00-0	reaction mass of: tetrasodium phosphonoethane-1,2-dicarboxylate; hexasodium phosphonobutane-1,2,3,4-tetracarboxylate	410-800-5	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
607-296-00-6	reaction mass of: pentaerythriol tetraesters with heptanoic acid and 2-ethylhexanoic acid	410-830-9	—	R53	R: 53 S: 61		
607-297-00-1	(E-E)-3,3'-(1,4-phenylenedimethylidene)bis(2-oxobornane-10-sulfonic acid)	410-960-6	92761-26-7	Xi; R41	Xi R: 41 S: (2-)26-39		
607-298-00-7	2-(trimethylammonium)ethoxycarboxybenzene-4-sulfonate	411-010-3	—	R43	Xi R: 43 S: (2-)22-36/37		
607-299-00-2	methyl 3-(acetylthio)-2-methyl-propanoate	411-040-7	97101-46-7	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
607-300-00-6	trisodium [2-(5-chloro-2,6-difluoropyrimidin-4-ylamino)-5-(b-sulfamoyl-c,d-sulfonatophthalocyanin-a-yl-K4,N29,N30,N31,N32-sulfonylamino)benzoato(5-)]cuprate(II) where a=1,2,3,4 b=8,9,10,11 c=15,16,17,18 d=22,23,24,25	411-430-7	—	Xi; R41 R43	Xi R: 41-43 S: (2-)26-36/37/39		
607-301-00-1	reaction mass of: dodecanoic acid; poly(1-7)lactate esters of dodecanoic acid	411-860-5	—	R43 N; R51-53	Xi; N R: 38-41-43-51/53 S: (2-)24-26-37/39-61		
607-302-00-7	reaction mass of: tetradecanoic acid; poly(1-7)lactate esters of tetradecanoic acid	411-910-6	—	Xi; R38-41 R43 N; R51-53	Xi; N R: 38-41-43-51/53 S: (2-)24-26-37/39-61		
607-303-00-2	1-cyclopropyl-6,7-difluoro-1,4-dihydro-4-oxoquinoline-3-carboxylic acid	413-760-7	93107-30-3	Repr. Cat. 3; R62 R52-53	Xn R: 62-52/53 S: (2-)22-36/37-61		
607-304-00-8	fluazifop-butyl (ISO); butyl (RS)-2-[4-(5-trifluoromethyl-2-pyridyloxy)phenoxy]propanoate	274-125-6	69806-50-4	Repr. Cat. 2; R61 N; R50-53	T; N R: 61-50/53 S: 53-45-60-61		
607-305-00-3	fluazifop-P-butyl (ISO); butyl (R)-2-[4-(5-trifluoromethyl-2-pyridyloxy)phenoxy]propanoate	—	79241-46-6	Repr. Cat. 3; R63 N; R50-53	Xn; N R: 50/53-63 S: (2-)29-36/37-46-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-306-00-9	chlozolate (ISO); ethyl (RS)-3-(3,5-dichlorophenyl)-5-methyl-2,4-dioxo-oxazolidine-5-carboxylate	282-714-4	84332-86-5	Carc. Cat. 3; R40 N; R51-53	Xn; N R: 40-51/53 S: (2-)36/37-61		
607-307-00-4	vinclozolin (ISO); N-3,5-dichlorophenyl-5-methyl-5-vinyl-1,3-oxazolidine-2,4-dione	256-599-6	50471-44-8	Carc. Cat. 3; R40 Repr. Cat. 2; R60-61 R43 N; R51-53	T; N R: 60-61-40-43-51/ 53 S: 53-45-61		
607-308-00-X	esters of 2,4-D	—	—	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)26-29-36/37-46-60-61		A
607-309-00-5	carfentrazone-ethyl (ISO); ethyl (RS)-2-chloro-3-[2-chloro-4-fluoro-5-[4-difluoromethyl-4,5-dihydro-3-methyl-5-oxo-1H-1,2,4-triazol-1-yl]phenyl]propionate	—	128639-02-1	N; R50-53	N R: 50/53 S: 60-61		
607-310-00-0	kresoxim-methyl (ISO); methyl (E)-2-methoxyimino-[2-(o-tolyloxymethyl)phenyl]acetate	—	143390-89-0	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-60-61		
607-311-00-6	benazolin-ethyl; ethyl 4-chloro-2-oxo-2H-benzothiazole-3-acetate	246-591-0	25059-80-7	N; R51-53	N R: 51/53 S: 61		
607-312-00-1	methoxyacetic acid	210-894-6	625-45-6	Repr. Cat. 2; R60-61 Xn; R22 C; R34	T R: 60-61-22-34 S: 53-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	E
607-313-00-7	neodecanoyl chloride	254-875-0	40292-82-8	T+; R26 Xn; R22 C; R34	T+ R: 22-26-34 S: (1/2-)26-28-36/37/ 39-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
607-314-00-2	ethofumesate (ISO); (±)-2-ethoxy-2,3-dihydro-3,3-dimethylbenzofuran-5-yl methanesulfonate	247-525-3	26225-79-6	N; R51-53	N R: 51/53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-315-00-8	glyphosate (ISO); N-(phosphonomethyl)glycine	213-997-4	1071-83-6	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
607-316-00-3	glyphosate-trimesium; glyphosate-trimethylsulfonium	—	81591-81-3	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)36/37-46-61		
607-317-00-9	bis(2-ethylhexyl) phthalate; di-(2-ethylhexyl) phthalate; DEHP	204-211-0	117-81-7	Repr. Cat. 2; R60-61	T R: 60-61 S: 53-45		
607-318-00-4	dibutyl phthalate; DBP	201-557-4	84-74-2	Repr. Cat. 2; R61 Repr. Cat. 3; R62 N; R50	T; N R: 61-50-62 S: 53-45-61		
607-319-00-X	deltamethrin (ISO); (S)- α -cyano-3-phenoxybenzyl (1R, 3R)-3-(2,2-dibromovinyl)- 2,2-dimethylcyclopropanecarboxylate	258-256-6	52918-63-5	T; R23/25 N; R50-53	T; N R: 23/25-50/53 S: (1/2-)24-28-36/37/ 39-38-45-60-61		
607-320-00-5	bis[4-(ethenyloxy)butyl] 1,3-benzenedicarboxylate	413-930-0	130066-57-8	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
607-321-00-0	(S)-methyl-2-chloropropionate	412-470-8	73246-45-4	R10 Xn; R48/22 Xi; R36	Xn R: 10-36-48/22 S: (2-)23-26-36		
607-322-00-6	4-(4,4-dimethyl-3-oxo-pyrazolidin-1-yl)-benzoic acid	413-120-7	107144-30-9	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)22-61		
607-323-00-1	2-(1-(2-hydroxy-3,5-di- <i>tert</i> -pentyl-phenyl)ethyl)-4,6-di- <i>tert</i> - pentylphenyl acrylate	413-850-6	123968-25-2	R53	R: 53 S: 61		
607-324-00-7	reaction mass of: N,N-di(hydrogenated alkyl C ₁₄ -C ₁₈)phthalamic acid; dihydrogenated alkyl (C ₁₄ -C ₁₈)amine	413-800-3	—	R53	R: 53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-325-00-2	(S)-2-chloropropionic acid	411-150-5	29617-66-1	Xn; R21/22 C; R35	C R: 21/22-35 S: (1/2-)23-26-28-36/ 37/39-45		
607-326-00-8	reaction mass of: isobutyl hydrogen 2-(α -2,4,6-trimethylnon-2-enyl)succinate; isobutyl hydrogen 2-(β -2,4,6-trimethylnon-2-enyl)succinate	410-720-0	141847-13-4	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
607-327-00-3	2-(2-iodoethyl)-1,3-propanediol diacetate	411-780-0	127047-77-2	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)36-61		
607-328-00-9	methyl 4-bromomethyl-3-methoxybenzoate	410-310-1	70264-94-7	Xi; R38-41 R43 N; R50-53	Xi; N R: 38-41-43-50/53 S: (2-)26-36/37/39- 60-61		
607-329-00-4	reaction mass of: sodium 2-(C ₁₂₋₁₈ - <i>n</i> -alkyl)amino-1,4-butan-dioate; sodium 2-octadecenyl-amino-1,4-butandioate	411-250-9	—	R43	Xi R: 43 S: (2-)24-26-37/39		
607-330-00-X	(S)-2,3-dihydro-1H-indole-2-carboxylic acid	410-860-2	79815-20-6	Repr. Cat. 3; R62 Xn; R48/22 R43	Xn R: 43-48/22-62 S: (2-)22-25-26-36/37		
607-331-00-5	reaction mass of: bis(2,2,6,6-tetramethyl-1-octyloxypiperidin-4-yl)-1,10-decanedioate; 1,8-bis[(2,2,6,6-tetramethyl-4-((2,2,6,6-tetramethyl-1-octyloxy)piperidin-4-yl)-decan-1,10-dioyl)piperidin-1-yl]oxy]octane	406-750-9	—	R53	R: 53 S: 23-61		
607-332-00-0	cyclopentyl chloroformate	411-460-0	50715-28-1	R10 T; R23 Xn; R22-48/ 22 Xi; R41 R43	T R: 10-22-23-41-43- 48/22 S: (1/2-)26-36/37/39- 45		
607-333-00-6	reaction mass of: dodecyl N-(2,2,6,6-tetramethylpiperidin-4-yl)- β -alaninate; tetradecyl N-(2,2,6,6-tetramethylpiperidin-4-yl)- β -alaninate	405-670-1	—	Xn; R22-48/ 22 C; R34 N; R50-53	C; N R: 22-34-48/22-50/ 53 S: (1/2-)26-36/37/39- 45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-334-00-1	ethyl 1-ethyl-6,7,8-trifluoro-1,4-dihydro-4-oxoquinoline-3-carboxylate	405-880-3	100501-62-0	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
607-335-00-7	methyl (R)-2-(4-(3-chloro-5-trifluoromethyl-2-pyridyloxy)phenoxy)propionate	406-250-0	72619-32-0	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
607-336-00-2	4-methyl-8-methylenetricyclo[3.3.1.1 ^{3,7}]dec-2-yl acetate	406-560-6	122760-85-4	Xi; R38 R43 N; R51-53	Xi; N R: 38-43-51/53 S: (2-)36/37-61		
607-337-00-8	di-tert-(C ₁₂₋₁₄)-alkylammonium 2-benzothiazolylthiosuccinate	406-052-4	125078-60-6	R10 Xn; R22 Xi; R38-41 N; R51-53	Xn; N R: 10-22-38-41-51/53 S: (2-)26-37/39-61		
607-338-00-3	2-methylpropyl 2-hydroxy-2-methylbut-3-enoate	406-235-9	72531-53-4	Xi; R36/38	Xi R: 36/38 S: (2-)26-37		
607-339-00-9	2,3,4,5-tetrachlorobenzoylchloride	406-760-3	42221-52-3	Xn; R22 C; R34 R43	C R: 22-34-43 S: (1/2-)26-36/37/39-45		
607-340-00-4	1,3-bis(4-benzoyl-3-hydroxyphenoxy)prop-2-yl acetate	406-990-4	—	N; R51-53	N R: 51/53 S: 61		
607-341-00-X	(9S)-9-amino-9-deoxyerythromycin	406-790-7	26116-56-3	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		
607-342-00-5	4-chlorobutyl veratrate	410-950-1	69788-75-6	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
607-343-00-0	4,7-methanooctahydro-1 <i>H</i> -indene-diyldimethyl bis(2-carboxybenzoate)	407-410-2	—	R53	R: 53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-344-00-6	reaction mass of: 3-(N-(3-dimethylaminopropyl)-(C ₄₋₈)perfluoroalkylsulfonamido)propionic acid; N-[dimethyl-3-(C ₄₋₈ -perfluoroalkylsulfonamido)propylammonium propionate; 3-(N-(3-dimethyl-propylammonium)-(C ₄₋₈)perfluoroalkylsulfonamido)propionic acid propionate	407-810-7	—	Xn; R48/22	Xn R: 48/22 S: (2-)21-22-36/37		
607-345-00-1	potassium 2-(2,4-dichlorophenoxy)-(R)-propionate	413-580-9	113963-87-4	Xn; R22 Xi; R38-41 R43	Xn R: 22-38-41-43 S: (2-)24-26-37/39		
607-346-00-7	3-icosyl-4-henicosylidene-2-oxetanone	401-210-9	83708-14-9	R53	R: 53 S: 61		
607-347-00-2	sodium (R)-2-(2,4-dichlorophenoxy)propionate	413-340-3	119299-10-4	Xn; R22 Xi; R38-41 R43	Xn R: 22-38-41-43 S: (2-)22-26-36/37/39		
607-348-00-8	magnesium bis((R)-2-(2,4-dichlorophenoxy)propionate)	413-360-2	—	Xn; R22 Xi; R38-41 R43	Xn R: 22-38-41-43 S: (2-)22-26-36/37/39		
607-349-00-3	mono-(tetrapropylammonium) hydrogen 2,2'-dithiobisbenzoate	411-270-8	—	R52-53	R: 52/53 S: 61		
607-350-00-9	bis(4-(1,2-bis(ethoxycarbonyl)ethylamino)-3-methylcyclohexyl)methane	412-060-9	136210-32-7	R43 R52-53	Xi R: 43-52/53 S: (2-)36/37-61		
607-351-00-4	methyl O-(4-amino-3,5-dichloro-6-fluoropyridin-2-yloxy)acetate	407-550-4	69184-17-4	N; R51-53	N R: 51/53 S: 20/21-61		
607-352-00-X	4,4'-oxydiphthalic anhydride	412-830-4	1823-59-2	R52-53	R: 52/53 S: 61		
607-353-00-5	reaction mass of: ethyl <i>exo</i> -tricyclo[5.2.1.0 ^{2,6}]decane- <i>endo</i> -2-carboxylate; ethyl <i>endo</i> -tricyclo[5.2.1.0 ^{2,6}]decane- <i>exo</i> -2-carboxylate	407-520-0	80657-64-3	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
607-354-00-0	ethyl 2-cyclohexylpropionate	412-280-5	2511-00-4	N; R51-53	N R: 51/53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-355-00-6	<i>p</i> -tolyl 4-chlorobenzoate	411-530-0	15024-10-9	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
607-356-00-1	ethyl <i>trans</i> -2,2,6-trimethylcyclohexanecarboxylate	412-540-8	—	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
607-357-00-7	reaction mass of: <i>trans</i> -4-acetoxy-4-methyl-2-propyl-tetrahydro-2 <i>H</i> -pyran; <i>cis</i> -4-acetoxy-4-methyl-2-propyl-tetrahydro-2 <i>H</i> -pyran	412-450-9	131766-73-9	R43	Xi R: 43 S: (2-)24-37		
607-358-00-2	(1 <i>S</i> ,3 <i>S</i> ,5 <i>R</i> ,6 <i>R</i>)-(4-nitrophenylmethyl)-1-dioxo-6-phenylacetamido-penam-3-carboxylate	412-670-5	54275-93-3	R42	Xn R: 42 S: (2-)22		
607-359-00-8	(1 <i>S</i> ,4 <i>R</i> ,6 <i>R</i> ,7 <i>R</i>)-(4-nitrophenylmethyl) 3-methylene-1-oxo-7-phenylacetamido-cepham-4-carboxylateido-penam-3-carboxylate	412-800-0	76109-32-5	R42	Xn R: 42 S: (2-)22		
607-360-00-3	sodium 3-acetoacetyl-amino-4-methoxytolyl-6-sulfonate	411-680-7	133167-77-8	R43	Xi R: 43 S: (2-)24-37		
607-361-00-9	methyl (<i>R</i>)-2-(4-hydroxyphenoxy)propionate	411-950-4	96562-58-2	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
607-362-00-4	reaction mass of: (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(2-(bis(2-hydroxyethyl)amino)ethoxycarbonylmethyl)hexadec-4-enoate; (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(2-(bis(2-hydroxyethyl)amino)ethoxycarbonylmethyl)tetradec-4-enoate; (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(3-methoxypropylcarbamoylemethyl)hexadec-4-enoate; (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(3-methoxypropylcarbamoylemethyl)tetradec-4-enoate	413-500-2	—	Xi; R38-41 N; R51-53	Xi; N R: 38-41-51/53 S: (2-)26-37/39-61		
607-363-00-X	methyl-3-methoxyacrylate	412-900-4	5788-17-0	R43	Xi R: 43 S: (2-)24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-364-00-5	3-phenyl-7-[4-(tetrahydrofurfuryloxy)phenyl]-1,5-dioxas-indacen-2,6-dione	413-330-9	134724-55-3	R53	R: 53 S: 61		
607-365-00-0	2-(2-amino-1,3-thiazol-4-yl)-(Z)-2-methoxyiminoacetyl chloride hydrochloride	410-620-7	119154-86-8	Xn; R22 C; R34 R43	C R: 22-34-43 S: (1/2-)22-26-36/37/ 39-45		
607-366-00-6	3,5-dimethylbenzoyl chloride	413-010-9	6613-44-1	C; R34 R43	C R: 34-43 S: (1/2-)26-36/37/39- 45		
607-367-00-1	potassium bis(N-carboxymethyl)-N-methyl-glycinato-(2-)N,O, O,N)-ferrate-(1-) monohydrate	411-640-9	153352-59-1	Xn; R22	Xn R: 22 S: (2-)37		
607-368-00-7	1-(N,N-dimethylcarbamoyl)-3-tert-butyl-5-carbethoxymethylthio-1H-1,2,4-triazole	411-650-3	110895-43-7	T; R23/25 N; R50-53	T; N R: 23/25-50/53 S: (1/2-)37-38-45-60- 61		
607-369-00-2	reaction mass of: <i>trans</i> -(2R)-5-acetoxy-1,3-oxathiolane-2-carboxylic acid; <i>cis</i> -(2R)-5-acetoxy-1,3-oxathiolane-2-carboxylic acid	411-660-8	147027-04-1	Xn; R22 Xi; R38-41 R43	Xn R: 22-38-41-43 S: (2-)22-24-26-37/39		
607-370-00-8	2-[[2-(acetyloxy)-3-(1,1-dimethyl-ethyl)-5-methylphenyl]methyl]-6-(1,1-dimethylethyl)-4-methylphenol	412-210-3	41620-33-1	N; R50-53	N R: 50/53 S: 60-61		
607-371-00-3	3-ethyl 5-methyl 4-(2-chlorophenyl)-1,4-dihydro-2-[2-(1,3-dihydro-1,3-dioxo-(2H)isoindol-2-yl)-ethoxymethyl]-6-methyl-3,5-pyridinedicarboxylate	413-410-3	88150-62-3	R53	R: 53 S: 61		
607-372-00-9	ethoxylated bis phenol A di-(norbornene carboxylate)	412-410-0	—	R52-53	R: 52/53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-373-00-4	(±) tetrahydrofurfuryl (R)-2-[4-(6-chloroquinoxalin-2-yloxy)phenyloxy]propionate	414-200-4	119738-06-6	Muta. Cat. 3; R68 Repr. Cat. 2; R61 Repr. Cat. 3; R62 Xn; R22-48/ 22 N; R50-53	T; N R: 61-22-48/22-62- 68-50/53 S: 53-45-60-61		E
607-374-00-X	5-amino-2,4,6-triiodo-1,3-benzenedicarbonyldichloride	417-220-1	37441-29-5	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-36/37-61		
607-375-00-5	reaction mass of: cis-4-hydroxy-3-(1,2,3,4-tetrahydro-3-(4-(4-trifluoromethylbenzyloxy)phenyl)-1-naphthyl)coumarin; trans-4-hydroxy-3-(1,2,3,4-tetrahydro-3-(4-(4-trifluoromethylbenzyloxy)phenyl)-1-naphthyl)coumarin	421-960-0	90035-08-8	T+; R26/27/ 28 T; R48/23/ 24/25 N; R50-53	T+; N R: 26/27/28-48/23/ 24/25-50/53 S: (1/2-)28-36/37/39- 45-60-61		
607-376-00-0	benzyl 2,4-dibromobutanoate	420-710-8	23085-60-1	Repr. Cat. 3; R62 Xi; R38 R43 N; R50-53	Xn; N R: 38-43-62-50/53 S: (2-)23-36/37-41- 60-61		
607-377-00-6	trans-4-cyclohexyl-L-proline monohydrochloride	419-160-1	90657-55-9	Repr. Cat. 3; R62 Xn; R22 Xi; R38-41 R43	Xn R: 22-38-41-43-62 S: (2-)22-26-36/37/39		
607-378-00-1	ammonium (Z)-α-methoxyimino-2-furylacetate	405-990-1	97148-39-5	F; R11	F R: 11 S: (2-)22-43		
607-379-00-7	reaction mass of: 2-[N-(2-hydroxyethyl)stearamido]ethyl stearate; sodium [bis[2-(stearoyloxy)ethyl]amino]methylsulfonate; sodium [bis(2-hydroxyethyl)amino]methylsulfonate; N,N-bis(2-hydroxyethyl)stearamide	401-230-8		R52-53	R: 52/53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-380-00-2	reaction mass of: ammonium-1,2-bis(hexyloxycarbonyl)ethanesulfonate; ammonium-1-hexyloxycarbonyl-2-octyloxycarbonylethane-sulfonate; ammonium-2-hexyloxycarbonyl-1-octyloxycarbonylethane-sulfonate	407-320-3	—	Xi; R38-41 R52-53	Xi R: 38-41-52/53 S: (2-)26-37/39-61		
607-381-00-8	reaction mass of triesters of 2,2-bis(hydroxymethyl)butanol with C ₇ -alkanoic acids and 2-ethylhexanoic acid	413-710-4	—	R53	R: 53 S: 61		
607-382-00-3	2-((4-amino-2-nitrophenyl)amino)benzoic acid	411-260-3	117907-43-4	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)24-26-37/39-61		
607-383-00-9	reaction mass of: 2,2,6,6-tetramethylpiperidin-4-yl-hexadecanoate; 2,2,6,6-tetramethylpiperidin-4-yl-octadecanoate	415-430-8	86403-32-9	Xi; R41 R43 N; R50-53	Xi; N R: 41-43-50/53 S: (2-)24-26-37/39-60-61		
607-384-00-4	reaction mass of: esters of C ₁₄ -C ₁₅ branched alcohols with 3,5-di- <i>t</i> -butyl-4-hydroxyphenyl propionic acid; C ₁₅ branched and linear alkyl 3,5-bis(1,1-dimethylethyl)-4-hydroxybenzenepropanoate; C ₁₃ branched and linear alkyl 3,5-bis(1,1-dimethylethyl)-4-hydroxybenzenepropanoate	413-750-2	171090-93-0	R53	R: 53 S: 61		
607-385-00-X	Copolymer of vinyl-alcohol and vinyl acetate partially acetylated with 4-(2-(4-formylphenyl)ethenyl)-1-methylpyridinium methylsulfate	414-590-6	125229-74-5	N; R51-53	N R: 51/53 S: 61		
607-386-00-5	reaction mass of: tetradecanoic acid (42.5-47.5 %); poly(1-7)lactate esters of tetradecanoic acid (52.5-57.5 %)	412-580-6	174591-51-6	Xi; R38-41 R43 N; R50-53	Xi; N R: 38-41-43-50/53 S: (2-)24-26-37/39-60-61		
607-387-00-0	reaction mass of: dodecanoic acid (35-40 %); poly(1-7)lactate esters of dodecanoic acid (60-65 %)	412-590-0	58856-63-6	Xi; R38-41 R43 N; R50-53	Xi; N R: 38-41-43-50/53 S: (2-)24-26-37/39-60-61		
607-388-00-6	4-ethylamino-3-nitrobenzoic acid	412-090-2	2788-74-1	Xn; R22 R43 R52-53	Xn R: 22-43-52/53 S: (2-)22-24-37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-389-00-1	trisodium N,N-bis(carboxymethyl)-3-amino-2-hydroxypropionate	414-130-4	119710-96-2	Xn; R22	Xn R: 22 S: (2-)22		
607-390-00-7	1,2,3,4-tetrahydro-6-nitro-quinoxaline	414-270-6	41959-35-7	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)22-61		
607-391-00-2	dimethylcyclopropane-1,1-dicarboxylate	414-240-2	6914-71-2	R52-53	R: 52/53 S: 61		
607-392-00-8	2-phenoxyethyl 4-((5-cyano-1,6-dihydro-2-hydroxy-1,4-dimethyl-6-oxo-3-pyridinyl)azo)benzoate	414-260-1	88938-37-8	R53	R: 53 S: 61		
607-393-00-3	3-(cis-1-propenyl)-7-amino-8-oxo-5-thia-1-azabicyclo[4.2.0]oct-2-ene-2-carboxylic acid	415-750-8	106447-44-3	R43	Xi R: 43 S: (2-)22-24-37		
607-394-00-9	5-methylpyrazine-2-carboxylic acid	413-260-9	5521-55-1	Xi; R41	Xi R: 41 S: (2-)26-39		
607-395-00-4	reaction mass of: sodium 1-tridecyl-4-allyl-(2 or 3)-sulfobutanedioate; sodium 1-dodecyl-4-allyl-(2 or 3)-sulfobutanedioate	410-230-7	—	C; R34 R43 N; R51-53	C; N R: 34-43-51/53 S: (1/2-)26-36/37/39-45-61		
607-396-00-X	bis(1,2,2,6,6-pentamethyl-4-piperidinyl) 2-(4-methoxybenzylidene)malonate	414-840-4	147783-69-5	N; R50-53	N R: 50/53 S: 22-60-61		
607-397-00-5	reaction mass of: Ca salicylates (branched C ₁₀₋₁₄ and C ₁₈₋₃₀ alkylated); Ca phenates (branched C ₁₀₋₁₄ and C ₁₈₋₃₀ alkylated); Ca sulfurized phenates (branched C ₁₀₋₁₄ and C ₁₈₋₃₀ alkylated)	415-930-6	—	R43	Xi R: 43 S: (2-)36/37		
607-398-00-0	ethyl N-(5-chloro-3-(4-(diethylamino)-2-methylphenylimino)-4-methyl-6-oxo-1,4-cyclohexadienyl)carbamate	414-820-5	125630-94-6	N; R50-53	N R: 50/53 S: 60-61		
607-399-00-6	2,2-dimethyl 3-methyl-3-butenyl propanoate	415-610-6	104468-21-5	Xi; R38 R52-53	Xi R: 38-52/53 S: (2-)37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-400-00-X	methyl 3-[[[(dibutylamino)thioxomethyl]thio]propanoate	414-400-1	32750-89-3	N; R50-53	N R: 50/53 S: 60-61		
607-401-00-5	ethyl 3-hydroxy-5-oxo-3-cyclohexene-1-carboxylate	414-450-4	88805-65-6	Xi; R38-41 R43	Xi R: 38-41-43 S: (2-)24-26-37/39		
607-402-00-0	methyl N-(phenoxy-carbonyl)-L-valinate	414-500-5	153441-77-1	R52-53	R: 52/53 S: 61		
607-403-00-6	reaction mass of: bis(1S,2S,4S)-(1-benzyl-4-tert-butoxycarbonyl-2-hydroxy-5-phenyl)pentylammonium succinate; isopropyl alcohol	414-810-0	—	Xn; R48/22 Xi; R41 N; R50-53	Xn; N R: 41-48/22-50/53 S: (2-)22-26-36/39-60-61		
607-404-00-1	reaction mass of: ((Z)-3,7-dimethyl-2,6-octadienyl)oxycarbonylpropanoic acid; di-((E)-3,7-dimethyl-2,6-octadienyl) butandioate; di-((Z)-3,7-dimethyl-2,6-octadienyl) butandioate; (Z)-3,7-dimethyl-2,6-octadienyl butandioate; ((E)-3,7-dimethyl-2,6-octadienyl)oxycarbonylpropanoic acid	415-190-4	—	R43	Xi R: 43 S: (2-)24-37		
607-405-00-7	2-hexyldecyl-p-hydroxybenzoate	415-380-7	148348-12-3	N; R51-53	N R: 51/53 S: 61		
607-406-00-2	potassium 2,5-dichlorobenzoate	415-700-5	184637-62-5	Xn; R22 Xi; R41	Xn R: 22-41 S: (2-)26-39		
607-407-00-8	ethyl 2-carboxy-3-(2-thienyl)propionate	415-680-8	143468-96-6	Xi; R38-41 R43	Xi R: 38-41-43 S: (2-)24-26-37/39		
607-408-00-3	potassium N-(4-fluorophenyl)glycinate	415-710-1	184637-63-6	Xn; R48/22 Xi; R41 R43 R52-53	Xn R: 41-43-48/22-52/53 S: (2-)22-26-36/37/39-61		
607-409-00-9	reaction mass of: (3R)-[1S-(1α, 2α, 6β-((2S)-2-methyl-1-oxo-butoxy)-8α)]hexahydro-2,6-dimethyl-1-naphthalene]-3,5-dihydroxyheptanoic acid; inert biomass from <i>Aspergillus terreus</i>	415-840-7	—	R43 R52-53	Xi R: 43-52/53 S: (2-)36/37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-410-00-4	mono[2-(dimethylamino)ethyl]monohydrogen-2-(hexadec-2-enyl)butanedioate and/or mono[2-(dimethylamino)ethyl]monohydrogen-3-(hexadec-2-enyl)butanedioate	415-880-5	779343-34-9	Xi; R38-41 R43 N; R50-53	Xi; N R: 38-41-43-50/53 S: (2-)24-26-37/39-60-61		
607-411-00-X	oxiranemethanol, 4-methylbenzene-sulfonate, (S)-	417-210-7	70987-78-9	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xi; R41 R43 N; R51-53	T; N R: 45-41-43-68-51/ 53 S: 53-45-61		
607-412-00-5	ethyl 2-(1-cyanocyclohexyl)acetate	415-970-4	133481-10-4	Xn; R22-48/ 22 R52-53	Xn R: 22-48/22-52/53 S: (2-)36/37-61		
607-413-00-0	trans-4-phenyl-L-proline	416-020-1	96314-26-0	Repr. Cat. 3; R62 R43	Xn R: 43-62 S: (2-)22-36/37		
607-414-00-6	tris(2-ethylhexyl)-4,4',4''-(1,3,5-triazine-2,4,6-triyltriimino)tri-benzoate	402-070-1	88122-99-0	R53	R: 53 S: 61		
607-415-00-1	poly-(methyl methacrylate)-co-(butylmethacrylate)-co-(4-acryloxybutyl-isopropenyl- α,α -dimethylbenzyl carbamate)-co-(maleicanhydride)	419-590-1	—	F; R11 R43	F; Xi R: 11-43 S: (2-)24-37-43		
607-416-00-7	4-(2-carboxymethylthio)ethoxy-1-hydroxy-5-isobutyloxycarbonylamino-N-(3-dodecyloxypropyl)-2-naphthamide	420-730-7	—	N; R50-53	N R: 50/53 S: 60-61		
607-418-00-8	2-ethylhexyl 4-aminobenzoate	420-170-3	26218-04-2	N; R50-53	N R: 50/53 S: 60-61		
607-419-00-3	(3'-carboxymethyl-5-(2-(3-ethyl-3H-benzothiazol-2-ylidene)-1-methyl-ethylidene)-4,4'-dioxo-2'-thioxo-(2,5')bithiazolidinyliden-3-yl)-acetic acid	422-240-9	166596-68-5	Xi; R41 R43	Xi R: 41-43 S: (2-)26-36/37/39		
607-420-00-9	2,2-bis(hydroxymethyl)butanoic acid	424-090-1	10097-02-6	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-421-00-4	cypermethrin <i>cis/trans</i> +/- 40/60; (RS)- α -cyano-3-phenoxybenzyl (1RS,3RS;1RS,3SR)-3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate	257-842-9	52315-07-8	Xn; R20/22 Xi; R37 N; R50-53	Xn; N R: 20/22-37-50/53 S: (2-)24-36/37/39-60-61		
607-422-00-X	α -cypermethrin	257-842-9	67375-30-8	T; R25 Xn; R48/22 Xi; R37 N; R50-53	T; N R: 25-37-48/22-50/53 S: (2-)36/37/39-45-60-61		
607-423-00-5	esters of mecoprop and of mecoprop-P	—	—	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)13-36/37-60-61		A
607-424-00-0	trifloxystrobin (ISO); (E,E)- α -methoxyimino-[2-[[[1-[3-(trifluoromethyl)phenyl]ethylidene]amino]oxy]methyl]benzeneacetic acid methyl ester	—	141517-21-7	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-46-60-61		
607-425-00-6	metalaxyl (ISO); methyl-N-(2,6-dimethylphenyl)-N-(methoxyacetyl)-DL-alanine	260-979-7	57837-19-1	Xn; R22 R43 R52-53	Xn R: 22-43-52/53 S: (2-)13-24-37-46-61		
607-426-00-1	1,2-benzenedicarboxylic acid, dipentylester, branched and linear; [1] n-pentyl-isopentylphthalate; [2] di-n-pentyl phthalate; [3] diisopentylphthalate [4]	284-032-2 [1] - [2] - 205-017-9 [3] - 210-088-4 [4]	84777-06-0 [1] - [2] - 131-18-0 [3] - 605-50-5 [4]	Repr. Cat. 2; R60-61 N; R50	T; N R: 60-61-50 S: 53-45-61		
607-427-00-7	bromoxynil heptanoate (ISO); 2,6-dibromo-4-cyanophenyl heptanoate	260-300-4	56634-95-8	Repr. Cat. 3; R63 Xn; R20/22 R43 N; R50-53	Xn; N R: 20/22-43-63-50/53 S: (2-)36/37-46-60-61		
607-430-00-3	BBP; benzyl butyl phthalate	201-622-7	85-68-7	Repr. Cat. 2; R61 Repr. Cat. 3; R62 N; R50-53	T; N R: 61-62-50/53 S: 53-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-431-00-9	prallethrin (ISO); ETOC; 2-methyl-4-oxo-3-(prop-2-ynyl)cyclopent-2-en-1-yl 2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate	245-387-9	23031-36-9	T; R23 Xn; R22 N; R50-53	T; N R: 22-23-50/53 S: (1/2-)45-60-61		
607-432-00-4	S-metolachlor; reaction mass of (S)-2-chloro-N-(2-ethyl-6-methyl-phenyl)-N-(2-methoxy-1-methyl-ethyl)-acetamide (80-100 %); [1] (R)-2-chloro-N-(2-ethyl-6-methyl-phenyl)-N-(2-methoxy-1-methyl-ethyl)-acetamide (0-20 %) [2]	- [1] - [2]	87392-12-9 [1] 178961-20-1 [2]	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
607-433-00-X	cypermethrin <i>cis/trans</i> +/- 80/20; (RS)- α -cyano-3-phenoxybenzyl (1RS; 3RS; 1RS, 3SR)-3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate	257-842-9	52315-07-8	Xn; R22 Xi; R37/38 R43 N; R50-53	Xn; N R: 22-37/38-43-50/ 53 S: (2-)36/37/39-60-61		
607-434-00-5	mecoprop-P [1] and its salts; (R)-2-(4-chloro-2-methylphenoxy)propionic acid	240-539-0	16484-77-8	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)13-26-37/39-46-61		
607-435-00-0	2S-isopropyl-5R-methyl-1R-cyclohexyl 2,2-dihydroxyacetate	416-810-6	111969-64-3	Xn; R48/22 Xi; R41 N; R51-53	Xn; N R: 41-48/22-51/53 S: (2-)22-26-36/39-61		
607-436-00-6	2-hydroxy-3-(2-ethyl-4-methylimidazol)propyl neodecanoate	417-350-9	—	Xi; R38-41 N; R50-53	Xi; N R: 38-41-50/53 S: (2-)26-28-37/39-60-61		
607-437-00-1	3-(4-aminophenyl)-2-cyano-2-propenoic acid	417-480-6	252977-62-1	R43	Xi R: 43 S: (2-)22-24-37		
607-438-00-7	methyl-2-[(aminosulfonyl)methyl]benzoate	419-010-5	112941-26-1	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)22-26		
607-439-00-2	methyl tetrahydro-2-furancarboxylate	420-670-1	37443-42-8	Xi; R41	Xi R: 41 S: (2-)26-39		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-440-00-8	methyl 2-aminosulfonyl-6-(trifluoromethyl)pyridine-3-carboxylate	421-220-7	144740-59-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-61		
607-441-00-3	3-[3-(2-dodecyloxy-5-methylphenylcarbonyl)-4-hydroxy-1-naphthylthio]propionic acid	421-490-6	167684-63-1	R53	R: 53 S: 57-61		
607-442-00-9	benzyl [hydroxy-(4-phenylbutyl)phosphinyl] acetate	416-050-5	87460-09-1	Xi; R41	Xi R: 41 S: (2-)26-36/39		
607-443-00-4	bis(2,4-di- <i>tert</i> -butyl-6-methylphenyl)ethyl phosphate	416-140-4	145650-60-8	R53	R: 53 S: 61		
607-444-00-X	reaction mass of: <i>cis</i> -1,4-dimethylcyclohexyl dibenzoate; <i>trans</i> -1,4-dimethylcyclohexyl dibenzoate	416-230-3	35541-81-2	R53	R: 53 S: 61		
607-445-00-5	Iron (III) tris(4-methylbenzenesulfonate)	420-960-8	77214-82-5	Xi; R41	Xi R: 41 S: (2-)24-26-39		
607-446-00-0	methyl 2-[4-(2-chloro-4-nitrophenylazo)-3-(1-oxopropyl)amino]phenylaminopropionate	416-240-8	155522-12-6	R43 R53	Xi R: 43-53 S: (2-)22-24-37-61		
607-447-00-6	sodium 4-[4-(4-hydroxyphenylazo)phenylamino]-3-nitrobenzenesulfonate	416-370-5	156738-27-1	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
607-448-00-1	2,3,5,6-tetrafluorobenzoic acid	416-800-1	652-18-6	Xi; R38-41	Xi R: 38-41 S: (2-)22-26-37/39		
607-449-00-7	reaction mass of: 4,4',4''-[(2,4,6-trioxo-1,3,5-(2 <i>H</i> ,4 <i>H</i> ,6 <i>H</i>)-triazine-1,3,5-triyl)tris[methylene(3,5,5-trimethyl-3,1-cyclohexanediyl)iminocarbonyloxy-2,1-ethanediyl(ethyl)amino]]trisbenzenediazoniumtri[bis(2-methylpropyl)naphthalenesulfonate]; 4,4',4'',4'''-[[5,5'-[carbonylbis(imino(1,5,5-trimethyl-3,1-cyclohexanediyl)methylene)]-2,4,6-trioxo-1,3,5-(2 <i>H</i> ,4 <i>H</i> ,6 <i>H</i>)-triazine-1,1',3,3'-tetrayl]tetrakis[methylene(3,5,5-trimethyl-3,1-cyclohexanediyl)iminocarbonyloxy-2,1-ethanediyl(ethyl)amino]]tetrakisbenzenediazoniumtetra[bis(2-methylpropyl)naphthalenesulfonate]	417-080-1	—	E; R2 R43 N; R50-53	E; Xi; N R: 2-43-50/53 S: (2-)24-37-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-450-00-2	2-mercaptobenzothiazolyl-(Z)-(2-aminothiazol-4-yl)-2-(tert-butoxycarbonyl) isopropoxyiminoacetate	419-040-9	89604-92-2	R53	R: 53 S: 61		
607-451-00-8	4-[4-amino-5-hydroxy-3-(4-(2-sulfoxyethylsulfonyl)phenylazo)-2,7-disulfonapht-6-ylazo]-6-[3-(4-amino-5-hydroxy-3-(4-(2-sulfoxyethylsulfonyl)phenylazo)-2,7-disulfonapht-6-ylazo)phenylcarbonylamino]benzenesulfonic acid, sodium salt	417-640-5	161935-19-9	Xi; R41 R43	Xi R: 41-43 S: (2-)22-24-26-37/39		
607-453-00-9	4-benzyl-2,6-dihydroxy-4-aza-heptylene bis(2,2-dimethyloctanoate)	418-100-1	172964-15-7	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
607-454-00-4	reaction mass of: <i>trans</i> -2-(1-methylethyl)-1,3-dioxane-5-carboxylic acid; <i>cis</i> -2-(1-methylethyl)-1,3-dioxane-5-carboxylic acid	418-170-3	116193-72-7	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)25-26-39-61		
607-455-00-X	1-amino-4-(3-[4-chloro-6-(2,5-di-sulfophenylamino)-1,3,5-triazin-2-ylamino]-2,2-dimethyl-propylamino)-anthraquinone-2-sulfonic acid, sodium/lithiumsalt	419-520-8	172890-93-6	R43	Xi R: 43 S: (2-)22-24-37		
607-456-00-5	3-amino-4-chlorobenzoic acid, hexadecyl ester	419-700-6	143269-74-3	N; R51-53	N R: 51/53 S: 61		
607-457-00-0	tetrasodium dihydrogen 1,1"-dihydroxy-8,8"-[p-phenylbis(imino-{6-[4-(2-aminoethyl)piperazin-1-yl]}-1,3,5-triazine-4,2-diyl-imino)]bis(2,2'-azonaphthalene-1',3,6-trisulfonate)	420-350-1	172277-97-3	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
607-458-00-6	reaction mass of: 2-ethyl-[2,6-dibromo-4-[1-[3,5-dibromo-4-(2-hydroxyethoxy)phenyl]-1-methylethyl]phenoxy]propenoate; 2,2'-diethyl-[4,4'-bis(2,6-dibromophenoxy)-1-methylethyldene] dipropenoate; 2,2'-[(1-methylethyldene)bis[[2,6-dibromo-4,1-phenylene)oxy]ethanol]]	420-850-1	—	N; R51-53	N R: 51/53 S: 61		
607-459-00-1	isopentyl 4-{2-[5-cyano-1,2,3,6-tetrahydro-1-(2-isopropoxyethoxy-carbonylmethyl)-4-methyl-2,6-dioxo-3-pyridylidene]hydrazino}benzoate	418-930-4	—	R53	R: 53 S: 61		
607-460-00-7	3-tridecyloxy-propyl-ammonium 9-octadecenoate	418-990-1	778577-53-0	Xn; R48/22 Xi; R36/38 N; R50-53	Xn; N R: 36/38-48/22-50/53 S: (2-)23-26-37/39-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-461-00-2	reaction mass of: pentasodium 2-{4-[3-methyl-4-[6-sulfonato-4-(2-sulfonato-phenylazo)-naphthalen-1-ylazo]-phenylamino]-6-[3-(2-sulfato-ethanesulfonyl)-phenylamino]-1,3,5-triazin-2-ylamino]-benzene-1,4-disulfonate; pentasodium 2-{4-[3-methyl-4-[7-sulfonato-4-(2-sulfonato-phenylazo)-naphthalen-1-ylazo]-phenylamino]-6-[3-(2-sulfato-ethanesulfonyl)-phenylamino]-1,3,5-triazin-2-ylamino]-benzene-1,4-disulfonate	421-160-1	—	R52-53	R: 52/53 S: 61		
607-462-00-8	reaction mass of: 1-hexyl acetate; 2-methyl-1-pentyl acetate; 3-methyl-1-pentyl acetate; 4-methyl-1-pentyl acetate; other mixed linear and branched C ₆ -alkyl acetates	421-230-1	88230-35-7	N; R51-53	N R: 51/53 S: 61		
607-463-00-3	3-(phenothiazin-10-yl)propionic acid	421-260-5	362-03-8	N; R51-53	N R: 51/53 S: 24/25-61		
607-464-00-9	reaction mass of: 7-chloro-1-ethyl-6-fluoro-1,4-dihydro-4-oxo-quinoline-3-carboxylic acid; 5-chloro-1-ethyl-6-fluoro-1,4-dihydro-4-oxo-quinoline-3-carboxylic acid	421-280-4		R52-53	R: 52/53 S: 61		
607-465-00-4	tris(2-hydroxyethyl)ammonium 7-{4-[4-(2-cyanoamino-4-hydroxy-6-oxidopyrimidin-5-ylazo)benzamido]-2-ethoxy-phenylazo}naphthalene-1,3-disulfonate	421-440-3	778583-04-3	R52-53	R: 52/53 S: 61		
607-466-00-X	reaction mass of: phenyl 1-(1-[2-chloro-5-(hexadecyloxycarbonyl)phenylcarbamoyl]-3,3-dimethyl-2-oxobutyl)-1H-2,3,3a,7a-tetrahydrobenzotriazole-5-carboxylate; phenyl 2-(1-(2-chloro-5-(hexadecyloxycarbonyl)phenylcarbamoyl)-3,3-dimethyl-2-oxobutyl)-1H-2,3,3a,7a-tetrahydrobenzotriazole-5-carboxylate; phenyl 3-(1-(2-chloro-5-(hexadecyloxycarbonyl)phenylcarbamoyl)-3,3-dimethyl-2-oxobutyl)-1H-2,3,3a,7a-tetrahydrobenzotriazole-5-carboxylate	421-480-1	—	N; R51-53	N R: 51/53 S: 37/39-61		
607-467-00-5	1,1,3,3-tetrabutyl-1,3-ditinoxidicaprlyate	419-430-9	56533-00-7	Xn; R21/22-48/22 C; R34 N; R50-53	C; N R: 21/22-34-48/22-50/53 S: (1/2-)26-36/37/39-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-468-00-0	reaction mass of: monosodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate; disodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate; trisodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate; tetrasodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate	419-450-8	—	R43	Xi R: 43 S: (2-)22-24-37		
607-469-00-6	disodium 7-((4,6-bis(3-diethylaminopropylamino)-1,3,5-triazine-2-yl)amino)-4-hydroxy-3-(4-(4-sulfonatophenylazo)phenylazo)-2-naphthalene sulfonate	419-460-2	120029-06-3	R52-53	R: 52/53 S: 61		
607-470-00-1	potassium sodium 6,13-dichloro-3,10-bis{2-[4-[3-(2-hydroxysulphonyloxyethanesulfonyl)phenylamino]-6-(2,5-disulfonatophenylamino)-1,3,5-triazin-2-ylamino]ethylamino}benzo[5,6][1,4]oxazino[2,3-b]phenoxazine-4,11-disulfonate	414-100-0	154336-20-6	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)39-22-26-61		
607-472-00-2	ammonium iron(III) trimethylenediaminetetraacetate hemihydrate	400-660-3	111687-36-6	N; R51-53	N R: 51/53 S: 61		
607-474-00-3	(4-(4-(4-dimethylaminobenzyliden-1-yl)-3-methyl-5-oxo-2-pyrazolin-1-yl)benzoic acid	410-430-4	117573-89-4	R53	R: 53 S: 61		
607-475-00-9	reaction mass of: tetrasodium 7-(4-[4-chloro-6-[methyl-(3-sulfonatophenyl)amino]-1,3,5-triazin-2-ylamino]-2-ureidophenylazo)naphthalene-1,3,6-trisulfonate; tetrasodium 7-(4-[4-chloro-6-[methyl-(4-sulfonatophenyl)amino]-1,3,5-triazin-2-ylamino]-2-ureidophenylazo)naphthalene-1,3,6-trisulfonate (1:1)	412-940-2	148878-18-6	R43	Xi R: 43 S: (2-)22-24-37		
607-476-00-4	trisodium N,N-bis(carboxymethyl)-β-alanine	414-070-9	129050-62-0	C; R34 R52-53	C R: 34-52/53 S: (1/2-)26-36/37/39-45-61		
607-478-00-5	tetramethylammonium hydrogen phthalate	416-900-5	79723-02-7	T; R25 Xn; R48/22 N; R50	T; N R: 25-48/22-50 S: (1/2-)25-36-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-479-00-0	hexadecyl 4-chloro-3-[2-(5,5-dimethyl-2,4-dioxo-1,3-oxazolidin-3-yl)-4,4-dimethyl-3-oxopentamido]benzoate	418-550-9	168689-49-4	R53	R: 53 S: 61		
607-480-00-6	1,2-benzenedicarboxylic acid; di-C ₇₋₁₁ -branched and linear alkylesters	271-084-6	68515-42-4	Repr. Cat. 2; R61 Repr. Cat. 3; R62	T R: 61-62 S: 53-45		
607-487-00-4	reaction mass of: disodium 4-(3-ethoxycarbonyl-4-(5-(3-ethoxycarbonyl-5-hydroxy-1-(4-sulfonatophenyl)pyrazol-4-yl)penta-2,4-dienylidene)-4,5-dihydro-5-oxopyrazol-1-yl)benzenesulfonate; trisodium 4-(3-ethoxycarbonyl-4-(5-(3-ethoxycarbonyl-5-oxido-1-(4-sulfonatophenyl)pyrazol-4-yl)penta-2,4-dienylidene)-4,5-dihydro-5-oxopyrazol-1-yl)benzenesulfonate	402-660-9	—	Repr. Cat. 2; R61 R52-53	T R: 61-52/53 S: 53-45-61		
607-488-00-X	ethyl (2-acetylamino-5-fluoro-4-isothiocyanatophenoxy)acetate	414-210-9	147379-38-2	N; R50-53	N R: 50/53 S: 60-61		
607-489-00-5	reaction mass of: 2-ethylhexyl linolenate, linoleate and oleate; 2-ethylhexyl epoxyoleate; 2-ethylhexyl diepoxylinoleate; 2-ethylhexyl triepoxylinolenate	414-890-7	71302-79-9	R43	Xi R: 43 S: (2-)24-37		
607-490-00-0	N-[2-hydroxy-3-(C ₁₂₋₁₆ -alkyloxy)propyl]-N-methyl glycinate	415-060-7	—	Xi; R41 R43	Xi R: 41-43 S: (2-)24-26-37/39		
607-492-00-1	2-(1-(3',3'-dimethyl-1'-cyclohexyl)ethoxy)-2-methyl propyl propanoate	415-490-5	141773-73-1	N; R51-53	N R: 51/53 S: 61		
607-493-00-7	methyl (3aR,4R,7aR)-2-methyl-4-(1S,2R,3-triacetoxypropyl)-3a,7a-dihydro-4H-pyrano[3,4-d]oxazole-6-carboxylate	415-670-3	78850-37-0	Xi; R41	Xi R: 41 S: (2-)26-39		
607-494-00-2	bis(2-ethylhexyl)octylphosphonate	417-170-0	52894-02-7	N; R50-53	N R: 50/53 S: 60-61		
607-495-00-8	sodium 4-sulfophenyl-6-((1-oxononyl)amino)hexanoate	417-550-6	168151-92-6	R43	Xi R: 43 S: (2-)24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-496-00-3	2,2'-methylenebis(4,6-di- <i>tert</i> -butyl-phenyl)-2-ethylhexyl phosphite	418-310-3	126050-54-2	R53	R: 53 S: 61		
607-497-00-9	cerium oxide isostearate	419-760-3	—	R53	R: 53 S: 61		
607-498-00-4	(E)-3,7-dimethyl-2,6-octadienylhexadecanoate	421-370-3	3681-73-0	Xi; R38 R53	Xi R: 38-53 S: (2-)37-61		
607-499-00-X	bis(dimethyl-(2-hydroxyethyl)ammonium) 1,2-ethanediyl-bis(2-hexadecenylsuccinate)	421-660-1	—	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)24-26-37/39-61		
607-500-00-3	calcium 2,2,bis[(5-tetrapropylene-2-hydroxy)phenyl]ethanoate	421-670-4	—	Xi; R38 N; R50-53	Xi; N R: 38-50/53 S: (2-)37-60-61		
607-501-00-9	reaction mass of: triphenylthiophosphate and tertiary butylated phenyl derivatives	421-820-9	192268-65-8	R53	R: 53 S: 61		
607-502-00-4	(N-benzyl-N,N,N-tributyl)ammonium 4-dodecylbenzenesulfonate	422-200-0	178277-55-9	C; R34 Xn; R22 N; R51-53	C; N R: 22-34-51/53 S: (1/2-)26-36/37/39-45-61		
607-503-00-X	2,4,6-tri- <i>n</i> -propyl-2,4,6-trioxo-1,3,5,2,4,6-trioxatriphosphorinane	422-210-5	68957-94-8	C; R34	C R: 34 S: (1/2-)26-36/37/39-45		
607-505-00-0	pentasodium 7-(4-(4-(5-amino-4-sulfonato-2-(4-((2-(sulfonato-ethoxy)sulfonyl)phenylazo)phenylamino)-6-chloro-1,3,5-triazin-2-yl)amino-2-ureidophenylazo)naphthalene-1,3,6-trisulfonate	422-930-1		R52-53	R: 52/53 S: 22-61		
607-506-00-6	reaction mass of: strontium (4-chloro-2-((4,5-dihydro-3-methyl-5-oxo-1-(3-sulfonatophenyl)-1 <i>H</i> -pyrazol-4-yl)azo)-5-methyl)benzenesulfonate; disodium (4-chloro-2-((4,5-dihydro-3-methyl-5-oxo-1-(3-sulfonatophenyl)-1 <i>H</i> -pyrazol-4-yl)azo)-5-methyl)benzenesulfonate	422-970-8		N; R51-53	N R: 51/53 S: 22-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-507-00-1	potassium,sodium 2,4-diamino-3-[4-(2-sulfonatoethoxysulfonyl)phenylazo]-5-[4-(2-sulfonatoethoxysulfonyl)-2-sulfonato-phenylazo]-benzenesulfonate	422-980-2	187026-95-5	Xi; R41	Xi R: 41 S: (2-)22-26-39		
607-508-00-7	disodium 3,3'-[iminobis(sulfonyl-4,1-phenylene-(5-hydroxy-3-methylpyrazole-1,4-diyl)azo-4,1-phenylenesulfonylimino-(4-amino-6-hydroxypyrimidine-2,5-diyl)azo-4,1-phenylene-sulfonylimino(4-amino-6-hydroxypyrimidine-2,5-diyl)azo]bis(benzenesulfonate)]	423-110-4	—	Xi; R41	Xi R: 41 S: (2-)22-26-39		
607-512-00-9	trisodium 2,4-diamino-3,5-bis-[4-(2-sulfonatoethoxy)sulfonyl]phenylazo]benzenesulfonate	423-970-0	182926-43-8	R52-53	R: 52/53 S: 22-61		
607-513-00-4	reaction mass of: Trisodium 4-benzoylamino-6-(6-ethenesulfonyl-1-sulfato-naphthalen-2-ylazo)-5-hydroxynaphthalene-2,7-disulfonate; 5-(benzoylamino)-4-hydroxy-3-((1-sulfo-6-((2-(sulfooxy)ethyl)sulfonyl)-2-naphthyl)azo)naphthalene-2,7-disulfonic acid sodium salt; 5-(benzoylamino)-4-hydroxy-3-((1-sulfo-6-((2-(sulfooxy)ethyl)sulfonyl)-2-naphthyl)azo)naphthalene-2,7-disulfonic acid	423-200-3	—	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)22-26-36/37/39-61		
607-515-00-5	reaction mass of: disodium hexyldiphenyl ether disulphonate; disodium dihexyldiphenyl ether disulphonate	429-650-7	147732-60-3	Xi; R36 N; R51-53	Xi; N R: 36-51/53 S: (2-)26-61		
607-516-00-0	N,N'-bis(trifluoroacetyl)-S,S'-bis-L-homocysteine	429-670-6	105996-54-1	Xi; R41 R43	Xi R: 41-43 S: (2-)24-26-37/39		
607-517-00-6	(S)-α-(acetylthio)benzenepropanoic acid	430-300-0	76932-17-7	Xn; R22 Xi; R41 R43	Xn R: 22-41-43 S: (2-)22-26-36/37/39		
607-526-00-5	cartap (ISO); 1,3-bis(carbamoylthio)-2-(dimethylamino)propane	—	15263-53-3	N; R50-53	N R: 50/53 S: 60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
607-527-00-0	reaction mass of: 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1''H,1''H,2''H,2''H-tridecafluorooctyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1''H,1''H,2''H,2''H-heptdecafluorodecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1''H,1''H,2''H,2''H-heneicosafuorododecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1''H,1''H,2''H,2''H-pentacosafuorotetradecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-heptadecafluorodecyl)-12-(1''H,1''H,2''H,2''H-heptadecafluorodecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-heptadecafluorodecyl)-12-(1''H,1''H,2''H,2''H-heneicosafuorododecyl)dodecanedioate	423-180-6	—	Xn; R48/22	Xn R: 48/22 S: (2-)36		
608-001-00-3	acetonitrile; cyanomethane	200-835-2	75-05-8	F; R11 Xn; R20/21/ 22 Xi; R36	F; Xn R: 11-20/21/22-36 S: (2-)16-36/37		
608-002-00-9	trichloroacetonitrile	208-885-7	545-06-2	T; R23/24/25 N; R51-53	T; N R: 23/24/25-51/53 S: (1/2-)45-61		
608-003-00-4	acrylonitrile	203-466-5	107-13-1	F; R11 Carc. Cat. 2; R45 T; R23/24/25 Xi; R37/38- 41 R43 N; R51-53	F; T; N R: 45-11-23/24/25- 37/38-41-43-51/53 S: - 53-45-61	T; R23/24/25: C ≥ 1 % Xn; R20/21/22: 0,2 % ≤ C < 1 %	D E
608-004-00-X	2-hydroxy-2-methylpropionitrile; 2-cyanopropan-2-ol; acetone cyanohydrin	200-909-4	75-86-5	T+; R26/27/ 28 N; R50-53	T+; N R: 26/27/28-50/53 S: (1/2-)7/9-27-45- 60-61		
608-005-00-5	n-butyronitrile	203-700-6	109-74-0	R10 ⊗ T; R23/24/25	T R: 10-23/24/25 S: (1/2-)45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
608-006-00-0	bromoxynil (ISO) 3,5-dibromo-4-hydroxybenzonitrile; bromoxynil phenol	216-882-7	1689-84-5	Repr. Cat. 3; R63 T+; R26 T; R25 R43 N; R50-53	T+; N R: 25-26-43-63-50/ 53 S: (1/2-)27/28-36/37- 45-63-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
608-007-00-6	ioxynil (ISO) 4-hydroxy-3,5-diiodobenzonitrile	216-881-1	1689-83-4	Repr. Cat. 3; R63 T; R23/25 Xn; R21-48/ 22 Xi; R36 N; R50-53	T; N R: 21-23/25-36-48/ 22-63-50/53 S: (1/2-)36/37-45-60- 61-63	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
608-008-00-1	chloroacetonitrile	203-467-0	107-14-2	T; R23/24/25 N; R51-53	T; N R: 23/24/25-51/53 S: (1/2-)45-61		
608-009-00-7	malononitrile	203-703-2	109-77-3	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)23-27-45-60- 61		
608-010-00-2	methacrylonitrile; 2-methyl-2-propene nitrile	204-817-5	126-98-7	F; R11 T; R23/24/25 R43	F; T R: 11-23/24/25-43 S: (1/2-)9-16-18-29- 45	T; R23/24/25: C ≥ 1 % Xn; R20/21/22: 0,2 % ≤ C < 1 % R43: C ≥ 0,2 %	D
608-011-00-8	oxalonitrile; cyanogen	207-306-5	460-19-5	F; R11 ⊗ T; R23 N; R50-53	F; T; N R: 11-23-50/53 S: (1/2-)23-45-60-61		
608-012-00-3	benzonitrile	202-855-7	100-47-0	Xn; R21/22	Xn R: 21/22 S: (2-)23		
608-013-00-9	2-chlorobenzonitrile	212-836-5	873-32-5	Xn; R21/22 Xi; R36	Xn R: 21/22-36 S: (2-)23		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
608-014-00-4	chlorothalonil (ISO); tetrachloroisophthalonitrile	217-588-1	1897-45-6	Carc. Cat. 3; R40 T+; R26 Xi; R41 Xi; R37 R43 N; R50-53	T+; N R: 26-37-40-41-43-50/53 S: (2-)28-36/37/39-45-60-61	N; R50-53: C $\geq$ 2,5 % N; R51-53: 0,25 % $\leq$ C < 2,5 % R52-53: 0,025 % $\leq$ C < 0,25 %	
608-015-00-X	dichlobenil (ISO); 2,6-dichlorobenzonitrile	214-787-5	1194-65-6	Xn; R21 N; R51-53	Xn; N R: 21-51/53 S: (2-)36/37-61		
608-016-00-5	1,4-Dicyano-2,3,5,6-tetra-chloro-benzene	401-550-8	1897-41-2	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
608-017-00-0	bromoxynil octanoate (ISO); 2,6-dibromo-4-cyanophenyl octanoate	216-885-3	1689-99-2	Repr. Cat. 3; R63 T; R23 Xn; R22 R43 N; R50-53	T; N R: 22-23-43-63-50/53 S: (1/2-)36/37-45-63-60-61	N; R50-53: C $\geq$ 2,5 % N; R51-53: 0,25 % $\leq$ C < 2,5 % R52-53: 0,025 % $\leq$ C < 0,25 %	
608-018-00-6	ioxynil octanoate (ISO); 4-cyano-2,6-diiodophenyl octanoate	223-375-4	3861-47-0	Repr. Cat. 3; R63 T; R25 Xi; R36 R43 N; R50-53	T; N R: 25-36-43-63-50/53 S: (1/2-)26-36/37-45-60-61	N; R50-53: C $\geq$ 2,5 % N; R51-53: 0,25 % $\leq$ C < 2,5 % R52-53: 0,025 % $\leq$ C < 0,25 %	
608-019-00-1	2,2'-dimethyl-2,2'-azodipropionitrile; ADZN	201-132-3	78-67-1	E; R2 F; R11 Xn; R20/22 R52-53	E; Xn R: 2-11-20/22-52/53 S: (2-)39-41-47-61		
608-021-00-2	3-(2-(diaminomethyleneamino)thiazol-4-ylmethylthio)propionitrile	403-710-2	76823-93-3	Xn; R22 R43	Xn R: 22-43 S: (2-)22-24-37		
608-022-00-8	3,7-dimethyloctanenitrile	403-620-3	40188-41-8	Xi; R38 R43 N; R51-53	Xi; N R: 38-43-51/53 S: (2-)36/37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
608-023-00-3	fenbuconazole (ISO) 4-(4-chlorophenyl)-2-phenyl-2-[(1 <i>H</i> -1,2,4-triazol-1-yl)methyl]butanenitrile	406-140-2	114369-43-6	N; R50-53	N R: 50/53 S: 60-61		
608-024-00-9	2-(4-(<i>N</i> -butyl- <i>N</i> -phenethylamino)phenyl)ethylene-1,1,2-tricarbonitrile	407-650-8	97460-76-9	R53	R: 53 S: 61		
608-025-00-4	2-nitro-4,5-bis(benzyloxy)phenylacetonitrile	410-970-0	117568-27-1	R53	R: 53 S: 61		
608-026-00-X	3-cyano-3,5,5-trimethylcyclohexanone	411-490-4	7027-11-4	Xn; R22-48/22 R43 R52-53	Xn R: 22-43-48/22-52/53 S: (2-)36/37-61		
608-027-00-5	reaction mass of: 3-(4-ethylphenyl)-2,2-dimethylpropanenitrile; 3-(2-ethylphenyl)-2,2-dimethylpropanenitrile; 3-(3-ethylphenyl)-2,2-dimethylpropanenitrile	412-660-0	—	N; R51-53	N R: 51/53 S: 61		
608-028-00-0	4-(2-cyano-3-phenylamino-acryloyloxymethyl)-cyclohexylmethyl 2-cyano-3-phenylamino)-acrylate	413-510-7	147374-67-2	Xn; R48/20/21 R43 N; R51-53	Xn; N R: 43-48/20/21-51/53 S: (2-)36/37-61		
608-029-00-6	1,2-dihydro-6-hydroxy-4-methyl-1-[3-(1-methylethoxy)propyl]-2-oxo-3-pyridinecarbonitrile	411-990-2	68612-94-2	R43	Xi R: 43 S: (2-)24-37		
608-030-00-1	<i>N</i> -acetyl- <i>N</i> -[5-cyano-3-(2-dibutylamino-4-phenylthiazol-5-yl-methylene)-4-methyl-2,6-dioxo-1,2,3,6-tetrahydropyridin-1-yl]benzamide	412-340-0	147741-93-3	N; R50-53	N R: 50/53 S: 60-61		
608-031-00-7	2-benzyl-2-methyl-3-butenitrile	407-870-4	97384-48-0	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
608-033-00-8	<i>N</i> -butyl-3-(2-chloro-4-nitrophenylhydrazono)-1-cyano-2-methylprop-1-ene-1,3-dicarboximide	407-970-8	75511-91-0	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
608-034-00-3	chlorfenapyr; 4-bromo-2-(4-chlorophenyl)-1-ethoxymethyl-5-trifluoromethylpyrrole-3-carbonitrile	—	122453-73-0	T; R23 Xn; R22 N; R50-53	T; N R: 22-23-50/53 S: (1/2-)13-36/37-45-60-61		
608-035-00-9	(±)-α-[(2-acetyl-5-methylphenyl)-amino]-2,6-dichlorobenzene-aceto-nitrile	419-290-9	—	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
608-036-00-4	3-(2-{4-[2-(4-cyanophenyl)vinyl]phenyl}vinyl)benzonitrile	419-060-8	79026-02-1	R53	R: 53 S: 61		
608-037-00-X	reaction mass of: (E)-2,12-tridecadiennitrile; (E)-3,12-tridecadiennitrile; (Z)-3,12-tridecadiennitrile	422-190-8		N; R50-53	N R: 50/53 S: 60-61		
608-038-00-5	2,2,4-trimethyl-4-phenyl-butane-nitrile	422-580-8	75490-39-0	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
608-039-00-0	2-phenylhexanenitrile	423-460-8	3508-98-3	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)23-60-61		
608-040-00-6	4,4'-dithiobis(5-amino-1-(2,6-dichloro-4-(trifluoromethyl)phenyl)-1H-pyrazole-3-carbonitrile)	423-490-1	130755-46-3	N; R50-53	N R: 50/53 S: 60-61		
608-041-00-1	4'-((2-butyl-4-oxo-1,3-diazaspiro[4.4]non-1-ene-3-yl)methyl)(1,1'-biphenyl)-2-carbonitrile	423-500-4	138401-24-8	N; R50-53	N R: 50/53 S: 60-61		
608-043-00-2	3-(cis-3-hexenyloxy)propanenitril	415-220-6	142653-61-0	T; R23 Xn; R22 N; R50-53	T; N R: 22-23-50/53 S: (1/2-)13-36/37-45-60-61		
608-065-00-2	salts of bromoxynil with the exception of those specified elsewhere in this Annex	—	—	Repr. Cat. 3; R63 T+; R26 T; R25 R43 N; R50-53	T+; N R: 25-26-43-50/53 S: (1/2-)27/28-36/37-45-63-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
608-066-00-8	salts of ioxynil with the exception of those specified elsewhere in this Annex	—	—	Repr. Cat. 3; R63 T; R23/25 Xn; R21-48/22 Xi; R36 N; R50-53	T; N R: 21-23/25-36-48/ 22-63-50/53 S: (1/2-)36/37-45-63- 60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	A
609-001-00-6	1-nitropropane	203-544-9	108-03-2	R10 Xn; R20/21/ 22	Xn R: 10-20/21/22 S: (2-)9	Xn; R20/21/22: C ≥ 5 %	
609-002-00-1	2-nitropropane	201-209-1	79-46-9	R10 Carc. Cat. 2; R45 Xn; R20/22	T R: 45-10-20/22 S: 53-45		E
609-003-00-7	nitrobenzene	202-716-0	98-95-3	Carc. Cat. 3; R40 Repr. Cat. 3; R62 T; R23/24/ 25-48/23/24 N; R51-53	T; N R: 23/24/25-40-48/ 23/24-51/53-62 S: (1/2-)28-36/37-45- 61		
609-004-00-2	dinitrobenzene; [1] 1,4-dinitrobenzene; [2] 1,3-dinitrobenzene; [3] 1,2-dinitrobenzene [4]	246-673-6 [1] 202-833-7 [2] 202-776-8 [3] 208-431-8 [4]	25154-54-5 [1] 100-25-4 [2] 99-65-0 [3] 528-29-0 [4]	T+; R26/27/ 28 R33 N; R50-53	T+; N R: 26/27/28-33-50/ 53 S: (1/2-)28-36/37-45- 60-61		
609-005-00-8	1,3,5-trinitrobenzene	202-752-7	99-35-4	E; R2 ⊗ T+; R26/27/ 28 R33 N; R50-53	E; T+; N R: 2-26/27/28-33-50/ 53 S: (1/2-)35-45-60-61		
609-006-00-3	4-nitrotoluene	202-808-0	99-99-0	T; R23/24/25 R33 N; R51-53	T; N R: 23/24/25-33-51/ 53 S: (1/2-)28-37-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
609-007-00-9	2,4-dinitrotoluene; dinitrotoluene, technical grade; [1] dinitrotoluene [2]	204-450-0 [1] 246-836-1 [2]	121-14-2 [1] 25321-14-6 [2]	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62 T; R23/24/25 Xn; R48/22 N; R51-53	T; N R: 45-23/24/25-48/ 22-62-68-51/53 S: 53-45-61		E
609-008-00-4	2,4,6-trinitrotoluene; TNT	204-289-6	118-96-7	E; R2 T; R23/24/25 R33 N; R51-53	E; T; N R: 2-23/24/25-33-51/ 53 S: (1/2-)35-45-61		
609-009-00-X	2,4,6-trinitrophenol; picric acid	201-865-9	88-89-1	E; R2 ⊗ R4 T; R23/24/25	E; T R: 2-4-23/24/25 S: (1/2-)28-35-37-45		
609-010-00-5	salts of picric acid	—	—	E; R3 T; R23/24/25	E; T R: 3-23/24/25 S: (1/2-)28-35-37-45		A
609-011-00-0	2,4,6-trinitroanisole	—	606-35-9	E; R2 Xn; R20/21/ 22 N; R51-53	E; Xn; N R: 2-20/21/22-51/53 S: (2-)35-61		
609-012-00-6	2,4,6-trinitro- <i>m</i> -cresol	210-027-1	602-99-3	E; R2 R4 Xn; R20/21/ 22	E; Xn R: 2-4-20/21/22 S: (2-)35		
609-013-00-1	2,4,6-trinitro- <i>m</i> -xylene	211-187-5	632-92-8	E; R2 Xn; R20/21/ 22 R33	E; Xn R: 2-20/21/22-33 S: (2-)35		
609-015-00-2	4-nitrophenol; <i>p</i> -nitrophenol	202-811-7	100-02-7	Xn; R20/21/ 22 R33	Xn R: 20/21/22-33 S: (2-)28		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
609-016-00-8	dinitrophenol (reaction mass of isomers); [1] 2,4(or 2,6)-dinitrophenol [2]	247-096-2 [1] 275-732-9 [2]	25550-58-7 [1] 71629-74-8 [2]	T; R23/24/25 R33 N; R50-53	T; N R: 23/24/25-33-50/ 53 S: (1/2-)28-37-45-60- 61		
609-018-00-9	2,4,6-trinitroresorcinol; styphnic acid	201-436-6	82-71-3	E; R2 ⊗ R4 Xn; R20/21/ 22	E; Xn R: 2-4-20/21/22 S: (2-)35		
609-019-00-4	lead 2,4,6-trinitro- <i>m</i> -phenylene dioxide; lead 2,4,6-trinitroresorcinoxide; lead styphnate	239-290-0	15245-44-0	E; R3 Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R20/22 R33 N; R50-53	E; T; N R: 61-3-20/22-33-50/ 53-62 S: 53-45-60-61		E 1
609-020-00-X	DNOC (ISO); 4,6-dinitro- <i>o</i> -cresol	208-601-1	534-52-1	Muta. Cat. 3; R68 T+; R26/27/ 28 Xi; R38-41 R43 R44 N; R50-53	T+; N R: 26/27/28-38-41- 43-44-50/53-68 S: (1/2-)36/37-45-60- 61		
609-021-00-5	sodium salt of DNOC; sodium 4,6-dinitro- <i>o</i> -cresolate; [1] potassium salt of DNOC; potassium 4,6-dinitro- <i>o</i> -cresolate [2]	219-007-7 [1] - [2]	2312-76-7 [1] 5787-96-2 [2]	T; R23/24/25 R33 N; R50-53	T; N R: 23/24/25-33-50/ 53 S: (1/2-)13-45-60-61		
609-022-00-0	ammonium salt of DNOC; ammonium 4,6-dinitro- <i>o</i> -tolyl oxide	221-037-0	2980-64-5	T+; R26/27/ 28 R33 N; R50-53	T+; N R: 26/27/28-33-50/ 53 S: (1/2-)13-28-45-60- 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
609-023-00-6	dinocap (ISO)	254-408-0	39300-45-3	Repr. Cat. 2; R61 Xn; R20-48/ 22 Xi; R38 R43 N; R50-53	T; N R: 61-20-22-38-43- 48/22-50/53 S: 53-45-60-61		E
609-024-00-1	binapacryl (ISO); 2-sec-butyl-4,6-dinitrophenyl-3-methylcrotonate	207-612-9	485-31-4	Repr. Cat. 2; R61 Xn; R21/22 N; R50-53	T; N R: 61-21/22-50/53 S: 53-45-60-61		E
609-025-00-7	dinoseb (ISO); 6-sec-butyl-2,4-dinitrophenol	201-861-7	88-85-7	R44 T; R24/25 Repr. Cat. 2; R61 Repr. Cat. 3; R62 Xi; R36 N; R50-53	T; N R: 61-62-24/25-36- 44-50/53 S: 53-45-60-61		E
609-026-00-2	salts and esters of dinoseb, with the exception of those specified elsewhere in this Annex	—	—	R44 Repr. Cat. 2; R61 Repr. Cat. 3; R62 T; R24/25 Xi; R36 N; R50-53	T; N R: 61-62-24/25-36- 44-50/53 S: 53-45-60-61		AE
609-027-00-8	dinocton; reaction mass of isomers: methyl 2-octyl-4,6-dinitrophenyl carbonate, methyl 4-octyl-2,6-dinitrophenyl carbonate	—	63919-26-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
609-028-00-3	dinex (ISO); 2-cyclohexyl-4,6-dinitrophenol	205-042-5	131-89-5	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)13-45-60-61		
609-029-00-9	salts and esters of dinex	—	—	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)13-45-60-61		A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
609-030-00-4	dinoterb (ISO); 2- <i>tert</i> -butyl-4,6-dinitrophenol	215-813-8	1420-07-1	Repr. Cat. 2; R61 T+; R28 T; R24 R44 N; R50-53	T+; N R: 61-24-28-44-50/ 53 S: 53-45-60-61		E
609-031-00-X	salts and esters of dinoterb	—	—	Repr. Cat. 2; R61 T+; R28 T; R24 N; R50-53	T+; N R: 61-24-28-50/53 S: 45-53-60-61		AE
609-032-00-5	bromofenoxim (ISO); 3,5-dibromo-4-hydroxybenzaldehyde-O-(2,4-dinitrophenyl)- oxime	236-129-6	13181-17-4	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)25-60-61		
609-033-00-0	dinosam (ISO); 2-(1-methylbutyl)-4,6-dinitrophenol	—	4097-36-3	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)13-45-60-61		
609-034-00-6	salts and esters of dinosam	—	—	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)13-45-60-61		A
609-035-00-1	nitroethane	201-188-9	79-24-3	R10 Xn; R20/22	Xn R: 10-20/22 S: (2-)9-25-41	Xn; R20/22: C ≥ 12,5 %	
609-036-00-7	nitromethane	200-876-6	75-52-5	R5-10 Xn; R22	Xn R: 5-10-22 S: (2-)41	Xn; R22: C ≥ 12,5 %	
609-037-00-2	5-nitroacenaphthene	210-025-0	602-87-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		
609-038-00-8	2-nitronaphthalene	209-474-5	581-89-5	Carc. Cat. 2; R45 N; R51-53	T; N R: 45-51/53 S: 53-45-61		
609-039-00-3	4-nitrobiphenyl	202-204-7	92-93-3	Carc. Cat. 2; R45 N; R51-53	T; N R: 45-51/53 S: 53-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
609-040-00-9	nitrofen (ISO); 2,4-dichlorophenyl 4-nitrophenyl ether	217-406-0	1836-75-5	Carc. Cat. 2; R45 Repr. Cat. 2; R61 Xn; R22 N; R50-53	T; N R: 45-61-22-50/53 S: 53-45-60-61		E
609-041-00-4	2,4-dinitrophenol	200-087-7	51-28-5	T; R23/24/25 R33 N; R50	T; N R: 23/24/25-33-50 S: (1/2-)28-37-45-61		
609-042-00-X	pendimethalin (ISO); N-(1-ethylpropyl)-2,6-dinitro-3,4-xyldine	254-938-2	40487-42-1	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-29-37-60-61		
609-043-00-5	quintozene (ISO); pentachloronitrobenzene	201-435-0	82-68-8	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)13-24-37-60-61		
609-044-00-0	tecnazene (ISO); 1,2,4,5-tetrachloro-3-nitrobenzene	204-178-2	117-18-0	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
609-045-00-6	reaction mass of: 4,6-dinitro-2-(3-octyl)phenyl methyl carbonate and 4,6-dinitro-2-(4-octyl)phenyl methyl carbonate; dinocron-6	—	8069-76-9	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
609-046-00-1	trifluralin (ISO) (containing < 0.5 ppm NPDA); α,α,α-trifluoro-2,6-dinitro-N,N-dipropyl-p-toluidine (containing < 0.5 ppm NPDA); 2,6-dinitro-N,N-dipropyl-4-trifluoromethylaniline (containing < 0.5 ppm NPDA); N,N-dipropyl-2,6-dinitro-4-trifluoromethylaniline (containing < 0.5 ppm NPDA)	216-428-8	1582-09-8	Xi; R36 R43 N; R50-53	Xi; N R: 36-43-50/53 S: (2-)24-37-60-61		
609-047-00-7	2-nitroanisole	202-052-1	91-23-6	Carc. Cat. 2; R45 Xn; R22	T R: 45-22 S: 53-45		E
609-048-00-2	sodium 3-nitrobenzenesulphonate	204-857-3	127-68-4	Xi; R36 R43	Xi R: 36-43 S: (2-)24-26-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
609-049-00-8	2,6-dinitrotoluene	210-106-0	606-20-2	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62 T; R23/24/25 Xn; R48/22 R52-53	T R: 45-23/24/25-48/ 22-62-68-52/53 S: 53-45-61		E
609-050-00-3	2,3-dinitrotoluene	210-013-5	602-01-7	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62 T; R23/24/25 Xn; R48/22 N; R50-53	T; N R: 45-23/24/25-48/ 22-62-68-50/53 S: 53-45-60-61		E
609-051-00-9	3,4-dinitrotoluene	210-222-1	610-39-9	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62 T; R23/24/25 Xn; R48/22 N; R51-53	T; N R: 45-23/24/25-48/ 22-62-68-51/53 S: 53-45-61		E
609-052-00-4	3,5-dinitrotoluene	210-566-2	618-85-9	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62 T; R23/24/25 Xn; R48/22 R52-53	T R: 45-23/24/25-48/ 22-62-68-52/53 S: 53-45-61		E
609-053-00-X	hydrazine-trinitromethane	414-850-9	—	E; R3 O; R8 Carc. Cat. 2; R45 T; R23/25 R43	E; T R: 45-3-8-23/25-43 S: 53-45		E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
609-054-00-5	2,3-dinitrophenol; [1] 2,5-dinitrophenol; [2] 2,6-dinitrophenol; [3] 3,4-dinitrophenol; [4] salts of dinitrophenol [5]	200-628-7 [1] 206-348-1 [2] 209-357-9 [3] 209-415-3 [4] - [5]	66-56-8 [1] 329-71-5 [2] 573-56-8 [3] 577-71-9 [4] - [5]	T; R23/24/25 R33 N; R51-53	T; N R: 23/24/25-33-51 S: (1/2-)28-37-45-61		
609-055-00-0	2,5-dinitrotoluene	210-581-4	619-15-8	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62 T; R23/24/25 Xn; R48/22 N; R51-53	T; N R: 45-23/24/25-48/ 22-62-68-51/53 S: 53-45-61		E
609-056-00-6	2,2-dibromo-2-nitroethanol	412-380-9	69094-18-4	E; R2 Carc. Cat. 3; R40 Xn; R22-48/ 22 C; R35 R43 N; R50-53	E; C; N R: 2-22-35-40-43-48/ 22-50/53 S: (1/2-)23-26-36/37/ 39-45-60-61	Xn; R22: C $\geq$ 10 % C; R35: C $\geq$ 10 % C; R34: 5 % $\leq$ C < 10 % Xi; R36/37/38: 1 % $\leq$ C < 5 %	
609-057-00-1	3-chloro-2,4-difluoronitrobenzene	411-980-8	3847-58-3	Xn; R22 C; R34 R43 N; R50-53	C; N R: 22-34-43-50/53 S: (1/2-)22-26-28-36/ 37/39-45-60-61		
609-058-00-7	2-nitro-2-phenyl-1,3-propanediol	410-360-4	5428-02-4	T; R39-48/25 Xn; R21/22 Xi; R41 R43 N; R51-53	T; N R: 21/22-39-41-43- 48/25-51/53 S: 53-45-61		
609-059-00-2	2-chloro-6-(ethylamino)-4-nitrophenol	411-440-1	131657-78-8	Xn; R22 R43 N; R51-53	Xn; N R: 22-43-51/53 S: (2-)22-24-37/39-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
609-060-00-8	4-[(3-hydroxypropyl)amino]-3-nitrophenol	406-305-9	92952-81-3	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
609-061-00-3	(E,Z)-4-chlorophenyl(cyclopropyl)ketone O-(4-nitrophenyl-methyl)oxime	406-100-4	94097-88-8	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
609-062-00-9	2-bromo-2-nitropropanol	407-030-7	24403-04-1	T; R24 Xn; R22-48/ 22 C; R34 R43 N; R50-53	T; N R: 22-24-34-43-48/ 22-50/53 S: (1/2-)26-36/37/39- 45-60-61		
609-063-00-4	2-[(4-chloro-2-nitrophenyl)amino]ethanol	413-280-8	59320-13-7	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)22-61		
609-064-00-X	mesotrione (ISO); 2-[4-(methylsulfonyl)-2-nitrobenzoyl]-1,3-cyclohexanedione	—	104206-82-8	N; R50-53	N R: 50/53 S: 60-61		
609-065-00-5	2-nitrotoluene	201-853-3	88-72-2	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 3; R62 Xn; R22 N; R51-53	T; N R: 45-46-22-62-51/ 53 S: 53-45-61		E
609-066-00-0	lithium sodium 3-amino-10-{4-(10-amino-6,13-dichloro-4,11-disulfonatobenzo[5,6][1,4]oxazino[2,3-b]phenoxazine-3-ylamino)-6-[methyl(2-sulfonato-ethyl)amino]-1,3,5-triazin-2-ylamino}-6,13-dichlorobenzo[5,6][1,4]oxazino[2,3-b]phenoxazine-4,11-disulfonate	418-870-9	154212-58-5	Xn; R20/21/ 22-68/20/ 21/22	Xn R: 20/21/22-68/20/ 21/22 S: (2-)36/37		
609-067-00-6	sodium and potassium 4-(3-aminopropylamino)-2,6-bis[3-(4-methoxy-2-sulfo-phenylazo)-4-hydroxy-2-sulfo-7-naphthylamino]-1,3,5-triazine	416-280-6	156769-97-0	R43	Xi R: 43 S: (2-)22-24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
609-068-00-1	musk xylene; 5- <i>tert</i> -butyl-2,4,6-trinitro- <i>m</i> -xylene	201-329-4	81-15-2	E; R2 Carc. Cat. 3; R40 N; R50-53	E; Xn; N R: 2-40-50/53 S: (2-)36/37-46-60-61		
609-070-00-2	1,4-dichloro-2-(1,1,2,3,3,3-hexafluoropropoxy)-5-nitrobenzene	415-580-4	130841-23-5	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)36/37/39-60-61		
609-071-00-8	reaction mass of: 2-methylsulfanyl-4,6-bis-(2-hydroxy-4-methoxy-phenyl)-1,3,5-triazine; 2-(4,6-bis-methylsulfanyl-1,3,5-triazin-2-yl)-5-methoxy-phenol	423-520-3	156137-33-6	R43	Xi R: 43 S: (2-)22-24-37		
610-001-00-3	trichloronitromethane; chloropicrin	200-930-9	76-06-2	Xn; R22 T+; R26 Xi; R36/37/38	T+ R: 22-26-36/37/38 S: (1/2-)36/37-38-45		
610-002-00-9	1,1-dichloro-1-nitroethane	209-854-0	594-72-9	T; R23/24/25	T R: 23/24/25 S: (1/2-)26-45		
610-003-00-4	chlorodinitrobenzene	—	—	T; R23/24/25 R33 N; R50-53	T; N R: 23/24/25-33-50/53 S: (1/2-)28-36/37-45-60-61		C
610-004-00-X	2-chloro-1,3,5-trinitrobenzene	201-864-3	88-88-0	E; R2 T+; R26/27/28 N; R50-53	E; T+; N R: 2-26/27/28-50/53 S: (1/2-)28-36/37-45-60-61		
610-005-00-5	1-chloro-4-nitrobenzene	202-809-6	100-00-5	Carc. Cat. 3; R40 Muta. Cat. 3; R68 T; R23/24/25 Xn; R48/20/21/22 N; R51-53	T; N R: 23/24/25-40-48/20/21/22-68-51/53 S: (1/2-)28-36/37-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
610-006-00-0	chloronitroanilines with the exception of those specified elsewhere in this Annex	—	—	T+; R26/27/28 R33 N; R51-53	T+; N R: 26/27/28-33-51/53 S: (1/2-)28-36/37-45-61		A C
610-007-00-6	1-chloro-1-nitropropane	209-990-0	600-25-9	Xn; R20/22	Xn R: 20/22 S: (2-)	Xn; R20/22: C ≥ 5 %	
610-008-00-1	2,6-dichloro-4-nitroanisole	403-350-6	17742-69-7	T; R25 N; R51-53	T; N R: 25-51/53 S: (1/2-)36/37-45-61		
610-009-00-7	2-chloro-4-nitroaniline	204-502-2	121-87-9	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)22-24-61		
610-010-00-2	2-bromo-1-(2-furyl)-2-nitroethylene	406-110-9	35950-52-8	Xn; R22-48/22 C; R34 R43 N; R50-53	C; N R: 22-34-43-48/22-50/53 S: (1/2-)22-26-36/37/39-45-60-61		
611-001-00-6	azobenzene	203-102-5	103-33-3	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xn; R20/22-48/22 N; R50-53	T; N R: 45-20/22-48/22-68-50/53 S: 53-45-60-61		E
611-002-00-1	azoxybenzene	207-802-1	495-48-7	Xn; R20/22	Xn R: 20/22 S: (2-)28		
611-003-00-7	fenaminosulf (ISO); sodium 4-dimethylaminobenzenediazosulphonate	205-419-4	140-56-7	T; R25 Xn; R21 R52-53	T R: 21-25-52/53 S: (1/2-)36/37-45-61		
611-004-00-2	methyl-ONN-azoxymethyl acetate; methyl azoxy methyl acetate	209-765-7	592-62-1	Carc. Cat. 2; R45 Repr. Cat. 2; R61	T R: 45-61 S: 53-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-005-00-8	disodium {5-[(4'-((2,6-hydroxy-3-((2-hydroxy-5-sulphophenyl)azo)phenyl)azo)(1,1'-biphenyl)-4-yl)azo]salicylato(4-)} cuprate(2-); CI Direct Brown 95	240-221-1	16071-86-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		
611-006-00-3	4- <i>o</i> -tolylazo- <i>o</i> -toluidine; 4-amino-2',3-dimethylazobenzene; fast garnet GBC base; AAT; <i>o</i> -aminoazotoluene	202-591-2	97-56-3	Carc. Cat. 2; R45 R43	T R: 45-43 S: 53-45		
611-007-00-9	tricyclazole (ISO); 5-methyl-1,2,4-triazolo(3,4- <i>b</i>)benzo-1,3-thiazole	255-559-5	41814-78-2	Xn; R22	Xn R: 22 S: (2-)		
611-008-00-4	4-aminoazobenzene; 4-phenylazoaniline	200-453-6	60-09-3	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61		
611-009-00-X	sodium (1-(5-(4-(4-anilino-3-sulphophenylazo)-2-methyl-5-methylsulphonamidophenylazo)-4-hydroxy-2-oxido-3-(phenylazo)phenylazo)-5-nitro-4-sulphonato-2-naphtholato)iron (II)	401-220-3	—	Xn; R20 R52-53	Xn R: 20-52/53 S: (2-)61		
611-010-00-5	2'-(2-cyano-4,6-dinitrophenylazo)-5'-(<i>N,N</i> -dipropylamino) propionanilide	403-010-7	106359-94-8	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
611-011-00-0	<i>N,N,N',N'</i> -tetramethyl-3,3'-(propylenebis(iminocarbonyl-4,1-phenylenazo(1,6-dihydro-2-hydroxy-4-methyl-6-oxopyridine-3,1-diyl)))di(propylammonium) dilactate	403-340-1	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
611-012-00-6	reaction mass of 2,2-iminodiethanol 6-methyl-2-(4-(2,4,6-triaminopyrimidin-5-ylazo)phenyl)benzothiazole-7-sulfonate and 2-methylaminoethanol 6-methyl-2-(4-(2,4,6-triaminopyrimidin-5-ylazo)phenyl)benzothiazole-7-sulfonate and <i>N,N</i> -diethylpropane-1,3-diamine 6-methyl-2-(4-(2,4,6-triaminopyrimidin-5-ylazo)phenyl)benzothiazole-7-sulfonate	403-410-1	114565-65-0	R43	Xi R: 43 S: (2-)22-24-26-37		
611-013-00-1	trilithium-1-hydroxy-7-(3-sulfonatoanilino)-2-(3-methyl-4-(2-methoxy-4-(3-sulfonatophenylazo)phenylazo)phenylazo)naphthalene-3-sulfonate	403-650-7	117409-78-6	E; R2 N; R51-53	E; N R: 2-51/53 S: (2-)35-61		
611-014-00-7	(tetrasodium 1-(4-(3-acetamido-4-(4'-nitro-2,2'-disulfonato-stilben-4-ylazo)anilino)-6-(2,5-disulfonatoanilino)-1,3,5-triazin-2-yl)-3-carboxypyridinium) hydroxide	404-250-5	115099-55-3	R43	Xi R: 43 S: (2-)22-24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-015-00-2	tetrasodium 4-amino-5-hydroxy-6-(4-(2-(2-sulfonatooxy)ethylsulfonyl)ethylcarbamoyl)phenylazo)-3-(4-(2-(sulfonatooxy)ethylsulfonyl)phenylazo)naphthalene-2,7-disulfonate	404-320-5	116889-78-2	R43	Xi R: 43 S: (2-)22-24-37		
611-016-00-8	reaction mass of 1,1'-((dihydroxyphenylene)bis(azo-3,1-phenylenazo(1-(3-dimethylaminopropyl)-1,2-dihydro-6-hydroxy-4-methyl-2-oxopyridine-5,3-diyl)))dipyridinium dichloride dihydrochloride, mixed isomers and 1-(1-(3-dimethylamino-propyl)-5-(3-((4-(1-(3-dimethylaminopropyl)-1,6-dihydro-2-hydroxy-4-methyl-6-oxo-5-pyridinio-3-pyridylazo)phenylazo)-2,4(or2,6 or3,5)-dihydroxyphenylazo)phenylazo)-1,2-dihydro-6-hydroxy-4-methyl-2-oxo-3-pyridyl)pyridinium dichloride	404-540-1	—	R43	Xi R: 43 S: (2-)22-24-37		
611-017-00-3	2-(4-(diethylaminopropylcarbamoyl)phenylazo)-3-oxo-N-(2,3-dihydro-2-oxobenzimidazol-5-yl)butyramide	404-910-2	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
611-018-00-9	tetraammonium 5-(4-(7-amino-1-hydroxy-3-sulfonato-2-naphthylazo)-6-sulfonato-1-naphthylazo)isophthalate	405-130-5	—	R43	Xi R: 43 S: (2-)24-37		
611-019-00-4	tetralithium 6-amino-4-hydroxy-3-(7-sulfonato-4-(4-sulfonatophenylazo)-1-naphthylazo)naphthalene-2,7-disulfonate	405-150-4	106028-58-4	R43	Xi R: 43 S: (2-)24-37		
611-020-00-X	tetrakis(tetramethylammonium) 6-amino-4-hydroxy-3-(7-sulfonato-4-(4-sulfonatophenylazo)-1-naphthylazo)naphthalene-2,7-disulfonate	405-170-3	116340-05-7	T; R25 R43 R52-53	T R: 25-43-52/53 S: (1/2-)22-24-37-45-61		
611-021-00-5	2-(4-(4-cyano-3-methylisothiazol-5-ylazo)-N-ethyl-3-methylanilino)ethyl acetate	405-480-9	—	Xn; R22-48/22 Xi; R38 R53	Xn R: 22-38-48/22-53 S: (2-)22-36/37-61		
611-022-00-0	4-dimethylaminobenzenediazonium 3-carboxy-4-hydroxy-benzenesulfonate	404-980-4	—	E; R2 T; R23/25 Xn; R21-48/22 Xi; R41 R43 N; R50/53	E; T; N R: 2-21-23/25-41-43-48/22-50/53 S: (1/2-)3-12-26-35-36/37/39-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-023-00-6	disodium 7-(4,6-dichloro-1,3,5-triazin-2-ylamino)-4-hydroxy-3-(4-(2-(sulfonyloxy)ethylsulfonyl)phenylazo) naphthalene-2-sulfonate	404-600-7	—	R43	X R: 43 S: (2-)22-24-37		
611-024-00-1	Benzidine based azo dyes; 4,4'-diarylazobiphenyl dyes, with the exception of those specified elsewhere in this Annex	—	—	Carc. Cat. 2; R45	T R: 45 S: 53-45		A
611-025-00-7	disodium 4-amino-3-[[4'-[(2,4-diaminophenyl)azo][1,1'-biphenyl]-4-yl]azo]-5-hydroxy-6-(phenylazo)naphthalene-2,7-disulphonate; C.I. Direct Black 38	217-710-3	1937-37-7	Carc. Cat. 2; R45 Repr. Cat. 3; R63	T R: 45-63 S: 53-45		
611-026-00-2	tetrasodium 3,3'-[[1,1'-biphenyl]-4,4'-diylbis(azo)]bis[5-amino-4-hydroxynaphthalene-2,7-disulphonate]; C.I. Direct Blue 6	220-012-1	2602-46-2	Carc. Cat. 2; R45 Repr. Cat. 3; R63	T R: 45-63 S: 53-45		
611-027-00-8	disodium 3,3'-[[1,1'-biphenyl]-4,4'-diylbis(azo)]bis(4-amino-naphthalene-1-sulphonate); C.I. Direct Red 28	209-358-4	573-58-0	Carc. Cat. 2; R45 Repr. Cat. 3; R63	T R: 45-63 S: 53-45		
611-028-00-3	C,C'-azodi(formamide)	204-650-8	123-77-3	R42 R44 ☒	Xn R: 42-44 S: (2-)22-24-37		
611-029-00-9	o-dianisidine based azo dyes; 4,4'-diarylazo-3,3'-dimethoxybiphenyl dyes with the exception of those mentioned elsewhere in this Annex	—	—	Carc. Cat. 2; R45	T R: 45 S: 53-45		A H
611-030-00-4	o-tolidine based dyes; 4,4'-diarylazo-3,3'-dimethylbiphenyl dyes, with the exception of those mentioned elsewhere in this Annex	—	—	Carc. Cat. 2; R45	T R: 45 S: 53-45		A H
611-031-00-X	4,4'-(4-iminocyclohexa-2,5-dienylidenemethylene)dianiline hydrochloride; C.I. Basic Red 9	209-321-2	569-61-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		
611-032-00-5	1,4,5,8-tetraaminoanthraquinone; C.I. Disperse Blue 1	219-603-7	2475-45-8	Carc. Cat. 2; R45 Xi; R38-41 R43	T R: 45-38-41-43 S: 53-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-033-00-0	hexasodium [4,4"-azoxybis(2,2'-disulfonatostilbene-4,4'-diy-lazo)]-bis[5'-sulfonatobenzene-2,2'- diolato-O(2),O(2),N(1)]-copper(II)	400-020-3	82027-60-9	N; R51-53	N R: 51/53 S: 61		
611-034-00-6	N-(5-(bis(2-methoxyethyl)amino)-2-((5-nitro-2,1-benzisothiazol-3-yl)azo)phenylacetamide	402-430-8	105076-77-5	R53	R: 53 S: 61		
611-035-00-1	tetralithium 6-amino-4-hydroxy-3-[7-sulfonato-4-(5-sulfonato-2-naphthylazo)-1-naphthylazo]naphthalene-2,7-disulfonate	403-660-1	107246-80-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
611-036-00-7	2-(4-(5,6(or 6,7)-dichloro-1,3-benzothiazol-2-ylazo)-N-methyl- <i>m</i> -toluidino)ethyl acetate	405-440-0	—	R43	Xi R: 43 S: (2-)22-24-37		
611-037-00-2	3(or 5)-(4-(N-benzyl-N-ethylamino)-2-methylphenylazo)-1,4-dimethyl-1,2,4-triazolium methylsulphate	406-055-0	124584-00-5	Xn; R22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-51/53 S: (2-)22-24-26-37/ 39-61		
611-038-00-8	trisodium 1-hydroxynaphthalene-2-azo-4'(5',5"-dimethylbiphenyl)-4"-azo(4"-phenylsulfonyloxybenzene)- 2',2",4-trisulfonate	406-820-9	—	Xi; R36	Xi R: 36 S: (2-)25-26		
611-039-00-3	7-(((4,6-dichloro-1,3,5-triazin-2-yl)amino)-4-hydroxy-3-(4-((2-sulfoxy)ethyl)sulfonyl)phenylazo)naphthalene-2-sulfonic acid	407-050-6	117715-57-8	R43	Xi R: 43 S: (2-)22-24-37		
611-040-00-9	3-(5-acetylamino-4-(4-[4,6-bis(3-diethylaminopropylamino)-1,3,5-triazin-2-ylamino]phenylazo)-2-(2-methoxyethoxy)phenylazo)-6-amino-4-hydroxy-2-naphthalenesulfonic acid	407-670-7	115099-58-6	N; R50-53	N R: 50/53 S: 60-61		
611-041-00-4	2-[[[4[[4,6-bis[[3-(diethylamino)propyl]amino]-1,3,5-triazine-2-yl]amino]phenyl]azo]-N-(2,3-dihydro-2-oxo-1 <i>H</i> -benzimidazol-5-yl)-3-oxobutanamide	407-680-1	98809-11-1	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)24-26-37/39-61		
611-042-00-X	trisodium 5-amino-3-[5-(2-bromoacryloylamino)-2-sulfonatophenylazo]-4-hydroxy-6-(4-vinylsulfonylphenylazo)naphthalene-2,7-disulfonate	411-770-6	136213-71-3	R52-53	R: 52/53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-043-00-5	reaction mass of: trisodium N(1')-N(2):N(1''')-N(2'')-η-6-[2-amino-4-(or 6)-hydroxy-(or 4-amino-2-hydroxy)phenylazo]-6''-(1-carbaniloyl-2-hydroxyprop-1-enylazo)-5',5'''-disulfamoyl-3,3''-disulfonatobis(naphthalene-2,1'-azobenzene-1,2'-diolato-O(1),O(2'))-chromate; trisodium N(1')-N(2):N(1''')-N(2'')-η-6,6''-bis(1-carbaniloyl-2-hydroxyprop-1-enylazo)-5',5'''-disulfamoyl-3,3''-disulfonato-bis(naphthalene-2,1'-azobenzene-1,2'-diolato-O(1),O(2'))-chromate; trisodium N(1')-N(2):N(1''')-N(2'')-η-6,6''-bis[2-amino-4-(or 6)-hydroxy-(or 4-amino-2-hydroxy)phenylazo]5',5'''-disulfamoyl-3,3''-disulfonatobis(naphthalene-2,1'-azobenzene-1,2'-diolato-O(1),O(2'))-chromate (2:1:1)	402-850-1	—	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
611-044-00-0	reaction mass of: <i>tert</i> -alkyl(C ₁₂ -C ₁₄)ammonium bis[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]-chromate (1-); <i>tert</i> -alkyl(C ₁₂ -C ₁₄)ammonium bis[1-[(2-hydroxy-4-nitrophenyl)azo]-2-naphthalenolato(2-)]-chromate(1-); <i>tert</i> -alkyl(C ₁₂ -C ₁₄)ammonium bis[1-[[5-(1,1-dimethylpropyl)-2-hydroxy-3-nitrophenyl]azo]-2-naphthalenolato(2-)]-chromate(1-); <i>tert</i> -alkyl(C ₁₂ -C ₁₄)ammonium [[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]-[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]]-chromate(1-); <i>tert</i> -alkyl(C ₁₂ -C ₁₄)ammonium [[1-[[5-(1,1-dimethylpropyl)-2-hydroxy-3-nitrophenyl]azo]-2-naphthalenolato(2-)]-[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]]-chromate(1-); <i>tert</i> -alkyl(C ₁₂ -C ₁₄)ammonium ((1-(4(or 5)-nitro-2-oxidophenylazo)-2-naphtholato)(1-(3-nitro-2-oxido-5-pentylphenylazo)-2-naphtholato))chromate(1-)	403-720-7	117527-94-3	N; R51-53	N R: 51/53 S: 61		
611-045-00-6	2-[4-[N-(4-acetoxybutyl)-N-ethyl]amino-2-methylphenylazo]-3-acetyl-5-nitrothiophene	404-830-8	—	R53	R: 53 S: 61		
611-046-00-1	4,4'-diamino-2-methylazobenzene	407-590-2	43151-99-1	T; R25 Xn; R48/22 R43 N; R50-53	T; N R: 25-43-48/22-50/53 S: (1/2-)22-28-36/37-45-60-61		
611-047-00-7	reaction mass of: 2-[[4-[N-ethyl-N-(2-acetoxyethyl)amino]phenyl]azo]-5,6-dichlorobenzothiazole; 2-[[4-[N-ethyl-N-(2-acetoxyethyl)amino]phenyl]azo]-6,7-dichlorobenzothiazole (1:1)	407-890-3	111381-11-4	R53	R: 53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-048-00-2	reaction mass of: 2-[[4-[bis(2-acetoxyethyl)amino]phenyl]azo]-5,6-dichlorobenzothiazole; 2-[[4-[bis(2-acetoxyethyl)amino]phenyl]azo]-6,7-dichlorobenzothiazole (1:1)	407-900-6	111381-12-5	R53	R: 53 S: 61		
611-049-00-8	reaction mass of 7-[4-(3-diethylaminopropylamino)-6-(3-diethylammoniopropylamino)-1,3,5-triazin-2-ylamino]-4-hydroxy-3-(4-phenylazophenylazo)-naphthalene-2-sulfonate, acetic acid, lactic acid (2:1:1)	408-000-6	118658-98-3	Xn; R48/22 R43 R52-53	Xn R: 43-48/22-52/53 S: (2-)22-36/37-61		
611-051-00-9	2-(4-(N-ethyl-N-(2-hydroxyethyl)amino-2-methylphenyl)azo-6-methoxy-3-methyl-benzothiazolium chloride	411-110-7	136213-74-6	N; R50-53	N R: 50/53 S: 60-61		
611-052-00-4	monosodium aqua-[5-[[[2,4-dihydroxy-5-[(2-hydroxy-3,5-dinitrophenyl)azo]phenyl]azo]-2-naphthalensulfonate], iron complex	400-720-9	—	R52-53	R: 52/53 S: 61		
611-053-00-X	2,2'-azobis[2-methylpropionamide] dihydrochloride	221-070-0	2997-92-4	Xn; R22 R43	Xn R: 22-43 S: (2-)24-37		
611-055-00-0	C.I. Disperse Yellow 3; N-[4-[(2-hydroxy-5-methylphenyl)azo]phenyl]acetamide	220-600-8	2832-40-8	Carc. Cat. 3; R40 R43	Xn R: 40-43 S: (2-)22-36/37-46		
611-056-00-6	C.I. Solvent Yellow 14; 1-phenylazo-2-naphthol	212-668-2	842-07-9	Carc. Cat. 3; R40 Muta. Cat. 3; R68 R43 R53	Xn R: 40-43-53-68 S: (2-)22-36/37-46-61		
611-057-00-1	6-hydroxy-1-(3-isopropoxypropyl)-4-methyl-2-oxo-5-[4-(phenylazo)phenylazo]-1,2-dihydro-3-pyridinecarbonitrile	400-340-3	85136-74-9	Carc. Cat. 2; R45 R53	T R: 45-53 S: 53-45-61		
611-058-00-7	(6-(4-hydroxy-3-(2-methoxyphenylazo)-2-sulfonato-7-naphthylamino)-1,3,5-triazin-2,4-diyl)bis[(amino-1-methylethyl)ammonium] formate	402-060-7	108225-03-2	Carc. Cat. 2; R45 Xi; R41 N; R51-53	T; N R: 45-41-51/53 S: 53-45-61		
611-059-00-2	octasodium 2-(6-(4-chloro-6-(3-(N-methyl-N-(4-chloro-6-(3,5-disulfonato-2-naphthylazo)-1-hydroxy-6-naphthylamino)-1,3,5-triazin-2-yl)aminomethyl)phenylamino)-1,3,5-triazin-2-ylamino)-3,5-disulfonato-1-hydroxy-2-naphthylazo) naphthalene-1,5-disulfonate	412-960-1	148878-21-1	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)22-24-26-37/39-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-060-00-8	reaction mass of: sodium 5-[8-[4-[4-[7-(3,5-dicarboxylatophenylazo)-8-hydroxy-3,6-disulfonatonaphthalen-1-ylamino]-6-hydroxy-1,3,5-triazin-2-yl]-2,5-dimethylpiperazin-1-yl]-6-hydroxy-1,3,5-triazin-2-ylamino]-1-hydroxy-3,6-disulfonatonaphthalen-2-ylazo]-isophthalate; ammonium 5-[8-[4-[4-[7-(3,5-dicarboxylatophenylazo)-8-hydroxy-3,6-disulfonatonaphthalen-1-ylamino]-6-hydroxy-1,3,5-triazin-2-yl]-2,5-dimethylpiperazin-1-yl]-6-hydroxy-1,3,5-triazin-2-ylamino]-1-hydroxy-3,6-disulfonatonaphthalen-2-ylazo]-isophthalate; 5-[8-[4-[4-[7-(3,5-dicarboxylatophenylazo)-8-hydroxy-3,6-disulfonatonaphthalen-1-ylamino]-6-hydroxy-1,3,5-triazin-2-yl]-2,5-dimethylpiperazin-1-yl]-6-hydroxy-1,3,5-triazin-2-ylamino]-1-hydroxy-3,6-disulfonatonaphthalen-2-ylazo]-isophthalic acid	413-180-4	187285-15-0	Xi; R41	Xi R: 41 S: (2-)22-26-39		
611-061-00-3	disodium 5-[5-[4-(5-chloro-2,6-difluoropyrimidin-4-ylamino)benzamido]-2-sulfonatophenylazo]-1-ethyl-6-hydroxy-4-methyl-2-oxo-3-pyridylmethylsulfonate	412-530-3	—	Xi; R41 R43	Xi R: 41-43 S: (2-)22-24-26-37/39		
611-062-00-9	octasodium 2-(8-(4-chloro-6-(3-((4-chloro-6-(3,6-disulfonato-2-(1,5-disulfonatonaphthalen-2-ylazo)-1-hydroxynaphthalen-8-ylamino)-1,3,5-triazin-2-yl)aminomethyl)phenylamino)-1,3,5-triazin-2-ylamino)-3,6-disulfonato-1-hydroxynaphthalen-2-ylazo)naphthalene-1,5-disulfonate	413-550-5	—	Xi; R38-41	Xi R: 38-41 S: (2-)22-26-37/39		
611-063-00-4	trisodium [4'-(8-acetylamino-3,6-disulfonato-2-naphthylazo)-4''-(6-benzoylamino-3-sulfonato-2-naphthylazo)-biphenyl-1,3',3'',1'''-tetraolato-O,O',O'',O''']copper(II)	413-590-3	164058-22-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		
611-064-00-X	4-(3,4-dichlorophenylazo)-2,6-di- <i>sec</i> -butyl-phenol	410-600-8	124719-26-2	Xn; R48/22 Xi; R38 N; R50-53	Xn; N R: 38-48/22-50/53 S: (2-)23-25-36/37-60-61		
611-065-00-5	4-(4-nitrophenylazo)-2,6-di- <i>sec</i> -butyl-phenol	410-610-2	111850-24-9	Xn; R48/22 Xi; R36/38 R43 N; R50-53	Xn; N R: 36/38-43-48/22-50/53 S: (2-)23-26-36/37-60-61		
611-066-00-0	tetrasodium 5-[4-chloro-6-(N-ethyl-anilino)-1,3,5-triazin-2-ylamino]-4-hydroxy-3-(1,5-disulfonatonaphthalen-2-ylazo)-naphthalene-2,7-disulfonate	411-540-5	130201-57-9	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)22-24-26-37/39-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-067-00-6	reaction mass of: bis(tris(2-(2-hydroxy(1-methyl)ethoxy)ethyl) ammonium) 7-anilino-4-hydroxy-3-(2-methoxy-5-methyl-4-(4-sulfonatophenylazo)phenylazo)naphthalene-2-sulfonate; bis(tris(2-(2-hydroxy(2-methyl)ethoxy)ethyl)ammonium) 7-anilino-4-hydroxy-3-(2-methoxy-5-methyl-4-(4-sulfonatophenylazo)phenylazo)naphthalene-2-sulfonate	406-910-8	—	Xn; R22 Xi; R41 R52-53	Xn R: 22-41-52/53 S: (2-)26-36/39-61		
611-068-00-1	tetrasodium 4-amino-3,6-bis(5-[4-chloro-6-(2-hydroxyethylamino)-1,3,5-triazin-2-ylamino]-2-sulfonatophenylazo)-5-hydroxynaphthalene-2,7-disulfonate	400-690-7	85665-98-1	N; R51-53	N R: 51/53 S: 61		
611-069-00-7	N,N-di-[poly(oxyethylene)-co-poly(oxypropylene)]-4-[(3,5-dicyano-4-methyl-2-thienyl)azo]-3-methylaniline	413-380-1	—	N; R51-53	N R: 51/53 S: 61		
611-070-00-2	reaction mass of: disodium (6-(4-anisidino)-3-sulfonato-2-(3,5-dinitro-2-oxidophenylazo)-1-naphtholato)(1-(5-chloro-2-oxidophenylazo)-2-naphtholato)chromate(1-); trisodium bis(5-(4-anisidino)-3-sulfonato-2-(3,5-dinitro-2-oxidophenylazo)-1-naphtholato)chromate(1-)	405-665-4	—	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
611-071-00-8	tris(tetramethylammonium) 5-hydroxy-1-(4-sulphonatophenyl)-4-(4-sulphonatophenylazo)pyrazole-3-carboxylate	406-073-9	131013-81-5	T; R25 R52-53	T R: 25-52/53 S: (1/2-)37-45-61		
611-072-00-3	2,4-bis[2,2'-[2-(N,N-dimethylamino)ethyloxycarbonyl]phenylazo]-1,3-dihydroxybenzene, dihydrochloride	407-010-8	118208-02-9	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)26-39-61		
611-073-00-9	dimethyl 3,3'-(N-(4-(4-bromo-2,6-dicyanophenylazo)-3-hydroxyphenyl)imino)dipropionate	407-310-9	122630-55-1	R53	R: 53 S: 61		
611-074-00-4	reaction mass of: sodium/potassium (3-(4-(5-(5-chloro-2,6-difluoropyrimidin-4-ylamino)-2-methoxy-3-sulfonatophenylazo)-2-oxidophenylazo)-2,5,7-trisulfonato-4-naphtholato) copper(II); sodium/potassium (3-(4-(5-(5-chloro-4,6-difluoropyrimidin-2-ylamino)-2-methoxy-3-sulfonatophenylazo)-2-oxidophenylazo)-2,5,7-trisulfonato-4-naphtholato)copper(II)	407-100-7	—	R43	Xi R: 43 S: (2-)22-24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-075-00-X	reaction mass of: tris(3,5,5-trimethylhexylammonium) 4-amino-3-(4-(4-(2-amino-4-hydroxyphenylazo)anilino)-3-sulfonatophenylazo)-5,6-dihydro-5-oxo-6-phenylhydrazono-naphthalene-2,7-disulfonate; tris(3,5,5-trimethylhexylammonium) 4-amino-3-(4-(4-(4-amino-2-hydroxyphenylazo)anilino)-3-sulfonatophenylazo)-5,6-dihydro-5-oxo-6-phenylhydrazononaphthalene-2,7-disulfonate (2:1)	406-000-0	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
611-076-00-5	3-(2,6-dichloro-4-nitrophenylazo)-1-methyl-2-phenylindole	406-280-4	117584-16-4	N; R50-53	N R: 50/53 S: 60-61		
611-077-00-0	dilithium disodium (5,5'-diamino-(μ-4,4'-dihydroxy-1:2-κ-2, O4,O4',-3,3'-[3,3'-dihydroxy-1:2-κ-2-O3,O3'-biphenyl-4,4'-ylenebisazo-1:2-(N3,N4-η:N3',N4'-η)]-dinaphthalene-2,7-disulfonato(8)))dicuprate(2-)	407-230-4	126637-70-5	Xn; R22 R43	Xn R: 22-43 S: (2-)22-24-37		
611-078-00-6	(2,2'-(3,3'-dioxidobiphenyl-4,4'-diyldiazo)bis(6-(4-(3-(diethylamino)propylamino)-6-(3-(diethylammonio)propylamino)-1,3,5-triazin-2-ylamino)-3-sulfonato-1-naphtholato))dicopper (II) acetate lactate	407-240-9	159604-94-1	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-61		
611-079-00-1	disodium 7-[4-chloro-6-(N-ethyl-o-toluidino)-1,3,5-triazin-2-ylamino]-4-hydroxy-3-(4-methoxy-2-sulfonatophenylazo)-2-naphthalenesulfonate	410-390-8	147703-64-8	Xi; R41	Xi R: 41 S: (2-)22-26-39		
611-080-00-7	sodium 3-(2-acetamido-4-(4-(2-hydroxybutoxy)phenylazo)phenylazo)benzenesulfonate	410-150-2	147703-65-9	R43	Xi R: 43 S: (2-)22-24-37		
611-081-00-2	tetrasodium [7-(2,5-dihydroxy-KO2-7-sulfonato-6-[4-(2,5,6-trichloro-pyrimidin-4-ylamino)phenylazo]-(N1,N7-N)-1-naphthylazo)-8-hydroxy-KO8-naphthalene-1,3,5-trisulfonato (6-)]cuprate(II)	411-470-5	141048-13-7	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
611-082-00-8	reaction mass of: pentasodium bis(1-(3(or 5)-(4-anilino-3-sulfonatophenylazo)-4-hydroxy-2-oxidophenylazo)-6-nitro-4-sulfonato-2-naphtholato)ferrate(1-); pentasodium [(1-(3-(4-anilino-3-sulfonatophenylazo)-4-hydroxy-2-oxidophenylazo)-6-nitro-4-sulfonato-2-naphtholato)-(5-(4-anilino-3-sulfonatophenylazo)-4-hydroxy-2-oxido-phenylazo)-6-nitro-4-sulfonato-2-naphtholato)ferrate(1-)]	407-570-3	—	N; R51-53	N R: 51/53 S: 61		
611-083-00-3	reaction mass of: 2-[N-ethyl-4-[(5,6-dichlorobenzothiazol-2-yl)azo]-m-toluidino]ethyl acetate; 2-[N-ethyl-4-[(6,7-dichlorobenzothiazol-2-yl)azo]-m-toluidino]ethyl acetate (1:1)	411-560-4	—	T; R48/25 R43 N; R51-53	T; N R: 43-48/25-51/53 S: (1/2-)22-36/37-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-084-00-9	reaction mass of: N-(4-chlorophenyl)-4-(2,5-dichloro-4-(dimethylsulfamoyl)phenylazo)-3-hydroxy-2-naphthalenecarboxamide; N-(4-chlorophenyl)-4-(2,5-dichloro-4-(methylsulfamoyl)phenylazo)-3-hydroxy-2-naphthalenecarboxamide	412-550-2	—	R53	R: 53 S: 61		
611-085-00-4	reaction mass of: 3-cyano-5-(2-cyano-4-nitro-phenylazo)-2-(2-hydroxy-ethylamino)-4-methyl-6-[3-(2-phenoxyethoxy)propylamino]pyridine; 3-cyano-5-(2-cyano-4-nitro-phenylazo)-6-(2-hydroxy-ethylamino)-4-methyl-2-[3-(2-phenoxyethoxy)propylamino]pyridine; 3-cyano-5-(2-cyano-4-nitro-phenylazo)-2-amino-4-methyl-6-[3-(3-hydroxypropoxy)propylamino]pyridine; 3-cyano-5-(2-cyano-4-nitro-phenylazo)-6-amino-4-methyl-2-[3-(3-methoxypropoxy)propylamino]pyridine	411-880-4	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
611-086-00-X	monolithium 5-[[2,4-dihydroxy-5-[(2-hydroxy-3,5-dinitrophenyl)azo]phenyl]azo]-2-naphthalenesulfonate], iron complex, monohydrate	411-360-7	—	R52-53	R: 52/53 S: 61		
611-087-00-5	reaction mass of: 3-((5-cyano-1,6-dihydro-1,4-dimethyl-2-hydroxyl-6-oxo-3-pyridinyl)azo)-benzoyloxy-2-phenoxyethane; 3-((5-cyano-1,6-dihydro-1,4-dimethyl-2-hydroxy-6-oxo-3-pyridinyl)azo)-benzoyloxy-2-ethyloxy-2-(ethylphenol)	411-710-9	—	R53	R: 53 S: 61		
611-088-00-0	reaction mass of: trilithium 4-amino-3-((4-((4-((2-amino-4-hydroxyphenyl)azo)phenyl)amino)-3-sulfophenyl)azo)-5-hydroxy-6-(phenylazo)naphthalene-2,7-disulfonate; trilithium 4-amino-3-((4-((4-((4-amino-2-hydroxyphenyl)azo)phenyl)amino)-3-sulfophenyl)azo)-5-hydroxy-6-(phenylazo)naphthalene-2,7-disulfonate	411-890-9	—	Xn; R22 Xi; R41 R52-53	Xn R: 22-41-52/53 S: (2-)22-26-39-61		
611-089-00-6	2-((4-(ethyl-(2-hydroxyethyl)amino)-2-methylphenyl)azo)-6-methoxy-3-methyl-benzothiazolium methylsulfate	411-100-2	136213-73-5	Xn; R48/22 R43 N; R50-53	Xn; N R: 43-48/22-50/53 S: (2-)22-36/37-60-61		
611-090-00-1	2,5-dibutoxy-4-(morpholin-4-yl)benzenediazonium 4-methylbenzenesulfonate	413-290-2	93672-52-7	F; R11 Xn; R22 Xi; R41 R43 R52-53	F; Xn R: 11-22-41-43-52/53 S: (2-)12-22-24-26-37/39-47-61		
611-091-00-7	sodium (1.0-1.95)/lithium (0.05-1) 5-((5-((5-chloro-6-fluoropyrimidin-4-yl)amino)-2-sulfonatophenyl)azo)-1,2-dihydro-6-hydroxy-1,4-dimethyl-2-oxo-3-pyridinemethylsulfonate	413-470-0	134595-59-8	R43	Xi R: 43 S: (2-)22-24/25-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-092-00-2	<i>tert</i> -(dodecyl/tetradecyl)-ammonium bis(3-(4-((5-(1,1-dimethyl-propyl)-2-hydroxy-3-nitrophenyl)azo)-3-methyl-5-hydroxy-(1 <i>H</i>)pyrazol-1-yl)benzenesulfonamido)chromate	413-210-6	—	N; R51-53	N R: 51/53 S: 61		
611-093-00-8	sodium 2-(4-(4-fluoro-6-(2-sulfo-ethylamino)-[1,3,5]triazin-2-ylamino)-2-ureido-phenylazo)-5-(4-sulfo-phenylazo)benzene-1-sulfonate	410-770-3	146177-84-6	R43	Xi R: 43 S: (2-)22-24-37		
611-094-00-3	reaction mass of: 2-[2-acetylamino-4-[N,N-bis[2-ethoxy-carbonyloxy]ethyl]amino]phenylazo]-5,6-dichloro-1,3-benzothiazole; 2-[2-acetylamino-4-[N,N-bis[2-ethoxy-carbonyloxy]ethyl]amino]phenylazo]-6,7-dichloro-1,3-benzotriazole (1:1)	411-600-0	143145-93-1	R53	R: 53 S: 61		
611-095-00-9	hexasodium 1,1'-[(1-amino-8-hydroxy-3,6-disulfonate-2,7-naphthalenediyl)bis(azo(4-sulfonate-1,3-phenyl)imino[6-[(4-chloro-3-sulfonatophenyl)amino]-1,3,5-triazin-2,4-diyl]]]bis[3-carboxypyridinium] dihydroxide	412-240-7	89797-03-5	N; R51-53	N R: 51/53 S: 22-61		
611-096-00-4	methyl N-[3-acetylamino)-4-(2-cyano-4-nitrophenylazo)phenyl]-N-[(1-methoxy)acetyl]glycinate	413-040-2	149850-30-6	R43	Xi R: 43 S: (2-)22-24-37		
611-097-00-X	reaction mass of iron complexes of: 1,3-dihydroxy-4-[(5-phenylaminosulfonyl)-2-hydroxyphenylazo]- <i>n</i> -(5-amino-sulfonyl-2-hydroxyphenylazo)benzene and: 1,3-dihydroxy-4-[(5-phenylaminosulfonyl)-2-hydroxyphenylazo]- <i>n</i> -[4-(4-nitro-2-sulfo-phenylamino)phenylazo]benzene (<i>n</i> =2,5,6)	414-150-3	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-61		
611-098-00-5	tetrakis(tetramethylammonium)3,3'-(6-(2-hydroxyethylamino)1,3,5-triazine-2,4-diylbisimino(2-methyl-4,1-phenyleneazo))bisnaphthalene-1,5-disulfonate	405-950-3	131013-83-7	T; R25 R52-53	T R: 25-52/53 S: (1/2-)37-45-61		
611-099-00-0	(methylenebis(4,1-phenylenazo(1-(3-(dimethylamino)propyl)-1,2-dihydro-6-hydroxy-4-methyl-2-oxopyridine-5,3-diyl)))-1,1'-dipyridinium dichloride dihydrochloride	401-500-5	118658-99-4	Carc. Cat. 2; R45 N; R51-53	T; N R: 45-51/53 S: 53-45-61		
611-100-00-4	potassium sodium 3,3'-(3(or4)-methyl-1,2-phenylenebis(imino(6-chloro)-1,3,5-triazine-4,2-diylimino(2-acetamido-5-methoxy)-4,1-phenylenazo)dinaphthalene-1,5-disulfonate	403-810-6	140876-13-7	Xi; R41	Xi R: 41 S: (2-)26-39		
611-101-00-X	2'-(4-chloro-3-cyano-5-formyl-2-thienyl)azo-5'-diethylaminoacetanilide	405-200-5	104366-25-8	R43	Xi R: 43 S: (2-)22-24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-103-00-0	trisodium (1-(3-carboxylato-2-oxido-5-sulfonatophenylazo)-5-hydroxy-7-sulfonatophthalen-2-amido)nickel(II)	407-110-1	—	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)24-26-37/39-61		
611-104-00-6	reaction mass of: trisodium (2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)(2(or 4or 6)-(3,5-dinitro-2-oxidophenylazo)-5-hydroxy-4(or 2or 6)-(4-(4-nitro-2-sulfonatoanilino)phenylazo)phenolato)ferrate(1-); trisodium bis(2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)ferrate(1-); trisodium (2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)(2(or 4 or 6)-(3,5-dinitro-2-oxidophenylazo)-5-hydroxy-4(or 2 or 6)-(4-nitro-2-sulfonatophenylazo)phenolato)ferrate(1-); trisodium (2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)(2(or 4 or 6)-(3,5-dinitro-2-oxidophenylazo)-5-hydroxy-4(or 2 or 6)-(3-sulfonatophenylazo)phenolato)ferrate(1-); disodium 3,3'-(2,4-dihydroxy-1,3(or 1,5 or 3,5)-phenylene-diazo)dibenzenesulfonate	406-870-1	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
611-105-00-1	sodium 4-(4-chloro-6-(N-ethylanilino)-1,3,5-triazin-2-ylamino)-2-(1-(2-chlorophenyl)-5-hydroxy-3-methyl-1H-pyrazol-4-ylazo)benzenesulfonate	407-800-2	136213-75-7	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-61		
611-106-00-7	hexasodium 4,4'-dihydroxy-3,3'-bis[2-sulfonato-4-(4-sulfonatophenylazo)phenylazo]-7,7'[p-phenylenebis(imino(6-chloro-1,3,5-triazine-4,2-diyl)imino)]dinaphthalene-2-sulfonate	410-180-6	157627-99-1	Xi; R41	Xi R: 41 S: (2-)26-39		
611-107-00-2	potassium sodium 4-(4-chloro-6-(3,6-disulfonato-7-(5,8-disulfonato-naphthalen-2-ylazo)-8-hydroxy-naphthalen-1-ylamino)-1,3,5-triazin-2-ylamino)-5-hydroxy-6-(4-(2-sulfatoethanesulfonyl)-phenylazo)-naphthalene-1,7-disulfonate	412-490-7	—	R43	Xi R: 43 S: (2-)22-24-37		
611-108-00-8	disodium 5-(((4-((4-chloro-3-sulfonatophenyl)azo)-1-naphthyl)azo)-8-(phenylamino)-1-naphthalenesulfonate	413-600-6	6527-62-4	R52-53	R: 52/53 S: 61		
611-109-00-3	Reaction products of: copper(II) sulfate and tetrasodium 2,4-bis[6-(2-methoxy-5-sulfonatophenylazo)-5-hydroxy-7-sulfonato-2-naphthylamino]-6-(2-hydroxyethylamino)-1,3,5-triazine (2:1)	407-710-3	—	N; R51-53	N R: 51/53 S: 61		
611-110-00-9	tetra-sodium/lithium 4,4'-bis-(8-amino-3,6-disulfonato-1-naphthol-2-ylazo)-3-methylazobenzene	408-210-8	124605-82-9	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-28-37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-111-00-4	disodium 2-[[4-(2-chloroethylsulfonyl)phenyl]-[(2-hydroxy-5-sulfo-3-[3-[2-(2-(sulfooxy)ethylsulfonyl)ethylazo]-4-sulfobenzoato(3-)cuprate(1-)	414-230-8	—	R43	Xi R: 43 S: (2-)22-24-37		
611-112-00-X	tetrasodium 4-hydroxy-5-[4-[3-(2-sulfatoethanesulfonyl)phenylamino]-6-morpholin-4-yl-1,3,5-triazin-2-ylamino]-3-(1-sulfonatophthalen-2-ylazo)naphthalene-2,7-disulfonate	413-070-6	—	R43	Xi R: 43 S: (2-)22-24-37		
611-113-00-5	lithium sodium (2-(((5-((2,5-dichlorophenyl)azo)-2-hydroxyphenyl)methylene)amino)benzoato(2-)))(2-(((4,5-dihydro-3-methyl-5-oxo-1-phenyl-1H-pyrazol-4-yl)azo)-5-sulfobenzoato(3-))) chromate(2-)	414-280-0	149626-00-6	N; R51-53	N R: 51/53 S: 24/25-61		
611-114-00-0	lithium sodium (4-(((5-chloro-2-hydroxyphenyl)azo)-2,4-dihydro-5-methyl-3H-pyrazol-3-onato(2-)))(3-(((4,5-dihydro-3-methyl-1-(4-methylphenyl)-5-oxo-1H-pyrazol-4-yl)azo)-4-hydroxy-5-nitrobenzenesulfonato(3-))) chromate(2-)	414-250-7	149564-66-9	Xn; R22 Xi; R41 R52-53	Xn R: 22-41-52/53 S: (2-)22-26-39-61		
611-115-00-6	trilithium bis(4-(((4-(diethylamino)-2-hydroxyphenyl)azo)-3-hydroxy-1-naphthalenesulfonato(3-)))chromate(3-)	414-290-5	149564-65-8	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-61		
611-116-00-1	reaction mass of: trisodium 5-{4-chloro-6-[2-(2,6-dichloro-5-cyanopyrimidin-4-ylamino)-propylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatophthalen-2-ylazo)-naphthalene-2,7-disulfonate; trisodium 5-{4-chloro-6-[2-(2,6-dichloro-5-cyanopyrimidin-4-ylamino)-1-methyl-ethylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatophthalen-2-ylazo)-naphthalene-2,7-disulfonate; trisodium 5-{4-chloro-6-[2-(4,6-dichloro-5-cyanopyrimidin-2-ylamino)-propylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatophthalen-2-ylazo)-naphthalene-2,7-disulfonate; trisodium 5-{4-chloro-6-[2-(4,6-dichloro-5-cyanopyrimidin-2-ylamino)-1-methyl-ethylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatophthalen-2-ylazo)-naphthalene-2,7-disulfonate	414-620-8	—	Xi; R41 R43	Xi R: 41-43 S: (2-)22-24-26-37/39		
611-117-00-7	1,3-bis{6-fluoro-4-[1,5-disulfo-4-(3-aminocarbonyl-1-ethyl-6-hydroxy-4-methyl-pyrid-2-on-5-ylazo)-phenyl-2-ylamino]-1,3,5-triazin-2-ylamino}propane lithium-, sodium salt	415-100-3	149850-29-3	R43	Xi R: 43 S: (2-)22-24-37		
611-118-00-2	sodium 1,2-bis[4-[4-(4-sulfofenylazo)-2-sulfofenylazo]-2-ureido-phenyl-amino]-6-fluoro-1,3,5-triazin-2-ylamino]-propane, sodium salt	413-990-8		R43	Xi R: 43 S: (2-)22-24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-119-00-8	tetrasodium 4-[4-chloro-6-(4-methyl-2-sulfophenylamino)-1,3,5-triazin-2-ylamino]-6-(4,5-dimethyl-2-sulfophenylazo)-5-hydroxynaphthalene-2,7-disulfonate	415-400-4	148878-22-2	Xi; R41 R43	Xi R: 41-43 S: (2-)22-24-26-37/39		
611-120-00-3	5-{4-[5-amino-2-[4-(2-sulfoxyethylsulfonyl)phenylazo]-4-sulfo-phenylamino]-6-chloro-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfo-naphthalen-2-ylazo)-naphthalene-2,7-disulfonicacid sodium salt	418-340-7	157707-94-3	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)22-26-39-61		
611-121-00-9	Main component 6 (isomer): asym. 1:2 Cr(III)-complex of: A: 3-hydroxy-4-(2-hydroxy-naphthalene-1-ylazo)naphthalene-1-sulfonic acid, Na-salt and B: 1-[2-hydroxy-5-(4-methoxy-phenylazo)phenylazo]naphthalene-2-ol; Main component 8 (isomer): asym. 1:2 Cr-complex of: A: 3-hydroxy-4-(2-hydroxy-naphthalene-1-ylazo)-naphthalene-1-sulfonic acid, Na-salt and B: 1-[2-hydroxy-5-(4-methoxy-phenylazo)-phenylazo]-naphthalene-2-ol	417-280-9	30785-74-1	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		
611-122-00-4	hexasodium (di[N-(3-(4-[5-(5-amino-3-methyl-1-phenylpyrazol-4-yl-azo)-2,4-disulfo-anilino]-6-chloro-1,3,5-triazin-2-ylamino)phenyl)-sulfamoyl](di-sulfo)-phthalocyaninato)nickel	417-250-5	151436-99-6	Xi; R41 R43	Xi R: 41-43 S: (2-)22-24-26-37/39		
611-123-00-X	3-(2,4-bis(4-((5-(4,6-bis(2-aminopropylamino)-1,3,5-triazin-2-ylamino)-4-hydroxy-2,7-disulfonaphthalen-3-yl)azo)phenylamino)-1,3,5-triazin-6-ylamino)propyldiethylammonium lactate	424-310-4	178452-66-9	Xi; R41	Xi R: 41 S: (2-)26-39		
611-124-00-5	reaction mass of: pentasodium 5-amino-3-(5-{4-chloro-6-[4-(2-sulfoxyethoxysulfonato)phenylamino]-1,3,5-triazin-2-ylamino}-2-sulfonatophenylazo)-6-[5-(2,3-dibromopropionylamino)-2-sulfonatophenylazo]-4-hydroxynaphthalene-2,7-disulfonate; pentasodium 5-amino-6-[5-(2-bromoacryloylamino)-2-sulfonatophenylazo]-3-(5-{4-chloro-6-[4-(2-sulfoxyethoxysulfonato)phenylamino]-1,3,5-triazin-2-ylamino}-2-sulfonatophenylazo)-4-hydroxynaphthalene-2,7-disulfonate; tetrasodium 5-amino-3-[5-{4-chloro-6-[4-(vinylsulfonyl)phenylamino]-1,3,5-triazin-2-ylamino}-2-sulfonatophenylazo]-6-[5-(2,3-dibromopropionylamino)-2-sulfonatophenylazo]-4-hydroxynaphthalene-2,7-disulfonate	424-320-9		Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
611-125-00-0	reaction mass of: Disodium 6-[3-carboxy-4,5-dihydro-5-oxo-4-sulfonatophenyl]pyrazolin-4-yl-azo]-3-[2-oxido-4-(ethen-sulfonyl)-5-methoxyphenylazo]-4-oxidonaphthalene-2-sulfonate copper (II) complex; Disodium 6-[3-carboxy-4,5-dihydro-5-oxo-4-sulfonatophenyl]pyrazolin-4-yl-azo]-3-[2-oxido-4-(2-hydroxyethylsulfonyl)-5-methoxyphenylazo]-4-oxidonaphthalene-2-sulfonate copper (II) complex	423-940-7	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-126-00-6	2,6-bis-(2-(4-(4-amino-phenylamino)-phenylazo)-1,3-dimethyl-3H-imidazolium)-4-dimethylamino-1,3,5-triazine, dichloride	424-120-1	174514-06-8	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		
611-127-00-1	pentasodium 4-amino-6-(5-(4-(2-ethyl-phenylamino)-6-(2-sulfatoethanesulfonyl)-1,3,5-triazin-2-ylamino)-2-sulfonato-phenylazo)-5-hydroxy-3-(4-(2-sulfatoethanesulfonyl)phenylazo)naphthalene-2,7-disulfonate	423-790-2	—	R5 Xi; R41 R43 R52-53	Xi R: 5-41-43-52/53 S: (2-)22-26-36/37/ 39-41-61		
611-128-00-7	N,N'-bis{6-chloro-4-[6-(4-vinylsulfonylphenylazo)-2,7-disulfonic acid-5-hydroxynaphthalen-4-ylamino]-1,3,5-triazin-2-yl}-N-(2-hydroxyethyl)ethane-1,2-diamine, sodium salt	419-500-9	171599-85-2	Xi; R41 R43	Xi R: 41-43 S: (2-)22-24-26-37/39		
611-129-00-2	reaction mass of: 5-[(4-[(7-amino-1-hydroxy-3-sulfo-2-naphthyl)azo]-2,5-diethoxyphenyl)azo]-2-[(3-phosphonophenyl)azo]benzoic acid; 5-[(4-[(7-amino-1-hydroxy-3-sulfo-2-naphthyl)azo]-2,5-diethoxyphenyl)azo]-3-[(3-phosphonophenyl)azo]benzoic acid	418-230-9	163879-69-4	E; R2 Repr. Cat. 3; R62 Xn; R48/22 R43 N; R51-53	E; Xn; N R: 2-43-48/22-62-51/ 53 S: (2-)26-35-36/37-61		
611-130-00-8	tetra-ammonium 2-[6-[7-(2-carboxylato-phenylazo)-8-hydroxy-3,6-disulfonato-1-naphthylamino]-4-hydroxy-1,3,5-triazin-2-ylamino]benzoate	418-520-5	183130-96-3	Xi; R36 N; R50-53	Xi; N R: 36-50/53 S: (2-)26-39-60-61		
611-131-00-3	2-[2-hydroxy-3-(2-chlorophenyl)carbamoyl-1-naphthylazo]-7-[2-hydroxy-3-(3-methylphenyl)carbamoyl-1-naphthylazo]fluoren-9-one	420-580-2	151798-26-4	Repr. Cat. 2; R61 R53	T R: 61-53 S: 53-45-61		
611-132-00-9	pentasodium bis{7-[4-(1-butyl-5-cyano-1,2-dihydro-2-hydroxy-4-methyl-6-oxo-3-pyridylazo)phenylsulfonylamino]-5'-nitro-3,3'-disulfonatophthalene-2-azobenzene-1,2'-diolato} chromate (III)	419-210-2	178452-71-6	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
611-133-00-4	Product by process iron complex of azo dyestuffs obtained by coupling a mixture of diazotized 2-amino-1-hydroxybenzene-4-sulfanilide and 2-amino-1-hydroxybenzene-4-sulfonamide with resorcin, the obtained mixture being subsequently submitted to a second coupling reaction with a mixture of diazotized 3-aminobenzene-1-sulfonic acid (metanilic acid) and 4'-amino-4-nitro-1,1'-diphenylamine-2-sulfonic acid and metallization with ferric chloride, sodium salt	419-260-5	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
611-134-00-X	trisodium 2-{α[2-hydroxy-3-[4-chloro-6-[4-(2,3-dibromopropionylamino)-2-sulfonatophenylamino]-1,3,5-triazin-2-ylamino]-5-sulfonatophenylazo]-benzylidenehydrazino}-4-sulfonatobenzoate, copper complex	423-770-3	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)22-26-39-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
611-135-00-5	Reaction product of: 2-[[4-amino-2-ureidophenylazo]-5-[(2-(sulfoxy)ethyl)sulfonyl]]benzenesulfonic acid with 2,4,6-trifluoropyrimidine and partial hydrolysis to the corresponding vinylsulfonyl derivative,mixed potassium/sodium salt	424-250-9	—	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
611-136-00-0	2-{4-(2-ammoniopropylamino)-6-[4-hydroxy-3-(5-methyl-2-methoxy-4-sulfamoylphenylazo)-2-sulfonatonaphth-7-ylamino]-1,3,5-triazin-2-ylamino}-2-aminopropyl formate	424-260-3	—	Repr. Cat. 3; R62 Xi; R41 N; R51-53	Xn; N R: 41-62-51/53 S: (2-)22-26-36/37/ 39-61		
611-137-00-6	6-tert-butyl-7-chloro-3-tridecyl-7,7a-dihydro-1H-pyrazolo [5,1-c]-1,2,4-triazole	419-870-1	159038-16-1	R53	R: 53 S: 61		
611-138-00-1	2-(4-aminophenyl)-6-tert-butyl-1H-pyrazolo[1,5-b][1,2,4]triazole	415-910-7	152828-25-6	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-61		
611-140-00-2	azafenidin (ISO) 2-(2,4-dichloro-5-prop-2-ynyloxyphenyl)-5,6,7,8-tetrahydro-1,2,4-triazolo[4,3-a]pyridin-3(2H)-one	—	68049-83-2	Repr. Cat. 2; R61 Repr. Cat. 3; R62 Xn; R48/22 N; R50-53	T; N R: 61-48/22-62-50/ 53 S: 53-45-60-61	N; R50-53: $C \geq 0,025 \%$ N; R51-53: $0,0025 \% \leq C < 0,025 \%$ R52-53: $0,00025 \% \leq C < 0,0025 \%$	E
612-001-00-9	mono-methylamine; [1] di-methylamine; [2] tri-methylamine [3]	200-820-0 [1] 204-697-4 [2] 200-875-0 [3]	74-89-5 [1] 124-40-3 [2] 75-50-3 [3]	F+; R12 Xn; R20 Xi; R37/38-41	F+; Xn R: 12-20-37/38-41 S: (2-)16-26-39	Xn; R20: $C \geq 5 \%$ Xi; R37/38-41: $C \geq 5 \%$ Xi; R36: $0,5 \% \leq C < 5 \%$	5
612-001-01-6	mono-methylamine ... %; [1] di-methylamine ... %; [2] tri-methylamine ... % [3]	200-820-0 [1] 204-697-4 [2] 200-875-0 [3]	74-89-5 [1] 124-40-3 [2] 75-50-3 [3]	F+; R12 Xn; R20/22 C; R34	F+; C R: 12-20/22-34 S: (1/2-)3-16-26-29-36/37/39-45	Xn; R20/22: $C \geq 15 \%$ C; R34: $C \geq 10 \%$ Xi; R36/37/38: $5 \% \leq C < 10 \%$	B
612-002-00-4	ethylamine	200-834-7	75-04-7	F+; R12 Xi; R36/37	F+; Xi R: 12-36/37 S: (2-)16-26-29		
612-003-00-X	diethylamine	203-716-3	109-89-7	F; R11 Xn; R20/21/22 C; R35	F; C R: 11-20/21/22-35 S: (1/2-)3-16-26-29-36/37/39-45	C; R35: $C \geq 10 \%$ C; R34: $5 \% \leq C < 10 \%$ Xi; R36/37/38: $1 \% \leq C < 5 \%$	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-004-00-5	triethylamine	204-469-4	121-44-8	F; R11 Xn; R20/21/ 22 C; R35	F; C R: 11-20/21/22-35 S: (1/2-)3-16-26-29- 36/37/39-45	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
612-005-00-0	butylamine	203-699-2	109-73-9	F; R11 Xn; R20/21/ 22 C; R35	F; C R: 11-20/21/22-35 S: (1/2-)3-16-26-29- 36/37/39-45	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
612-006-00-6	ethylenediamine; 1,2-diaminoethane	203-468-6	107-15-3	R10 Xn; R21/22 C; R34 R42/43	C R: 10-21/22-34-42/ 43 S: (1/2-)23-26-36/37/ 39-45	C; R34: C ≥ 10 % Xi; R36/38: 2 % ≤ C < 10 %	
612-007-00-1	2-aminopropane; isopropylamine	200-860-9	75-31-0	F+; R12 Xi; R36/37/ 38	F+; Xi R: 12-36/37/38 S: (2-)16-26-29		
612-008-00-7	aniline	200-539-3	62-53-3	Carc. Cat. 3; R40 Muta. Cat. 3; R68 T; R23/24/ 25-48/23/ 24/25 Xi; R41 R43 N; R50	T; N R: 23/24/25-40-41- 43-48/23/24/25-68- 50 S: (1/2-)26-27-36/37/ 39-45-46-61-63	T; R23/24/25: C ≥ 25 % Xn; R20/21/22: 1 % ≤ C < 25 % T; R48/23/24/25: C ≥ 1 % Xn; R48/20/21/22: 0,2 % ≤ C < 1 %	
612-009-00-2	salts of aniline	—	—	Carc. Cat. 3; R40 Muta. Cat. 3; R68 T; R23/24/ 25-48/23/ 24/25 Xi; R41 R43 N; R50	T; N R: 23/24/25-40-41- 43-48/23/24/25-68- 50 S: (1/2-)26-27-36/37/ 39-45-61-63	T; R23/24/25: C ≥ 25 % Xn; R20/21/22: 1 % ≤ C < 25 % T; R48/23/24/25: C ≥ 1 % Xn; R48/20/21/22: 0,2 % ≤ C < 1 %	A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-010-00-8	chloroanilines, with exception of those specified elsewhere in this Annex	—	—	T; R23/24/25 R33 N; R50-53	T; N R: 23/24/25-33-50/ 53 S: (1/2-)28-36/37-45- 60-61		C
612-011-00-3	4-nitrosoaniline	211-535-6	659-49-4	Xn; R20/21/ 22	Xn R: 20/21/22 S: (2-)25-28		
612-012-00-9	<i>o</i> -nitroaniline; [1] <i>m</i> -nitroaniline; [2] <i>p</i> -nitroaniline [3]	201-855-4 [1] 202-729-1 [2] 202-810-1 [3]	88-74-4 [1] 99-09-2 [2] 100-01-6 [3]	T; R23/24/25 R33 R52-53	T R: 23/24/25-33-52/ 53 S: (1/2-)28-36/37-45- 61		C
612-013-00-4	3-aminobenzene sulphonic acid; metanilic acid	204-473-6	121-47-1	Xn; R20/21/ 22	Xn R: 20/21/22 S: (2-)25-28		
612-014-00-X	sulphanilic acid; 4-aminobenzenesulphonic acid	204-482-5	121-57-3	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)24-37		
612-015-00-5	<i>N</i> -methylaniline	202-870-9	100-61-8	T; R23/24/25 R33 N; R50-53	T; N R: 23/24/25-33-50/ 53 S: (1/2-)28-36/37-45- 60-61		
612-016-00-0	<i>N,N</i> -dimethylaniline	204-493-5	121-69-7	Carc. Cat. 3; R40 T; R23/24/25 N; R51-53	T; N R: 23/24/25-40-51/ 53 S: (1/2-)28-36/37-45- 61		
612-017-00-6	<i>N</i> -methyl- <i>N</i> ,2,4,6-tetranitroaniline; tetryl	207-531-9	479-45-8	E; R2 ☉ T; R23/24/25 R33	E; T R: 2-23/24/25-33 S: (1/2-)35-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-018-00-1	bis(2,4,6-trinitrophenyl)amine; hexyl	205-037-8	131-73-7	E; R2 ⊗ T+; R26/27/ 28 R33 N; R51-53	E; T+; N R: 2-26/27/28-33-51/ 53 S: (1/2-)35-36-45-61		
612-019-00-7	dipicrylamine, ammonium salt	220-639-0	2844-92-0	E ⊗ R1 T+; R26/27/ 28 R33 N; R51-53	E; T+; N R: 1-26/27/28-33-51/ 53 S: (1/2-)28-36/37-45- 61		
612-020-00-2	1-naphthylamine	205-138-7	134-32-7	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)24-61		
612-022-00-3	2-naphthylamine	202-080-4	91-59-8	Carc. Cat. 1; R45 Xn; R22 N; R51-53	T; N R: 45-22-51/53 S: 53-45-61	Carc. Cat. 1; R45: C ≥ 0,01 %	E
612-023-00-9	phenylhydrazine; [1] phenylhydrazinium chloride; [2] phenylhydrazine hydrochloride; [3] phenylhydrazinium sulphate (2:1) [4]	202-873-5 [1] 200-444-7 [2] 248-259-0 [3] 257-622-2 [4]	100-63-0 [1] 59-88-1 [2] 27140-08-5 [3] 52033-74-6 [4]	Carc. Cat. 2; R45 Muta. Cat. 3; R68 T; R23/24/ 25-48/23/ 24/25 Xi; R36/38 R43 N; R50	T; N R: 45-23/24/25-36/ 38-43-48/23/24/25- 68-50 S: 53-45-61		E
612-024-00-4	<i>m</i> -toluidine; 3-aminotoluene	203-583-1	108-44-1	T; R23/24/25 R33 N; R50	T; N R: 23/24/25-33-50 S: (1/2-)28-36/37-45- 61		
612-025-00-X	nitrotoluidines, with the exception of those specified elsewhere in this Annex	—	—	T; R23/24/25 R33 N; R51-53	T; N R: 23/24/25-33-51/ 53 S: (1/2-)28-36/37-45- 61		C

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-026-00-5	diphenylamine	204-539-4	122-39-4	T; R23/24/25 R33 N; R50-53	T; N R: 23/24/25-33-50/ 53 S: (1/2-)28-36/37-45- 60-61		
612-027-00-0	xylidines with the exception of those specified elsewhere in this Annex; dimethyl anilines with the exception of those specified elsewhere in this Annex	—	—	T; R23/24/25 R33 N; R51-53	T; N R: 23/24/25-33-51/ 53 S: (1/2-)28-36/37-45- 61		C
612-028-00-6	<i>p</i> -phenylenediamine	203-404-7	106-50-3	T; R23/24/25 Xi; R36 R43 N; R50-53	T+; N R: 23/24/25-36-43- 50/53 S: (1/2-)28-36/37-45- 60-61		
612-029-00-1	benzene-1,4-diamine dihydrochloride; <i>p</i> -phenylenediamine dihydrochloride	210-834-9	624-18-0	T; R23/24/25 Xi; R36 R43 N; R50-53	T; N R: 23/24/25-36-43- 50/53 S: (1/2-)28-36/37-45- 60-61		
612-030-00-7	2-methyl- <i>p</i> -phenylenediamine sulphate [1]	210-431-8 [1] 228-871-4 [2]	615-50-9 [1] 6369-59-1 [2]	T; R25 Xn; R20/21 R43 N; R51-53	T; N R: 20/21-25-43-51/ 53 S: (1/2-)24-37-45-61		
612-031-00-2	<i>N,N</i> -dimethylbenzene-1,3-diamine; [1] 4-amino- <i>N,N</i> -dimethylaniline; 3-amino- <i>N,N'</i> -dimethylaniline [2]	220-623-3 [1] 202-807-5 [2]	2836-04-6 [1] 99-98-9 [2]	T; R23/24/25	T R: 23/24/25 S: (1/2-)28-45		C
612-032-00-8	<i>N,N,N',N'</i> -tetramethyl- <i>p</i> -phenylenediamine	202-831-6	100-22-1	Xn; R20/21/ 22	Xn R: 20/21/22 S: (2-)28		
612-033-00-3	2-aminophenol	202-431-1	95-55-6	Xn; R20/22 Muta. Cat. 3; R68	Xn R: 20/22-68 S: (2-)28-36/37		
612-034-00-9	2-amino-4,6-dinitrophenol; picramic acid	202-544-6	96-91-3	E; R1 ⊗ Xn; R20/21/ 22 R52-53	E; Xn R: 1-20/21/22-52/53 S: (2-)35-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-035-00-4	2-methoxyaniline; <i>o</i> -anisidine	201-963-1	90-04-0	Carc. Cat. 2; R45 Muta. Cat. 3; R68 T; R23/24/25	T R: 45-23/24/25-68 S: 53-45		E
612-036-00-X	3,3'-dimethoxybenzidine; <i>o</i> -dianisidine	204-355-4	119-90-4	Carc. Cat. 2; R45 Xn; R22	T R: 45-22 S: 53-45		E
612-037-00-5	salts of 3,3'-dimethoxybenzidine; salts of <i>o</i> -dianisidine	—	—	Carc. Cat. 2; R45 Xn; R22	T R: 45-22 S: 53-45		AE
612-038-00-0	2-nitro- <i>p</i> -anisidine; 4-methoxy-2-nitroaniline	202-547-2	96-96-8	T+; R26/27/ 28 R33 R52-53	T+ R: 26/27/28-33-52/ 53 S: (1/2-)28-36/37-45- 61		
612-039-00-6	2-ethoxyaniline; <i>o</i> -phenetidine	202-356-4	94-70-2	T; R23/24/25 R33	T R: 23/24/25-33 S: (1/2-)28-36/37-45		
612-040-00-1	2,4-dinitroaniline	202-553-5	97-02-9	T+; R26/27/ 28 R33 N; R51-53	T+; N R: 26/27/28-33-51/ 53 S: (1/2-)28-36/37-45- 61		
612-041-00-7	4,4'-bi- <i>o</i> -toluidine	204-358-0	119-93-7	Carc. Cat. 2; R45 Xn; R22 N; R51-53	T; N R: 45-22-51/53 S: 53-45-61		E
612-042-00-2	benzidine; 1,1'-biphenyl-4,4'-diamine; 4,4'-diaminobiphenyl; biphenyl-4,4'-ylenediamine	202-199-1	92-87-5	Carc. Cat. 1; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61	Carc. Cat. 1; R45: C ≥ 0,01 %	E
612-043-00-8	<i>N,N'</i> -dimethylbenzidine	—	2810-74-4	Xn; R20/21/ 22	Xn R: 20/21/22 S: (2-)22-36		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-044-00-3	N,N'-diacetylbenzidine	210-338-2	613-35-4	Xn; R20/21/22	Xn R: 20/21/22 S: (2-)22-36		
612-046-00-4	allylamine	203-463-9	107-11-9	F; R11 T; R23/24/25 N; R51-53	F; T; N R: 11-23/24/25-51/53 S: (1/2-)9-16-24/25-45-61		
612-047-00-X	benzylamine	202-854-1	100-46-9	Xn; R21/22 C; R34	C R: 21/22-34 S: (1/2-)26-36/37/39-45		
612-048-00-5	dipropylamine	205-565-9	142-84-7	F; R11 Xn; R20/21/22 C; R35	F; C R: 11-20/21/22-35 S: (1/2-)16-26-36/37/39-45	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
612-049-00-0	di-n-butylamine; [1] di-sec-butylamine [2]	203-921-8 [1] 210-937-9 [2]	111-92-2 [1] 626-23-3 [2]	R10 Xn; R20/21/22	Xn R: 10-20/21/22 S: (2-)		
612-050-00-6	cyclohexylamine	203-629-0	108-91-8	R10 Xn; R21/22 C; R34	C R: 10-21/22-34 S: (1/2-)36/37/39-45	C; R34: C ≥ 10 % Xi; R36/38: 2 % ≤ C < 10 %	
612-051-00-1	4,4'-diaminodiphenylmethane; 4,4'-methylenedianiline	202-974-4	101-77-9	Carc. Cat. 2; R45 Muta. Cat. 3; R68 T; R39/23/24/25 Xn; R48/20/21/22 R43 N; R51-53	T; N R: 45-39/23/24/25-43-48/20/21/22-68-51/53 S: 53-45-61		E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-052-00-7	(S)- <i>sec</i> -butylamine; (S)-2-aminobutane; [1] (R)- <i>sec</i> -butylamine; (R)-2-aminobutane; [2] <i>sec</i> -butylamine; 2-aminobutane [3]	208-164-7 [1] 236-232-6 [2] 237-732-7 [3]	513-49-5 [1] 13250-12-9 [2] 13952-84-6 [3]	F; R11 Xn; R20/22 C; R35 N; R50	F; C; N R: 11-20/22-35-50 S: (1/2-)9-16-26-28- 36/37/39-45-61		C
612-053-00-2	N-ethylaniline	203-135-5	103-69-5	T; R23/24/25 R33	T R: 23/24/25-33 S: (1/2-)28-37-45		
612-054-00-8	N,N-diethylaniline	202-088-8	91-66-7	T; R23/24/25 R33 N; R51-53	T; N R: 23/24/25-33-51/ 53 S: (1/2-)28-37-45-61	T; R23/24/25: C ≥ 5 % Xn; R20/21/22: 1 % ≤ C < 5 %	
612-055-00-3	N-methyl- <i>o</i> -toluidine; [1] N-methyl- <i>m</i> -toluidine; [2] N-methyl- <i>p</i> -toluidine [3]	210-260-9 [1] 211-795-0 [2] 210-769-6 [3]	611-21-2 [1] 696-44-6 [2] 623-08-5 [3]	T; R23/24/25 R33 R52-53	T R: 23/24/25-33-52/ 53 S: (1/2-)28-36/37-45- 61		C
612-056-00-9	N,N-dimethyl- <i>p</i> -toluidine; [1] N,N-dimethyl- <i>m</i> -toluidine; [2] N,N-dimethyl- <i>o</i> -toluidine [3]	202-805-4 [1] 204-495-6 [2] 210-199-8 [3]	99-97-8 [1] 121-72-2 [2] 609-72-3 [3]	T; R23/24/25 R33 R52-53	T R: 23/24/25-33-52/ 53 S: (1/2-)28-36/37-45- 61	T; R23/24/25: C ≥ 5 % Xn; R20/21/22: 1 % ≤ C < 5 %	C
612-057-00-4	piperazine	203-808-3	110-85-0	C; R34 R42/43 R52-53	C R: 34-42/43-52/53 S: (1/2-)22-26-36/37/ 39-45-61		
612-058-00-X	2,2'-iminodiethylamine; diethylenetriamine	203-865-4	111-40-0	Xn; R21/22 C; R34 R43	C R: 21/22-34-43 S: (1/2-)26-36/37/39- 45		
612-059-00-5	3,6-diazoctanethylenediamin; triethylenetetramine	203-950-6	112-24-3	Xn; R21 C; R34 R43 R52-53	C R: 21-34-43-52/53 S: (1/2-)26-36/37/39- 45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-060-00-0	3,6,9-triazaundecamethylenediamine; tetraethylenepentamine	203-986-2	112-57-2	Xn; R21/22 C; R34 R43 N; R51-53	C; N R: 21/22-34-43-51/ 53 S: (1/2-)26-36/37/39- 45-61		
612-061-00-6	3-aminopropyldimethylamine; N,N-dimethyl-1,3-diaminopropane	203-680-9	109-55-7	R10 Xn; R22 C; R34 R43	C R: 10-22-34-43 S: (1/2-)26-36/37/39- 45		
612-062-00-1	3-aminopropyldiethylamine; N,N-diethyl-1,3-diaminopropane	203-236-4	104-78-9	R10 Xn; R21/22 C; R34 R43	C R: 10-21/22-34-43 S: (1/2-)26-36/37/39- 45		
612-063-00-7	3,3'-iminodi(propylamine); dipropylenetriamine	200-261-2	56-18-8	T+; R26 T; R24 Xn; R22 C; R35 R43	T+; C R: 22-24-26-35-43 S: (1/2-)26-28-36/37/ 39-45		
612-064-00-2	3,6,9,12-tetra-azatetradecamethylenediamine; pentactylenhexamine	223-775-9	4067-16-7	C; R34 R43 N; R50-53	C; N R: 34-43-50/53 S: (1/2-)26-36/37/39- 45-60-61		
612-065-00-8	polyethylenepolyamines with the exception of those specified elsewhere in this Annex	—	—	Xn; R21/22 C; R34 R43 N; R50-53	C; N R: 21/22-34-43-50/ 53 S: (1/2-)26-36/37/39- 45-60-61		
612-066-00-3	dicyclohexylamine	202-980-7	101-83-7	Xn; R22 C; R34 N; R50-53	C; N R: 22-34-50/53 S: (1/2-)26-36/37/39- 45-60-61	C; R34: C ≥ 10 % Xi; R36/38: 2 % ≤ C < 10 %	
612-067-00-9	3-aminomethyl-3,5,5-trimethylcyclohexylamine	220-666-8	2855-13-2	Xn; R21/22 C; R34 R43 R52-53	C R: 21/22-34-43-52/ 53 S: (1/2-)26-36/37/39- 45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-068-00-4	3,3'-dichlorobenzidine; 3,3'-dichlorobiphenyl-4,4'-ylenediamine	202-109-0	91-94-1	Carc. Cat. 2; R45 Xn; R21 R43 N; R50-53	T; N R: 45-21-43-50/53 S: 53-45-60-61		E
612-069-00-X	salts of 3,3'-dichlorobenzidine; salts of 3,3'-dichlorobiphenyl-4,4'-ylenediamine	— — —	— — —	Carc. Cat. 2; R45 Xn; R21 R43 N; R50-53	T; N R: 45-21-43-50/53 S: 53-45-60-61		AE
612-070-00-5	salts of benzidine [	208-519-6 208-520-1 244-236-4 252-984-8	531-85-1 531-86-2 21136-70-9 36341-27-2	Carc. Cat. 1; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61		AE
612-071-00-0	salts of 2-naphthylamine	209-030-0 210-313-6	553-00-4 612-52-2	Carc. Cat. 1; R45 Xn; R22 N; R51-53	T; N R: 45-22-51/53 S: 53-45-61		AE
612-072-00-6	biphenyl-4-ylamine; xenylamine; 4-aminobiphenyl	202-177-1	92-67-1	Carc. Cat. 1; R45 Xn; R22	T R: 45-22 S: 53-45		E
612-073-00-1	salts of biphenyl-4-ylamine; salts of xenylamine; salts of 4-aminobiphenyl	—	—	Carc. Cat. 1; R45 Xn; R22	T R: 45-22 S: 53-45		AE
612-074-00-7	benzyl dimethylamine	203-149-1	103-83-3	R10 Xn; R20/21/ 22 C; R34 R52-53	C R: 10-20/21/22-34- 52/53 S: (1/2-)26-36-45-61		
612-075-00-2	2-aminoethyldimethylamine; 2-dimethylaminoethylamine	203-541-2	108-00-9	F; R11 Xn; R21/22 C; R35	F; C R: 11-21/22-35 S: (1/2-)16-23-26-28- 36-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-076-00-8	ethyldimethylamine	209-940-8	598-56-1	F+; R12 ☒ Xn; R20/22 C; R34	F+; C R: 12-20/22-34 S: (1/2-)3-16-26-36-45		
612-077-00-3	dimethylnitrosoamine; N-nitrosodimethylamine	200-549-8	62-75-9	Carc. Cat. 2; R45 T+; R26 T; R25-48/25 N; R51-53	T+; N R: 45-25-26-48/25-51/53 S: 53-45-61	Carc. Cat. 2; R45: C ≥ 0,001 %	E
612-078-00-9	2,2'-dichloro-4,4'-methylenedianiline; 4,4'-methylene bis(2-chloroaniline)	202-918-9	101-14-4	Carc. Cat. 2; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61		E
612-079-00-4	salts of 2,2'-dichloro-4,4'-methylenedianiline; salts of 4,4'-methylenebis(2-chloroaniline)	—	—	Carc. Cat. 2; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61		AE
612-080-00-X	4-amino-N,N-diethylaniline; N,N-diethyl-p-phenyldiamine	202-214-1	93-05-0	T; R25 C; R34	T R: 25-34 S: (1/2-)26-36-45		
612-081-00-5	salts of 4,4'-bi-o-toluidine; salts of 3,3'-dimethylbenzidine; salts of o-toluidine	210-322-5 265-294-7 277-985-0	612-82-8 64969-36-4 74753-18-7	Carc. Cat. 2; R45 Xn; R22 N; R51-53	T; N R: 45-22-51/53 S: 53-45-61		AE
612-082-00-0	thiourea; thiocarbamide	200-543-5	62-56-6	Carc. Cat. 3; R40 Repr. Cat. 3; R63 Xn; R22 N; R51-53	Xn; N R: 22-40-51/53-63 S: (2-)36/37-61		
612-083-00-6	1-methyl-3-nitro-1-nitrosoguanidine	200-730-1	70-25-7	Carc. Cat. 2; R45 Xn; R20 Xi; R36/38 N; R51-53	T; N R: 45-20-36/38-51/53 S: 53-45-61	Carc. Cat. 2; R45: C ≥ 0,01 %	E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-084-00-1	dapsone; 4,4'-diamino diphenyl sulfone	201-248-4	80-08-0	Xn; R22	Xn R: 22 S: (2-)22		
612-085-00-7	4,4'-methylenedi-o-toluidine	212-658-8	838-88-0	Carc. Cat. 2; R45 Xn; R22 R43 N; R50-53	T; N R: 45-22-43-50/53 S: 53-45-60-61		E
612-086-00-2	amitraz (ISO); N,N-bis(2,4-xylyliminomethyl) methylamine	251-375-4	33089-61-1	Xn; R22-48/ 22 R43 N; R50-53	Xn; N R: 22-43-48/22-50/ 53 S: (2-)22-24-60-36/ 37-61	N; R50-53: $C \geq 2,5 \%$ N; R51-53: $0,25 \% \leq C < 2,5 \%$ R52-53: $0,025 \% \leq C < 0,25 \%$	
612-087-00-8	guazatine (ISO)		108173-90-6	T+; R26 Xn; R21/22 Xi; R37/38- 41 N; R50-53	T+; N R: 21/22-26-37/38- 41-50/53 S: (1/2-)26-28-36/37/ 39-38-45-46-60-61- 63		
612-088-00-3	simazine (ISO); 6-chloro-N,N'-diethyl-1,3,5-triazine-2,4-diamine	204-535-2	122-34-9	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-46-60-61		
612-089-00-9	1,5-naphthylenediamine	218-817-8	2243-62-1	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-60-61		
612-090-00-4	2,2'-(nitrosoimino)bisethanol	214-237-4	1116-54-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		
612-091-00-X	o-toluidine; 2-aminotoluene	202-429-0	95-53-4	Carc. Cat. 2; R45 T; R23/25 Xi; R36 N; R50	T; N R: 45-23/25-36-50 S: 53-45-61		E
612-092-00-5	N,N'-(2,2-dimethylpropylidene)hexamethylenediamine	401-660-6	1000-78-8	Xi; R38 R43	Xi R: 38-43 S: (2-)24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-093-00-0	3,5-dichloro-4-(1,1,2,2-tetrafluoroethoxy)aniline	401-790-3	104147-32-2	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24/25-26-57-60-61		
612-094-00-6	4-(2-chloro-4-trifluoromethyl)phenoxy-2-fluoroaniline hydrochloride	402-190-4	—	T; R48/25 Xn; R22-48/20 Xi; R41 R43 N; R50-53	T; N R: 22-41-43-48/20-48/25-50/53 S: (1/2-)26-36/37/39-45-60-61		
612-095-00-1	benzyl-2-hydroxydodecyldimethylammonium benzoate	402-610-6	11 3694-52-3	C; R34 Xn; R22 N; R50-53	C; N R: 22-34-50/53 S: (1/2-)26-28-36/37/39-45-60-61		
612-096-00-7	4,4'-carbonimidoylbis[N,N-dimethylaniline]	207-762-5	492-80-8	Carc. Cat. 3; R40 Xn; R22 Xi; R36 N; R51-53	Xn; N R: 22-36-40-51/53 S: (2-)36/37-61		
612-097-00-2	salts of 4,4'-carbonimidoylbis[N,N-dimethylaniline]	—	—	Carc. Cat. 3; R40 Xn; R22 Xi; R36 N; R51-53	Xn; N R: 22-36-40-51/53 S: (2-)36/37-61		A
612-098-00-8	nitrosodipropylamine	210-698-0	621-64-7	Carc. Cat. 2; R45 Xn; R22 N; R51-53	T; N R: 45-22-51/53 S: 53-45-61	Carc. Cat. 2; R45: C ≥ 0,001 %	E
612-099-00-3	4-methyl- <i>m</i> -phenylenediamine; 2,4-toluenediamine	202-453-1	95-80-7	Carc. Cat. 2; R45 T; R25 Xn; R21 Xi; R36 R43 N; R51-53	T; N R: 45-21-25-36-43-51/53 S: 53-45-61		E

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-100-00-7	propylenediamine	201-155-9	78-90-0	R10 Xn; R21/22 C; R35	C R: 10-21/22-35 S: (1/2-)26-37/39-45		
612-101-00-2	methenamine; hexamethylenetetramine	202-905-8	100-97-0	F; R11 R42/43	F; Xn R: 11-42/43 S: (2-)16-22-24-37		
612-102-00-8	N,N-bis(3-aminopropyl)methylamine	203-336-8	105-83-9	T; R23/24 Xn; R22 C; R34	T R: 22-23/24-34 S: (1/2-)26-36/37/39-45		
612-103-00-3	N,N,N',N'-tetramethylethylenediamine	203-744-6	110-18-9	F; R11 Xn; R20/22 C; R34	F; C R: 11-20/22-34 S: (1/2-)16-26-36/37/39-45		
612-104-00-9	hexamethylenediamine	204-679-6	124-09-4	Xn; R21/22 Xi; R37 C; R34	C R: 21/22-34-37 S: (1/2-)22-26-36/37/39-45		
612-105-00-4	2-piperazin-1-ylethylamine	205-411-0	140-31-8	Xn; R21/22 C; R34 R43 R52-53	C R: 21/22-34-43-52/53 S: (1/2-)26-36/37/39-45-61		
612-106-00-X	2,6-diethylaniline	209-445-7	579-66-8	Xn; R22	Xn R: 22 S: (2-)23-24		
612-107-00-5	1-phenylethylamine; [1] DL- α -methylbenzylamine [2]	202-706-6 [1] 210-545-8 [2]	98-84-0 [1] 618-36-0 [2]	Xn; R21/22 C; R34	C R: 21/22-34 S: (1/2-)26-28-36/37/39-45		
612-108-00-0	3-aminopropyltriethoxysilane	213-048-4	919-30-2	Xn; R22 C; R34	C R: 22-34 S: (1/2-)26-36/37/39-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-109-00-6	bis(2-dimethylaminoethyl)(methyl)amine	221-201-1	3030-47-5	T; R24 Xn; R22 C; R34	T R: 22-24-34 S: (1/2-)26-36/37/39-45		
612-110-00-1	2,2'-dimethyl-4,4'-methylenebis(cyclohexylamine)	229-962-1	6864-37-5	T; R23/24 Xn; R22 C; R35 N; R51-53	T; C; N R: 22-23/24-35-51/53 S: (1/2-)26-36/37/39-45-61		
612-111-00-7	2-methyl- <i>m</i> -phenylenediamine; 2,6-toluenediamine	212-513-9	823-40-5	Muta. Cat. 3; R68 Xn; R21/22 R43 N; R51-53	Xn; N R: 21/22-43-51/53-68 S: (2-)24-36/37-61		
612-112-00-2	<i>p</i> -anisidine; 4-methoxyaniline	203-254-2	104-94-9	T+; R26/27/28 R33 N; R50	T+; N R: 26/27/28-33-50 S: (1/2-)28-36/37-45-61		
612-113-00-8	6-methyl-2,4-bis(methylthio)phenylene-1,3-diamine	403-240-8	106264-79-3	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
612-114-00-3	<i>R,R</i> -2-hydroxy-5-(1-hydroxy-2-(4-phenylbut-2-ylamino)ethyl)benzamide hydrogen 2,3-bis(benzoyloxy)succinate	404-390-7	—	F; R11 R43 R52-53	F; Xi R: 11-43-52/53 S: (2-)24-37-61		
612-115-00-9	dimethyldioctadecylammonium hydrogen sulfate	404-050-8	123312-54-9	Xi; R36 R53	Xi R: 36-53 S: (2-)26-39-61		
612-116-00-4	C ₈₋₁₈ alkylbis(2-hydroxyethyl)ammonium bis(2-ethylhexyl)phosphate	404-690-8	68132-19-4	T; R23 C; R34 R43 N; R50-53	T; N R: 23-34-43-50/53 S: (1/2-)26-36/37/39-45-60-61		
612-117-00-X	C ₁₂₋₁₄ - <i>tert</i> -alkylamine, methylphosphonic acid salt	404-750-3	119415-07-5	Xn; R22 C; R34 N; R51-53	C; N R: 22-34-51/53 S: (1/2-)26-28-36/37/39-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-118-00-5	A reaction mass of: (1,3-dioxo-2H-benz(de)isoquinolin-2-ylpropyl)hexadecyldimethylammonium 4-toluenesulfonate; (1,3-dioxo-2H-benz(de)isoquinolin-2-ylpropyl)hexadecyldimethylammonium bromide	405-080-4	—	Xi; R41 N; R50-53	X; N R: 41-50/53 S: (2-)22-26-39-60-61		
612-119-00-0	benzyldimethyloctadecylammonium 3-nitrobenzenesulfonate	405-330-2	—	Xi; R38-41 N; R50-53	Xi; N R: 38-41-50/53 S: (2-)26-37/39-60-61		
612-120-00-6	aclonifen (ISO); 2-chloro-6-nitro-3-phenoxyaniline	277-704-1	74070-46-5	N; R50-53	N R: 50/53 S: 60-61		
612-121-00-1	amines, polyethylenepoly-; HEPA	268-626-9	68131-73-7	Xn; R21/22 C; R34 R43 N; R50-53	C; N R: 21/22-34-43-50/53 S: (1/2-)26-36/37/39-45-60-61		
612-122-00-7	hydroxylamine	232-259-2	7803-49-8	R5 ☒ Xn; R22-48/22 Xi; R37/38-41 R43 N; R50	Xn; N R: 5-22-37/38-41-43-48/22-50 S: (2-)22-26-36/37/39-61		
612-123-00-2	hydroxylammonium chloride; hydroxylamine hydrochloride; [1] bis(hydroxylammonium) sulphate; hydroxylamine sulphate (2:1); [2] hydroxylammonium hydrogensulphate; hydroxylamine sulphate (1:1) [3]	226-798-2 [1] 233-118-8 [2] 233-154-4 [3]	5470-11-1 [1] 10039-54-0 [2] 10046-00-1 [3]	☒ Xn; R22-48/22 Xi; R36/38 R43 N; R50	Xn; N R: 22-36/38-43-48/22-50 S: (2-)22-24-37-61		
612-124-00-8	N,N,N-trimethylanilinium chloride	205-319-0	138-24-9	T; R24/25	T R: 24/25 S: (1/2-)25-39-45-53		
612-125-00-3	2-methyl- <i>p</i> -phenylenediamine; 2,5-toluenediamine	202-442-1	95-70-5	T; R25 Xn; R20/21 R43 N; R51-53	T; N R: 20/21-25-43-51/53 S: (1/2-)24-37-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-126-00-9	toluene-2,4-diammonium sulphate; 4-methyl-m-phenylenediamine sulfate	265-697-8	65321-67-7	Carc. Cat. 2; R45 T; R25 Xn; R21 Xi; R36 R43 N; R51-53	T; N R: 45-21-25-36-43- 51/53 S: 53-45-61		E
612-127-00-4	3-aminophenol	209-711-2	591-27-5	Xn; R20/22 N; R51-53	Xn; N R: 20/22-51/53 S: (2-)28-61		
612-128-00-X	4-aminophenol	204-616-2	123-30-8	Muta. Cat. 3; R68 Xn; R20/22 N; R50-53	Xn; N R: 20/22-50/53-68 S: (2-)28-36/37-60-61		
612-129-00-5	diisopropylamine	203-558-5	108-18-9	F; R11 Xn; R20/22 C; R34	F; C R: 11-20/22-34 S: (1/2-)16-26-36/37/ 39-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
612-130-00-0	2,6-diamino-3,5-diethyltoluene; 4,6-diethyl-2-methyl-1,3-benzenediamine; [1] 2,4-diamino-3,5-diethyltoluene; 2,4-diethyl-6-methyl-1,3-benzenediamine; [2] diethylmethylbenzenediamine [3]	218-255-3 [1] 218-256-9 [2] 270-877-4 [3]	2095-01-4 [1] 2095-02-5 [2] 68479-98-1 [3]	Xn; R21/22- 48/22 Xi; R36 N; R50-53	Xn; N R: 21/22-36-48/22- 50/53 S: (2-)26-28-36/37/ 39-60-61		C
612-131-00-6	didecyldimethylammonium chloride	230-525-2	7173-51-5	Xn; R22 C; R34	C R: 22-34 S: (2-)26-36/37/39-45		
612-132-00-1	N,N'-diphenyl-p-phenylenediamine; N,N'-diphenyl-1,4-benzenediamine	200-806-4	74-31-7	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
612-133-00-7	(4-ammonio- <i>m</i> -tolyl)ethyl(2-hydroxyethyl)ammonium sul- phate; 4-(N-ethyl-N-2-hydroxyethyl)-2-methylphenylenediamine sul- phate	247-162-0	25646-77-9	T; R25 Xn; R48/22 R43 N; R50-53	T; N R: 25-43-48/22-50/ 53 S: (1/2-)24-37-45-60- 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-134-00-2	N-(2-(4-amino-N-ethyl- <i>m</i> -toluidino)ethyl)methanesulphona- mide sesquisulphate; 4-(N-ethyl-N-2-methanesulphonylaminoethyl)-2-methylphe- nylenediamine sesquisulphate monohydrate	247-161-5	25646-71-3	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
612-135-00-8	N-2-naphthylaniline; N-phenyl-2-naphthylamine	205-223-9	135-88-6	Carc. Cat. 3; R40 Xi; R36/38 R43 N; R51-53	Xn; N R: 36/38-40-43-51/ 53 S: (2-)26-36/37-61		
612-136-00-3	N-isopropyl-N'-phenyl- <i>p</i> -phenylenediamine	202-969-7	101-72-4	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61	R43: C ≥ 0,1 %	
612-137-00-9	4-chloroaniline	203-401-0	106-47-8	Carc. Cat. 2; R45 T; R23/24/25 R43 N; R50-53	T; N R: 45-23/24/25-43- 50/53 S: 53-45-60-61		E
612-138-00-4	furalaxyl (ISO); methyl N-(2,6-dimethylphenyl)-N-(2-furylcarbonyl)-DL-alani- nate	260-875-1	57646-30-7	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)36/37/39-61		
612-139-00-X	mefenacet (ISO); 2-(benzothiazol-2-yloxy)-N-methyl-N-phenylacetamide	277-328-8	73250-68-7	N; R51-53	N R: 51/53 S: 61		
612-140-00-5	quaternary ammonium compounds, benzyl-C ₈₋₁₈ -alkyldime- thyl, chlorides	264-151-6	63449-41-2	Xn; R21/22 C; R34 N; R50	C; N R: 21/22-34-50 S: (2-)36/37/39-45-61		
612-141-00-0	4,4'-methylenebis(2-ethylaniline); 4,4'-methylenebis(2-ethylbenzeneamine)	243-420-1	19900-65-3	Carc. Cat. 3; R40 Xn; R22 N; R50-53	Xn; N R: 22-40-50/53 S: (2-)36/37-60-61		
612-142-00-6	biphenyl-2-ylamine	201-990-9	90-41-5	Carc. Cat. 3; R40 Xn; R22 R52-53	Xn R: 22-40-52/53 S: (2-)36/37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-143-00-1	N ⁵ ,N ⁵ -diethyltoluene-2,5-diamine monohydrochloride; 4-diethylamino-2-methylaniline monohydrochloride	218-130-3	2051-79-8	T; R25 Xi; R36 R43 N; R50-53	T; N R: 25-36-43-50/53 S: (1/2-)24-26-37-45-60-61		
612-144-00-7	flumetralin (ISO); N-(2-chloro-6-fluorobenzyl)-N-ethyl- α,α,α -trifluoro-2,6-dinitro- <i>p</i> -toluidine	—	62924-70-3	Xi; R36/38 R43 N; R50-53	Xi; N R: 36/38-43-50/53 S: (2-)36/37-60-61		
612-145-00-2	<i>o</i> -phenylenediamine	202-430-6	95-54-5	Carc. Cat. 3; R40 Muta. Cat. 3; R68 T; R25 Xn; R20/21 Xi; R36 R43 N; R50-53	T; N R: 20/21-25-36-40-43-50/53-68 S: (1/2-)28-36/37-45-60-61		
612-146-00-8	<i>o</i> -phenylenediamine dihydrochloride	210-418-7	615-28-1	Carc. Cat. 3; R40 Muta. Cat. 3; R68 T; R25 Xn; R20/21 Xi; R36 R43 N; R50-53	T; N R: 20/21-25-36-40-43-50/53-68 S: (1/2-)28-36/37-45-60-61		
612-147-00-3	<i>m</i> -phenylenediamine	203-584-7	108-45-2	Muta. Cat. 3; R68 T; R23/24/25 Xi; R36 R43 N; R50-53	T; N R: 23/24/25-36-43-50/53-68 S: (1/2-)28-36/37-45-60-61		
612-148-00-9	<i>m</i> -phenylenediamine dihydrochloride	208-790-0	541-69-5	Muta. Cat. 3; R68 T; R23/24/25 Xi; R36 R43 N; R50-53	T; N R: 23/24/25-36-43-50/53-68 S: (1/2-)28-36/37-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-149-00-4	1,3-diphenylguanidine	203-002-1	102-06-7	Repr. Cat. 3; R62 Xn; R22 Xi; R36/37/ 38 N; R51-53	Xn; N R: 22-36/37/38-51/ 53-62 S: (2-)26-36/37/39-61		
612-150-00-X	spiroxamine (ISO); 8- <i>tert</i> -butyl-1,4-dioxaspiro[4.5]decan-2-ylmethyl(ethyl)(propyl)amine	—	118134-30-8	Xn; R20/21/ 22 Xi; R38 R43 N; R50-53	Xn; N R: 20/21/22-38-43- 50/53 S: (2-)36/37/39-46- 60-61		
612-151-00-5	diaminotoluene, technical product - reaction mass of [2] and [3]; methyl-phenylenediamine; [1] 4-methyl- <i>m</i> -phenylene diamine; [2] 2-methyl- <i>m</i> -phenylene diamine [3]	246-910-3 [1] 202-453-1 [2] 212-513-9 [3]	25376-45-8 [1] 95-80-7 [2] 823-40-5 [3]	Carc. Cat. 2; R45 T; R25 Xn; R20/21 Xi; R36 R43 N; R51-53	T; N R: 45-20/21-25-36- 43-51/53 S: 53-45-61		E
612-152-00-0	<i>N,N</i> -diethyl- <i>N'</i> , <i>N'</i> -dimethylpropan-1,3-diyl-diamine	406-610-7	62478-82-4	R10 Xn; R20/22- 48/20 C; R35 R52-53	C R: 10-20/22-35-48/ 20-52/53 S: (1/2-)26-28-36/37/ 39-45-61		
612-153-00-6	4-[<i>N</i> -ethyl- <i>N</i> -(2-hydroxyethyl)amino]-1-(2-hydroxyethyl)amino-2-nitrobenzene, monohydrochloride	407-020-2	132885-85-9	Xn; R22 R43 R52-53	Xn R: 22-43-52/53 S: (2-)22-24-37-61		
612-154-00-1	6'-(isobutylethylamino)-3'-methyl-2'-phenylamino-spiro[isobenzoo-2-oxofuran-7,9'-(9 <i>H</i>)]-xanthene]	410-890-6	95235-29-3	R53	R: 53 S: 61		
612-155-00-7	2'-anilino-6'-((3-ethoxypropyl)ethylamino)-3'-methylspiro(isobenzoo-3-oxofuran)-1-(1 <i>H</i>)-9'-xanthene	411-730-8	93071-94-4	R53	R: 53 S: 61		
612-156-00-2	reaction mass of: trihexadecylmethylammonium chloride; dihexadecyldimethylammonium chloride	405-620-9	—	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-157-00-8	(Z)-1-benzo[b]thien-2-ylethanone oxime hydrochloride	410-780-8	—	Xn; R22-48/22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-48/22-51/53 S: (2-)22-26-36/37/39-61		
612-158-00-3	reaction mass of: bis(5-dodecyl-2-hydroxybenzald-oximate) copper (II) C ₁₂ -alkyl group is branched; 4-dodecylsalicylaldoxime	410-820-4	—	R53	R: 53 S: 61		
612-159-00-9	Reaction products of: trimethylhexamethylene diamine (a mixture of 2,2,4-trimethyl-1,6-hexanediamine and 2,4,4-trimethyl-1,6-hexanediamine, EINECS listed), Epoxide 8 (mono[(C ₁₀ -C ₁₆ -alkyloxy)methyl]oxirane derivatives) and p-toluene-sulfonic acid	410-880-1	—	Xn; R22 C; R34 N; R50-53	C; N R: 22-34-50/53 S: (1/2-)23-26-36/37/39-45-60-61		
612-160-00-4	p-toluidine; 4-aminotoluene; [1] toluidinium chloride; [2] toluidine sulphate (1:1) [3]	203-403-1 [1] 208-740-8 [2] 208-741-3 [3]	106-49-0 [1] 540-23-8 [2] 540-25-0 [3]	Carc. Cat. 3; R40 T; R23/24/25 Xi; R36 R43 N; R50	T; N R: 23/24/25-36-40-43-50 S: (1/2-)28-36/37-45-61		
612-161-00-X	2,6-xylidine; 2,6-dimethylaniline	201-758-7	87-62-7	Carc. Cat. 3; R40 Xn; R20/21/22 Xi; R37/38 N; R51-53	Xn; N R: 20/21/22-37/38-40-51/53 S: (2-)23-25-36/37-61		
612-162-00-5	dimethyldioctadecylammonium chloride; DODMAC	203-508-2	107-64-2	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)24-26-39-46-60-61		
612-163-00-0	metalaxyl-M (ISO); mefenoxam; (R)-2-[(2,6-dimethylphenyl)-methoxyacetyl amino]propionic acid methyl ester	—	70630-17-0	Xn; R22 Xi; R41	Xn R: 22-41 S: (2-)26-39-46		
612-164-00-6	2-butyl-2-ethyl-1,5-diaminopentane	412-700-7	137605-95-9	Xn; R21/22-48/22 C; R34 R43 R52-53	C R: 21/22-34-43-48/22-52/53 S: (1/2-)26-36/37/39-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-165-00-1	N,N'-diphenyl-N,N'-bis(3-methylphenyl)-(1,1'-diphenyl)-4,4'-diamine	413-810-8	65181-78-4	N; R51-53	N R: 51/53 S: 61		
612-166-00-7	reaction mass of: <i>cis</i> -(5-ammonium-1,3,3-trimethyl)-cyclohexanemethylammonium phosphate (1:1); <i>trans</i> -(5-ammonium-1,3,3-trimethyl)-cyclohexanemethylammonium phosphate (1:1)	411-830-1	114765-88-7	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)24-26-37/39-61		
612-167-00-2	5-acetyl-3-amino-10,11-dihydro-5H-dibenz[b,f]azepine-hydrochloride	410-490-1	—	Xn; R22-48/22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-48/22-51/53 S: (2-)22-26-36/37/39-61		
612-168-00-8	3,5-dichloro-2,6-difluoropyridine-4-amine	220-630-1	2840-00-8	Xn; R21/22 N; R51-53	Xn; N R: 21/22-51/53 S: (2-)36/37-61		
612-170-00-9	4-chlorophenyl cyclopropyl ketone O-(4-aminobenzyl)oxime	405-260-2	—	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
612-171-00-4	N,N,N',N'-tetraglycidyl-4,4'-diamino-3,3'-diethyldiphenylmethane	410-060-3	130728-76-6	Muta. Cat. 3; R68 R43 N; R51-53	Xn; N R: 43-68-51/53 S: (2-)36/37-61		
612-172-00-X	4,4'-methylenebis(N,N'-dimethylcyclohexanamine	412-840-9	13474-64-1	Xn; R22-48/22 C; R35 R52-53	C R: 22-35-48/22-52/53 S: (1/2-)26-36/37/39-45-61		
612-173-00-5	lithium 1-amino-4-(4- <i>tert</i> -butylanilino)anthraquinone-2-sulfonate	411-140-0	125328-86-1	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)22-26-36/37/39-61		
612-174-00-0	4,4-dimethoxybutylamine	407-690-6	19060-15-2	Xn; R22 C; R34 R43 R52-53	C R: 22-34-43-52/53 S: (1/2-)26-36/37/39-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-175-00-6	2-(O-aminooxy)ethylamine dihydrochloride	412-310-7	37866-45-8	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
612-176-00-1	Polymer of 1,3-dibromopropane and N,N-diethyl-N',N'-dimethyl-1,3-propanediamine	410-570-6	143747-73-3	N; R50-53	N R: 50/53 S: 60-61		
612-177-00-7	2-naphthylamino-6-sulfomethylamide	412-120-4	104295-55-8	Xn; R48/22 R43 N; R51-53	Xn; N R: 43-48/22-51/53 S: (2-)22-36/37-61		
612-178-00-2	1,4,7,10-tetraazacyclododecane disulfate	412-080-8	112193-77-8	Xn; R22 Xi; R37-41 R52-53	Xn R: 22-37-41-52/53 S: (2-)26-36/37/39-61		
612-179-00-8	1-(2-propenyl)pyridinium chloride	412-740-5	25965-81-5	Xn; R22 R43	Xn R: 22-43 S: (2-)24-37		
612-180-00-3	3-aminobenzylamine	412-230-2	4403-70-7	Xn; R22 C; R34 N; R51-53	C; N R: 22-34-51/53 S: (1/2-)22-26-36/37/ 39-45-61		
612-181-00-9	2-phenylthioaniline	413-030-8	1134-94-7	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
612-182-00-4	1-ethyl-1-methylmorpholinium bromide	418-210-1	65756-41-4	Muta. Cat. 3; R68	Xn R: 68 S: (2-)36/37		
612-183-00-X	1-ethyl-1-methylpyrrolidinium bromide	418-200-5	69227-51-6	Muta. Cat. 3; R68	Xn R: 68 S: (2-)36/37		
612-184-00-5	6'-(dibutylamino)-3'-methyl-2'-(phenylamino)spiro[isobenzofuran-1(3H),9-(9H)-xanthen]-3-one	403-830-5	89331-94-2	R52-53	R: 52/53 S: 61		
612-185-00-0	1-[3-[4-((heptadecafluorononyl)oxy)-benzamido]propyl]-N,N,N-trimethylammonium iodide	407-400-8	59493-72-0	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-186-00-6	bis(N-(7-hydroxy-8-methyl-5-phenylphenazin-3-ylidene)dimethylammonium) sulfate	406-770-8	149057-64-7	Xn; R48/22 Xi; R41 R43 N; R50-53	Xn; N R: 41-43-48/22-50/53 S: (2-)22-26-36/37/39-60-61		
612-187-00-1	2,3,4-trifluoroaniline	407-170-9	3862-73-5	Xn; R21/22-48/22 Xi; R38-41 N; R51-53	Xn; N R: 21/22-38-41-48/22-51/53 S: (2-)23-26-36/37/39-61		
612-188-00-7	4,4'-(9H-fluoren-9-ylidene)bis(2-chloroaniline)	407-560-9	107934-68-9	N; R51-53	N R: 51/53 S: 61		
612-189-00-2	4-amino-2-(aminomethyl)phenol dihydrochloride	412-510-4	135043-64-0	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)22-24-37-60-61		
612-190-00-8	4,4'-methylenebis(2-isopropyl-6-methylaniline)	415-150-6	16298-38-7	Xn; R48/22 N; R51-53	Xn; N R: 48/22-51/53 S: (2-)36-61		
612-191-00-3	Polymer of allylamine hydrochloride	415-050-2	71550-12-4	Xn; R22 R43	Xn R: 22-43 S: (2-)36/37		
612-192-00-9	2-isopropyl-4-(N-methyl)aminomethylthiazole	414-800-6	154212-60-9	Xn; R21/22 Xi; R38-41 N; R51-53	Xn; N R: 21/22-38-41-51/53 S: (2-)26-36/37/39-61		
612-193-00-4	3-methylaminomethylphenylamine	414-570-7	18759-96-1	Xn; R21/22 C; R34 R43 N; R50-53	C; N R: 21/22-34-43-50/53 S: (1/2-)26-36/37/39-45-60-61		
612-194-00-X	2-hydroxy-3-[(2-hydroxyethyl)-[2-(1-oxotetradecyl)amino]ethyl]amino]-N,N,N-trimethyl-1-propanammonium chloride	414-670-0	141890-30-4	Xn; R22 Xi; R41 N; R50-53	Xn; N R: 22-41-50/53 S: (2-)26-39-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-195-00-5	bis[tributyl 4-(methylbenzyl)ammonium] 1,5-naphthalenedi-sulfonate	415-210-1	160236-81-7	Xn; R20/22 Xi; R41 N; R50-53	Xn; N R: 20/22-41-50/53 S: (2-)26-36/39-60-61		
612-196-00-0	4-chloro- <i>o</i> -toluidine; [1] 4-chloro- <i>o</i> -toluidine hydrochloride [2]	202-441-6 [1] 221-627-8 [2]	95-69-2 [1] 3165-93-3 [2]	Carc. Cat. 2; R45 Muta. Cat. 3; R68 T; R23/24/25 N; R50-53	T; N R: 45-23/24/25-68- 50/53 S: 53-45-60-61		E
612-197-00-6	2,4,5-trimethylaniline; [1] 2,4,5-trimethylaniline hydrochloride [2]	205-282-0 [1] - [2]	137-17-7 [1] 21436-97-5 [2]	Carc. Cat. 2; R45 T; R23/24/25 N; R51-53	T; N R: 45-23/24/25-51/ 53 S: 53-45-61		E
612-198-00-1	4,4'-thiodianiline and its salts	205-370-9	139-65-1	Carc. Cat. 2; R45 Xn; R22 N; R51-53	T; N R: 45-22-51/53 S: 53-45-61		E
612-199-00-7	4,4'-oxydianiline and its salts; <i>p</i> -aminophenyl ether	202-977-0	101-80-4	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 3; R62 T; R23/24/25 N; R51-53	T; N R: 45-46-23/24/25- 62-51/53 S: 53-45-61		E
612-200-00-0	2,4-diaminoanisole; 4-methoxy- <i>m</i> -phenylenediamine; [1] 2,4-diaminoanisole sulphate [2]	210-406-1 [1] 254-323-9 [2]	615-05-4 [1] 39156-41-7 [2]	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xn; R22 N; R51-53	T; N R: 45-22-68-51/53 S: 53-45-61		E
612-201-00-6	<i>N,N,N',N'</i> -tetramethyl-4,4'-methylenedianiline	202-959-2	101-61-1	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61		
612-202-00-1	3,4-dichloroaniline	202-448-4	95-76-1	T; R23/24/25 Xi; R41 R43 N; R50-53	T; N R: 23/24/25-41-43- 50/53 S: (1/2-)26-36/37/39- 45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-204-00-2	C.I. Basic Violet 3; 4-[4,4'-bis(dimethylamino) benzhydrylidene]cyclohexa-2,5-dien-1-ylidene]dimethylammonium chloride	208-953-6	548-62-9	Carc. Cat. 3; R40 Xn; R22 Xi; R41 N; R50-53	Xn; N R: 22-40-41-50/53 S: (2-)26-36/37/39-46-60-61		
612-205-00-8	C.I. Basic Violet 3 with ≥ 0.1 % of Michler's ketone (EC no. 202-027-5)	208-953-6	548-62-9	Carc. Cat. 2; R45 Xn; R22 Xi; R41 N; R50-53	T; N R: 45-22-41-50/53 S: 53-45-60-61		E
612-206-00-3	famoxadone (ISO); 3-anilino-5-methyl-5-(4-phenoxyphenyl)-1,3-oxazolidine-2,4-dione	—	131807-57-3	Xn; R48/22 N; R50-53	Xn; N R: 48/22-50/53 S: (2-)46-60-61		
612-207-00-9	4-ethoxyaniline; <i>p</i> -phenetidine	205-855-5	156-43-4	Muta. Cat. 3; R68 Xn; R20/21/ 22 Xi; R36 R43	Xn R: 20/21/22-36-43-68 S: (2-)36/37-46		
612-209-00-X	6-methoxy- <i>m</i> -toluidine; <i>p</i> -cresidine	204-419-1	120-71-8	Carc. Cat. 2; R45 Xn; R22	T R: 45-22 S: 53-45		E
612-210-00-5	5-nitro- <i>o</i> -toluidine; [1] 5-nitro- <i>o</i> -toluidine hydrochloride [2]	202-765-8 [1] 256-960-8 [2]	99-55-8 [1] 51085-52-0 [2]	Carc. Cat. 3; R40 T; R23/24/25 R52-53	T R: 23/24/25-40-52/ 53 S: (1/2-)36/37-45-61		
612-211-00-0	N-[(benzotriazole-1-yl)methyl]-4-carboxybenzenesulfonamide	416-470-9	170292-97-4	Xi; R36 N; R51-53	Xi; N R: 36-51/53 S: (2-)26-61		
612-212-00-6	2,6-dichloro-4-trifluoromethylaniline	416-430-0	24279-39-8	Xn; R20/22 Xi; R38 R43 N; R50-53	Xn; N R: 20/22-38-43-50/ 53 S: (2-)24-37-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
612-213-00-1	isobutylidene-(2-(2-isopropyl-4,4-dimethyloxazolidine-3-yl)-1,1-dimethylethyl)amine	419-850-2	148348-13-4	C; R34 R52-53	C R: 34-52/53 S: (1/2-)23-26-36/37/ 39-45-61		
612-214-00-7	4-(2,2-diphenylethenyl)-N,N-di-phenylbenzenamine	421-390-2	89114-90-9	R53	R: 53 S: 61		
612-215-00-2	3-chloro-2-(isopropylthio)aniline	421-700-6	179104-32-6	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
612-217-00-3	1-methoxy-2-propylamine	422-550-4	37143-54-7	F; R11 C; R34 Xn; R22 R52-53	F; C R: 11-22-34-52/53 S: (1/2-)9-26-36/37/ 39-45-61		
613-001-00-1	ethyleneimine; aziridine	205-793-9	151-56-4	F; R11 Carc. Cat. 2; R45 Muta. Cat. 2; R46 T+; R26/27/ 28 C; R34 N; R51-53	F; T+; N R: 45-46-11-26/27/ 28-34-51/53 S: 53-45-61		D E
613-002-00-7	pyridine	203-809-9	110-86-1	F; R11 Xn; R20/21/ 22	F; Xn R: 11-20/21/22 S: (2-)26-28	Xn; R20/21/22: C ≥ 5 %	
613-003-00-2	1,2,3,4-tetranitrocarbazole	—	6202-15-9	E ⊗ R1 Xn; R20/21/ 22	E; Xn R: 1-20/21/22 S: (2-)35		
613-004-00-8	crimidine (ISO); 2-chloro-6-methylpyrimidin-4-yl dimethylamine	208-622-6	535-89-7	T+; R28	T+ R: 28 S: (1/2-)36/37-45		
613-007-00-4	desmetryne (ISO); 6-isopropylamino-2-methylamino-4-methylthio-1,3,5-triazine	213-800-1	1014-69-3	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-008-00-X	dazomet (ISO); tetrahydro-3,5-dimethyl-1,3,5-thiadiazine-2-thione	208-576-7	533-74-4	Xn; R22 Xi; R36 N; R50-53	Xn; N R: 22-36-50/53 S: (2-)15-22-24-60-61		
613-009-00-5	2,4,6-trichloro-1,3,5-triazine; cyanuric chloride	203-614-9	108-77-0	R14 T+; R26 Xn; R22 C; R34 R43	T+; R: 14-22-26-34-43 S: (1/2-)26-28-36/37/ 39-45-46-63	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
613-010-00-0	ametryn (ISO); 2-ethylamino-4-isopropylamino-6-methylthio-1,3,5-triazine	212-634-7	834-12-8	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)36-60-61		
613-011-00-6	amitrole (ISO); 1,2,4-triazol-3-ylamine	200-521-5	61-82-5	Repr. Cat. 3; R63 Xn; R48/22 N; R51-53	Xn; N R: 48/22-63-51/53 S: (2-)13-36/37-61		
613-012-00-1	bentazone (ISO); 3-isopropyl-2,1,3-benzothiadiazine-4-one-2,2-dioxide	246-585-8	25057-89-0	Xn; R22 Xi; R36 R43 R52-53	Xn R: 22-36-43-52/53 S: (2-)24-37-61		
613-013-00-7	cyanazine (ISO); 2-(4-chloro-6-ethylamino-1,3,5-triazine-2-ylamino)-2-methylpropionitrile	244-544-9	21725-46-2	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)37-60-61		
613-014-00-2	ethoxyquin (ISO); 6-ethoxy-1,2-dihydro-2,2,4-trimethylquinoline	202-075-7	91-53-2	Xn; R22	Xn R: 22 S: (2-)24		
613-015-00-8	fenazaflor (ISO); phenyl 5,6-dichloro-2-trifluoromethylbenzimidazole-1-carboxylate	238-134-9	14255-88-0	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		
613-016-00-3	fuberidazole (ISO); 2-(2-furyl)benzimidazole	223-404-0	3878-19-1	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)22-60-61		
613-017-00-9	bis (8-hydroxyquinolinium) sulphate	205-137-1	134-31-6	Xn; R22	Xn R: 22 S: (2-)36		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-018-00-4	morfamquat (ISO); 1,1'-bis(3,5-dimethylmorpholinocarbonylmethyl)-4,4'-bipyridilium ion	—	7411-47-4	Xn; R22 Xi; R36/37/38 R52-53	Xn R: 22-36/37/38-52/53 S: (2-)22-36-61		
613-019-00-X	thioquinox (ISO); 2-thio-1,3-dithiolo(4,5,b)quinoxaline	202-272-8	93-75-4	Xn; R22	Xn R: 22 S: (2-)24		
613-020-00-5	tridemorph (ISO); 2,6-dimethyl-4-tridecylmorpholine	246-347-3	24602-86-6	Repr. Cat. 2; R61 Xn; R20/22 Xi; R38 N; R50-53	T; N R: 61-20/22-38-50/53 S: 53-45-60-61		E
613-021-00-0	dithianon (ISO); 5,10-dihydro-5,10-dioxonaphtho(2,3-b)(1,4)dithiazine-2,3-dicarbonitrile	222-098-6	3347-22-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24-60-61		
613-022-00-6	pyrethrins including cinerins, with the exception of those specified elsewhere in this Annex	—	—	Xn; R20/21/22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)13-60-61		A
613-023-00-1	2-methyl-4-oxo-3-(penta-2,4-dienyl)cyclopent-2-enyl [1R-[1 α [S*(Z)],3 β]]-chrysanthemate; pyrethrin I	204-455-8	121-21-1	Xn; R20/21/22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)13-60-61		
613-024-00-7	2-methyl-4-oxo-3-(penta-2,4-dienyl)cyclopent-2-enyl[1R-[1 α [S*(Z)](3 β)]-3-(3-methoxy-2-methyl-3-oxoprop-1-enyl)-2,2-dimethylcyclopropanecarboxylate; pyrethrin II	204-462-6	121-29-9	Xn; R20/21/22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)13-60-61		
613-025-00-2	cinerin I; 3-(but-2-enyl)-2-methyl-4-oxocyclopent-2-enyl 2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate	246-948-0	25402-06-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-026-00-8	cinerin II; 3-(but-2-enyl)-2-methyl-4-oxocyclopent-2-enyl 2,2-dimethyl-3-(3-methoxy-2-methyl-3-oxoprop-1-enyl)cyclopropanecarboxylate	204-454-2	121-20-0	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-027-00-3	piperidine	203-813-0	110-89-4	F; R11 T; R23/24 C; R34	F; T R: 11-23/24-34 S: (1/2-)16-26-27-45	T; R23/24: C $\geq$ 5 % Xn; R20/21: 1 % $\leq$ C < 5 % C; R34: C $\geq$ 5 % Xi; R36/38: 1 % $\leq$ C < 5 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-028-00-9	morpholine	203-815-1	110-91-8	R10 Xn; R20/21/ 22 C; R34	C R: 10-20/21/22-34 S: (1/2-)23-36-45	C; R34: C ≥ 10 % Xi; R36/38: 1 % ≤ C < 10 %	
613-029-00-4	dichloro-1,3,5-triazinetriione; dichloroisocyanuric acid	220-487-5	2782-57-2	O; R8 Xn; R22 R31 Xi; R36/37 N; R50-53	O; Xn; N R: 8-22-31-36/37-50/ 53 S: (2-)8-26-41-60-61		
613-030-00-X	troclosene potassium; [1] troclosene sodium [2]	218-828-8 [1] 220-767-7 [2]	2244-21-5 [1] 2893-78-9 [2]	O; R8 ⊗ Xn; R22 R31 Xi; R36/37 N; R50-53	O; Xn; N R: 8-22-31-36/37-50/ 53 S: (2-)8-26-41-60-61	Xn; R22: C ≥ 10 % Xi; R36/37: C ≥ 10 % R31: C ≥ 10 %	
613-030-01-7	troclosene sodium, dihydrate	220-767-7	51580-86-0	Xn; R22 R31 Xi; R36/37 N; R50-53	Xn; N R: 22-31-36/37-50/ 53 S: (2-)8-26-41-60-61		
613-031-00-5	symclosene; trichloroisocyanuric acid; trichloro-1,3,5-triazinetriion	201-782-8	87-90-1	O; R8 Xn; R22 Xi; R36/37 R31 N; R50-53	O; Xn; N R: 8-22-31-36/37-50/ 53 S: (2-)8-26-41-60-61		
613-032-00-0	methyl-2,3,5,6-tetrachloro-4-pyridylsulphone; 2,3,5,6-tetrachloro-4-(methylsulphonyl)pyridine	236-035-5	13108-52-6	Xn; R21/22 Xi; R36 R43	Xn R: 21/22-36-43 S: (2-)26-28		
613-033-00-6	2-methylaziridine; propyleneimine	200-878-7	75-55-8	F; R11 Carc. Cat. 2; R45 T+; R26/27/ 28 Xi; R41 N; R51-53	F; T+; N R: 45-11-26/27/28- 41-51/53 S: 53-45-61	Carc. Cat. 2; R45: C ≥ 0,01 %	E
613-034-00-1	1,2-dimethylimidazole	217-101-2	1739-84-0	Xn; R22 Xi; R38-41	Xn R: 22-38-41 S: (2-)24-26		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-035-00-7	1-methylimidazole	210-484-7	616-47-7	Xn; R21/22 C; R34	C R: 21/22-34 S: (1/2-)26-36-45		
613-036-00-2	2-methylpyridine; 2-picoline	203-643-7	109-06-8	R10 Xn; R20/21/ 22 Xi; R36/37	Xn R: 10-20/21/22-36/ 37 S: (2-)26-36		
613-037-00-8	4-methylpyridine; 4-picoline	203-626-4	108-89-4	R10 T; R24 Xn; R20/22 Xi; R36/37/ 38	T R: 10-20/22-24-36/ 37/38 S: (1/2-)26-36-45		
613-038-00-3	6-phenyl-1,3,5-triazine-2,4-diyl diamine; 6-phenyl-1,3,5-triazine-2,4-diamine; benzoguanamine	202-095-6	91-76-9	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
613-039-00-9	ethylene thiourea; imidazolidine-2-thione; 2-imidazoline-2-thiol	202-506-9	96-45-7	Repr. Cat. 2; R61 Xn; R22	T R: 61-22 S: 53-45		E
613-040-00-4	azaconazole (ISO); 1-{{[2-(2,4-dichlorophenyl)-1,3-dioxolan-2-yl]methyl}-1H- 1,2,4-triazole	262-102-3	60207-31-0	Xn; R22	Xn R: 22 S: (2-)46		
613-041-00-X	morpholine-4-carbonyl chloride	239-213-0	15159-40-7	R14 Carc. Cat. 3; R40 Xi; R36/38	Xn R: 14-36/38-40 S: (2-)26-30-36-38		
613-042-00-5	imazalil (ISO); 1-[2-(allyloxy)-2-(2,4-dichlorophenyl)ethyl]-1H-imidazole	252-615-0	35554-44-0	Xn; R20/22 Xi; R41 N; R50-53	Xn; N R: 20/22-41-50/53 S: (2-)26-39-60-61		
613-043-00-0	imazalil sulphate (ISO) powder; 1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1H-imidazolium hydrogen sulphate; [1] (±)-1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1H-imidazo- lium hydrogen sulphate [2]	261-351-5 [1] 281-291-3 [2]	58594-72-2 [1] 83918-57-4 [2]	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24/25-37-46- 60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-043-01-8	imazalil sulphate (ISO), aqueous solution; 1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1 <i>H</i> -imidazolium hydrogen sulphate; [1] (±)-1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1 <i>H</i> -imidazo- lium hydrogen sulphate [2]	261-351-5 [1] 281-291-3 [2]	58594-72-2 [1] 83918-57-4 [2]	Xn; R22 C; R34 R43 N; R50-53	C; N R: 22-34-43-50/53 S: (2-)26-36/37/39- 45-60-61	C; R34: C ≥ 50 % Xi; R38: 30 % ≤ C < 50 % Xi; R41: 15 % ≤ C < 50 % Xi; R36: 5 % ≤ C < 15 %	
613-044-00-6	captan (ISO); 1,2,3,6-tetrahydro- <i>N</i> -(trichloromethylthio)phthalimide	205-087-0	133-06-2	Carc. Cat. 3; R40 T; R23 Xi; R41 R43 N; R50	T; N R: 23-40-41-43-50 S: (1/2-)26-29-36/37/ 39-45-61		
613-045-00-1	folpet (ISO); <i>N</i> -(trichloromethylthio)phthalimide	205-088-6	133-07-3	Carc. Cat. 3; R40 Xn; R20 Xi; R36 R43 N; R50	Xn; N R: 20-36-40-43-50 S: (2-)36/37-46-61		
613-046-00-7	captafol (ISO); 1,2,3,6-tetrahydro- <i>N</i> -(1,1,2,2-tetrachloroethylthio)phthali- mide	219-363-3	2425-06-1	Carc. Cat. 2; R45 R43 N; R50-53	T; N R: 45-43-50/53 S: 53-45-60-61		
613-047-00-2	1-dimethylcarbamoyl-5-methylpyrazol-3-yl dimethylcarba- mate; dimetilan (ISO)	211-420-0	644-64-4	T; R25 Xn; R21 N; R50-53	T; N R: 21-25-50/53 S: (1/2-)36/37-45-60- 61		
613-048-00-8	carbendazim (ISO); methyl benzimidazol-2-ylcarbamate	234-232-0	10605-21-7	Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 N; R50-53	T; N R: 46-60-61-50/53 S: 53-45-60-61		
613-049-00-3	benomyl (ISO); methyl 1-(butylcarbamoyl)benzimidazol-2-ylcarbamate	241-775-7	17804-35-2	Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 Xi; R37/38 R43 N; R50-53	T; N R: 46-60-61-37/38- 43-50/53 S: 53-45-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-050-00-9	carbadox (INN); methyl 3-(quinoxalin-2-ylmethylene)carbazate 1,4-dioxide; 2-(methoxycarbonylhydrazonomethyl)quinoxaline 1,4-dioxide	229-879-0	6804-07-5	F; R11 Carc. Cat. 2; R45 Xn; R22	F; T R: 45-11-22 S: 53-45		E
613-051-00-4	molinate (ISO); S-ethyl 1-perhydroazepinecarbothioate; S-ethyl perhydroazepine-1-carbothioate	218-661-0	2212-67-1	Carc. Cat. 3; R40 Repr. Cat. 3; R62 Xn; R20/ 2248/22 R43 N; R50-53	Xn; N R: 20/22-40-43-48/ 22-62-50/53 S: (2-)36/37-46-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
613-052-00-X	trifenmorph (ISO); 4-tritylmorpholine	215-812-2	1420-06-0	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-053-00-5	anilazine (ISO); 2-chloro-N-(4,6-dichloro-1,3,5-triazin-2-yl)aniline	202-910-5	101-05-3	Xi; R36/38 N; R50-53	Xi; N R: 36/38-50/53 S: (2-)22-60-61		
613-054-00-0	thiabendazol (ISO); 2-(thiazole-4-yl)benzimidazole	205-725-8	148-79-8	N; R50-53	N R: 50/53 S: 60-61		
613-056-00-1	1,2-dimethyl-3,5-diphenylpyrazolium methylsulphate; difenzoquat methyl sulfate	256-152-5	43222-48-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-057-00-7	dodemorph (ISO); 4-cyclododecyl-2,6-dimethylmorpholine	216-474-9	1593-77-7	Xi; R36/37/ 38 N; R51-53	Xi; N R: 36/37/38-51/53 S: (2-)26-61		
613-058-00-2	permethrin (ISO); <i>m</i> -phenoxybenzyl 3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate	258-067-9	52645-53-1	Xn; R20/22 R43 N; R50-53	Xn; N R: 20/22-43-50/53 S: (2-)13-24-36/37/ 39-60-61	N; R50-53: $C \geq 0,025 \%$ N; R51-53: $0,0025 \% \leq C < 0,025 \%$ R52-53: $0,00025 \% \leq C < 0,0025 \%$	
613-059-00-8	profluralin (ISO); N-(cyclopropylmethyl)- α,α,α -trifluoro-2,6-dinitro-N-propyl-p-toluidine	247-656-6	26399-36-0	Xi; R36 N; R50-53	Xi; N R: 36-50/53 S: (2-)60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-060-00-3	resmethrin (ISO); 5-benzyl-3-furylmethyl (±)-cis-trans-chrysanthemate	233-940-7	10453-86-8	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60/61		
613-061-00-9	6-(1α,5αβ,8αβ,9-pentahydroxy-7β-isopropyl-2β,5β,8β-trimethylperhydro-8ba,9-epoxy-5,8-ethanocyclopenta[1,2-b]indene-nyl) pyrrole-2-carboxylate; ryania	239-732-2	15662-33-6	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		
613-062-00-4	sabadilla (ISO); veratrine	—	8051-02-3	Xi; R36/37/ 38	Xi R: 36/37/38 S: (2-)36/37/39		
613-063-00-X	secbumeton (ISO); 2-sec-butylamino-4-ethylamino-6-methoxy-1,3,5-triazine	247-554-1	26259-45-0	Xn; R22 Xi; R36 N; R50-53	Xn; N R: 22-36-50/53 S: (2-)60-61		
613-064-00-5	5-(3,6,9-trioxa-2-undecyloxy)benzo(d)-1,3-dioxolane; sesamex	—	51-14-9	Xn; R22	Xn R: 22 S: (2-)		
613-065-00-0	simetryn (ISO); 2,4-bis(ethylamino)-6-methylthio-1,3,5-triazine	213-801-7	1014-70-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-066-00-6	terbumeton (ISO); 2-tert-butylamino-4-ethylamino-6-methoxy-1,3,5-triazine	251-637-8	33693-04-8	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-067-00-1	propazine (ISO); 2-chloro-4,6-bis(isopropylamino)-1,3,5-triazine	205-359-9	139-40-2	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-60-61		
613-068-00-7	atrazine (ISO); 2-chloro-4-ethylamine-6-isopropylamine-1,3,5-triazine	217-617-8	1912-24-9	Xn; R48/22 R43 N; R50-53	Xn; N R: 43-48/22-50/53 S: (2-)36/37-60-61		
613-069-00-2	ε-caprolactam	203-313-2	105-60-2	Xn; R20/22 Xi; R36/37/ 38	Xn R: 20/22-36/37/38 S: (2-)		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-070-00-8	propylenethiourea	—	2122-19-2	Repr. Cat. 3; R63 Xn; R22 R52-53	Xn R: 22-52/53-63 S: (2-)36/37-46-61		
613-071-00-3	2-fluoro-5-trifluoromethylpyridine	400-290-2	69045-82-5	R10 R43 R52-53	Xi R: 10-43-52/53 S: (2-)24-37-61		
613-072-00-9	N,N-bis(2-ethylhexyl)-((1,2,4-triazol-1-yl)methyl)amine	401-280-0	91273-04-0	C; R34 R43 N; R51-53	C; N R: 34-43-51/53 S: (1/2-)26-28-36/37/ 39-45-61		
613-073-00-4	N,N-dimethyl-2-(3-(4-chlorophenyl)-4,5-dihydropyrazol-1-yl)phenylsulphonyl)ethylamine	401-410-6	10357-99-0	Xn; R48/22 R43 N; R51-53	Xn; N R: 43-48/22-51/53 S: (2-)24-37-61		
613-074-00-X	3-(3-methylpent-3-yl)isoxazol-5-ylamine	401-460-9	82560-06-3	T; R23/25 Xi; R41 R52-53	T R: 23/25-41-52/53 S: (1/2-)22-26-36/37/ 39-45-61		
613-075-00-5	1,3-dichloro-5-ethyl-5-methylimidazolidine-2,4-dione	401-570-7	89415-87-2	O; R8 T; R23 C; R34 Xn; R22 R43 N; R50	O; T; N R: 8-22-23-34-43-50 S: (1/2-)8-26-36/37/ 39-45-61		
613-076-00-0	3-chloro-5-trifluoromethyl-2-pyridylamine	401-670-0	79456-26-1	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
613-077-00-6	reaction mass of 5-heptyl-1,2,4-triazol-3-ylamine and 5-nonyl-1,2,4-triazol-3-ylamine	401-940-8	—	Xn; R22 Xi; R36 N; R51-53	Xn; N R: 22-36-51/53 S: (2-)22-26-61		
613-078-00-1	N,N,N,N-tetrakis(4,6-bis(butyl-(N-methyl-2,2,6,6-tetramethylpiperidin-4-yl)amino)triazin-2-yl)-4,7-diazadecane-1,10-diamine	401-990-0	106990-43-6	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-079-00-7	4-(1(or 4 or 5 or 6)-methyl-8,9,10-trinorborn-5-en-2-yl)pyridine, reaction mass of isomers	402-520-7	—	Xn; R21/22 Xi; R38 R43 N; R50-53	Xn; N R: 21/22-38-43-50/ 53 S: (2-)36/37-60-61		
613-080-00-2	3-(bis(2-ethylhexyl)aminomethyl)benzothiazole-2(3H)-thione	402-540-6	105254-85-1	C; R34 R43 N; R50-53	C; N R: 34-43-50/53 S: (1/2-)26-28-36/37/ 39-45-60-61		
613-081-00-8	1-butyl-2-methylpyridinium bromide	402-680-8	26576-84-1	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
613-082-00-3	2-methyl-1-pentylpyridinium bromide	402-690-2	—	Xn; R21/22 R52-53	Xn R: 21/22-52/53 S: (2-)36/37-61		
613-083-00-9	2-(4-(3-(4-chlorophenyl)-2-pyrazolin-1-yl)phenylsulfonyl)ethyldimethylammonium formate	402-120-2	—	C; R34 Xn; R48/22 R43 N; R50-53	C; N R: 34-43-48/22-50/ 53 S: (1/2-)24-26-28-37/ 39-45-60-61		
613-084-00-4	2-(4-(3-(4-chlorophenyl)-4,5-dihydropyrazolyl)phenylsulphonyl)ethyldimethylammonium hydrogen phosphonate	402-490-5	106359-93-7	Xi; R36 N; R50-53	Xi; N R: 36-50/53 S: (2-)26-60-61		
613-085-00-X	reaction mass of 1,1'-(methylenebis(4,1-phenylene))dipyrrole-2,5-dione and N-(4-(4-(2,5-dioxopyrrol-1-yl)benzyl)phenyl)acetamide and 1-(4-(4-(5-oxo-2H-2-furylidenamino)benzyl)phenyl)pyrrole-2,5-dione	401-970-1	—	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
613-086-00-5	caffeine	200-362-1	58-08-2	Xn; R22	Xn R: 22 S: (2-)		
613-087-00-0	tetrahydrothiophene	203-728-9	110-01-0	F; R11 Xn; R20/21/ 22 Xi; R36/38 R52-53	F; Xn R: 11-20/21/22-36/ 38-52/53 S: (2-)16-23-36/37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-088-00-6	1,2-benzisothiazol-3(2H)-one; 1,2-benzisothiazolin-3-one	220-120-9	2634-33-5	Xn; R22 Xi; R38-41 R43 N; R50	Xn; N R: 22-38-41-43-50 S: (2-)24-26-37/39-61	R43: C ≥ 0,05 %	
613-089-00-1	diquat dibromide; [1] diquat dichloride; [2] 6,7-dihydrodipyrido[1,2-α:2',1'-c]pyrazinediylum dihydroxide [3]	201-579-4 [1] 223-714-6 [2] 301-467-6 [3]	85-00-7 [1] 4032-26-2 [2] 94021-76-8 [3]	T+; R26 T; R48/25 Xn; R22 Xi; R36/37/ 38 R43 N; R50-53	T+; N R: 22-26-36/37/38-43-48/25-50/53 S: (1/2-)28-36/37/39-45-60-61		
613-090-00-7	paraquat dichloride; 1,1-dimethyl-4,4'-bipyridinium dichloride; [1] paraquat dimethylsulfate; 1,1-dimethyl-4,4'-bipyridinium dimethyl sulphate [2]	217-615-7 [1] 218-196-3 [2]	1910-42-5 [1] 2074-50-2 [2]	T+; R26 T; R24/25-48/25 Xi; R36/37/ 38 N; R50-53	T+; N R: 24/25-26-36/37/38-48/25-50/53 S: (1/2-)22-28-36/37/39-45-60-61		
613-091-00-2	morfamquat dichloride; [1] morfamquat sulfate [2]	225-062-8 [1] - [2]	4636-83-3 [1] 29873-36-7 [2]	Xn; R22 Xi; R36/37/ 38 R52-53	Xn R: 22-36/37/38-52/53 S: (2-)22-36-61		
613-092-00-8	1,10-phenanthroline	200-629-2	66-71-7	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)45-60-61		
613-093-00-3	hexasodium 6,13-dichloro-3,10-bis((4-(2,5-disulfonatoanilino)-6-fluoro-1,3,5-triazin-2-ylamino)prop-3-ylamino)-5,12-dioxa-7,14-diazapentacene-4,11-disulfonate	400-050-7	85153-92-0	R42/43	Xn R: 42/43 S: (2-)22-24-37		
613-094-00-9	4-methoxy-N,6-dimethyl-1,3,5-triazin-2-ylamine	401-360-5	5248-39-5	Xn; R22-48/22	Xn R: 22-48/22 S: (2-)22-36		
613-095-00-4	sodium 3-(2H-benzotriazol-2-yl)-5-sec-butyl-4-hydroxybenzenesulfonate	403-080-9	92484-48-5	Xi; R41	Xi R: 41 S: (2-)26-39		
613-096-00-X	2-amino-6-ethoxy-4-methylamino-1,3,5-triazine	403-580-7	62096-63-3	Xn; R22	Xn R: 22 S: (2-)		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-097-00-5	7-amino-3-((5-carboxymethyl-4-methyl-1,3-thiazol-2-ylthio)methyl)-8-oxo-5-thia-1-azabicyclo(4.2.0)oct-2-ene-2-carboxylic acid	403-690-5	111298-82-9	R42/43 R52-53	Xn R: 42/43-52/53 S: (2-)22-24-37-61		
613-098-00-0	N-(n-octyl)-2-pyrrolidone	403-700-8	2687-94-7	C; R34 N; R51-53	C; N R: 34-51/53 S: (1/2-)23-26-36/37/39-45		
613-099-00-6	1-dodecyl-2-pyrrolidone	403-730-1	2687-96-9	C; R34 R43 N; R50-53	C; N R: 34-43-50/53 S: (1/2-)26-36/37/39-45-60-61		
613-100-00-X	2,9-bis(3-(diethylamino)propylsulfamoyl)quino(2,3-b)acridine-7,14-dione	404-230-6	—	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
613-101-00-5	N-tert-pentyl-2-benzothiazolesulfenamide	404-380-2	110799-28-5	R43 R52-53	Xi R: 43-52/53 S: (2-)36/37-61		
613-102-00-0	dimethomorph (ISO); 4-(3-(4-chlorophenyl)-3-(3,4-dimethoxyphenyl)acryloyl)morpholine	404-200-2	110488-70-5	N; R51-53	N R: 51/53 S: 61		
613-103-00-6	sodium 5-n-butylbenzotriazole	404-450-2	118685-34-0	Xn; R22 C; R34 R43 N; R51-53	C; N R: 22-34-43-51/53 S: (1/2-)26-36/37/39-45-61		
613-104-00-1	5-tert-butyl-3-isoxazolylamine hydrochloride	404-840-2	—	Xn; R22-48/22 Xi; R41 R52-53	Xn R: 22-41-48/22-52/53 S: (2-)26-36/39-61		
613-105-00-7	hexakis(tetramethylammonium) 4,4'-vinylenebis((3-sulfonato-4,1-phenylene)imino(6-morpholino-1,3,5-triazine-4,2-diyl)imino)bis(5-hydroxy-6-phenylazonaphthalene-2,7-disulfonate)	405-160-9	124537-30-0	T; R25 R43 R52-53	T R: 25-43-52/53 S: (1/2-)24-37-45-61		
613-106-00-2	tetrapotassium 2-(4-(5-(1-(2,5-disulfonatophenyl)-3-ethoxycarbonyl-5-hydroxypyrazol-4-yl)penta-2,4-dienylidene)-3-ethoxycarbonyl-5-oxo-2-pyrazolin-1-yl)benzene-1,4-disulfonate	405-240-3	—	R43	Xi R: 43 S: (2-)24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-107-00-8	hexasodium 2,2'-vinylenebis((3-sulfonato-4,1-phenylene)imino(6-(N-cyanoethyl-N-(2-hydroxypropyl)amino)-1,3,5-triazine-4,2-diyl)imino)dibenzene-1,4-disulfonate	405-280-1	76508-02-6	Xi; R36	Xi R: 36 S: (2-)26		
613-108-00-3	benzothiazole-2-thiol	205-736-8	149-30-4	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
613-109-00-9	bis(piperidinothiocarbonyl) disulphide	202-328-1	94-37-1	Xi; R36/37/38 R43	Xi R: 36/37/38-43 S: (2-)24-26-37		
613-110-00-4	dimepiperate (ISO); S-(1-methyl-1-phenylethyl) piperidine-1-carbothioate	262-784-2	61432-55-1	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
613-111-00-X	1,2,4-triazole	206-022-9	288-88-0	Repr. Cat. 3; R63 Xn; R22 Xi; R36	Xn R: 22-36-63 S: (2-)36/37		
613-112-00-5	octhilinone (ISO); 2-octyl-2H-isothiazol-3-one	247-761-7	26530-20-1	T; R23/24 Xn; R22 C; R34 R43 N; R50-53	T; N R: 22-23/24-34-43-50/53 S: (1/2-)26-36/37/39-45-60-61	R43: C ≥ 0,05 %	
613-113-00-0	2-(morpholinothio)benzothiazole	203-052-4	102-77-2	Xi; R36/38 R43 N; R51-53	Xi; N R: 36/38-43-51/53 S: (2-)24-26-37-61		
613-114-00-6	2,2',2''-(hexahydro-1,3,5-triazine-1,3,5-triyl)triethanol; 1,3,5-tris(2-hydroxyethyl)hexahydro-1,3,5-triazine	225-208-0	4719-04-4	Xn; R22 R43	Xn R: 22-43 S: (2-)24-37	R43: C ≥ 0,1 %	
613-115-00-1	hymexazol (ISO); 3-hydroxy-5-methylisoxazole	233-000-6	10004-44-1	Xn; R22 Xi; R41 R52-53	Xn R: 22-41-52/53 S: (2-)26-39-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-116-00-7	tolylfluamid (ISO); dichloro-N-[(dimethylamino)sulphonyl]fluoro-N-(p-tolyl) methanesulphenamide	211-986-9	731-27-1	T; R23 Xn; R48/20 Xi; R36/37/ 38 R43 N; R50-53	T; N R: 23-36/37/38-43- 48/20-50/53 S: (1/2-)24-26-37-38- 45-60-61		
613-117-00-2	diniconazole (ISO); (E)-β-[(2,4-dichlorophenyl)methylene]-α-(1,1-dimethylethyl)- 1H-1,2,4-triazol-1-ethanol; (E)-(RS)-1-(2,4-dichlorophenyl)-4,4-dimethyl-2-(1H-1,2,4- triazol-1-yl)pent-1-en-3-ol	—	76714-88-0	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-118-00-8	flubenzimine (ISO); N-[3-phenyl-4,5-bis[(trifluoromethyl)imino]thiazolidin-2-ylidene]aniline;	253-703-1	37893-02-0	Xi; R36 N; R50-53	Xi; N R: 36-50/53 S: (2-)26-60-61		
613-119-00-3	(benzothiazol-2-ylthio)methyl thiocyanate; TCMTB	244-445-0	21564-17-0	T+; R26 Xn; R22 Xi; R36/38 R43 N; R50-53	T+; N R: 22-26-36/38-43- 50/53 S: (1/2-)28-36/37-38- 45-60-61		
613-120-00-9	bioresmethrin; (5-bezylfur-3-yl)methyl(1R)-trans-2,2-dimethyl-3-(2-methyl- propenyl)cyclopropanecarboxylate	249-014-0	28434-01-7	N; R50-53	N R: 50/53 S: 60-61		
613-121-00-4	chlorsulfuron (ISO); 2-chloro-N-[[[(4-methoxy-6-methyl-1,3,5-triazin-2-yl)amino] carbonyl]benzenesulphonamide;	265-268-5	64902-72-3	N; R50-53	N R: 50/53 S: 60-61		
613-122-00-X	diclobutrazole (ISO); (R*, R*)-(±)-β-[(2,4-dichlorophenyl)methyl]-α-(1,1-dimethyle- thyl)-1H-1,2,4-triazole-1-ethanol; (2RS, 3RS)-1-(2,4-dichlorophenyl)-4,4-dimethyl-2-(1H-1,2,4- triazol-1-yl)pentan-3-ol	—	75736-33-3	Xi; R36 N; R51-53	Xi; N R: 36-51/53 S: (2-)26-61		
613-123-00-5	5,6-dihydro-3H-imidazo[2,1-c]-1,2,4-dithiazole-3-thione; etem	251-684-4	33813-20-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-124-00-0	fenpropimorph (ISO); <i>cis</i> -4-[3-(<i>p</i> - <i>tert</i> -butylphenyl)-2-methylpropyl]-2,6-dimethyl-morpholine	266-719-9	67564-91-4	Repr. Cat. 3; R63 Xn; R22 Xi; R38 N; R51-53	Xn; N R: 22-38-63-51/53 S: (2-)36/37-46-61		
613-125-00-6	hexythiazox (ISO); <i>trans</i> -5-(4-chlorophenyl)- <i>N</i> -cyclohexyl-4-methyl-2-oxo-3-thiazolidine-carboxamide	—	78587-05-0	N; R50-53	N R: 50/53 S: 60-61		
613-126-00-1	imazapyr (ISO); 2-[4,5-dihydro-4-methyl-4-(1-methylethyl)-5-oxo-1 <i>H</i> -imidazol-2-yl]-3-pyridine carboxylate	—	81334-34-1	Xi; R36 R52-53	Xi R: 36-52/53 S: (2-)26-61		
613-127-00-7	1,1-dimethylpiperidinium chloride; mepiquat chloride	246-147-6	24307-26-4	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
613-128-00-2	prochloraz (ISO); <i>N</i> -propyl- <i>N</i> -[2-(2,4,6-trichlorophenoxy)ethyl]-1 <i>H</i> -imidazole-1-carboxamide;	266-994-5	67747-09-5	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-129-00-8	metamitron (ISO); 4-amino-3-methyl-6-phenyl-1,2,4-triazin-5-one	255-349-3	41394-05-2	Xn; R22 N; R50	Xn; N R: 22-50 S: (2-)61		
613-131-00-9	pyroquilon (ISO); 1,2,5,6-tetrahydropyrrolo[3,2,1- <i>ij</i>]quinolin-4-one	—	57369-32-1	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
613-132-00-4	hexazinone (ISO); 3-cyclohexyl-6-dimethylamino-1-methyl-1,2,3,4-tetrahydro-1,3,5-triazine-2,4-dione;	257-074-4	51235-04-2	Xn; R22 Xi; R36 N; R50-53	Xn; N R: 22-36-50/53 S: (2-)60-61		
613-133-00-X	etridiazole (ISO); 5-ethoxy-3-trichloromethyl-1,2,4-thiadiazole	219-991-8	2593-15-9	Carc. Cat. 3; R40 T; R23 Xn; R21/22 N; R50-53	T; N R: 21/22-23-40-50/53 S: (1/2-)36/37-38-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-134-00-5	myclobutanil (ISO); 2-(4-chlorophenyl)-2-(1 <i>H</i> -1,2,4-triazol-1-ylmethyl)hexanenitrile	—	88671-89-0	Repr. Cat. 3; R63 Xn; R22 Xi; R36 N; R51-53	Xn; N R: 22-36-51/53-63 S: (2-)36/37-46-61		
613-135-00-0	di(benzothiazol-2-yl) disulphide	204-424-9	120-78-5	R31 R43 N; R50-53	Xi; N R: 31-43-50/53 S: (2-)36/37-60-61		
613-136-00-6	N-cyclohexylbenzothiazole-2-sulphenamide	202-411-2	95-33-0	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
613-137-00-1	methabenzthiazuron (ISO); 1-(1,3-benzothiazol-2-yl)1,3-dimethylurea	242-505-0	18691-97-9	N; R50-53	N R: 50/53 S: 60-61		
613-138-00-7	quinoxifen (ISO); 5,7-dichloro-4-(4-fluorophenoxy)quinoline	—	124495-18-7	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-46-60-61		
613-139-00-2	metsulfuron-methyl; 2-(4-methoxy-6-methyl-1,3,5-triazin-2-ylcarbamoylsulfa-moyl) benzoic acid	—	74223-64-6	N; R50-53	N R: 50/53 S: 60-61		
613-140-00-8	cycloheximide (ISO); 4-((2 <i>R</i>)-2-[(1 <i>S</i> ,3 <i>S</i> ,5 <i>S</i>)-3,5-dimethyl-2-oxocyclohexyl]-2-hydroxyethyl)piperidine-2,6-dione	200-636-0	66-81-9	Muta. Cat. 3; R68 Repr. Cat. 2; R61 T+; R28 N; R51-53	T+; N R: 61-28-51/53-68 S: 53-45-61		E
613-141-00-3	1,4-diamino-2-(2-butyltetrazol-5-yl)-3-cyanoanthraquinone	401-470-3	93686-63-6	R53	R: 53 S: 61		
613-142-00-9	<i>trans</i> -N-methyl-2-styryl-[4'-aminomethine-(1-acetyl-1-(2-methoxyphenyl)acetamido)]pyridinium acetate	405-860-4	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-61		
613-143-00-4	1-(3-phenylpropyl)-2-methylpyridinium bromide	405-930-4	10551-42-5	Xn; R22 Xi; R36 R52-53	Xn R: 22-36-52/53 S: (2-)26-36/37-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-144-00-X	Reaction products of: poly(vinyl acetate), partially hydrolyzed, with (E)-2-(4-formylstyryl)-3,4-dimethylthiazoliummethyl sulfate	406-460-2	125139-08-4	R52-53	R: 52/53 S: 61		
613-145-00-5	(S)-3-benzyloxycarbonyl-1,2,3,4-tetrahydro-isoquinolinium 4-methylbenzenesulfonate	406-960-0	77497-97-3	N; R51-53	N R: 51/53 S: 61		
613-146-00-0	N-ethyl-N-methylpiperidinium iodide	407-780-5	4186-71-4	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)22-61		
613-147-00-6	4-[2-(1-methyl-2-(4-morpholinyl)ethoxy)ethyl]morpholine	407-940-4	111681-72-2	Xi; R41	Xi R: 41 S: (2-)26-39		
613-148-00-1	tetrasodium 1,2-bis(4-fluoro-6-[5-(1-amino-2-sulfonatoant-hrachinon-4-ylamino)-2,4,6-trimethyl-3-sulfonatophenyla-mino]-1,3,5-triazin-2-ylamino)ethane	411-240-4	143683-23-2	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24/25-37-61		
613-149-00-7	pyridaben (ISO); 2-tert-butyl-5-(4-tert-butylbenzylthio)-4-chloropyridazin-3 (2H)-one	405-700-3	96489-71-3	T; R23/25 N; R50-53	T; N R: 23/25-50/53 S: (1/2-)36/37-45-60-61		
613-150-00-2	2,2'-[3,3'-(piperazine-1,4-diyl)dipropyl]bis(1H-benzimidazo [2,1-b]benzo[l,m,n][3,8]phenanthroline-1,3,6-trione	406-295-6	—	R53	R: 53 S: 61		
613-151-00-8	1-(3-mesyloxy-5-trityloxymethyl-2-D-threofuryl)thymine	406-360-9	104218-44-2	R53	R: 53 S: 61		
613-152-00-3	phenyl N-(4,6-dimethoxypyrimidin-2-yl)carbamate	406-600-2	89392-03-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
613-153-00-9	2,3,5-trichloropyridine	407-270-2	16063-70-0	R52-53	R: 52/53 S: 61		
613-154-00-4	2-amino-4-chloro-6-methoxypyrimidine	410-050-9	5734-64-5	Xn; R22	Xn R: 22 S: (2-)22		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-155-00-X	5-chloro-2,3-difluoropyridine	410-090-7	89402-43-7	R10 Xn; R22 R52-53	Xn R: 10-22-52/53 S: (2-)23-36-61		
613-156-00-5	2-butyl-4-chloro-5-formylimidazole	410-260-0	83857-96-9	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
613-157-00-0	2,4-diamino-5-methoxymethylpyrimidine	410-330-0	54236-98-5	Xn; R22-48/ 22 Xi; R36	Xn R: 22-36-48/22 S: (2-)22-26-36		
613-158-00-6	2,3-dichloro-5-trifluoromethyl-pyridine	410-340-5	69045-84-7	Xn; R20/22 Xi; R41 R43 N; R51-53	Xn; N R: 20/22-41-43-51/ 53 S: (2-)24-26-37/39-61		
613-159-00-1	fenazaquin (ISO); 4-[2-[4-(1,1-dimethylethyl)phenyl]-ethoxy]quinazoline	410-580-0	120928-09-8	T; R25 Xn; R20 N; R50-53	T; N R: 20-25-50/53 S: (1/2-)37-45-60-61		
613-160-00-7	(1S)-2-methyl-2,5-diazobicyclo[2.2.1]heptane dihydrobromide	411-000-9	125224-62-6	R43	Xi R: 43 S: (2-)24-37		
613-163-00-3	azimsulfuron (ISO); 1-(4,6-dimethoxypyrimidin-2-yl)-3-[1-methyl-4-(2-methyl-2H-tetrazol-5-yl)pyrazol-5-ylsulfonyl]urea	—	120162-55-2	N; R50-53	N R: 50/53 S: 60-61		
613-164-00-9	flufenacet (ISO); N-(4-fluorophenyl)-N-isopropyl-2-(5-trifluoromethyl-[1,3,4]thiadiazol-2-yloxy)acetamide	—	142459-58-3	Xn; R22-48/ 22 R43 N; R50-53	Xn; N R: 22-43-48/22-50/ 53 S: (2-)13-24-37-60-61		
613-165-00-4	flupyrsulfuron-methyl-sodium (ISO); methyl 2-[[[(4,6-dimethoxypyrimidin-2-ylcarbamoyl)sulfa-moyl]-6-trifluoromethyl]nicotinate, monosodium salt	—	144740-54-5	N; R50-53	N R: 50/53 S: 60-61		
613-166-00-X	flumioxazin (ISO); N-(7-fluoro-3,4-dihydro-3-oxo-4-prop-2-ynyl-2H-1,4-benzoxazin-6-yl)cyclohex-1-ene-1,2-dicarboxamide	—	103361-09-7	Repr. Cat. 2; R61 N; R50-53	T; N R: 61-50/53 S: 53-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-167-00-5	reaction mass of: 5-chloro-2-methyl-4-isothiazolin-3-one [EC no. 247-500-7] and 2-methyl-2H -isothiazol-3-one [EC no. 220-239-6] (3:1); reaction mass of: 5-chloro-2-methyl-4-isothiazolin-3-one [EC no. 247-500-7] and 2-methyl-4-isothiazolin-3-one [EC no. 220-239-6] (3:1)	—	55965-84-9	T; R23/24/25 C; R34 R43 N; R50-53	T; N R: 23/24/25-34-43-50/53 S: (2-)26-28-36/37/39-45-60-61	C; R34: C ≥ 0,6 % Xi; R36/38: 0,06 % ≤ C < 0,6 % R43: C ≥ 0,0015 %	
613-168-00-0	1-vinyl-2-pyrrolidone	201-800-4	88-12-0	Carc. Cat. 3; R40 Xn; R20/21/ 22-48/20 Xi; R37-41	Xn R: 20/21/22-37-40-41-48/20 S: (2-)26-36/37/39		D
613-169-00-6	9-vinylcarbazole	216-055-0	1484-13-5	Muta. Cat. 3; R68 Xn; R21/22 Xi; R38 R43 N; R50-53	Xn; N R: 21/22-38-43-50/53-68 S: 22-23-36/37-60-61		
613-170-00-1	2,2-ethylmethylthiazolidine	404-500-3	694-64-4	Xn; R22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-51/53 S: (2-)24-26-37/39-61		
613-171-00-7	hexaconazole (ISO); (RS)-2-(2,4-dichlorophenyl)-1-(1H-1,2,4-triazol-1-yl)hexan-2-ol	413-050-7	79983-71-4	Xn; R22 R43 N; R51-53	Xn; N R: 22-43-51/53 S: (2-)24-37-61		
613-172-00-2	5-chloro-1,3-dihydro-2H-indol-2-one	412-200-9	17630-75-0	Repr. Cat. 3; R62 Xn; R22 R43 R52-53	Xn R: 22-43-62-52/53 S: (2-)22-36/37-61		
613-173-00-8	fluquinconazole (ISO); 3-(2,4-dichlorophenyl)-6-fluoro-2-(1H-1,2,4-triazol-1-yl)quinazolin-4-(3H)-one	411-960-9	136426-54-5	T; R23/25-48/25 Xn; R21 Xi; R38 N; R50-53	T; N R: 21-23/25-38-48/25-50/53 S: (1/2-)36/37/39-38-45-60-61		
613-174-00-3	(±) 2-(2,4-dichlorophenyl)-3-(1H-1,2,4-triazol-1-yl)propyl-1,1,2,2-tetrafluoroether	407-760-6	112281-77-3	Carc. Cat. 3; R40 Xn; R20/22 N; R51-53	Xn; N R: 20/22-40-51/53 S: (2-)36/37-41-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-175-00-9	epoxiconazole (ISO); (2RS,3SR)-3-(2-chlorophenyl)-2-(4-fluorophenyl)-[(1H-1,2,4-triazol-1-yl)methyl]oxirane	406-850-2	133855-98-8	Carc. Cat. 3; R40 Repr. Cat. 3; R62 Repr. Cat. 3; R63 N; R51-53	Xn; N R: 40-62-63-51/53 S: (2-)36/37-46-61		
613-176-00-4	2-methyl-2-azabicyclo[2.2.1]heptane	404-810-9	4524-95-2	R10 Xn; R21/22-48/20 C; R34	C R: 10-21/22-34-48/20 S: (1/2-)16-26-36/37/39-45		
613-177-00-X	8-amino-7-methylquinoline	412-760-4	5470-82-6	Xn; R21/22 R43 N; R51-53	Xn; N R: 21/22-43-51/53 S: (2-)36/37-61		
613-178-00-5	4-ethyl-2-methyl-2-isopentyl-1,3-oxazolidine	410-470-2	137796-06-6	C; R34 R43	C R: 34-43 S: (1/2-)7/8-26-36/37/39-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
613-179-00-0	lithium 3-oxo-1,2(2H)-benzisothiazol-2-ide	411-690-1	111337-53-2	Xn; R22 C; R34 R43 N; R51-53	C; N R: 22-34-43-51/53 S: (1/2-)26-36/37/39-45-61		
613-180-00-6	N-(1,1-dimethylethyl)bis(2-benzothiazolesulfen)amide	407-430-1	3741-80-8	N; R50-53	N R: 50/53 S: 60-61		
613-181-00-1	5,5-dimethyl-perhydro-pyrimidin-2-one α-(4-trifluoromethylstyryl)-α-(4-trifluoromethyl)cinnamylidenehydrazone	405-090-9	67485-29-4	T; R48/25 Xn; R22 Xi; R36 N; R50-53	T; N R: 22-36-48/25-50/53 S: (1/2-)22-26-36/37-45-60-61		
613-182-00-7	1-(1-naphthylmethyl)quinolinium chloride	406-220-7	65322-65-8	Carc. Cat. 3; R40 Muta. Cat. 3; R68 Xn; R22 Xi; R38-41 R52-53	Xn R: 22-38-40-41-52/53-68 S: (2-)22-26-36/37/39-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-183-00-2	reaction mass of: 5-(N-methylperfluorooctylsulfonamido) methyl-3-octadecyl-1,3-oxazolidin-2-one; 5-(N-methylperfluoroheptylsulfonamido)methyl-3-octadecyl-1,3-oxazolidin-2-one	413-640-4	—	Xn; R48/22 N; R50-53	Xn; N R: 48/22-50/53 S: (2-)36-60-61		
613-184-00-8	nitrilotriethyleneammonio propane-2-ol 2-ethylhexanoate	413-670-8	—	Xi; R36 R43	Xi R: 36-43 S: (2-)24-26-37		
613-185-00-3	2,3,5,6-tetrahydro-2-methyl-2H-cyclopenta[d]-1,2-thiazol-3-one	407-630-9	82633-79-2	T; R25 Xi; R41 R43 N; R50-53	T; N R: 25-41-43-50/53 S: (1/2-)22-26-36/37/ 39-45-60-61		
613-186-00-9	(2R,3R)-3-((R)-1-(tert-butyldimethylsiloxy)ethyl)-4-oxoazetidin-2-yl acetate	408-050-9	76855-69-1	Xi; R36 R43 N; R51-53	Xi; N R: 36-43-51/53 S: (2-)24-26-37-61		
613-188-00-X	1-(3-(4-fluorophenoxy)propyl)-3-methoxy-4-piperidinone	411-500-7	116256-11-2	Xn; R22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-51/53 S: (2-)22-24-26-37/ 39-61		
613-189-00-5	1,4,7,10-tetrakis(p-toluensulfonyl)-1,4,7,10-tetraazacyclodecane	414-030-0	52667-88-6	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
613-190-00-0	disodium 1-amino-4-(2-(5-chloro-6-fluoro-pyrimidin-4-ylamino-methyl)-4-methyl-6-sulfo-phenylamino)-9,10-dioxo-9,10-dihydro-anthracene-2-sulfonate	414-040-5	149530-93-8	Xn; R22 R43	Xn R: 22-43 S: (2-)22-24-37		
613-191-00-6	3-ethyl-2-methyl-2-(3-methylbutyl)-1,3-oxazolidine	421-150-7	143860-04-2	Repr. Cat. 2; R60 C; R34 N; R50-53	T; N R: 60-34-50/53 S: 53-45-60-61		
613-193-00-7	pentakis[3-(dimethylammonio)propylsulfamoyl]-[(6-hydroxy-4,4,8,8-tetramethyl-4,8-diazoniaundecane-1,11-diyl)disulfamoyl]di[phthalocyaninecopper(II)] heptalactate	414-930-3	—	N; R51-53	N R: 51/53 S: 61		
613-194-00-2	6,13-dichloro-3,10-bis[2-[4-fluoro-6-(2-sulfophenylamino)-1,3,5-triazin-2-ylamino]propylamino]benzo[5,6][1,4]oxazino[2,3-b.]phenoxazine-4,11-disulphonic acid, lithium-, sodium salt	418-000-8	163062-28-0	Xi; R41	Xi R: 41 S: (2-)22-26-39		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-195-00-8	2,2-(1,4-phenylene)bis((4 <i>H</i> -3,1-benzoxazine-4-one)	418-280-1	18600-59-4	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
613-196-00-3	5-[[[4-chloro-6-[[2-[[[4-fluoro-6-[[5-hydroxy-6-[(4-methoxy-2-sulphophenyl)azo]-7-sulfo-2-naphthalenyl]amino]-1,3,5-triazin-2-yl]amino]-1-methylethyl]amino]-1,3,5-triazin-2-yl]amino]-3-[[4-(ethenylsulfonyl)phenyl]azo]-4-hydroxy-naphtalene-2,7-disulfonic acid, sodium salt	418-380-5	168113-78-8	Xi; R41	Xi R: 41 S: (2-)26-39		
613-197-00-9	reaction mass of: 2,4,6-tri(butylcarbamoyl)-1,3,5-triazine; 2,4,6-tri(methylcarbamoyl)-1,3,5-triazine; [(2-butyl-4,6-dimethyl)tricarbamoyl]-1,3,5-triazine; [(2,4-dibutyl-6-methyl)tricarbamoyl]-1,3,5-triazine	420-390-1	187547-46-2	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
613-199-00-X	reaction mass of: 1,3,5-tris(3-aminomethylphenyl)-1,3,5-(1 <i>H</i> ,3 <i>H</i> ,5 <i>H</i>)-triazine-2,4,6-trione; reaction mass of oligomers of 3,5-bis(3-aminomethylphenyl)-1-poly[3,5-bis(3-aminomethylphenyl)-2,4,6-trioxo-1,3,5-(1 <i>H</i> ,3 <i>H</i> ,5 <i>H</i>)-triazin-1-yl]-1,3,5-(1 <i>H</i> ,3 <i>H</i> ,5 <i>H</i>)-triazine-2,4,6-trione	421-550-1	—	Carc. Cat. 2; R45 Repr. Cat. 2; R61 R43 R52-53	T R: 45-61-43-52/53 S: 53-45-61		
613-200-00-3	Reaction product of: copper, (29 <i>H</i> ,31 <i>H</i> -phthalocyaninato(2-)- <i>N</i> 29, <i>N</i> 30, <i>N</i> 31, <i>N</i> 32)-, chlorosulfuric acid and 3-(2-sulfoxyethylsulfonyl)aniline, sodium salts	420-980-7	—	Xi; R41	Xi R: 41 S: (2-)22-26-39		
613-201-00-9	(<i>R</i>)-5-bromo-3-(1-methyl-2-pyrrolidinyl methyl)-1 <i>H</i> -indole	422-390-5	143322-57-0	Repr. Cat. 3; R62 T; R39-48/25 Xn; R20/22 Xi; R41 R43 N; R50-53	T; N R: 20/22-39-41-43-48/25-62-50/53 S: (1/2-)53-45-60-61		
613-202-00-4	pymetrozine (ISO); (<i>E</i>)-4,5-dihydro-6-methyl-4-(3-pyridylmethyleneamino)-1,2,4-triazin-3(2 <i>H</i>)-one	—	123312-89-0	Carc. Cat. 3; R40 R52-53	Xn R: 40-52/53 S: (2-)36/37-61		
613-203-00-X	pyraflufen-ethyl; [1] pyraflufen [2]	- [1] - [2]	129630-19-9 [1] 129630-17-7 [2]	N; R50-53	N R: 50/53 S: 60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-204-00-5	oxadiargyl (ISO); 3-[2,4-dichloro-5-(2-propynyloxy)phenyl]-5-(1,1-dimethylethyl)-1,3,4-oxadiazol-2(3H)-one; 5- <i>tert</i> -butyl-3-[2,4-dichloro-5-(prop-2-ynyloxy)phenyl]-1,3,4-oxadiazol-2(3H)-one	254-637-6	39807-15-3	Repr. Cat. 3; R63 Xn; R48/22 N; R50-53	Xn; N R: 48/22-63-50/53 S: (2-)36/37-46-60-61		
613-205-00-0	propiconazole (ISO); (±)-1-[2-(2,4-dichlorophenyl)-4-propyl-1,3-dioxolan-2-ylmethyl]-1H-1,2,4-triazole	262-104-4	60207-90-1	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)36/37-46-60-61		
613-206-00-6	fenamidone (ISO); (S)-5-methyl-2-methylthio-5-phenyl-3-phenylamino-3,5-dihydroimidazol-4-one	—	161326-34-7	N; R50-53	N R: 50/53 S: 60-61		
613-208-00-7	imazamox (ISO); (RS)-2-(4-isopropyl-4-methyl-5-oxo-2-imidazolin-2-yl)-5-methoxymethylnicotinic acid	—	114311-32-9	N; R50-53	N R: 50/53 S: 60-61		
613-209-00-2	<i>cis</i> -1-(3-chloropropyl)-2,6-dimethyl-piperidin hydrochloride	417-430-3	63645-17-0	T; R25 Xn; R48/22 R43 N; R51-53	T; N R: 25-43-48/22-51/53 S: (1/2-)22-36/37-45-61		
613-210-00-8	2-(3-chloropropyl)-2,5,5-trimethyl-1,3-dioxane	417-650-1	88128-57-8	Xn; R48/22 R52-53	Xn R: 48/22-52/53 S: (2-)23-25-36-61		
613-211-00-3	N-methyl-4-(<i>p</i> -formylstyryl)pyridinium methylsulfate	418-240-3	74401-04-0	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
613-212-00-9	4-[4-(2-ethylhexyloxy)phenyl](1,4-thiazinane-1,1-dioxide)	418-320-8	133467-41-1	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)22-60-61		
613-213-00-4	<i>cis</i> -1-benzoyl-4-[(4-methylsulfonyl)oxy]-L-proline	416-040-0	120807-02-5	R52-53	R: 52/53 S: 61		
613-214-00-X	N,N-di- <i>n</i> -butyl-2-(1,2-dihydro-3-hydroxy-6-isopropyl-2-quinolylidene)-1,3-dioxindan-5-carboxamide	416-260-7	147613-95-4	R53	R: 53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-215-00-5	2-chloromethyl-3,4-dimethoxypyridinium chloride	416-440-5	72830-09-2	Xn; R21/22-48/22 Xi; R38-41 R43 N; R51-53	Xn; N R: 21/22-38-41-43-48/22-51/53 S: (2-)26-36/37/39-61		
613-216-00-0	6- <i>tert</i> -butyl-7-(6-diethylamino-2-methyl-3-pyridylimino)-3-(3-methylphenyl)pyrazolo[3,2-c][1,2,4]triazole	416-490-8	162208-01-7	N; R50-53	N R: 50/53 S: 60-61		
613-217-00-6	4-[3-(3,5-di- <i>tert</i> -butyl-4-hydroxyphenyl)propionyloxy]-1-[2-[3-(3,5-di- <i>tert</i> -butyl-4-hydroxyphenyl)propionyloxy]ethyl]-2,2,6,6-tetramethylpiperidine	416-770-1	73754-27-5	R53	R: 53 S: 61		
613-218-00-1	6-hydroxyindole	417-020-4	2380-86-1	Xn; R22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-51/53 S: (2-)24-26-37/39-61		
613-219-00-7	7a-ethyl-3,5-bis(1-methylethyl)-2,3,4,5-tetrahydrooxazolo[3,4-c]-2,3,4,5-tetrahydrooxazole	417-140-7	79185-77-6	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
613-220-00-2	trans-(4 <i>S</i> ,6 <i>S</i>)-5,6-dihydro-6-methyl-4 <i>H</i> -thieno[2,3- <i>b</i>]thiopyran-4-ol, 7,7-dioxide	417-290-3	147086-81-5	Xn; R22	Xn R: 22 S: (2-)36		
613-221-00-8	2-chloro-5-methyl-pyridine	418-050-0	18368-64-4	Xn; R21/22 Xi; R38 R52-53	Xn R: 21/22-38-52/53 S: (2-)23-25-36/37-61		
613-222-00-3	4-(1-oxo-2-propenyl)-morpholine	418-140-1	5117-12-4	Xn; R22-48/22 Xi; R41 R43	Xn R: 22-41-43-48/22 S: (2-)23-26-36/37/39		
613-223-00-9	<i>N</i> -isopropyl-3-(4-fluorophenyl)-1 <i>H</i> -indole	418-790-4	93957-49-4	R53	R: 53 S: 61		
613-224-00-4	2,5-dimercaptomethyl-1,4-dithiane	419-770-8	136122-15-1	Xn; R22 C; R34 R43 N; R50-53	C; N R: 22-34-43-50/53 S: (1/2-)26-36/37/39-45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
613-225-00-X	reaction mass of:[2-(anthraquinon-1-ylamino)-6-[(5-benzoylamino)-anthraquinone-1-ylamino]-4-phenyl]-1,3,5-triazine; 2,6-bis-[(5-benzoylamino)-anthraquinon-1-ylamino]-4-phenyl-1,3,5-triazine.	421-290-9	—	Xn; R48/22 R53	Xn R: 48/22-53 S: (2-)22-36-61		
613-226-00-5	1-(2-(ethyl(4-(4-(4-(4-(ethyl(2-pyridinoethyl)amino)-2-methylphenylazo)benzoylamino)-phenylazo)-3-methylphenyl)amino)ethyl)-pyridinium dichloride	420-950-3	163831-67-2	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		
613-227-00-0	(±)-[(R*,R*) and (R*,S*)]-6-fluoro-3,4-dihydro-2-oxiranyl-2H-1-benzopyran	419-600-2	99199-90-3	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-28-36/37-61		
613-228-00-6	(±)-(R*,S*)-6-fluoro-3,4-dihydro-2-oxiranyl-2H-1-benzopyran	419-630-6	793669-26-8	N; R51-53	N R: 51/53 S: 24-61		
613-230-00-7	florasulam (ISO); 2',6',8-trifluoro-5-methoxy-5-triazolo[1,5-c]; pyrimidine-2-sulfonilide	—	145701-23-1	N; R50-53	N R: 50/53 S: 60-61		
613-233-00-3	4,4'-(oxy-(bismethylene))-bis-1,3-dioxolane	423-230-7	56552-15-9	Xi; R41	Xi R: 41 S: (2-)26-39		
614-001-00-4	nicotine (ISO); 3-(N-methyl-2-pyrrolidinyl)pyridine	200-193-3	54-11-5	T+; R27 T; R25 N; R51-53	T+; N R: 25-27-51/53 S: (1/2-)36/37-45-61		
614-002-00-X	salts of nicotine	—	—	T+; R26/27/ 28 N; R51-53	T+; N R: 26/27/28-51/53 S: (1/2-)13-28-45-61		A
614-003-00-5	strychnine	200-319-7	57-24-9	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)36/37-45-60-61		
614-004-00-0	salts of strychnine	—	—	T+; R26/28 N; R50-53	T+; N R: 26/28-50/53 S: (1/2-)13-28-45-60-61		A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
614-005-00-6	colchicine	200-598-5	64-86-8	T+; R26/28	T+ R: 26/28 S: (1/2-)13-45		
614-006-00-1	brucine; 2,3-dimethoxystrychnine	206-614-7	357-57-3	T+; R26/28 R52-53	T+ R: 26/28-52/53 S: (1/2-)13-45-61		
614-007-00-7	brucine sulphate; [1] brucine nitrate; [2] Strychnidin-10-one, 2,3-dimethoxy-, mono[(R)-1-methylheptyl 1,2-benzenedicarboxylate]; [3] Strychnidin-10-one, 2,3-dimethoxy-, compd. with (S)mono(1-methylheptyl)-1,2-benzenedicarboxylate (1:1) [4]	225-432-9 [1] 227-317-9 [2] 269-439-5 [3] 269-710-8 [4]	4845-99-2 [1] 5786-97-0 [2] 68239-26-9 [3] 68310-42-9 [4]	T+; R26/28 R52-53	T+ R: 26/28-52/53 S: (1/2-)13-45-61		A
614-008-00-2	aconitine	206-121-7	302-27-2	T+; R26/28	T+ R: 26/28 S: (1/2-)24-45		
614-009-00-8	salts of aconitine	—	—	T+; R26/28	T+ R: 26/28 S: (1/2-)24-45		A
614-010-00-3	atropine	200-104-8	51-55-8	T+; R26/28	T+ R: 26/28 S: (1/2-)25-45		
614-011-00-9	salts of atropine	—	—	T+; R26/28	T+ R: 26/28 S: (1/2-)25-45		A
614-012-00-4	hyoscyamine	202-933-0	101-31-5	T+; R26/28	T+ R: 26/28 S: (1/2-)24-45		
614-013-00-X	salts of hyoscyamine	—	—	T+; R26/28	T+ R: 26/28 S: (1/2-)24-45		A
614-014-00-5	hyoscine	200-090-3	51-34-3	T+; R26/27/ 28	T+ R: 26/27/28 S: (1/2-)25-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
614-015-00-0	salts of hyoscine	—	—	T+; R26/27/28	T+ R: 26/27/28 S: (1/2-)25-45		A
614-016-00-6	pilocarpine	202-128-4	92-13-7	T+; R26/28	T+ R: 26/28 S: (1/2-)25-45		
614-017-00-1	salts of pilocarpine	—	—	T+; R26/28	T+ R: 26/28 S: (1/2-)25-45		A
614-018-00-7	papaverine	200-397-2	58-74-2	Xn; R22	Xn R: 22 S: (2-)22		
614-019-00-2	salts of papaverine	—	—	Xn; R22	Xn R: 22 S: (2-)22		A
614-020-00-8	physostigmine	200-332-8	57-47-6	T+; R26/28	T+ R: 26/28 S: (1/2-)25-45		
614-021-00-3	salts of physostigmine	—	—	T+; R26/28	T+ R: 26/28 S: (1/2-)25-45		A
614-022-00-9	digitoxin	200-760-5	71-63-6	T; R23/25 R33	T R: 23/25-33 S: (1/2-)45		
614-023-00-4	ephedrine	206-080-5	299-42-3	Xn; R22	Xn R: 22 S: (2-)22-25		
614-024-00-X	salts of ephedrine	—	—	Xn; R22	Xn R: 22 S: (2-)22-25		A
614-025-00-5	ouabain	211-139-3	630-60-4	T; R23/25 R33	T R: 23/25-33 S: (1/2-)45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
614-026-00-0	strophantin-K	234-239-9	11005-63-3	T; R23/25 R33	T R: 23/25-33 S: (1/2-)45		
614-027-00-6	bufa-4,20,22-trienolide, 6-(acetyloxy)-3-(β-D-glucopyranosyloxy)-8,14-dihydroxy-, (3β, 6β)-; red squill; scilliroside	208-077-4	507-60-8	T+; R28	T+ R: 28 S: (1/2-)36/37-45		
614-028-00-1	reaction mass of: 2-ethylhexyl mono-D-glucopyranoside; 2-ethylhexyl di-D-glucopyranoside	414-420-0	—	Xi; R41	Xi R: 41 S: (2-)26-39		
614-029-00-7	constitutional isomers of penta-O-allyl-β-D-fructofuranosyl-α-D-glucopyranoside; constitutional isomers of hexa-O-allyl-β-D-fructofuranosyl-α-D-glucopyranoside; constitutional isomers of hepta-O-allyl-β-D-fructofuranosyl-α-D-glucopyranoside	419-640-0	68784-14-5	Xn; R22	Xn R: 22 S: (2-)		
615-001-00-7	methyl isocyanate	210-866-3	624-83-9	F+; R12 ⊗ Repr. Cat. 3; R63 T+; R26 T; R24/25 R42/43 Xi; R37/38-41	F+; T+ R: 12-24/25-26-37/ 38-41-42/43-63 S: (1/2-)26-27/28-36/ 37/39-45-63		
615-002-00-2	methyl isothiocyanate	209-132-5	556-61-6	T; R23/25 C; R34 R43 N; R50-53	T; N R: 23/25-34-43-50/ 53 S: (1/2-)36/37-38-45-60-61		
615-003-00-8	thiocyanic acid	207-337-4	463-56-9	Xn; R20/21/ 22 R32 R52-53	Xn R: 20/21/22-32-52/ 53 S: (2-)13-61		
615-004-00-3	salts of thiocyanic acid	—	—	Xn; R20/21/ 22 R32 R52-53	Xn R: 20/21/22-32-52/ 53 S: (2-)13-61		A

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
615-005-00-9	4,4'-methylenediphenyl diisocyanate; diphenylmethane-4,4'-diisocyanate; [1] 2,2'-methylenediphenyl diisocyanate; diphenylmethane-2,2'-diisocyanate; [2] <i>o</i> -(<i>p</i> -isocyanatobenzyl)phenyl isocyanate; diphenylmethane-2,4'-diisocyanate; [3] methylenediphenyl diisocyanate [4]	202-966-0 [1] 219-799-4 [2] 227-534-9 [3] 247-714-0 [4]	101-68-8 [1] 2536-05-2 [2] 5873-54-1 [3] 26447-40-5 [4]	Xn; R20 Xi; R36/37/38 R42/43	Xn R: 20-36/37/38-42/43 S: (1/2-)23-36/37-45	Xi; R36/37/38: C ≥ 5 % R42: C ≥ 0,1 %	C 2
615-006-00-4	2-methyl- <i>m</i> -phenylene diisocyanate; toluene-2,4-di-isocyanate; [1] 4-methyl- <i>m</i> -phenylene diisocyanate; toluene-2,6-di-isocyanate; [2] <i>m</i> -tolylidene diisocyanate; toluene-diisocyanate [3]	202-039-0 [1] 209-544-5 [2] 247-722-4 [3]	91-08-7 [1] 584-84-9 [2] 26471-62-5 [3]	Carc. Cat. 3; R40 T+; R26 Xi; R36/37/38 R42/43 R52-53	T+ R: 26-36/37/38-40-42/43-52/53 S: (1/2-)23-36/37-45-61	R42: C ≥ 0,1 %	C 2
615-007-00-X	1,5-naphthylene diisocyanate	221-641-4	3173-72-6	Xn; R20 Xi; R36/37/38 R42 R52-53	Xn R: 20-36/37/38-42-52/53 S: (2-)26-28-38-45-61		
615-008-00-5	3-isocyanatomethyl-3,5,5-trimethylcyclohexyl isocyanate; isophorone di-isocyanate	223-861-6	4098-71-9	T; R23 Xi; R36/37/38 R42/43 N; R51-53	T; N R: 23-36/37/38-42/43-51/53 S: (1/2-)26-28-38-45-61	T; R23: C ≥ 2 % Xn; R20: 0,5 % ≤ C < 2 % R42/43: C ≥ 0,5 %	2
615-009-00-0	4,4'-methylenedi(cyclohexyl isocyanate); dicyclohexylmethane-4,4'-di-isocyanate	225-863-2	5124-30-1	T; R23 Xi; R36/37/38 R42/43	T R: 23-36/37/38-42/43 S: (1/2-)26-28-38-45	T; R23: C ≥ 2 % Xn; R20: 0,5 % ≤ C < 2 % R42/43: C ≥ 0,5 %	2
615-010-00-6	2,2,4-trimethylhexamethylene-1,6-di-isocyanate; [1] 2,4,4-trimethylhexamethylene-1,6-di-isocyanate [2]	241-001-8 [1] 239-714-4 [2]	16938-22-0 [1] 15646-96-5 [2]	T; R23 Xi; R36/37/38 R42	T R: 23-36/37/38-42 S: (1/2-)26-28-38-45	T; R23: C ≥ 2 % Xn; R20: 0,5 % ≤ C < 2 % R42: C ≥ 0,5 %	C 2
615-011-00-1	hexamethylene-di-isocyanate	212-485-8	822-06-0	T; R23 Xi; R36/37/38 R42/43	T R: 23-36/37/38-42/43 S: (1/2-)26-28-38-45	T; R23: C ≥ 2 % Xn; R20: 0,5 % ≤ C < 2 % R42/43: C ≥ 0,5 %	2

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
615-012-00-7	4-isocyanatosulphonyltoluene; tosyl isocyanate	223-810-8	4083-64-1	R14 Xi; R36/37/ 38 R42	Xn R: 14-36/37/38-42 S: (2-)26-28-30	Xi; R36/37/38: C ≥ 5 %	
615-013-00-2	cyanamide; carbanonitril	206-992-3	420-04-2	T; R25 Xn; R21 Xi; R36/38 R43	T R: 21-25-36/38-43 S: (1/2-)3-22-36/37- 45		
615-014-00-8	tris(1-dodecyl-3-methyl-2-phenylbenzimidazolium)hexacya- noferrate	—	7276-58-6	Xn; R22	Xn R: 22 S: (2-)24		
615-015-00-3	1,7,7-trimethylbicyclo(2,2,1)hept-2-yl thiocyanatoacetate; isobornyl thiocynoacetate	204-081-5	115-31-1	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24/25-60-61		
615-016-00-9	potassium cyanate	209-676-3	590-28-3	Xn; R22	Xn R: 22 S: (2-)24/25		
615-017-00-4	calcium cyanamide	205-861-8	156-62-7	Xn; R22 Xi; R37-41	Xn R: 22-37-41 S: (2-)22-26-36/37/39		
615-018-00-X	2-(2-butoxyethoxy)ethyl thiocyanate	203-985-7	112-56-1	R10 T; R24/25	T R: 10-24/25 S: (1/2-)13-36/37-45		
615-019-00-5	dicyclohexylcarbodiimide	208-704-1	538-75-0	T; R24 Xn; R22 Xi; R41 R43	T R: 22-24-41-43 S: (1/2-)24-26-37/39- 45		
615-020-00-0	methylene dithiocyanate	228-652-3	6317-18-6	T+; R26 T; R25 C; R34 R43 N; R50	T+; N R: 25-26-34-43-50 S: (1/2-)26-28-36/37/ 39-45-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
615-021-00-6	1,3,5-tris(oxiranylmethyl)-1,3,5-triazine-2,4,6(1H,3H,5H)-trione; TGIC	219-514-3	2451-62-9	Muta. Cat. 2; R46 T; R23/25 Xn; R48/22 Xi; R41 R43 R52-53	T R: 46-23/25-41-43-48/22-52/53 S: 53-45-61		E
615-022-00-1	methyl 3-isocyanatosulfonyl-2-thiophene-carboxylate	410-550-7	79277-18-2	E; R2 ⊗ R14 Xn; R48/22 R42/43	E; Xn R: 2-14-42/43-48/22 S: (2-)22-30-35-36/37		
615-023-00-7	2-(isocyanatosulfonylmethyl)benzoic acid methyl ester; (alt.):methyl 2-(isocyanatosulfonylmethyl)benzoate	410-900-9	83056-32-0	R10 R14 Muta. Cat. 3; R68 Xn; R20-48/22 Xi; R41 R42	Xn R: 10-14-20-41-42-48/22-68 S: (2-)23-26-36/37/39		
615-024-00-2	2-phenylethylisocyanate	413-080-0	1943-82-4	T; R23 Xn; R22 C; R35 R42/43 N; R51-53	T; C; N R: 22-23-35-42/43-51/53 S: (1/2-)23-26-36/37/39-43-45-61		
615-025-00-8	4,4'-ethylenediphenyl dicyanate	405-740-1	47073-92-7	Xn; R20/22-48/22 Xi; R41 N; R50-53	Xn; N R: 20/22-41-48/22-50/53 S: (2-)26-36/37/39-60-61		
615-026-00-3	4,4'-methylenebis(2,6-dimethylphenyl cyanate)	405-790-4	101657-77-6	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
615-028-00-4	ethyl 2-(isocyanatosulfonyl)benzoate	410-220-2	77375-79-2	E; R2 ⊗ R14 Xn; R22-48/22 Xi; R41 R42/43	E; Xn R: 2-14-22-41-42/43-48/22 S: (2-)8-23-26-30-35-36/37/39		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
615-029-00-X	2,5-bis-isocyanatomethyl-bicyclo[2.2.1]heptane	411-280-2	—	T+; R26 Xn; R22 C; R34 R42/43 R52-53	T+ R: 22-26-34-42/43-52/53 S: (1/2-)23-26-28-36/37/39-45-61		
615-030-00-5	alkali salts, alkali earth salts and other salts of thiocyanic acid not mentioned elsewhere in this Annex	—	—	Xn; R20/21/22 R32 R52-53	Xn R: 20/21/22-32-52/53 S: (2-)13-61		A
615-031-00-0	thallium salt of thiocyanic acid	222-571-7	3535-84-0	Xn; R20/21/22 R32 N; R51-53	Xn; N R: 20/21/22-32-51/53 S: (2-)13-61		A
615-032-00-6	metal salts of thiocyanic acid not mentioned elsewhere in this Annex	—	—	Xn; R20/21/22 R32 N; R50-53	Xn; N R: 20/21/22-32-50/53 S: (2-)13-60-61		A
616-001-00-X	N,N-dimethylformamide; dimethyl formamide	200-679-5	68-12-2	Repr. Cat. 2; R61 Xn; R20/21 Xi; R36	T R: 61-20/21-36 S: 53-45		E
616-002-00-5	2-fluoroacetamide	211-363-1	640-19-7	T+; R28 T; R24	T+ R: 24-28 S: (1/2-)36/37-45		
616-003-00-0	acrylamide; prop-2-enamide	201-173-7	79-06-1	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 3; R62 T; R25-48/23/24/25 Xn; R20/21 Xi; R36/38 R43	T R: 45-46-20/21-25-36/38-43-48/23/24/25-62 S: 53-45		DE

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
616-004-00-6	allidochlor (ISO); N,N-diallylchloroacetamide	202-270-7	93-71-0	Xn; R21/22 Xi; R36/38 N; R51-53	Xn; N R: 21/22-36/38-51/ 53 S: (2-)26-28-36/37/ 39-61		
616-005-00-1	chlorthiamid (ISO); 2,6-dichloro (thiobenzamide)	217-637-7	1918-13-4	Xn; R22	Xn R: 22 S: (2-)36		
616-006-00-7	dichlofluanid (ISO); N-dichlorofluoromethylthio-N',N'-dimethyl-N-phenylsulphamide	214-118-7	1085-98-9	Xn; R20 Xi; R36 R43 N; R50-53	Xn; N R: 20-36-43-50/53 S: (2-)24-37-60-61		
616-007-00-2	diphenamid (ISO); N,N-dimethyl-2,2-diphenylacetamide	213-482-4	957-51-7	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
616-008-00-8	propachlor (ISO); 2-chloro-N-isopropylacetanilide; α -chloro-N-isopropylacetanilide	217-638-2	1918-16-7	Xn; R22 Xi; R36 R43 N; R50-53	Xn; N R: 22-36-43-50/53 S: (2-)24-37-60-61		
616-009-00-3	propanil (ISO); 3',4'-dichloropropionanilide	211-914-6	709-98-8	Xn; R22 N; R50	Xn; N R: 22-50 S: (2-)22-61		
616-010-00-9	tosylchloramide sodium	204-854-7	127-65-1	Xn; R22 R31 C; R34 R42	C R: 22-31-34-42 S: (1/2-)7-22-26-36/ 37/39-45		
616-011-00-4	N,N-dimethylacetamide	204-826-4	127-19-5	Repr. Cat. 2; R61 Xn; R20/21	T R: 61-20/21 S: 53-45	Repr. Cat. 2; R61: C $\geq$ 5 %	E
616-012-00-X	N-(dichlorofluoromethylthio)phthalimide; N-(fluorodichloromethylthio)phthalimide	211-952-3	719-96-0	Xi; R38	Xi R: 38 S: (2-)28		
616-013-00-5	butyraldehyde oxime	203-792-8	110-69-0	T; R24 Xn; R22 Xi; R36	T R: 22-24-36 S: (1/2-)23-36-45		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
616-014-00-0	2-butanone oxime; ethyl methyl ketoxime; ethyl methyl ketone oxime	202-496-6	96-29-7	Carc. Cat. 3; R40 Xn; R21 Xi; R41 R43	Xn R: 21-40-41-43 S: (2-)13-23-26-36/ 37/39		
616-015-00-6	alachlor (ISO); 2-chloro-2',6'-diethyl-N-(methoxymethyl)acetanilide	240-110-8	15972-60-8	Carc. Cat. 3; R40 Xn; R22 R43 N; R50-53	Xn; N R: 22-40-43-50/53 S: (2-)36/37-46-60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	
616-016-00-1	1-(3,4-dichlorophenylimino) thiosemicarbazide	—	5836-73-7	T+; R28	T+ R: 28 S: (1/2-)22-36/37-45		
616-017-00-7	cartap hydrochloride	239-309-2	15263-52-2	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		
616-018-00-2	N,N-diethyl- <i>m</i> -toluamide; deet	205-149-7	134-62-3	Xn; R22 Xi; R36/38 R52-53	Xn R: 22-36/38-52/53 S: (2-)61		
616-019-00-8	perfluidone (ISO); 1,1,1-trifluoro-N-(4-phenylsulphonyl- <i>o</i> -tolyl)methanesulpho- namide	253-718-3	37924-13-3	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)		
616-020-00-3	tebuthiuron (ISO); 1-(5- <i>tert</i> -butyl-1,3,4-thiadiazol-2-yl)-1,3-dimethylurea	251-793-7	34014-18-1	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)37-60-61		
616-021-00-9	thiazafluron (ISO); 1,3-dimethyl-1-(5-trifluoromethyl-1,3,4-thiadiazol-2-yl)urea	246-901-4	25366-23-8	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
616-022-00-4	acetamide	200-473-5	60-35-5	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		
616-023-00-X	N-hexadecyl(or octadecyl)-N-hexadecyl(or octadecyl)benza- mide	401-980-6	—	Xi; R38 R43	Xi R: 38-43 S: (2-)24-37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
616-024-00-5	2-(4,4-dimethyl-2,5-dioxooxazolidin-1-yl)-2-chloro-5-(2-(2,4-di- <i>tert</i> -pentylphenoxy)butyramido)-4,4-dimethyl-3-oxovaleranimide	402-260-4	54942-74-4	R53	R: 53 S: 61		
616-025-00-0	valinamide	402-840-7	20108-78-5	Repr. Cat. 3; R62 Xi; R36 R43	Xn R: 36-43-62 S: (2-)26-36/37		
616-026-00-6	thioacetamide	200-541-4	62-55-5	Carc. Cat. 2; R45 Xn; R22 Xi; R36/38 R52-53	T R: 45-22-36/38-52/ 53 S: 53-45-61		E
616-027-00-1	tris(2-(2-hydroxyethoxy)ethyl)ammonium 3-acetoacetamido-4-methoxybenzenesulfonate	403-760-5	—	R43	Xi R: 43 S: (2-)24-37		
616-028-00-7	N-(4-(3-(4-cyanophenyl)ureido)-3-hydroxyphenyl)-2-(2,4-di- <i>tert</i> -pentylphenoxy)octanamide	403-790-9	108673-51-4	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
616-029-00-2	N,N'-ethylenebis(vinylsulfonylacetamide)	404-790-1	66710-66-5	Xi; R41 R43	Xi R: 41-43 S: (2-)24-26-37/39		
616-030-00-8	ethidimuron (ISO); 1-(5-ethylsulphonyl-1,3,4-thiadiazol-2-yl)-1,3-dimethylurea	250-010-6	30043-49-3	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
616-031-00-3	dimethachlor (ISO); 2-chloro-N-(2,6-dimethylphenyl)-N-(2-methoxyethyl)acetamide	256-625-6	50563-36-5	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
616-032-00-9	diflufenican (ISO); N-(2,4-difluorophenyl)-2-[3-(trifluoromethyl)phenoxy]-3-pyridinecarboxamide	—	83164-33-4	R52-53	R: 52/53 S: 61		
616-033-00-4	cyprofuram (ISO); N-(3-chlorophenyl)-N-(tetrahydro-2-oxo-3-furyl)cyclopropanecarboxamide	274-050-9	69581-33-5	T; R25 Xn; R21 N; R50-53	T; N R: 21-25-50/53 S: (1/2-)36/37-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
616-034-00-X	pyracarbolid (ISO); 3,4-dihydro-6-methyl-2H-pyran-5-carboxanilide	246-419-4	24691-76-7	R52-53	R: 52/53 S: 61		
616-035-00-5	cymoxanil (ISO); 2-cyano-N-[(ethylamino)carbonyl]-2-(methoxyimino)aceta- mide	261-043-0	57966-95-7	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)36/37-60-61		
616-036-00-0	2-chloracetamide	201-174-2	79-07-2	Repr. Cat. 3; R62 T; R25 R43	T R: 25-43-62 S: (1/2-)22-36/37-45	R43: C ≥ 0,1 %	
616-037-00-6	acetochlor (ISO); 2-chloro-N-(ethoxymethyl)-N-(2-ethyl-6-methylphenyl)aceta- mide	251-899-3	34256-82-1	Xn; R20 Xi; R37/38 R43 N; R50-53	Xn; N R: 20-37/38-43-50/ 53 S: (2-)36/37-60-61		
616-038-00-1	(4-aminophenyl)-N-methylmethylensulfonamide hydrochlo- ride	406-010-5	88918-84-7	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)24-26-37/39-61		
616-039-00-7	3',5'-dichloro-4'-ethyl-2'-hydroxypalmitanilide	406-200-8	117827-06-2	R43	Xi R: 43 S: (2-)24-37		
616-040-00-2	potassium N-(4-toluenesulfonyl)-4-toluenesulfonamide	406-650-5	97888-41-0	Xi; R41	Xi R: 41 S: (2-)26-39		
616-041-00-8	3',5'-dichloro-2-(2,4-di- <i>tert</i> -pentylphenoxy)-4'-ethyl-2'-hydro- xyhexananilide	406-840-8	101664-25-9	R53	R: 53 S: 61		
616-042-00-3	N-(2-(6-ethyl-7-(4-methylphenoxy)-1H-pyrazolo[1,5-b] [1,2,4]triazol-2-yl)propyl)-2-octadecyloxybenzamide	407-070-5	142859-67-4	R43 R53	Xi R: 43-53 S: (2-)22-24-37-61		
616-043-00-9	isoxaben (ISO); N-[3-(1-ethyl-1-methylpropyl)-1,2-oxazol-5-yl]-2,6-dimetho- xybenzamide	407-190-8	82558-50-7	R53	R: 53 S: 61		
616-044-00-4	N-(3,5-dichloro-4-ethyl-2-hydroxyphenyl)-2-(3-pentadecyl- phenoxy)-butanamide	402-510-2	—	N; R51-53	N R: 51/53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
616-045-00-X	2'-(4-chloro-3-cyano-5-formyl-2-thienylazo)-5'-diethylamino-2-methoxyacetanilide	405-190-2	122371-93-1	R43 R53	Xi R: 43-53 S: 2-22-24-37-61		
616-046-00-5	N-(2-(6-chloro-7-methylpyrazolo(1,5-b)-1,2,4-triazol-4-yl)propyl)-2-(2,4-di-tert-pentylphenoxy)octanamide	406-390-2	—	N; R50-53	N R: 50/53 S: 60-61		
616-047-00-0	reaction mass of: 2,2',2'',2'''-(ethylenedinitrilotetrakis-N,N-di(C ₁₆)alkylacetamide; 2,2',2'',2'''-(ethylenedinitrilotetrakis-N,N-di(C ₁₈)alkylacetamide	406-640-0	—	R43	Xi R: 43 S: (2-)24-37		
616-048-00-6	3'-trifluoromethylisobutyranilide	406-740-4	1939-27-1	Xn; R48/22 N; R51-53	Xn; N R: 48/22-51/53 S: (2-)22-36-61		
616-049-00-1	2-(2,4-bis(1,1-dimethylethyl)phenoxy)-N-(3,5-dichloro-4-ethyl-2-hydroxyphenyl)-hexanamide	408-150-2	99141-89-6	R53	R: 53 S: 61		
616-050-00-7	lufenuron (ISO); N-[2,5-dichloro-4-(1,1,2,3,3,3-hexafluoropropoxy)-phenyl-aminocarbonyl]-2,6-difluorobenzamide	410-690-9	103055-07-8	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
616-051-00-2	reaction mass of: 2,4 -bis(N'-(4-methylphenyl)-ureido)-toluene; 2,6 -bis(N'-(4-methylphenyl)-ureido)-toluene	411-070-0	—	R53	R: 53 S: 61		
616-052-00-8	formamide	200-842-0	75-12-7	Repr. Cat. 2; R61	T R: 61 S: 53-45		
616-053-00-3	N-methylacetamide	201-182-6	79-16-3	Repr. Cat. 2; R61	T R: 61 S: 53-45		
616-054-00-9	iprodione (ISO); 3-(3,5-dichlorophenyl)-2,4-dioxo-N-isopropylimidazolidine-1-carboxamide	253-178-9	36734-19-7	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-60-61		
616-055-00-4	propyzamide (ISO); 3,5-dichloro-N-(1,1-dimethylprop-2-ynyl)benzamide	245-951-4	23950-58-5	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
616-056-00-X	N-methylformamide	204-624-6	123-39-7	Repr. Cat. 2; R61 Xn; R21	T R: 61-21 S: 53-45		E
616-057-00-5	reaction mass of: N-[3-hydroxy-2-(2-methylacryloylamino-methoxy)propoxymethyl]-2-methylacrylamide; N-[2,3-bis-(2-methylacryloylaminomethoxy)propoxymethyl]-2-methylacrylamide; methacrylamide; 2-methyl-N-(2-methylacryloylaminomethoxymethyl)-acrylamide; N-(2,3-dihydroxypropoxymethyl)-2-methylacrylamide	412-790-8	—	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xn; R48/22	T R: 45-48/22 S: 53-45		E
616-058-00-0	1,3-bis(3-methyl-2,5-dioxo-1H-pyrrolinylmethyl)benzene	412-570-1	119462-56-5	Xn; R48/22 Xi; R41 R43 N; R50-53	Xn; N R: 41-43-48/22-50/53 S: (2-)26-36/37/39-60-61		
616-059-00-6	4-((4-(diethylamino)-2-ethoxyphenyl)imino)-1,4-dihydro-1-oxo-N-propyl-2-naphthalenecarboxamide	412-650-6	121487-83-0	R53	R: 53 S: 61		
616-060-00-1	Condensation product of: 3-(7-carboxyhept-1-yl)-6-hexyl-4-cyclohexene-1,2-dicarboxylic acid with polyamines (primarily amino-ethyl-piperazine and triethylenetetramine)	413-770-1	—	Xn; R22 C; R34 R43 N; R50-53	C; N R: 22-34-43-50/53 S: (1/2-)26-36/37/39-45-60-61		
616-061-00-7	N,N'-1,6-hexanediylbis(N-(2,2,6,6-tetramethyl-piperidin-4-yl)-formamide	413-610-0	124172-53-8	Xi; R36 R52-53	Xi R: 36-52/53 S: (2-)26-61		
616-062-00-2	N-[3-[(2-acetyloxy)ethyl](phenyl-methyl)amino]-4-methoxy-phenylacetamide	411-590-8	70693-57-1	C; R34 R52-53	C R: 34-52/53 S: (1/2-)26-36/37/39-45-61		
616-063-00-8	3-dodecyl-(1-(1,2,2,6,6-pentamethyl-4-piperidin-yl)-2,5-pyrrolidindione	411-920-0	106917-30-0	T; R23 Xn; R22-48/22 C; R35 N; R50-53	T; C; N R: 22-23-35-48/22-50/53 S: (1/2-)26-28-36/37/39-45-60-61		
616-064-00-3	N-tert-butyl-3-methylpicolinamide	406-720-5	32998-95-1	R52-53	R: 52/53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
616-065-00-9	3'-(3-acetyl-4-hydroxyphenyl)-1,1-diethylurea	411-970-3	79881-89-3	Xn; R22-48/22	Xn R: 22-48/22 S: (2-)22-36		
616-066-00-4	5,6,12,13-tetrachloroanthra(2,1,9- <i>def</i> :6,5,10- <i>d'ef'</i>)diisoquinoline-1,3,8,10(2 <i>H</i> ,9 <i>H</i>)-tetrone	405-100-1	115662-06-1	Repr. Cat. 3; R62	Xn R: 62 S: (2-)22-36/37		
616-067-00-X	dodecyl 3-(2-(3-benzyl-4-ethoxy-2,5-dioximidazolidin-1-yl)-4,4-dimethyl-3-oxovaleramido)-4-chlorobenzoate	407-300-4	92683-20-0	R53	R: 53 S: 61		
616-068-00-5	potassium 4-(11-methacrylamidoundecanamido)benzenesulfonate	406-500-9	174393-75-0	R43	Xi R: 43 S: (2-)22-24-37		
616-069-00-0	1-hydroxy-5-(2-methylpropyloxycarbonylamino)- <i>N</i> -(3-dodecyloxypropyl)-2-naphthoamide	406-210-2	110560-22-0	R53	R: 53 S: 61		
616-070-00-6	reaction mass of: 3,3'-dicyclohexyl-1,1'-methylenebis(4,1-phenylene)diurea; 3-cyclohexyl-1-(4-(4-(3-octadecylureido)benzyl)phenyl)urea; 3,3'-dioctadecyl-1,1'-methylenebis(4,1-phenylene)diurea	406-530-2	—	R53	R: 53 S: 22-61		
616-071-00-1	reaction mass of: bis(<i>N</i> -cyclohexyl- <i>N'</i> -phenyleneureido)methylene; bis(<i>N</i> -octadecyl- <i>N'</i> -phenyleneureido)methylene; bis(<i>N</i> -dicyclohexyl- <i>N'</i> -phenyleneureido)methylene (1:2:1)	406-550-1	—	R43 R53	Xi R: 43-53 S: (2-)22-24-37-61		
616-072-00-7	1-(2-deoxy-5- <i>O</i> -trityl-β- <i>D</i> -threopentofuranosyl)thymine	407-120-6	55612-11-8	R53	R: 53 S: 61		
616-073-00-2	4'-ethoxy-2-benzimidazoleanilide	407-600-5	120187-29-3	Muta. Cat. 3; R68 R53	Xn R: 68-53 S: (2-)22-36/37-61		
616-074-00-8	<i>N</i> -butyl-2-(4-morpholinylcarbonyl)benzamide	407-730-2	104958-67-0	Xi; R36 R43 R52-53	Xi R: 36-43-52/53 S: (2-)24-26-37-61		
616-075-00-3	D,L-(<i>N,N</i> -diethyl-2-hydroxy-2-phenylacetamide)	408-120-9	65197-96-8	Xn; R22 Xi; R41	Xn R: 22-41 S: (2-)26-39-46		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
616-076-00-9	tebufenozide (ISO); N-tert-butyl-N'-(4-ethylbenzoyl)-3,5-dimethylbenzohydrazide	412-850-3	112410-23-8	N; R51-53	N R: 51/53 S: 61		
616-077-00-4	reaction mass of: 2-(9-methyl-1,3,8,10-tetraoxo-2,3,9,10-tetrahydro-(1 <i>H</i> ,8 <i>H</i>)-anthra[2,1,9- <i>def</i> : 6,5,10- <i>d'e'f'</i>]diisoquinolin-2-ylethansulfonic acid; potassium 2-(9-methyl-1,3,8,10-tetraoxo-2,3,9,10-tetrahydro-(1 <i>H</i> ,8 <i>H</i>)-anthra[2,1,9- <i>def</i> : 6,5,10- <i>d'e'f'</i>]diisoquinolin-2-ylethansulfate	411-310-4	—	Xi; R41	Xi R: 41 S: (2-)26-39		
616-078-00-X	2-[2,4-bis(1,1-dimethyl-ethyl)phenoxy]-N-(2-hydroxy-5-methyl-phenyl)hexanamide	411-330-3	104541-33-5	R53	R: 53 S: 61		
616-079-00-5	1,6-hexanediyl-bis(2-(2-(1-ethylpentyl)-3-oxazolidinyl)ethyl) carbamate	411-700-4	140921-24-0	R43	Xi R: 43 S: (2-)24-37		
616-080-00-0	4-(2-((3-ethyl-4-methyl-2-oxo-pyrrolin-1-yl)carboxamido)ethyl)benzenesulfonamide	411-850-0	119018-29-0	R52-53	R: 52/53 S: 61		
616-081-00-6	5-bromo-8-naphtholactam	413-480-5	24856-00-6	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)22-24-37-60-61		
616-082-00-1	N-(5-chloro-3-((4-(diethylamino)-2-methylphenyl)imino-4-methyl-6-oxo-1,4-cyclohexadien-1-yl)benzamide	413-200-1	129604-78-0	R43	Xi R: 43 S: (2-)24-37		
616-083-00-7	[2-[(4-nitrophenyl)amino]ethyl]urea	410-700-1	27080-42-8	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
616-084-00-2	2,4-bis[N'-(4-methylphenyl)ureido]toluene	411-790-5	—	N; R50-53	N R: 50/53 S: 60-61		
616-085-00-8	3-(2,4-dichlorophenyl)-6-fluoro-quinazoline-2,4(1 <i>H</i> ,3 <i>H</i>)-dione	412-190-6	168900-02-5	N; R50-53	N R: 50/53 S: 60-61		
616-086-00-3	2-acetylamino-6-chloro-4-[(4-diethylamino)2-methylphenyl-imino]-5-methyl-1-oxo-2,5-cyclohexadiene	412-250-1	102387-48-4	R53	R: 53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
616-087-00-9	reaction mass of: 7,9,9-trimethyl-3,14-dioxo-4,13-dioxo-5,12-diazaheptadecane-1,16-diyl-prop-2-enoate; 7,7,9-trimethyl-3,14-dioxo-4,13-dioxo-5,12-diazaheptadecan-1,16-diyl-prop-2-enoate	412-260-6	52658-19-2	Xi; R36 R43 N; R51-53	Xi; N R: 36-43-51/53 S: (2-)26-36/37-61		
616-088-00-4	2-aminosulfonyl-N,N-dimethylnicotinamide	413-440-7	112006-75-4	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
616-089-00-X	5-(2,4-dioxo-1,2,3,4-tetrahydropyrimidine)-3-fluoro-2-hydroxymethyltetrahydrofuran	415-360-8	41107-56-6	Muta. Cat. 3; R68	Xn R: 68 S: (2-)22-36/37		
616-090-00-5	1-(1,4-benzodioxan-2-ylcarbonyl)piperazine hydrochloride	415-660-9	70918-74-0	T; R23/24/25 Xn; R48/22 N; R51-53	T; N R: 23/24/25-48/22-51/53 S: 53-45-61		
616-091-00-0	1,3,5-tris-[(2S and 2R)-2,3-epoxypropyl]-1,3,5-triazine-2,4,6-(1H,3H,5H)-trione	423-400-0	59653-74-6	Muta. Cat. 2; R46 T; R23 Xn; R22-48/22 Xi; R41 R43	T R: 46-22-23-41-43-48/22 S: 53-45		E
616-092-00-6	Polymeric reaction product of bicyclo[2.2.1]hepta-2,5-diene, ethene, 1,4-hexadiene, 1-propene with N,N-di-2-propenyl-formamide	404-035-6	—	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
616-093-00-1	Reaction products of: aniline-terephthalaldehyde-o-toluidine condensate with maleic anhydride	406-620-1	129217-90-9	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
616-094-00-7	3,3'-dicyclohexyl-1,1'-methylenebis(4,1-phenylene)diurea	406-370-3	58890-25-8	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
616-095-00-2	3,3'-dioctadecyl-1,1'-methylenebis(4,1-phenylene)diurea	406-690-3	43136-14-7	R53	R: 53 S: 61		
616-096-00-8	N-(3-hexadecyloxy-2-hydroxyprop-1-yl)-N-(2-hydroxyethyl) palmitamide	408-110-4	110483-07-3	R53	R: 53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
616-097-00-3	N,N'-1,4-phenylenebis(2-((2-methoxy-4-nitrophenyl)azo)-3-oxobutanamide	411-840-6	83372-55-8	R53	R: 53 S: 61		
616-098-00-9	1-[4-chloro-3-((2,2,3,3,3-pentafluoropropoxy)methyl)phenyl]-5-phenyl-1H-1,2,4-triazole-3-carboxamide	411-750-7	119126-15-7	N; R51-53	N R: 51/53 S: 61		
616-099-00-4	2-[4-[(4-hydroxyphenyl)sulfonyl]phenoxy]-4,4-dimethyl-N-[5-[(methylsulfonyl)amino]-2-[4-(1,1,3,3-tetramethylbutyl)phenoxy]phenyl]-3-oxopentanamide	414-170-2	135937-20-1	R53	R: 53 S: 61		
616-100-00-8	1,3-dimethyl-1,3-bis(trimethylsilyl)urea	414-180-7	10218-17-4	Xn; R22 Xi; R38	Xn R: 22-38 S: (2-)36/37		
616-101-00-3	(S)-N-tert-butyl-1,2,3,4-tetrahydro-3-isoquinolinecarboxamide	414-600-9	149182-72-9	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
616-102-00-9	reaction mass of: α-[3-(3-mercaptopropanoxycarbonylamino)methylphenylaminocarbonyl]-ω-[3-(3-mercaptopropanoxycarbonylamino)methylphenylaminocarbonyloxy]-poly-(oxyethylene-co-oxypropylene); 1,2-(or 1,3-)bis[α-(3-mercaptopropanoxycarbonylamino)methylphenylaminocarbonyl]-ω-oxy-poly(oxyethylene-co-oxypropylene)]-3-(or 2-)propanol; 1,2,3-tris[α-(3-mercaptopropanoxycarbonyl-amino)methylphenylaminocarbonyl]-ω-oxy-poly-(oxyethylene-co-oxypropylene)]propane]	415-870-0	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)36/37-61		
616-103-00-4	(S,S)-trans-4-(acetyl-amino)-5,6-dihydro-6-methyl-7,7-dioxo-4H-thieno[2,3-b]thiopyran-2-sulfonamide	415-030-3	120298-38-6	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
616-104-00-X	benalaxyl (ISO); methyl N-(2,6-dimethylphenyl)-N-(phenylacetyl)-DL-alaninate	275-728-7	71626-11-4	N; R50-53	N R: 50/53 S: 60-61		
616-105-00-5	chlorotoluron (ISO); 3-(3-chloro-p-tolyl)-1,1-dimethylurea	239-592-2	15545-48-9	Carc. Cat. 3; R40 Repr. Cat. 3; R63 N; R50-53	Xn; N R: 40-63-50/53 S: (2-)26-36/37-46-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
616-106-00-0	phenmedipham (ISO); methyl 3-(3-methylcarbaniloxy)carbanilate	237-199-0	13684-63-4	N; R50-53	N R: 50/53 S: 60-61		
616-108-00-1	iodosulfuron-methyl-sodium; sodium ([[5-iodo-2-(methoxycarbonyl)phenyl]sulfonyl]carbamoyl)(4-methoxy-6-methyl-1,3,5-triazin-2-yl)azanide	—	144550-36-7	N; R50-53	N R: 50/53 S: 60-61		
616-109-00-7	sulfosulfuron (ISO); 1-(4,6-dimethoxypyrimidin-2-yl)-3-(2-ethylsulfonylimidazo [1,2-a]pyridin-3-yl)sulfonylurea	—	141776-32-1	N; R50-53	N R: 50/53 S: 60-61		
616-110-00-2	cyclanilide (ISO); 1-(2,4-dichloroanilinoacetyl)cyclopropanecarboxylic acid	419-150-7	113136-77-9	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
616-111-00-8	fenhexamid (ISO); N-(2,3-dichlor-4-hydroxyphenyl)-1-methylcyclohexancarboxamid	422-530-5	126833-17-8	N; R51-53	N R: 51/53 S: 61		
616-112-00-3	oxasulfuron (ISO); oxetan-3-yl 2-[[4,6-dimethylpyrimidin-2-yl]-carbamoylsulfonyl]benzoate	—	144651-06-9	Xn; R48/22 N; R50-53	Xn; N R: 48/22-50/53 S: (2-)46-60-61		
616-113-00-9	desmedipham (ISO); ethyl 3-phenylcarbamoyloxyphenylcarbamate	237-198-5	13684-56-5	N; R50-53	N R: 50/53 S: 60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
616-114-00-4	dodecanamide, N,N'-(9,9',10,10'-tetrahydro-9,9',10,10'-tetraoxo(1,1'-biantanthracene)-4,4'-diyl)bis-	418-010-2	136897-58-0	R53	R: 53 S: 22-61		
616-115-00-X	N-(3-acetyl-2-hydroxyphenyl)-4-(4-phenylbutoxy)benzamide	416-150-9	136450-06-1	R53	R: 53 S: 61		
616-116-00-5	N-(4-dimethylaminopyridinium)-3-methoxy-4-(1-methyl-5-nitroindol-3-ylmethyl)-N-(o-tolylsulfonyl)benzamidate	416-790-9	143052-96-4	R53	R: 53 S: 61		
616-117-00-0	N-[2-(3-acetyl-5-nitrothiophen-2-ylazo)-5-diethylaminophenyl]acetamide	416-860-9	777891-21-1	Repr. Cat. 3; R62 R43 N; R50-53	Xn; N R: 43-62-50/53 S: (2-)22-36/37-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
616-118-00-6	N-(2',6'-dimethylphenyl)-2-piperidinecarboxamide hydrochloride	417-950-0	65797-42-4	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-61		
616-119-00-1	2-(1-butyl-3,5-dioxo-2-phenyl-(1,2,4)-triazolidin-4-yl)-4,4-dimethyl-3-oxo-N-(2-methoxy-5-(2-(dodecyl-1-sulfonyl))propionylamino)-phenyl)-pentanamide	418-060-5	118020-93-2	R53	R: 53 S: 61		
616-120-00-7	reaction mass of: N-(3-dimethylamino-4-methyl-phenyl)-benzamide; N-(3-dimethylamino-2-methyl-phenyl)-benzamide; N-(3-dimethylamino-3-methyl-phenyl)-benzamide	420-600-1	—	Xn; R48/22 N; R51-53	Xn; N R: 48/22-51/53 S: (2-)36/37-61		
616-121-00-2	2,4-dihydroxy-N-(2-methoxyphenyl)benzamide	419-090-1	129205-19-2	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
616-123-00-3	N-[3-[[4-(diethylamino)-2-methylphenyl]imino]-6-oxo-1,4-cyclohexadienyl]acetamide	414-740-0	96141-86-5	N; R50-53	N R: 50/53 S: 60-61		
616-124-00-9	lithium bis(trifluoromethylsulfonyl)imide	415-300-0	90076-65-6	T; R24/25 C; R34 R52-53	T R: 24/25-34-52/53 S: (1/2-)22-26-36/37/ 39-45-61		
616-125-00-4	3-cyano-N-(1,1-dimethylethyl)androsta-3,5-diene-17-β-carboxamide	415-730-9	151338-11-3	N; R50-53	N R: 50/53 S: 60-61		
616-127-00-5	reaction mass of: N,N'-Ethane-1,2-diylbis(decanamide); 12-Hydroxy-N-[2-[1-oxydecyl]amino]ethyl]octadecanamide; N,N'-Ethane-1,2-diylbis(12-hydroxyoctadecanamide)	430-050-2	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
616-128-00-0	N-(2-(1-allyl-4,5-dicyanoimidazol-2-ylazo)-5-(dipropylamino)phenyl)-acetamide	417-530-7	123590-00-1	R53	R: 53 S: 61		
616-129-00-6	N,N'-bis(2,2,6,6-tetramethyl-4-piperidyl)isophthalamide	419-710-0	42774-15-2	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)22-25-26		
616-130-00-1	N-(3-(2-(4,4-dimethyl-2,5-dioxo-imidazolin-1-yl)-4,4-dimethyl-3-oxo-pentanoylamino)-4-methoxy-phenyl)-octadecanamide	421-780-2	150919-56-5	R53	R: 53 S: 61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
616-132-00-2	N-[4-(4-cyano-2-furfurylidene-2,5-dihydro-5-oxo-3-furyl)phenyl]butane-1-sulfonamide	423-250-6	130016-98-7	N; R50-53	N R: 50/53 S: 60-61		
616-133-00-8	N-cyclohexyl-S,S-dioxobenzo[b]tiophene-2-carboxamide	423-990-1	149118-66-1	Xn; R22 Xi; R41 N; R50-53	Xn; N R: 22-41-50/53 S: (2-)22-26-39-60-61		
616-134-00-3	3,3'-bis(dioctyloxyphosphinothioylthio)-N,N'-oxybis(methylene)dipropionamide	401-820-5	793710-14-2	R52-53	R: 52/53 S: 61		
616-135-00-9	(3S,4aS,8aS)-2-[(2R,3S)-3-amino-2-hydroxy-4-phenylbutyl]-N-tert-butyldecahydroisoquinoline-3-carboxamide	430-230-0	136522-17-3	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-61		
616-142-00-7	1,3-Bis(vinylsulfonylacetamido)propane	428-350-3	93629-90-4	Muta. Cat. 3; R68 Xi; R41 R43 R52-53	Xn R: 41-43-68-52/53 S: (2-)22-26-36/37/39-61		
616-143-00-2	N,N'-dihexadecyl-N,N'-bis(2-hydroxyethyl)propanediamide	422-560-9	149591-38-8	Repr. Cat. 3; R62 Xi; R36 R53	Xn R: 36-62-53 S: (2-)26-36/37-61		
617-001-00-2	di-tert-butyl peroxide	203-733-6	110-05-4	O; R7 F; R11	O; F R: 7-11 S: (2-)3/7-14-16-36/37/39		
617-002-00-8	α,α -dimethylbenzyl hydroperoxide; cumene hydroperoxide	201-254-7	80-15-9	O; R7 T; R23 Xn; R21/22-48/20/22 C; R34 N; R51-53	O; T; N R: 7-21/22-23-34-48/20/22-51/53 S: (1/2-)3/7-14-36/37/39-45-50-61	C; R34: C $\geq$ 10 % Xi; R37/38-41: 3 % $\leq$ C < 10 % Xi; R36/37: 1 % $\leq$ C < 3 %	
617-003-00-3	dilauroyl peroxide	203-326-3	105-74-8	O; R7	O R: 7 S: (2-)3/7-14-36/37/39		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
617-004-00-9	1,2,3,4-tetrahydro-1-naphthyl hydroperoxide	212-230-0	771-29-9	O; R7 Xn; R22 C; R34 N; R50-53	O; C; N R: 7-22-34-50/53 S: (1/2-)3/7-14-26-36/37/39-45-60-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
617-006-00-X	bis(α,α-dimethylbenzyl) peroxide	201-279-3	80-43-3	O; R7 Xi; R36/38 N; R51-53	O; Xi; N R: 7-36/38-51/53 S: (2-)3/7-14-36/37/39-61		
617-007-00-5	tert-butyl α,α-dimethylbenzyl peroxide	222-389-8	3457-61-2	O; R7 Xi; R38 N; R51-53	O; Xi; N R: 7-38-51/53 S: (2-)3/7-14-36/37/39-61		
617-008-00-0	dibenzoyl peroxide; benzoyl peroxide	202-327-6	94-36-0	E; R2 ⊗ Xi; R36 R43	E; Xi R: 2-36-43 S: (2-)3/7-14-36/37/39		
617-010-00-1	1-hydroperoxycyclohexyl 1-hydroxycyclohexyl peroxide; [1] 1,1'-dioxybiscyclohexan-1-ol; [2] cyclohexylidene hydroperoxide; [3] cyclohexanone, peroxide [4]	201-091-1 [1] 219-306-2 [2] 220-279-4 [3] 235-527-7 [4]	78-18-2 [1] 2407-94-5 [2] 2699-11-8 [3] 12262-58-7 [4]	E; R2 ⊗ Xn; R22 C; R34	E; C R: 2-22-34 S: (1/2-)3/7-14-36/37/39-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	C
617-012-00-2	8-p-menthyl hydroperoxide; p-menthane hydroperoxide	201-281-4	80-47-7	O; R7 C; R34 Xn; R20	O; C R: 7-20-34 S: (1/2-)3/7-14-36/37/39-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
617-013-00-8	O,O-tert-butyl O-docosyl monoperoxyoxalate	404-300-6	116753-76-5	O; R7 N; R50-53	O; N R: 7-50/53 S: (2-)7-14-36/37/39-47-60-61		
617-014-00-3	6-(nonylamino)-6-oxo-peroxyhexanoic acid	406-680-9	104788-63-8	O; R7 Xi; R41 R43 N; R50	O; Xi; N R: 7-41-43-50 S: (2-)3/7-14-26-36/37/39-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
617-015-00-9	bis(4-methylbenzoyl)peroxide	407-950-9	895-85-2	E; R2 O; R7 N; R50-53	E; N R: 2-7-50/53 S: (2-)7-14-36/37/39-47-60-61		
617-016-00-4	3-hydroxy-1,1-dimethylbutyl 2-ethyl-2-methylheptaneperoxoate	413-910-1	—	O; R7 R10 Xi; R38 N; R50-53	O; Xi; N R: 7-10-38-50/53 S: (2-)7/47-14-36/37/39-60-61		
617-017-00-X	reaction mass of: 2,2'-bis(<i>tert</i> -pentylperoxy)- <i>p</i> -diisopropylbenzene; 2,2'-bis(<i>tert</i> -pentylperoxy)- <i>m</i> -diisopropylbenzene	412-140-3	32144-25-5	O; R7 ⊗ R53	O R: 7-53 S: (2-)3/7-14-36/37/39-61		
617-018-00-5	reaction mass of: 1-methyl-1-(3-(1-methylethyl)phenyl)ethyl-1-methyl-1-phenylethylperoxide, 63 % by weight; 1-methyl-1-(4-(1-methylethyl)phenyl)ethyl-1-methyl-1-phenylethylperoxide, 31 % by weight	410-840-3	71566-50-2	O; R7 N; R51-53	O; N R: 7-51/53 S: (2-)3/7-14-36/37/39-61		
617-019-00-0	6-(phthalimido)peroxyhexanoic acid	410-850-8	128275-31-0	O; R7 Xi; R41 N; R50	O; Xi; N R: 7-41-50 S: (2-)3/7-14-26-36/37/39-61		
617-020-00-6	1,3-di(prop-2,2-diyl)benzene bis(neodecanoylperoxide)	420-060-5	117663-11-3	R10 O; R7 N; R51-53	O; N R: 7-10-51/53 S: (2-)7-14-36/37/39-47-61		
647-001-00-8	glucosidase, β-	232-589-7	9001-22-3	R42	Xn R: 42 S: (2-)22-24-36/37		
647-002-00-3	cellulase	232-734-4	9012-54-8	R42	Xn R: 42 S: (2-)22-24-36/37		
647-003-00-9	cellobiohydrolase, exo-	253-465-9	37329-65-0	R42	Xn R: 42 S: (2-)22-24-36/37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
647-004-00-4	cellulases with the exception of those specified elsewhere in this Annex	—	—	R42	Xn R: 42 S: (2-)22-24-36/37		A
647-005-00-X	bromelain, juice	232-572-4	9001-00-7	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-006-00-5	ficin	232-599-1	9001-33-6	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-007-00-0	papain	232-627-2	9001-73-4	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-008-00-6	pepsin A	232-629-3	9001-75-6	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-009-00-1	rennin	232-645-0	9001-98-3	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-010-00-7	trypsin	232-650-8	9002-07-7	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-011-00-2	chymotrypsin	232-671-2	9004-07-3	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-012-00-8	subtilisin	232-752-2	9014-01-1	Xi; R37/38-41 R42	Xn R: 37/38-41-42 S: (2-)22-24-26-36/37/39		
647-013-00-3	proteinase, microbial neutral	232-966-6	9068-59-1	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
647-014-00-9	proteases with the exception of those specified elsewhere in this Annex	—	—	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-015-00-4	amylase, α-	232-565-6	9000-90-2	R42	Xn R: 42 S: (2-)22-24-36/37		
647-016-00-X	amylases with the exception of those specified elsewhere in this Annex	—	—	R42	Xn R: 42 S: (2-)22-24-36/37		
648-001-00-0	Distillates (coal tar), benzole fraction; Light Oil; [A complex combination of hydrocarbons obtained by the distillation of coal tar. It consists of hydrocarbons having carbon numbers primarily in the range of C ₄ to C ₁₀ and distilling in the approximate range of 80 °C to 160 °C (175°F to 320°F).]	283-482-7	84650-02-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-002-00-6	Tar oils, brown-coal; Light Oil; [The distillate from lignite tar boiling in the range of approximately 80 °C to 250 °C (176°F to 482°F). Composed primarily of aliphatic and aromatic hydrocarbons and monobasic phenols.]	302-674-4	94114-40-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-003-00-1	Benzol forerunnings (coal); Light Oil Redistillate, low boiling; [The distillate from coke oven light oil having an approximate distillation range below 100 °C (212°F). Composed primarily of C ₄ to C ₆ aliphatic hydrocarbons.]	266-023-5	65996-88-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-004-00-7	Distillates (coal tar), benzole fraction, BTX-rich; Light Oil Redistillate, low boiling; [A residue from the distillation of crude benzole to remove benzole fronts. Composed primarily of benzene, toluene and xylenes boiling in the range of approximately 75 °C to 200 °C (167°F to 392°F).]	309-984-9	101896-26-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-005-00-2	Aromatic hydrocarbons, C ₆₋₁₀ , C ₈ -rich; Light Oil Redistillate, low boiling	292-697-5	90989-41-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-006-00-8	Solvent naphtha (coal), light; Light Oil Redistillate, low boiling	287-498-5	85536-17-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-007-00-3	Solvent naphtha (coal), xylene-styrene cut; Light Oil Redistillate, intermediate boiling	287-502-5	85536-20-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-008-00-9	Solvent naphtha (coal), coumarone-styrene contg.; Light Oil Redistillate, intermediate boiling	287-500-4	85536-19-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-009-00-4	Naphtha (coal), distn. residues; Light Oil Redistillate, high boiling; [The residue remaining from the distillation of recovered naphtha. Composed primarily of naphthalene and condensation products of indene and styrene.]	292-636-2	90641-12-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-010-00-X	Aromatic hydrocarbons, C ₈ ; Light Oil Redistillate, high boiling	292-694-9	90989-38-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-012-00-0	Aromatic hydrocarbons, C ₈₋₉ , hydrocarbon resin polymn. by-product; Light Oil Redistillate, high boiling; [A complex combination of hydrocarbons obtained from the evaporation of solvent under vacuum from polymerized hydrocarbon resin. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₉ and boiling in the range of approximately 120 °C to 215 °C (248°F to 419°F).]	295-281-1	91995-20-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-013-00-6	Aromatic hydrocarbons, C ₉₋₁₂ , benzene distn.; Light Oil Redistillate, high boiling	295-551-9	92062-36-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-014-00-1	Extract residues (coal), benzole fraction alk., acid ext.; Light Oil Extract Residues, low boiling; [The redistillate from the distillate, freed of tar acids and tar bases, from bituminous coal high temperature tar boiling in the approximate range of 90 °C to 160 °C (194°F to 320°F). It consists predominantly of benzene, toluene and xylenes.]	295-323-9	91995-61-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-015-00-7	Extract residues (coal tar), benzole fraction alk., acid ext.; Light Oil Extract Residues, low boiling; [A complex combination of hydrocarbons obtained by the redistillation of the distillate of high temperature coal tar (tar acid and tar base free). It consists predominantly of unsubstituted and substituted mononuclear aromatic hydrocarbons boiling in the range of 85 °C-195 °C (185°F-383°F).]	309-868-8	101316-63-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-016-00-2	Extract residues (coal), benzole fraction acid; Light Oil Extract Residues, low boiling; [An acid sludge by-product of the sulphuric acid refining of crude high temperature coal. Composed primarily of sulfuric acid and organic compounds.]	298-725-2	93821-38-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-017-00-8	Extract residues (coal), light oil alk., distn. overheads; Light Oil Extract Residues, low boiling; [The first fraction from the distillation of aromatic hydrocarbons, coumarone, naphthalene and indene rich prefractionator bottoms or washed carbolic oil boiling substantially below 145 °C (293°F). Composed primarily of C ₇ and C ₈ aliphatic and aromatic hydrocarbons.]	292-625-2	90641-02-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-018-00-3	Extract residues (coal), light oil alk., acid ext., indene fraction; Light Oil Extract Residues, intermediate boiling	309-867-2	101316-62-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-019-00-9	Extract residues (coal), light oil alk., indene naphtha fraction; Light Oil Extract Residues, high boiling; [The distillate from aromatic hydrocarbons, coumarone, naphthalene and indene rich prefractionator bottoms or washed carbolic oils, having an approximate boiling range of 155 °C to 180 °C (311°F to 356°F). Composed primarily of indene, indan and trimethylbenzenes.]	292-626-8	90641-03-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-020-00-4	Solvent naphtha (coal); Light Oil Extract Residues, high boiling; [The distillate from either high temperature coal tar, coke oven light oil, or coal tar oil alkaline extract residue having an approximate distillation range of 130 °C to 210 °C (266°F to 410°F) Composed primarily of indene and other polycyclic ring systems containing a single aromatic ring. May contain phenolic compounds and aromatic nitrogen bases.]	266-013-0	65996-79-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-021-00-X	Distillates (coal tar), light oils, neutral fraction; Light Oil Extract Residues, high boiling; [A distillate from the fractional distillation of high temperature coal tar. Composed primarily of alkyl-substituted one ring aromatic hydrocarbons boiling in the range of approximately 135 °C to 210 °C (275°F to 410°F). May also include unsaturated hydrocarbons such as indene and coumarone.]	309-971-8	101794-90-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-022-00-5	Distillates (coal tar), light oils, acid exts.; Light Oil Extract Residues, high boiling; [This oil is a complex mixture of aromatic hydrocarbons, primarily indene, naphthalene, coumarone, phenol, and <i>o</i> -, <i>m</i> - and <i>p</i> -cresol and boiling in the range of 140 °C to 215 °C (284°F to 419°F).]	292-609-5	90640-87-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-023-00-0	Distillates (coal tar), light oils; Carbolic Oil; [A complex combination of hydrocarbons obtained by distillation of coal tar. It consists of aromatic and other hydrocarbons, phenolic compounds and aromatic nitrogen compounds and distills at the approximate range of 150 °C to 210 °C (302°F to 410°F).]	283-483-2	84650-03-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-024-00-6	Tar oils, coal; Carbolic Oil; [The distillate from high temperature coal tar having an approximate distillation range of 130 °C to 250 °C (266°F to 410°F). Composed primarily of naphthalene, alkylnaphthalenes, phenolic compounds, and aromatic nitrogen bases.]	266-016-7	65996-82-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-026-00-7	Extract residues (coal), light oil alk., acid ext.; Carbolic Oil Extract Residue; [The oil resulting from the acid washing of alkali-washed carbolic oil to remove the minor amounts of basic compounds (tar bases). Composed primarily of indene, indan and alkylbenzenes.]	292-624-7	90641-01-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-027-00-2	Extract residues (coal), tar oil alk.; Carbolic Oil Extract Residue; [The residue obtained from coal tar oil by an alkaline wash such as aqueous sodium hydroxide after the removal of crude coal tar acids. Composed primarily of naphthalenes and aromatic nitrogen bases.]	266-021-4	65996-87-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-028-00-8	Extract oils (coal), light oil; Acid Extract; [The aqueous extract produced by an acidic wash of alkali-washed carbolic oil. Composed primarily of acid salts of various aromatic nitrogen bases including pyridine, quinoline and their alkyl derivatives.]	292-622-6	90640-99-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-029-00-3	Pyridine, alkyl derivs.; Crude Tar Bases; [The complex combination of polyalkylated pyridines derived from coal tar distillation or as high-boiling distillates approximately above 150 °C (302°F) from the reaction of ammonia with acetaldehyde, formaldehyde or paraformaldehyde.]	269-929-9	68391-11-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-030-00-9	Tar bases, coal, picoline fraction; Distillate Bases; [Pyridine bases boiling in the range of approximately 125 °C to 160 °C (257°F 320°F) obtained by distillation of neutralized acid extract of the base-containing tar fraction obtained by the distillation of bituminous coal tars. Composed chiefly of lutidines and picolines.]	295-548-2	92062-33-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-031-00-4	Tar bases, coal, lutidine fraction; Distillate Bases	293-766-2	91082-52-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-032-00-X	Extract oils (coal), tar base, collidine fraction; Distillate Bases; [The extract produced by the acidic extraction of bases from crude coal tar aromatic oils, neutralization, and distillation of the bases. Composed primarily of collidines, aniline, toluidines, lutidines, xyloidines.]	273-077-3	68937-63-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-033-00-5	Tar bases, coal, collidine fraction; Distillate Bases; [The distillation fraction boiling in the range of approximately 181 °C to 186 °C (356°F to 367°F) from the crude bases obtained from the neutralized, acid-extracted base-containing tar fractions obtained by the distillation of bituminous coal tar. It contains chiefly aniline and collidines.]	295-543-5	92062-28-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-034-00-0	Tar bases, coal, aniline fraction; Distillate Bases; [The distillation fraction boiling in the range of approximately 180 °C to 200 °C (356°F to 392°F) from the crude bases obtained by dephenolating and debasing the carbolated oil from the distillation of coal tar. It contains chiefly aniline, collidines, lutidines and toluidines.]	295-541-4	92062-27-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-035-00-6	Tar bases, coal, toluidine fraction; Distillate Bases	293-767-8	91082-53-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-036-00-1	Distillates (petroleum), alkene-alkyne manuf. pyrolysis oil, mixed with high-temp. coal tar, indene fraction; Redistillates; [A complex combination of hydrocarbons obtained as a redistillate from the fractional distillation of bituminous coal high temperature tar and residual oils that are obtained by the pyrolytic production of alkenes and alkynes from petroleum products or natural gas. It consists predominantly of indene and boils in a range of approximately 160 °C to 190 °C (320°F to 374°F).]	295-292-1	91995-31-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-037-00-7	Distillates (coal), coal tar-residual pyrolysis oils, naphthalene oils; Redistillates; [The redistillate obtained from the fractional distillation of bituminous coal high temperature tar and pyrolysis residual oils and boiling in the range of approximately 190 °C to 270 °C (374°F to 518°F). Composed primarily of substituted dinuclear aromatics.]	295-295-8	91995-35-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-038-00-2	Extract oils (coal), coal tar-residual pyrolysis oils, naphthalene oil, redistillate; Redistillates; [The redistillate from the fractional distillation of dephenolated and debased methylnaphthalene oil obtained from bituminous coal high temperature tar and pyrolysis residual oils boiling in the approximate range of 220 °C to 230 °C (428°F to 446°F). It consists predominantly of unsubstituted and substituted dinuclear aromatic hydrocarbons.]	295-329-1	91995-66-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-039-00-8	Extract oils (coal), coal tar-residual pyrolysis oils, naphthalene oils; Redistillates; [A neutral oil obtained by debasing and dephenolating the oil obtained from the distillation of high temperature tar and pyrolysis residual oils which has a boiling range of 225 °C to 255 °C (437°F to 491°F). Composed primarily of substituted dinuclear aromatic hydrocarbons.]	310-170-0	122070-79-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-040-00-3	Extract oils (coal), coal tar residual pyrolysis oils, naphthalene oil, distn. residues; Redistillates; [Residue from the distillation of dephenolated and debased methylnaphthalene oil (from bituminous coal tar and pyrolysis residual oils) with a boiling range of 240 °C to 260 °C (464°F to 500°F). Composed primarily of substituted dinuclear aromatic and heterocyclic hydrocarbons.]	310-171-6	122070-80-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-041-00-9	Absorption oils, bicyclo arom. and heterocyclic hydrocarbon fraction; Wash Oil Redistillate; [A complex combination of hydrocarbons obtained as a redistillate from the distillation of wash oil. It consists predominantly of 2-ringed aromatic and heterocyclic hydrocarbons boiling in the range of approximately 260 °C to 290 °C (500°F to 554°F).]	309-851-5	101316-45-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-042-00-4	Distillates (coal tar), upper, fluorene-rich; Wash Oil Redistillate; [A complex combination of hydrocarbons obtained by the crystallization of tar oil. It consists of aromatic and polycyclic hydrocarbons primarily fluorene and some acenaphthene.]	284-900-0	84989-11-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-043-00-X	Creosote oil, acenaphthene fraction, acenaphthene-free; Wash Oil Redistillate; [The oil remaining after removal by a crystallization process of acenaphthene from acenaphthene oil from coal tar. Composed primarily of naphthalene and alkylnaphthalenes.]	292-606-9	90640-85-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-044-00-5	Distillates (coal tar), heavy oils; Heavy Anthracene Oil; [Distillate from the fractional distillation of coal tar of bituminous coal, with boiling range of 240 °C to 400 °C (464°F to 752°F). Composed primarily of tri- and polynuclear hydrocarbons and heterocyclic compounds.]	292-607-4	90640-86-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-045-00-0	Distillates (coal tar), upper; Heavy Anthracene Oil; [The distillate from coal tar having an approximate distillation range of 220 °C to 450 °C (428°F to 842°F). Composed primarily of three to four membered condensed ring aromatic hydrocarbons and other hydrocarbons.]	266-026-1	65996-91-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-046-00-6	Anthracene oil, acid ext.; Anthracene Oil Extract Residue; [A complex combination of hydrocarbons from the base-freed fraction obtained from the distillation of coal tar and boiling in the range of approximately 325 °C to 365 °C (617°F to 689°F). It contains predominantly anthracene and phenanthrene and their alkyl derivatives.]	295-274-3	91995-14-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-047-00-1	Distillates (coal tar); Heavy Anthracene Oil; [The distillate from coal tar having an approximate distillation range of 100 °C to 450 °C (212°F to 842°F). Composed primarily of two to four membered condensed ring aromatic hydrocarbons, phenolic compounds, and aromatic nitrogen bases.]	266-027-7	65996-92-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-048-00-7	Distillates (coal tar), pitch, heavy oils; Heavy Anthracene Oil; [The distillate from the distillation of the pitch obtained from bituminous high temperature tar. Composed primarily of tri- and polynuclear aromatic hydrocarbons and boiling in the range of approximately 300 °C to 470 °C (572°F to 878°F). The product may also contain heteroatoms.]	295-312-9	91995-51-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-049-00-2	Distillates (coal tar), pitch; Heavy Anthracene Oil; [The oil obtained from condensation of the vapors from the heat treatment of pitch. Composed primarily of two- to four-ring aromatic compounds boiling in the range of 200 °C to greater than 400 °C (392°F to greater than 752°F).]	309-855-7	101316-49-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-050-00-8	Distillates (coal tar), heavy oils, pyrene fraction; Heavy Anthracene Oil Redistillate; [The redistillate obtained from the fractional distillation of pitch distillate boiling in the range of approximately 350 °C to 400 °C (662°F to 752°F). Consists predominantly of tri- and polynuclear aromatics and heterocyclic hydrocarbons.]	295-304-5	91995-42-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-051-00-3	Distillates (coal tar), pitch, pyrene fraction; Heavy Anthracene Oil Redistillate; [The redistillate obtained from the fractional distillation of pitch distillate and boiling in the range of approximately 380 °C to 410 °C (7160 to 770°F). Composed primarily of tri- and polynuclear aromatic hydrocarbons and heterocyclic compounds.]	295-313-4	91995-52-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-052-00-9	Paraffin waxes (coal), brown-coal high-temp. tar, carbon-treated; Coal Tar Extract; [A complet combination of hydrocarbons obtained by the treatment of lignite carbonization tar with activated carbon for removal of trace constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-296-6	97926-76-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-053-00-4	Paraffin waxes (coal), brown-coal high-temp tar, clay-treated; Coal Tar Extract; [A complex combination of hydrocarbons obtained by the treatment of lignite carbonization tar with bentonite for removal of trace constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-297-1	97926-77-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-054-00-X	Pitch; Pitch	263-072-4	61789-60-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-055-00-5	Pitch, coal tar, high-temp.; Pitch; [The residue from the distillation of high temperature coal tar. A black solid with an approximate softening point from 30 °C to 180 °C (86°F to 356°F). Composed primarily of a complex mixture of three or more membered condensed ring aromatic hydrocarbons.]	266-028-2	65996-93-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-056-00-0	Pitch, coal tar, high-temp., heat-treated; Pitch; [The heat treated residue from the distillation of high temperature coal tar. A black solid with an approximate softening point from 80 °C to 180 °C (176°F to 356°F). Composed primarily of a complex mixture of three or more membered condensed ring aromatic hydrocarbons.]	310-162-7	121575-60-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-057-00-6	Pitch, coal tar, high-temp., secondary; Pitch Redistillate; [The residue obtained during the distillation of high boiling fractions from bituminous coal high temperature tar and/or pitch coke oil, with a softening point of 140 °C to 170 °C (284°F to 392°F) according to DIN 52025. Composed primarily of tri- and polynuclear aromatic compounds which also contain heteroatoms.]	302-650-3	94114-13-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-058-00-1	Residues (coal tar), pitch distn.; Pitch Redistillate; [Residue from the fractional distillation of pitch distillate boiling in the range of approximately 400 °C to 470 °C (752°F to 846°F). Composed primarily of polynuclear aromatic hydrocarbons, and heterocyclic compounds.]	295-507-9	92061-94-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-059-00-7	Tar, coal, high-temp., distn. and storage residues; Coal Tar Solids Residue; [Coke- and ash-containing solid residues that separate on distillation and thermal treatment of bituminous coal high temperature tar in distillation installations and storage vessels. Consists predominantly of carbon and contains a small quantity of hetero compounds as well as ash components.]	295-535-1	92062-20-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-060-00-2	Tar, coal, storage residues; Coal Tar Solids Residue; [The deposit removed from crude coal tar storages. Composed primarily of coal tar and carbonaceous particulate matter.]	293-764-1	91082-50-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-061-00-8	Tar, coal, high-temp., residues; Coal Tar Solids Residue; [Solids formed during the coking of bituminous coal to produce crude bituminous coal high temperature tar. Composed primarily of coke and coal particles, highly aromatized compounds and mineral substances.]	309-726-5	100684-51-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-062-00-3	Tar, coal, high-temp., high-solids; Coal Tar Solids Residue; [The condensation product obtained by cooling, to approximately ambient temperature, the gas evolved in the high temperature (greater than 700 °C (1292°F)) destructive distillation of coal. Composed primarily of a complex mixture of condensed ring aromatic hydrocarbons with a high solid content of coal-type materials.]	273-615-7	68990-61-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-063-00-9	Waste solids, coal-tar pitch coking; Coal Tar Solids Residue; [The combination of wastes formed by the coking of bituminous coal tar pitch. It consists predominantly of carbon.]	295-549-8	92062-34-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-064-00-4	Extract residues (coal), brown; Coal Tar Extract; [The residue from extraction of dried coal.]	294-285-0	91697-23-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-065-00-X	Paraffin waxes (coal), brown-coal-high-temp. tar; Coal Tar Extract; [A complex combination of hydrocarbons obtained from lignite carbonization tar by solvent crystallisation (solvent deoiling), by sweating or an adducting process. It consists predominantly of straight and branched chain saturated hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	295-454-1	92045-71-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-066-00-5	Paraffin waxes (coal), brown-coal-high-temp. tar, hydrotreated; Coal Tar Extract; [A complex combination of hydrocarbons obtained from lignite carbonization tar by solvent crystallisation (solvent deoiling), by sweating or an adducting process treated with hydrogen in the presence of a catalyst. It consists predominantly of straight and branched chain saturated hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	295-455-7	92045-72-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-067-00-0	Paraffin waxes (coal), brown-coal high-temp tar, silicic acid-treated; Coal Tar Extract; [A complex combination of hydrocarbons obtained by the treatment of lignite carbonization tar with silicic acid for removal of trace constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-298-7	97926-78-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-068-00-6	Tar, coal, low-temp., distn. residues; Tar Oil, intermediate boiling; [Residues from fractional distillation of low temperature coal tar to remove oils that boil in a range up to approximately 300 °C (572°F). Composed primarily of aromatic compounds.]	309-887-1	101316-85-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-069-00-1	Pitch, coal tar, low-temp; Pitch Residue; [A complex black solid or semi-solid obtained from the distillation of a low temperature coal tar. It has a softening point within the approximate range of 40 °C to 180 °C (104°F to 356°F). Composed primarily of a complex mixture of hydrocarbons.]	292-651-4	90669-57-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-070-00-7	Pitch, coal tar, low-temp., oxidized; Pitch Residue, oxidised; [The product obtained by air-blowing, at elevated temperature, low-temperature coal tar pitch. It has a softening-point within the approximate range of 70 °C to 180 °C (158°F to 356°F). Composed primarily of a complex mixture of hydrocarbons.]	292-654-0	90669-59-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-071-00-2	Pitch, coal tar, low-temp., heat-treated; Pitch Residue, oxidised; Pitch Residue, heat-treated; [A complex black solid obtained by the heat treatment of low temperature coal tar pitch. It has a softening point within the approximate range of 50 °C to 140 °C (122°F to 284°F). Composed primarily of a complex mixture of aromatic compounds.]	292-653-5	90669-58-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-072-00-8	Distillates (coal-petroleum), condensed-ring arom; Distillates; [The distillate from a mixture of coal and tar and aromatic petroleum streams having an approximate distillation range of 220 °C to 450 °C (428°F to 842°F). Composed primarily of 3- to 4-membered condensed ring aromatic hydrocarbons.]	269-159-3	68188-48-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-073-00-3	Aromatic hydrocarbons, C ₂₀₋₂₈ , polycyclic, mixed coal-tar pitch-polyethylene-polypropylene pyrolysis-derived; Pyrolysis Products; [A complex combination hydrocarbons obtained from mixed coal tar pitch-polyethylene-polypropylene pyrolysis. Composed primarily of polycyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₂₈ and having a softening point of 100 °C to 220 °C (212°F to 428°F) according to DIN 52025.]	309-956-6	101794-74-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-074-00-9	Aromatic hydrocarbons, C ₂₀₋₂₈ , polycyclic, mixed coal-tar pitch-polyethylene pyrolysis-derived; Pyrolysis Products; [A complex combination of hydrocarbons obtained from mixed coal tar pitch-polyethylene pyrolysis. Composed primarily of polycyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₂₈ and having a softening point of 100 °C to 220 °C (212°F to 428°F) according to DIN 52025.]	309-957-1	101794-75-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-075-00-4	Aromatic hydrocarbons, C ₂₀₋₂₈ , polycyclic, mixed coal-tar pitch-polystyrene pyrolysis-derived; Pyrolysis Products; [A complex combination of hydrocarbons obtained from mixed coal tar pitch-polystyrene pyrolysis. Composed primarily of polycyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₂₈ and having a softening point of 100 °C to 220 °C (212°F to 428°F) according to DIN 52025.]	309-958-7	101794-76-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-076-00-X	Pitch, coal tar-petroleum; Pitch Residues; [The residue from the distillation of a mixture of coal tar and aromatic petroleum streams. A solid with a softening point from 40 °C to 180 °C (140°F to 356°F). Composed primarily of a complex combination of three or more membered condensed ring aromatic hydrocarbons.]	269-109-0	68187-57-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-077-00-5	Phenanthrene, distn. residues; Heavy Anthracene Oil Redistillate; [Residue from the distillation of crude phenanthrene boiling in the approximate range of 340 °C to 420 °C (644°F to 788°F). It consists predominantly of phenanthrene, anthracene and carbazole.]	310-169-5	122070-78-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-078-00-0	Distillates (coal tar), upper, fluorene-free; Wash Oil Redistillate; [A complex combination of hydrocarbons obtained by the crystallization of tar oil. It consists of aromatic polycyclic hydrocarbons, primarily diphenyl, dibenzofuran and acenaphthene.]	284-899-7	84989-10-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-079-00-6	Anthracene oil; Anthracene oil; [A complex combination of polycyclic aromatic hydrocarbons obtained from coal tar having an approximate distillation range of 300 °C to 400 °C (572°F to 752°F). Composed primarily of phenanthrene, anthracene and carbazole.]	292-602-7	90640-80-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-080-00-1	Residues (coal tar), creosote oil distn.; Wash Oil Redistillate; [The residue from the fractional distillation of wash oil boiling in the approximate range of 270 °C to 330 °C (518°F to 626°F). It consists predominantly of dinuclear aromatic and heterocyclic hydrocarbons.]	295-506-3	92061-93-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-081-00-7	Tar, coal; Coal tar; [The by-product from the destructive distillation of coal. Almost black semisolid. A complex combination of aromatic hydro-carbons, phenolic compounds, nitrogen bases and thiophene.]	232-361-7	8007-45-2	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
648-082-00-2	Tar, coal, high-temp.; Coal tar; [The condensation product obtained by cooling, to approximately ambient temperature, the gas evolved in the high temperature (greater than 700 °C (1292°F)) destructive distillation of coal. A black viscous liquid denser than water. Composed primarily of a complex mixture of condensed ring aromatic hydrocarbons. May contain minor amounts of phenolic compounds and aromatic nitrogen bases.]	266-024-0	65996-89-6	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
648-083-00-8	Tar, coal, low-temp.; Coal oil; [The condensation product obtained by cooling, to approximately ambient temperature, the gas evolved in low temperature (less than 700 °C (1292°F)) destructive distillation of coal. A black viscous liquid denser than water. Composed primarily of condensed ring aromatic hydrocarbons, phenolic compounds, aromatic nitrogen bases, and their alkyl derivatives.]	266-025-6	65996-90-9	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
648-084-00-3	Distillates (coal), coke-oven light oil, naphthalene cut; Naphthalene Oil; [The complex combination of hydrocarbons obtained from prefractionation (continuous distillation) of coke oven light oil. It consists predominantly of naphthalene, coumarone and indene and boils above 148 °C (298°F).]	285-076-5	85029-51-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-085-00-9	Distillates (coal tar), naphthalene oils; Naphthalene Oil; [A complex combination of hydrocarbons obtained by the distillation of coal tar. It consists primarily of aromatic and other hydrocarbons, phenolic compounds and aromatic nitrogen compounds and distills in the approximate range of 200 °C to 250 °C (392°F to 482°F).]	283-484-8	84650-04-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-086-00-4	Distillates (coal tar), naphthalene oils, naphthalene-low; Naphthalene Oil Redistillate; [A complex combination of hydrocarbons obtained by crystallization of naphthalene oil. Composed primarily of naphthalene, alkyl naphthalenes and phenolic compounds.]	284-898-1	84989-09-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-087-00-X	Distillates (coal tar), naphthalene oil crystn. mother liquor; Naphthalene Oil Redistillate; [A complex combination of organic compounds obtained as a filtrate from the crystallization of the naphthalene fraction from coal tar and boiling in the range of approximately 200 °C to 230 °C (392°F to 446°F). Contains chiefly naphthalene, thionaphthene and alkyl naphthalenes.]	295-310-8	91995-49-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-088-00-5	Extract residues (coal), naphthalene oil, alk.; Naphthalene Oil Extract Residue; [A complex combination of hydrocarbons obtained from the alkali washing of naphthalene oil to remove phenolic compounds (tar acids). It is composed of naphthalene and alkyl naphthalenes.]	310-166-9	121620-47-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-089-00-0	Extract residues (coal), naphthalene oil, alk., naphthalene-low; Naphthalene Oil Extract Residue; [A complex combination of hydrocarbons remaining after the removal of naphthalene from alkali-washed naphthalene oil by a crystallization process. It is composed primarily of naphthalene and alkyl naphthalenes.]	310-167-4	121620-48-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-090-00-6	Distillates (coal tar), naphthalene oils, naphthalene-free, alk. exts.; Naphthalene Oil Extract Residue; [The oil remaining after the removal of phenolic compounds (tar acids) from drained naphthalene oil by an alkali wash. Composed primarily of naphthalene and alkyl naphthalenes.]	292-612-1	90640-90-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-091-00-1	Extract residues (coal), naphthalene oil alk., distn. overheads; Naphthalene Oil Extract Residue; [The distillation from alkali-washed naphthalene oil having an approximate distillation range of 180 °C to 220 °C (356°F to 428°F). Composed primarily of naphthalene, alkylbenzenes, indene and indan.]	292-627-3	90641-04-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-092-00-7	Distillates (coal tar), naphthalene oils, methylnaphthalene fraction; Methylnaphthalene Oil; [A distillate from the fractional distillation of high temperature coal tar. Composed primarily of substituted two ring aromatic hydrocarbons and aromatic nitrogen bases boiling in the range of approximately 225 °C to 255 °C (437°F to 491°F).]	309-985-4	101896-27-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-093-00-2	Distillates (coal tar), naphthalene oils, indole-methylnaphthalene fraction; Methylnaphthalene Oil; [A distillate from the fractional distillation of high temperature coal tar. Composed primarily of indole and methylnaphthalene boiling in the range of approximately 235 °C to 255 °C (455°F to 491°F).]	309-972-3	101794-91-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-094-00-8	Distillates (coal tar), naphthalene oils, acid exts.; Methylnaphthalene Oil Extract Residue; [A complex combination of hydrocarbons obtained by debasing the methylnaphthalene fraction obtained by the distillation of coal tar and boiling in the range of approximately 230 °C to 255 °C (446°F to 491°F). Contains chiefly 1(2)-methylnaphthalene, naphthalene, dimethylnaphthalene and biphenyl.]	295-309-2	91995-48-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-095-00-3	Extract residues (coal), naphthalene oil alk., distn. residues; Methylnaphthalene Oil Extract Residue; [The residue from the distillation of alkali-washed naphthalene oil having an approximate distillation range of 220 °C to 300 °C (428°F to 572°F). Composed primarily of naphthalene, alkylnaphthalenes and aromatic nitrogen bases.]	292-628-9	90641-05-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-096-00-9	Extract oils (coal), acidic, tar-base free; Methylnaphthalene Oil Extract Residue; [The extract oil boiling in the range of approximately 220 °C to 265 °C (428°F to 509°F) from coal tar alkaline extract residue produced by an acidic wash such as aqueous sulfuric acid after distillation to remove tar bases. Composed primarily of alkylnaphthalenes.]	284-901-6	84989-12-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-097-00-4	Distillates (coal tar), benzole fraction, distn. residues; Wash Oil; [A complex combination of hydrocarbons obtained from the distillation of crude benzole (high temperature coal tar). It may be a liquid with the approximate distillation range of 150 °C to 300 °C (302°F to 572°F) or a semi-solid or solid with a melting point up to 70 °C (158°F). It is composed primarily of naphthalene and alkyl naphthalenes.]	310-165-3	121620-46-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-098-00-X	Creosote oil, acenaphthene fraction; Wash Oil; [A complex combination of hydrocarbons produced by the distillation of coal tar and boiling in the range of approximately 240 °C to 280 °C (464°F to 536°F). Composed primarily of acenaphthene, naphthalene and alkyl naphthalene.]	292-605-3	90640-84-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-099-00-5	Creosote oil; [A complex combination of hydrocarbons obtained by the distillation of coal tar. It consists primarily of aromatic hydrocarbons and may contain appreciable quantities of tar acids and tar bases. It distills at the approximate range of 200 °C to 325 °C (392°F to 617°F).]	263-047-8	61789-28-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-100-00-9	Creosote oil, high-boiling distillate; Wash Oil; [The high-boiling distillation fraction obtained from the high temperature carbonization of bituminous coal which is further refined to remove excess crystalline salts. It consists primarily of creosote oil with some of the normal polynuclear aromatic salts, which are components of coal tar distillates, removed. It is crystal free at approximately 5 °C (41°F).]	274-565-9	70321-79-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-101-00-4	Creosote; [The distillate of coal tar produced by the high temperature carbonization of bituminous coal. It consists primarily of aromatic hydrocarbons, tar acids and tar bases.]	232-287-5	8001-58-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-102-00-X	Extract residues (coal), creosote oil acid; Wash Oil Extract Residue; [A complex combination of hydrocarbons from the base-freed fraction from the distillation of coal tar, boiling in the range of approximately 250 °C to 280 °C (482°F to 536°F). It consists predominantly of biphenyl and isomeric diphenylnaphthalenes.]	310-189-4	122384-77-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-103-00-5	Anthracene oil, anthracene paste; Anthracene Oil Fraction; [The anthracene-rich solid obtained by the crystallization and centrifuging of anthracene oil. It is composed primarily of anthracene, carbazole and phenanthrene.]	292-603-2	90640-81-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-104-00-0	Anthracene oil, anthracene-low; Anthracene Oil Fraction; [The oil remaining after the removal, by a crystallization process, of an anthracene-rich solid (anthracene paste) from anthracene oil. It is composed primarily of two, three and four membered aromatic compounds.]	292-604-8	90640-82-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-105-00-6	Residues (coal tar), anthracene oil distn.; Anthracene Oil Fraction; [The residue from the fraction distillation of crude anthracene boiling in the approximate range of 340 °C to 400 °C (644°F to 752°F). It consists predominantly of tri- and polynuclear aromatic and heterocyclic hydrocarbons.]	295-505-8	92061-92-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-106-00-1	Anthracene oil, anthracene paste, anthracene fraction; Anthracene Oil Fraction; [A complex combination of hydrocarbons from the distillation of anthracene obtained by the crystallization of anthracene oil from bituminous high temperature tar and boiling in the range of 330 °C to 350 °C (626°F to 662°F). It contains chiefly anthracene, carbazole and phenanthrene.]	295-275-9	91995-15-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-107-00-7	Anthracene oil, anthracene paste, carbazole fraction; Anthracene Oil Fraction; [A complex combination of hydrocarbons from the distillation of anthracene obtained by crystallization of anthracene oil from bituminous coal high temperature tar and boiling in the approximate range of 350 °C to 360 °C (662°F to 680°F). It contains chiefly anthracene, carbazole and phenanthrene.]	295-276-4	91995-16-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-108-00-2	Anthracene oil, anthracene paste, distn. lights; Anthracene Oil Fraction; [A complex combination of hydrocarbons from the distillation of anthracene obtained by crystallization of anthracene oil from bituminous light temperature tar and boiling in the range of approximately 290 °C to 340 °C (554°F to 644°F). It contains chiefly trinuclear aromatics and their dihydro derivatives.]	295-278-5	91995-17-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-109-00-8	Tar oils, coal, low-temp.; Tar Oil, high boiling; [A distillate from low-temperature coal tar. Composed primarily of hydrocarbons, phenolic compounds and aromatic nitrogen bases boiling in the range of approximately 160 °C to 340 °C (320°F to 644°F).]	309-889-2	101316-87-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-110-00-3	Extract residues (coal), low temp. coal atar alk.; [The residue from low temperature coal tar oils after an alkaline wash, such as aqueous sodium hydroxide, to remove crude coal tar acids. Composed primarily of hydrocarbons and aromatic nitrogen bases.]	310-191-5	122384-78-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-111-00-9	Phenols, ammonia liquor ext.; Alkaline Extract; [The combination of phenols extracted, using isobutyl acetate, from the ammonia liquor condensed from the gas evolved in low-temperature (less than 700 °C (1292°F)) destructive distillation of coal. It consists predominantly of a mixture of monohydric and dihydric phenols.]	284-881-9	84988-93-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-112-00-4	Distillates (coal tar), light oils, alk. exts.; Alkaline Extract; [The aqueous extract from carbolic oil produced by an alkaline wash such as aqueous sodium hydroxide. Composed primarily of the alkali salts of various phenolic compounds.]	292-610-0	90640-88-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-113-00-X	Extracts, coal tar oil alk.; Alkaline Extract; [The extract from coal tar oil produced by an alkaline wash such as aqueous sodium hydroxide. Composed primarily of the alkali salts of various phenolic compounds.]	266-017-2	65996-83-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-114-00-5	Distillates (coal tar), naphthalene oils, alk. exts.; Alkaline Extract; [The aqueous extract from naphthalene oil produced by an alkaline wash such as aqueous sodium hydroxid. Composed primarily of the alkali salts of various phenolic compounds.]	292-611-6	90640-89-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-115-00-0	Extract residues (coal), tar oil alk., carbonated, limed; Crude Phenols; [The product obtained by treatment of coal tar oil alkaline extract with CO ₂ and CaO. Composed primarily of CaCO ₃ , Ca (OH) ₂ , Na ₂ CO ₃ and other organic and inorganic impurities.]	292-629-4	90641-06-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-116-00-6	Tar acids, coal, crude; Crude Phenols; [The reaction product obtained by neutralizing coal tar oil alkaline extract with an acidic solution, such as aqueous sulfuric acid, or gaseous carbon dioxide, to obtain the free acids. Composed primarily of tar acids such as phenol, cresols, and xylenols.]	266-019-3	65996-85-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-117-00-1	Tar acids, brown-coal, crude; Crude Phenols; [An acidified alkaline extract of brown coal tar distillate. Composed primarily of phenol and phenol homologs.]	309-888-7	101316-86-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-118-00-7	Tar acids, brown-coal gasification; Crude Phenols; [A complex combination of organic compounds obtained from brown coal gasification. Composed primarily of C ₆₋₁₀ hydroxy aromatic phenols and their homologs.]	295-536-7	92062-22-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-119-00-2	Tar acids, distn. residues; Distillate Phenols; [A residue from the distillation of crude phenol from coal. It consists predominantly of phenols having carbon numbers in the range of C ₈ through C ₁₀ with a softening point of 60 °C to 80 °C (140°F to 176°F).]	306-251-5	96690-55-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-120-00-8	Tar acids, methylphenol fraction; Distillate Phenols; [The fraction of tar acid rich in 3- and 4-methylphenol, recovered by distillation of low-temperature coal tar crude tar acids.]	284-892-9	84989-04-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-121-00-3	Tar acids, polyalkylphenol fraction; Distillate Phenols; [The fraction of tar acids, recovered by distillation of low-temperature coal tar crude tar acids, having an approximate boiling range of 225 °C to 320 °C (437°F to 608°F). Composed primarily of polyalkylphenols.]	284-893-4	84989-05-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-122-00-9	Tar acids, xlenol fraction; Distillate Phenols; [The fraction of tar acids, rich in 2,4- and 2,5-dimethylphenol, recovered by distillation of low-temperature coal tar crude tar acids.]	284-895-5	84989-06-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-123-00-4	Tar acids, ethylphenol fraction; Distillate Phenols; [The fraction of tar acids, rich in 3- and 4-ethylphenol, recovered by distillation of low-temperature coal tar crude tar acids.]	284-891-3	84989-03-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-124-00-X	Tar acids, 3,5-xlenol fraction; Distillate Phenols; [The fraction of tar acids, rich in 3,5-dimethylphenol, recovered by distillation of low-temperature coal tar acids.]	284-896-0	84989-07-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-125-00-5	Tar acids, residues, distillates, first-cut; Distillate Phenols; [The residue from the distillation in the range of 235 °C to 355 °C (481°F to 697°F) of light carbolic oil.]	270-713-1	68477-23-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-126-00-0	Tar acids, cresylic, residues; Distillate Phenols; [The residue from crude coal tar acids after removal of phenol, cresols, xylenols and any higher boiling phenols. A black solid with a melting point approximately 80 °C (176°F). Composed primarily of polyalkylphenols, resin gums, and inorganic salts.]	271-418-0	68555-24-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-127-00-6	Phenols, C ₉₋₁₁ ; Distillate Phenols	293-435-2	91079-47-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-128-00-1	Tar acids, cresylic; Distillate Phenols; [A complex combination of organic compounds obtained from brown coal and boiling in the range of approximately 200 °C to 230 °C (392°F to 446°F). It contains chiefly phenols and pyridine bases.]	295-540-9	92062-26-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-129-00-7	Tar acids, brown-coal, C ₂ -alkylphenol fraction; Distillate Phenols; [The distillate from the acidification of alkaline washed lignite tar distillate boiling in the range of approximately 200 °C to 230 °C (392°F to 446°F). Composed primarily of <{ITA}>m-<{/ITA}> and <{ITA}>p-<{/ITA}>ethylphenol as well as cresols and xylenols.]	302-662-9	94114-29-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-130-00-2	Extract oils (coal), naphthalene oils; Acid Extract; [The aqueous extract produced by an acidic wash of alkali-washed naphthalene oil. Composed primarily of acid salts of various aromatic nitrogen bases including pyridine, quinoline and their alkyl derivatives.]	292-623-1	90641-00-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-131-00-8	Tar bases, quinoline derivs.; Distillate Bases	271-020-7	68513-87-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-132-00-3	Tar bases, coal, quinoline derivs. fraction; Distillate Bases	274-560-1	70321-67-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-133-00-9	Tar bases, coal, distn. residues; Distillate Bases; [The distillation residue remaining after the distillation of the neutralized, acid-extracted base-containing tar fractions obtained by the distillation of coal tars. It contains chiefly aniline, collidines, quinoline and quinoline derivatives and toluidines.]	295-544-0	92062-29-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-134-00-4	Hydrocarbon oils, arom., mixed with polyethylene and polypropylene, pyrolyzed, light oil fraction; Heat Treatment Products; [The oil obtained from the heat treatment of a polyethylene/polypropylene mixture with coal tar pitch or aromatic oils. It consists predominantly of benzene and its homologs boiling in a range of approximately 70 °C to 120 °C (158°F to 248°F).]	309-745-9	100801-63-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-135-00-X	Hydrocarbon oils, arom., mixed with polyethylene, pyrolyzed, light oil fraction; Heat Treatment Products; [The oil obtained from the heat treatment of polyethylene with coal tar pitch or aromatic oils. It consists predominantly of benzene and its homologs boiling in a range of 70 °C to 120 °C (158°F to 248°F).]	309-748-5	100801-65-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-136-00-5	Hydrocarbon oils, arom., mixed with polystyrene, pyrolyzed, light oil fraction; Heat Treatment Products; [The oil obtained from the heat treatment of polystyrene with coal tar pitch or aromatic oils. It consists predominantly of benzene and its homologs boiling in a range of approximately 70 °C to 210 °C (158°F to 410°F).]	309-749-0	100801-66-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-137-00-0	Extract residues (coal), tar oil alk., naphthalene distn. residues; Naphthalene Oil Extract Residue; [The residue obtained from chemical oil extracted after the removal of naphthalene by distillation composed primarily of two to four membered condensed ring aromatic hydrocarbons and aromatic nitrogen bases.]	277-567-8	73665-18-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-138-00-6	Creosote oil, low-boiling distillate; Wash Oil; [The low-boiling distillation fraction obtained from the high temperature carbonization of bituminous coal, which is further refined to remove excess crystalline salts. It consists primarily of creosote oil with some of the normal polynuclear aromatic salts, which are components of coal tar distillate, removed. It is crystal free at approximately 38 °C (100°F).]	274-566-4	70321-80-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-139-00-1	Tar acids, cresylic, sodium salts, caustic solns.; Alkaline Extract	272-361-4	68815-21-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-140-00-7	Extract oils (coal), tar base; Acid Extract; [The extract from coal tar oil alkaline extract residue produced by an acidic wash such as aqueous sulfuric acid after distillation to remove naphthalene. Composed primarily of the acid salts of various aromatic nitrogen bases including pyridine, quinoline, and their alkyl derivatives.]	266-020-9	65996-86-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-141-00-2	Tar bases, coal, crude; Crude Tar Bases; [The reaction product obtained by neutralizing coal tar base extract oil with an alkaline solution, such as aqueous sodium hydroxide, to obtain the free bases. Composed primarily of such organic bases as acridine, phenanthridine, pyridine, quinoline and their alkyl derivatives.]	266-018-8	65996-84-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-142-00-8	Residues (coal), liq. solvent extn.; [A cohesive powder composed of coal mineral matter and undissolved coal remaining after extraction of coal by a liquid solvent.]	302-681-2	94114-46-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-143-00-3	Coal liquids, liq. solvent extn. soln.; [The product obtained by filtration of coal mineral matter and undissolved coal from coal extract solution produced by digesting coal in a liquid solvent. A black, viscous, highly complex liquid combination composed primarily of aromatic and partly hydro-genated aromatic hydrocarbons, aromatic nitrogen compounds, aromatic sulfur compounds, phenolic and other aromatic oxygen compounds and their alkyl derivatives.]	302-682-8	94114-47-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-144-00-9	Coal liquids, liq. solvent extn.; [The substantially solvent-free product obtained by the distillation of the solvent from filtered coal extract solution produced by digesting coal in a liquid solvent. A black semi-solid, composed primarily of a complex combination of condensed-ring aromatic hydrocarbons, aromatic nitrogen compounds, aromatic sulfur compounds, phenolic compounds and other aromatic oxygen compounds, and their alkyl derivatives.]	302-683-3	94114-48-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-145-00-4	Tar brown-coal; [An oil distilled from brown-coal tar. Composed primarily of aliphatic, naphthenic and one- to three-ring aromatic hydrocarbons, their alkyl derivates, heteroaromatics and one- and two-ring phenols boiling in the range of approximately 150 °C to 360 °C (302°F to 680°F).]	309-885-0	101316-83-0	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
648-146-00-X	Tar, brown-coal, low-temp.; [A tar obtained from low temperature carbonization and low temperature gasification of brown coal. Composed primarily of aliphatic, naphthenic and cyclic aromatic hydrocarbons, heteroaromatic hydrocarbons and cyclic phenols.]	309-886-6	101316-84-1	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
648-147-00-5	Light oil (coal), coke-oven; Crude benzole; [The volatile organic liquid extracted from the gas evolved in the high temperature (greater than 700 °C (1292°F)) destructive distillation of coal. Composed primarily of benzene, toluene, and xylenes. May contain other minor hydrocarbon constituents.]	266-012-5	65996-78-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-148-00-0	Distillates (coal), liq. solvent extn., primary; [The liquid product of condensation of vapors emitted during the digestion of coal in a liquid solvent and boiling in the range of approximately 30 °C to 300 °C (86°F to 572°F). Composed primarily of partly hydrogenated condensed-ring aromatic hydrocarbons, aromatic compounds containing nitrogen, oxygen and sulfur, and their alkyl derivatives having carbon numbers predominantly in the range of C ₄ through C ₁₄ .]	302-688-0	94114-52-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-149-00-6	Distillates (coal), solvent extn., hydrocracked; [Distillate obtained by hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction process and boiling in the range of approximately 30 °C to 300 °C (86°F to 572°F). Composed primarily of aromatic, hydrogenated aromatic and naphthenic compounds, their alkyl derivatives and alkanes with carbon numbers predominantly in the range of C ₄ through C ₁₄ . Nitrogen, sulfur and oxygen-containing aromatic and hydrogenated aromatic compounds are also present.]	302-689-6	94114-53-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-150-00-1	Naphtha (coal), solvent extn., hydrocracked; [Fraction of the distillate obtained by hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 30 °C to 180 °C (86°F to 356°F). Composed primarily of aromatic, hydrogenated aromatic and naphthenic compounds, their alkyl derivatives and alkanes with carbon numbers predominantly in the range of C ₄ to C ₉ . Nitrogen, sulfur and oxygen-containing aromatic and hydrogenated aromatic compounds are also present.]	302-690-1	94114-54-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-151-00-7	Gasoline, coal solvent extn., hydrocracked naphtha; [Motor fuel produced by the reforming of the refined naphtha fraction of the products of hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 30 °C to 180 °C (86°F to 356°F). Composed primarily of aromatic and naphthenic hydrocarbons, their alkyl derivatives and alkyl hydrocarbons having carbon numbers in the range of C ₄ through C ₉ .]	302-691-7	94114-55-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-152-00-2	Distillates (coal), solvent extn., hydrocracked middle; [Distillate obtained from the hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 180 °C to 300 °C (356°F to 572°F). Composed primarily of two-ring aromatic, hydrogenated aromatic and naphthenic compounds, their alkyl derivatives and alkanes having carbon numbers predominantly in the range of C ₉ through C ₁₄ . Nitrogen, sulfur and oxygen-containing compounds are also present.]	302-692-2	94114-56-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-153-00-8	Distillates (coal), solvent extn., hydrocracked hydrogenated middle; [Distillate from the hydrogenation of hydrocracked middle distillate from coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 180 °C to 280 °C (356°F to 536°F). Composed primarily of hydrogenated two-ring carbon compounds and their alkyl derivatives having carbon numbers predominantly in the range of C ₉ through C ₁₄ .]	302-693-8	94114-57-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
648-154-00-3	Fuels, jet aircraft, coal solvent extn., hydrocracked hydrogenated; [Jet engine fuel produced by hydrogenation of the middle distillate fraction of the products of hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 180 °C to 225 °C (356°F to 473°F). Composed primarily of hydrogenated two-ring hydrocarbons and their alkyl derivatives having carbon numbers predominantly in the range of C ₁₀ through C ₁₂ .]	302-694-3	94114-58-6	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H
648-155-00-9	Fuels, diesel, coal solvent extn., hydrocracked hydrogenated; [Diesel engine fuel produced by the hydrogenation of the middle distillate fraction of the products of hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 200 °C to 280 °C (392°F to 536°F). Composed primarily of hydrogenated two-ring hydrocarbons and their alkyl derivatives having carbon numbers predominantly in the range of C ₁₁ through C ₁₄ .]	302-695-9	94114-59-7	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H
648-156-00-4	Light oil (coal), semi-coking process; Fresh oil; [The volatile organic liquid condensed from the gas evolved in the low temperature (less than 700 °C (1292°F) destructive distillation of coal. Composed primarily of C ₆₋₁₀ hydrocarbons.]	292-635-7	90641-11-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
649-001-00-3	Extracts (petroleum), light naphthenic distillate solvent	265-102-1	64742-03-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-002-00-9	Extracts (petroleum), heavy paraffinic distillate solvent	265-103-7	64742-04-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-003-00-4	Extracts (petroleum), light paraffinic distillate solvent	265-104-2	64742-05-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-004-00-X	Extracts (petroleum), heavy naphthenic distillate solvent	265-111-0	64742-11-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-005-00-5	Extracts (petroleum), light vacuum gas oil solvent	295-341-7	91995-78-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-006-00-0	hydrocarbons C ₂₆₋₅₅ , arom-rich	307-753-7	97722-04-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-007-00-6	fatty acids, tall-oil, reaction products with iminodiethanol and boric acid	400-160-5	—	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)28-37-61		
649-008-00-1	Residues (petroleum), atm. tower; Heavy Fuel oil; [A complex residuum from the atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly greater than C ₂₀ and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-045-2	64741-45-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-009-00-7	Gas oils (petroleum), heavy vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and boiling in the range of approximately 350 °C to 600 °C (662°F to 1112°F). This stream is likely to contain 5 wt. % or more of 4-to 6-membered condensed ring aromatic hydrocarbons.]	265-058-3	64741-57-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-010-00-2	Distillates (petroleum), heavy catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₅ and boiling in the range of approximately 260 °C to 500 °C (500°F to 932°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-063-0	64741-61-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-011-00-8	Clarified oils (petroleum), catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly greater than C ₂₀ and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-064-6	64741-62-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-012-00-3	Residues (petroleum), hydrocracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the products of a hydrocracking process. It consists of hydrocarbons having carbon numbers predominantly greater than C ₂₀ and boiling above approximately 350 °C (662°F).]	265-076-1	64741-75-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-013-00-9	Residues (petroleum), thermal cracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the product from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly greater than C ₂₀ and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-081-9	64741-80-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-014-00-4	Distillates (petroleum), heavy thermal cracked; Heavy Fuel oil; [A complex combination of hydrocarbons from the distillation of the products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₆ and boiling in the range of approximately 260 °C to 480 °C (500°F to 896°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-082-4	64741-81-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-015-00-X	Gas oils (petroleum), hydrotreated vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₅₀ and boiling in the range of approximately 230 °C to 600 °C (446°F to 1112°F). This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-162-9	64742-59-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-016-00-5	Residues (petroleum), hydrodesulfurized atmospheric tower; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating an atmospheric tower residuum with hydrogen in the presence of a catalyst under conditions primarily to remove organic sulfur compounds. It consists of hydrocarbons having carbon numbers predominantly greater than C ₂₀ and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-181-2	64742-78-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-017-00-0	Gas oils (petroleum), hydrodesulfurized heavy vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and boiling in the range of approximately 350 °C to 600 °C (662°F to 1112 °C). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-189-6	64742-86-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-018-00-6	Residues (petroleum), steam-cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained as the residual fraction from the distillation of the products of a steam cracking process (including steam cracking to produce ethylene). It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly greater than C ₁₄ and boiling above approximately 260 °C (500°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-193-8	64742-90-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-019-00-1	Residues (petroleum), atmospheric; Heavy Fuel oil; [A complex residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly greater than C ₁₁ and boiling above approximately 200 °C (392°F). This stream is likely to contain 5 wt. % or more of 4-to 6-membered condensed ring aromatic hydrocarbons.]	269-777-3	68333-22-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-020-00-7	Clarified oils (petroleum), hydrodesulfurized catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating catalytic cracked clarified oil with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly greater than C ₂₀ and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4-to 6-membered condensed ring aromatic hydrocarbons.]	269-782-0	68333-26-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-021-00-2	Distillates (petroleum), hydrodesulfurized intermediate catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating intermediate catalytic cracked distillates with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₃₀ and boiling in the range of approximately 205 °C to 450 °C (401°F to 842°F). It contains a relatively large proportion of tricyclic aromatic hydrocarbons.]	269-783-6	68333-27-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-022-00-8	Distillates (petroleum), hydrosulfurized heavy catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treatment of heavy catalytic cracked distillates with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₅ and boiling in the range of approximately 260 °C to 500 °C (500°F to 932°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	269-784-1	68333-28-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-023-00-3	Fuel oil, residues-straight-run gas oils, high-sulfur; Heavy Fuel oil	270-674-0	68476-32-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-024-00-9	Fuel oil, residual; Heavy Fuel oil; [The liquid product from various refinery streams, usually residues. The composition is complex and varies with the source of the crude oil.]	270-675-6	68476-33-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-025-00-4	Residues (petroleum), catalytic reformer fractionator residue distn.; Heavy Fuel oil; [A complex residuum from the distillation of catalytic reformer fractionator residue. It boils approximately above 399 °C (750°F).]	270-792-2	68478-13-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-026-00-X	Residues (petroleum), heavy coker gas oil and vacuum gas oil; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from the distillation of heavy coker gas oil and vacuum gas oil. It predominantly consists of hydrocarbons having carbon numbers predominantly greater than C ₁₃ and boiling above approximately 230 °C (446°F).]	270-796-4	68478-17-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-027-00-5	Residues (petroleum), heavy coker and light vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from the distillation of heavy coker gas oil and light vacuum gas oil. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C ₁₃ and boiling above approximately 230 °C (446°F).]	270-983-0	68512-61-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-028-00-0	Residues (petroleum), light vacuum; Heavy Fuel oil; [A complex residuum from the vacuum distillation of the residuum from the atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly greater than C ₁₃ and boiling above approximately 230 °C (446°F).]	270-984-6	68512-62-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-029-00-6	Residues (petroleum), steam-cracked light; Heavy Fuel oil; [A complex residuum from the distillation of the products from a steam-cracking process. It consists predominantly of aromatic and unsaturated hydrocarbons having carbon numbers greater than C ₇ and boiling in the range of approximately 101 °C to 555 °C (214°F to 1030°F).]	271-013-9	68513-69-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-030-00-1	Fuel oil, No 6; Heavy Fuel oil; [A distillate oil having a minimum viscosity of 900 SUS at 37.7 °C (100°F) to a maximum of 9000 SUS at 37.7 °C (100°F).]	271-384-7	68553-00-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-031-00-7	Residues (petroleum), topping plant, low-sulfur; Heavy Fuel oil; [A low-sulfur complex combination of hydrocarbons produced as the residual fraction from the topping plant distillation of crude oil. It is the residuum after the straight-run gasoline cut, kerosene cut and gas oil cut have been removed.]	271-763-7	68607-30-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-032-00-2	Gas oils (petroleum), heavy atmospheric; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₃₅ and boiling in the range of approximately 121 °C to 510 °C (250°F to 950°F).]	272-184-2	68783-08-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-033-00-8	Residues (petroleum), coker scrubber, Condensed-ring-arom.-contg.; Heavy Fuel oil; [A very complex combination of hydrocarbons produced as the residual fraction from the distillation of vacuum residuum and the products from a thermal cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C ₂₀ and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	272-187-9	68783-13-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-034-00-3	Distillates (petroleum), petroleum residues vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from the atmospheric distillation of crude oil.]	273-263-4	68955-27-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-035-00-9	Residues (petroleum), steam-cracked, resinous; Heavy Fuel oil; [A complex residuum from the distillation of steam-cracked petroleum residues.]	273-272-3	68955-36-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-036-00-4	Distillates (petroleum), intermediate vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum, distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₄ through C ₄₂ and boiling in the range of approximately 250 °C to 545 °C (482°F to 1013°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	274-683-0	70592-76-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-037-00-X	Distillates (petroleum), light vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₃₅ and boiling in the range of approximately 250 °C to 545 °C (482°F to 1013°F).]	274-684-6	70592-77-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-038-00-5	Distillates (petroleum), vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having numbers predominantly in the range of C ₁₅ through C ₅₀ and boiling in the range of approximately 270 °C to 600 °C (518°F to 1112°F). This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	274-685-1	70592-78-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-039-00-0	Gas oils (petroleum), hydrodesulfurized coker heavy vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by hydrodesulfurization of heavy coker distillate stocks. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range C ₁₈ to C ₄₄ and boiling in the range of approximately 304 °C to 548 °C (579°F to 1018°F). Likely to contain 5 % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	285-555-9	85117-03-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-040-00-6	Residues (petroleum), steam-cracked, distillates; Heavy Fuel oil; [A complex combination of hydrocarbons obtained during the production of refined petroleum tar by the distillation of steam cracked tar. It consists predominantly of aromatic and other hydrocarbons and organic sulfur compounds.]	292-657-7	90669-75-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-041-00-1	Residues (petroleum), vacuum, light; Heavy Fuel oil; [A complex residuum from the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C ₂₄ and boiling above approximately 390 °C (734°F).]	292-658-2	90669-76-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-042-00-7	Fuel oil, heavy, high-sulfur; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by the distillation of crude petroleum. It consists predominantly of aliphatic, aromatic and cycloaliphatic hydrocarbons having carbon numbers predominantly higher than C ₂₅ and boiling above approximately 400 °C (752°F).]	295-396-7	92045-14-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-043-00-2	Residues (petroleum), catalytic cracking; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from the distillation of the products from a catalytic cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C ₁₁ and boiling above approximately 200 °C (392°F).]	295-511-0	92061-97-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-044-00-8	Distillates (petroleum), intermediate catalytic cracked, thermally degraded; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process which has been used as a heat transfer fluid. It consists predominantly of hydrocarbons boiling in the range of approximately 220 °C to 450 °C (428°F to 842°F). This stream is likely to contain organic sulfur compounds.]	295-990-6	92201-59-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-045-00-3	Residual oils (petroleum); Heavy Fuel oil; [A complex combination of hydrocarbons, sulfur compounds and metal-containing organic compounds obtained as the residue from refinery fractionation cracking processes. It produces a finished oil with a viscosity above 2cSt. at 100 °C.]	298-754-0	93821-66-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-046-00-9	Residues, steam cracked, thermally treated; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by the treatment and distillation of raw steam-cracked naphtha. It consists predominantly of unsaturated hydrocarbons boiling in the range above approximately 180 °C (356°F).]	308-733-0	98219-64-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-047-00-4	Distillates (petroleum), hydrodesulfurized full-range middle; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating a petroleum stock with hydrogen. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₂₅ and boiling in the range of approximately 150 °C to 400 °C (302°F to 752°F).]	309-863-0	101316-57-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-048-00-X	Residues (petroleum), catalytic reformer fractionator; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the product from a catalytic reforming process. It consists of predominantly aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₂₅ and boiling in the range of approximately 160 °C to 400 °C (320°F to 725°F). This stream is likely to contain 5 wt. % or more of 4- or 6-membered condensed ring aromatic hydrocarbons.]	265-069-3	64741-67-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-049-00-5	Petroleum; Crude oil; [A complex combination of hydrocarbons, It consists predominantly of aliphatic, alicyclic and aromatic hydrocarbons. It may also contain small amounts of nitrogen, oxygen and sulfur compounds. This category encompasses light, medium, and heavy petroleums, as well as the oils extended from tar sands. Hydrocarbonaceous materials requiring major chemical changes for their recovery or conversion to petroleum refinery feedstocks such as crude shale oils; upgraded shale oils and liquid coal fuels are not included in this definition.]	232-298-5	8002-05-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-050-00-0	Distillates (petroleum), light paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated aliphatic hydrocarbons normally present in this distillation range of crude oil.]	265-051-5	64741-50-0	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-051-00-6	Distillates (petroleum), heavy paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated aliphatic hydrocarbons.]	265-052-0	64741-51-1	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-052-00-1	Distillates (petroleum), light naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-053-6	64741-52-2	Carc. Cat. 1; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-053-00-7	Distillates (petroleum), heavy naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-054-1	64741-53-3	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-054-00-2	Distillates (petroleum), acid-treated heavy naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-117-3	64742-18-3	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-055-00-8	Distillates (petroleum), acid-treated light naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-118-9	64742-19-4	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-056-00-3	Distillates (petroleum), acid-treated heavy paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil having a viscosity of a least 100 SUS at 100°F (19cSt at 40 °C).]	265-119-4	64742-20-7	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-057-00-9	Distillates (petroleum), acid-treated light paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil having a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-121-5	64742-21-8	Carc. Cat. 1; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-058-00-4	Distillates (petroleum), chemically neutralized heavy paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained from a treating process to remove acidic materials. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of aliphatic hydrocarbons.]	265-127-8	64742-27-4	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-059-00-X	Distillates (petroleum), chemically neutralized light paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity less than 100 SUS at 100°F (19cSt at 40 °C).]	265-128-3	64742-28-5	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-060-00-5	Distillates (petroleum), chemically neutralized heavy naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-135-1	64742-34-3	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-061-00-0	Distillates (petroleum), chemically neutralized light naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-136-7	64742-35-4	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-062-00-6	Gases (petroleum), catalytic cracked naphtha depropanizer overhead, C ₃ -rich acid-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked hydrocarbons and treated to remove acidic impurities. It consists of hydrocarbons having carbon numbers in the range of C ₂ through C ₄ , predominantly C ₃ .]	270-755-0	68477-73-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-063-00-1	Gases (petroleum), catalytic cracker; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of the products from a catalytic cracking process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-756-6	68477-74-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-064-00-7	Gases (petroleum), catalytic cracker, C ₁₋₅ -rich; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of aliphatic hydrocarbons having carbon numbers in the range of C ₁ through C ₆ , predominantly C ₁ through C ₅ .]	270-757-1	68477-75-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-065-00-2	Gases (petroleum), catalytic polymd. naphtha stabilizer overhead, C ₂₋₄ -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of catalytic polymerized naphtha. It consists of aliphatic hydrocarbons having carbon numbers in the range of C ₂ through C ₆ , predominantly C ₂ through C ₄ .]	270-758-7	68477-76-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-066-00-8	Gases (petroleum), catalytic reformer, C ₁₋₄ -rich; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers in the range of C ₁ through C ₆ , predominantly C ₁ through C ₄ .]	270-760-8	68477-79-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-067-00-3	Gases (petroleum), C ₃₋₅ olefinic-paraffinic alkylation feed; Petroleum gas; [A complex combination of olefinic and paraffinic hydrocarbons having carbon numbers in the range of C ₃ through C ₅ which are used as alkylation feed. Ambient temperatures normally exceed the critical temperature of these combinations.]	270-765-5	68477-83-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-068-00-9	Gases (petroleum), C ₄ -rich; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from a catalytic fractionation process. It consists of aliphatic hydrocarbons having carbon numbers in the range of C ₃ through C ₅ , predominantly C ₄ .]	270-767-6	68477-85-0	⊗ ⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-069-00-4	Gases (petroleum), deethanizer overheads; Petroleum gas; [A complex combination of hydrocarbons produced from distillation of the gas and gasoline fractions from the catalytic cracking process. It contains predominantly ethane and ethylene.]	270-768-1	68477-86-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-070-00-X	Gases (petroleum), deisobutanizer tower overheads; Petroleum gas; [A complex combination of hydrocarbons produced by the atmospheric distillation of a butane-butylene stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₄ .]	270-769-7	68477-87-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-071-00-5	Gases (petroleum), depropanizer dry, propene-rich; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from the gas and gasoline fractions of a catalytic cracking process. It consists predominantly of propylene with some ethane and propane.]	270-772-3	68477-90-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-072-00-0	Gases (petroleum), depropanizer overheads; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from the gas and gasoline fractions of a catalytic cracking process. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₄ .]	270-773-9	68477-91-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-073-00-6	Gases (petroleum), gas recovery plant depropanizer overheads; Petroleum gas; [A complex combination of hydrocarbons obtained by fractionation of miscellaneous hydrocarbon streams. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₁ through C ₄ , predominantly propane.]	270-777-0	68477-94-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-074-00-1	Gases (petroleum), Girbatol unit feed; Petroleum gas; [A complex combination of hydrocarbons that is used as the feed into the Girbatol unit to remove hydrogen sulfide. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₄ .]	270-778-6	68477-95-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-075-00-7	Gases (petroleum), isomerized naphtha fractionator, C ₄ -rich, hydrogen sulfide-free; Petroleum gas	270-782-8	68477-99-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-076-00-2	Tail gas (petroleum), catalytic cracked clarified oil and thermal cracked vacuum residue fractionation reflux drum; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked clarified oil and thermal cracked vacuum residue. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-802-5	68478-21-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-077-00-8	Tail gas (petroleum), catalytic cracked naphtha stabilization absorber; Petroleum gas; [A complex combination of hydrocarbons obtained from the stabilization of catalytic cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-803-0	68478-22-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-078-00-3	Tail gas (petroleum), catalytic cracker, catalytic reformer and hydrodesulfurizer combined fractionater; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation of products from catalytic cracking, catalytic reforming and hydrodesulfurizing processes treated to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	270-804-6	68478-24-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-079-00-9	Tail gas (petroleum), catalytic reformed naphtha fractionation stabilizer; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of catalytic reformed naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	270-806-7	68478-26-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-080-00-4	Tail gas (petroleum), saturate gas plant mixed stream, C ₄ -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of straight-run naphtha, distillation tail gas and catalytic reformed naphtha stabilizer tail gas. It consists of hydrocarbons having carbon numbers in the range of C ₃ through C ₆ , predominantly butane and isobutane.]	270-813-5	68478-32-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-081-00-X	Tail gas (petroleum), saturate gas recovery plant, C ₁₋₂ -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of distillate tail gas, straight-run naphtha, catalytic reformed naphtha stabilizer tail gas. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₁ through C ₅ , predominantly methane and ethane.]	270-814-0	68478-33-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-082-00-5	Tail gas (petroleum), vacuum residues thermal cracker; Petroleum gas; [A complex combination of hydrocarbons obtained from the thermal cracking of vacuum residues. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	270-815-6	68478-34-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-083-00-0	Hydrocarbons, C ₃₋₄ -rich, petroleum distillate; Petroleum gas; [A complex combination of hydrocarbons produced by distillation and condensation of crude oil. It consists of hydrocarbons having carbon numbers in the range of C ₃ through C ₅ , predominantly C ₃ through C ₄ .]	270-990-9	68512-91-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-084-00-6	Gases (petroleum), full-range straight-run naphtha dehexanizer off; petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of the full-range straight-run naphtha. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₆ .]	271-000-8	68513-15-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-085-00-1	Gases (petroleum), hydrocracking depropanizer off, hydrocarbon-rich; Petroleum gas; [A complex combination of hydrocarbon produced by the distillation of products from a hydrocracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ . It may also contain small amounts of hydrogen and hydrogen sulfide.]	271-001-3	68513-16-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-086-00-7	Gases (petroleum), light straight-run naphtha stabilizer off; Petroleum gas; [A complex combination of hydrocarbons obtained by the stabilization of light straight-run naphtha. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₆ .]	271-002-9	68513-17-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-087-00-2	Residues (petroleum), alkylation splitter, C ₄ -rich; Petroleum gas; [A complex residuum from the distillation of streams various refinery operations. It consists of hydrocarbons having carbon numbers in the range of C ₄ through C ₅ , predominantly butane and boiling in the range of approximately - 11.7 °C to 27.8 °C (11°F to 82°F).]	271-010-2	68513-66-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-088-00-8	Hydrocarbons, C ₁₋₄ ; Petroleum gas; [A complex combination of hydrocarbons provided by thermal cracking and absorber operations and by distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ and boiling in the range of approximately minus 164 °C to minus 0.5 °C (-263°F to 31°F).]	271-032-2	68514-31-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-089-00-3	Hydrocarbons, C ₁₋₄ , sweetened; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting hydrocarbon gases to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ and boiling in the range of approximately - 164 °C to - 0.5 °C (-263°F to 31°F).]	271-038-5	68514-36-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-090-00-9	Hydrocarbons, C ₁₋₃ ; Petroleum gas; [A complex combination of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₃ and boiling in the range of approximately minus 164 °C to minus 42 °C (-263°F to - 44°F).]	271-259-7	68527-16-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-091-00-4	Hydrocarbons, C ₁₋₄ , debutanizer fraction; Petroleum gas	271-261-8	68527-19-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-092-00-X	Gases (petroleum), C ₁₋₅ , wet; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of crude oil and/or the cracking of tower gas oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	271-624-0	68602-83-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-093-00-5	Hydrocarbons, C ₂₋₄ ; Petroleum gas	271-734-9	68606-25-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-094-00-0	Hydrocarbons, C ₃ ; Petroleum gas	271-735-4	68606-26-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-095-00-6	Gases (petroleum), alkylation feed; Petroleum gas; [A complex combination of hydrocarbons produced by the catalytic cracking of gas oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₄ .]	271-737-5	68606-27-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-096-00-1	Gases (petroleum), depropanizer bottoms fractionation off; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation of depropanizer bottoms. It consists predominantly of butane, isobutane and butadiene.]	271-742-2	68606-34-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-097-00-7	Gases (petroleum), refinery blend; Petroleum gas; [A complex combination obtained from various processes. It consists of hydrogen, hydrogen sulfide and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-183-7	68783-07-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-098-00-2	Gases (petroleum), catalytic cracking; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of the products from a catalytic cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₅ .]	272-203-4	68783-64-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-099-00-8	Gases (petroleum), C ₂₋₄ , sweetened; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of saturated and unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₄ and boiling in the range of approximately - 51 °C to - 34 °C (-60°F to - 30°F).]	272-205-5	68783-65-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-100-00-1	Gases (petroleum), crude oil fractionation off; Petroleum gas; [A complex combination of hydrocarbons produced by the fractionation of crude oil. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-871-7	68918-99-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-101-00-7	Gases (petroleum), dehexanizer off; Petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of combined naphtha streams. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-872-2	68919-00-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-102-00-2	Gases (petroleum), light straight run gasoline fractionation stabilizer off; Petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of light straight-run gasoline. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-878-5	68919-05-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-103-00-8	Gases (petroleum), naphtha unifier desulfurization stripper off; Petroleum gas; [A complex combination of hydrocarbons produced by a naphtha unifier desulfurization process and stripped from the naphtha product. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	272-879-0	68919-06-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-104-00-3	Gases (petroleum), straight-run naphtha catalytic reforming off; Petroleum gas; [A complex combination of hydrocarbons obtained by the catalytic reforming of straight-run naphtha and fractionation of the total effluent. It consists of methane, ethane, and propane.]	272-882-7	68919-09-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-105-00-9	Gases (petroleum), fluidized catalytic cracker splitter over-heads; Petroleum gas; [A complex combination of hydrocarbons produced by the fractionation of the charge to the C ₃ -C ₄ splitter. It consists predominantly of C ₃ hydrocarbons.]	272-893-7	68919-20-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-106-00-4	Gases (petroleum), straight-run stabilizer off; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation of the liquid from the first tower used in the distillation of crude oil. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	272-883-2	68919-10-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-107-00-X	Gases (petroleum), catalytic cracked naphtha debutanizer; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked naphtha. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	273-169-3	68952-76-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-108-00-5	Tail gas (petroleum), catalytic cracked distillate and naphtha stabilizer; Petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of catalytic cracked naphtha and distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	273-170-9	68952-77-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-109-00-0	Tail gas (petroleum), thermal-cracked distillate, gas oil and naphtha absorber; petroleum gas; [A complex combination of hydrocarbons obtained from the separation of thermal-cracked distillates, naphtha and gas oil. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	273-175-6	68952-81-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-110-00-6	Tail gas (petroleum), thermal cracked hydrocarbon fractionation stabilizer, petroleum coking; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of thermal cracked hydrocarbons from petroleum coking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	273-176-1	68952-82-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-111-00-1	Gases (petroleum, light steam-cracked, butadiene conc.; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a thermal cracking process. It consists of hydrocarbons having a carbon number predominantly of C ₄ .]	273-265-5	68955-28-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-112-00-7	Gases (petroleum), straight-run naphtha catalytic reformer stabilizer overhead; Petroleum gas; [A complex combination of hydrocarbons obtained by the catalytic reforming of straight-run naphtha and the fractionation of the total effluent. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₄ .]	273-270-2	68955-34-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-113-00-2	Hydrocarbons, C ₄ ; Petroleum gas	289-339-5	87741-01-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-114-00-8	Alkanes, C ₁₋₄ , C ₃ -rich; Petroleum gas	292-456-4	90622-55-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-115-00-3	Gases (petroleum), steam-cracker C ₃ -rich; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a steam cracking process. It consists predominantly of propylene with some propane and boils in the range of approximately - 70 °C to 0 °C (-94°F to 32°F).]	295-404-9	92045-22-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-116-00-9	Hydrocarbons, C ₄ , steam-cracker distillate; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of the products of a steam cracking process. It consists predominantly of hydrocarbons having a carbon number of C ₄ , predominantly 1-butene and 2-butene, containing also butane and isobutene and boiling in the range of approximately minus 12 °C to 5 °C (10.4°F to 41°F).]	295-405-4	92045-23-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-117-00-4	Petroleum gases, liquefied, sweetened, C ₄ fraction; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting a liquified petroleum gas mix to a sweetening process to oxidize mercaptans or to remove acidic impurities. It consists predominantly of C ₄ saturated and unsaturated hydrocarbons.]	295-463-0	92045-80-2	F+; R12 Carc. Cat. 1; R45 Muta. Cat. 2; R46	F+; T R: 12-45-46 S: 53-45		HKS
649-118-00-X	Hydrocarbons, C ₄ , 1,3-butadiene- and isobutene-free; Petroleum gas	306-004-1	95465-89-7	⊗ Carc. Cat. 2; R45	T R: 45 S: 53-45		H K
649-119-00-5	Raffinates (petroleum), steam-cracked C ₄ fraction cuprous ammonium acetate extrn., C ₃₋₅ and C ₃₋₅ unsatd., butadiene-free; Petroleum gas	307-769-4	97722-19-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-120-00-0	Gases (petroleum), amine system feed; Refinery gas; [The feed gas to the amine system for removal of hydrogen sulfide. It consists of hydrogen. Carbon monoxide, carbon dioxide, hydrogen sulfide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ may also be present.]	270-746-1	68477-65-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-121-00-6	Gases (petroleum), benzene unit hydrodesulfurizer off; Refinery gas; [Off gases produced by the benzene unit. It consists primarily of hydrogen. Carbon monoxide and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ , including benzene, may also be present.]	270-747-7	68477-66-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-122-00-1	Gases (petroleum), benzene unit recycle, hydrogen-rich; Refinery gas; [A complex combination of hydrocarbons obtained by recycling the gases of the benzene unit. It consists primarily of hydrogen with various small amounts of carbon monoxide and hydrocarbons having carbon numbers in the range of C ₁ through C ₆ .]	270-748-2	68477-67-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-123-00-7	Gases (petroleum), blend oil, hydrogen-nitrogen-rich; Refinery gas; [A complex combination of hydrocarbons obtained by distillation of a blend oil. It consists primarily of hydrogen and nitrogen with various small amounts of carbon monoxide, carbon dioxide, and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	270-749-8	68477-68-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-124-00-2	Gases (petroleum), catalytic reformed naphtha stripper overheads; Refinery gas; [A complex combination of hydrocarbons obtained from stabilization of catalytic reformed naphtha. Its consists of hydrogen and saturated hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	270-759-2	68477-77-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-125-00-8	Gases (petroleum), C ₆₋₈ catalytic reformer recycle; Refinery gas; [A complex combination of hydrocarbons produced by distillation of products from catalytic reforming of C ₆ -C ₈ feed and recycled to conserve hydrogen. It consists primarily of hydrogen. It may also contain various small amounts of carbon monoxide, carbon dioxide, nitrogen, and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-761-3	68477-80-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-126-00-3	Gases (petroleum), C ₆₋₈ catalytic reformer; Refinery gas; [A complex combination of hydrocarbons produced by distillation of products from catalytic reforming of C ₆ -C ₈ feed. It consists of hydrocarbons having carbon numbers in the range of C ₁ through C ₅ and hydrogen.]	270-762-9	68477-81-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-127-00-9	Gases (petroleum), C ₆₋₈ catalytic reformer recycle, hydrogen-rich; Refinery gas	270-763-4	68477-82-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-128-00-4	Gases (petroleum), C ₂ -return stream; Refinery gas; [A complex combination of hydrocarbons obtained by the extraction of hydrogen from a gas stream which consists primarily of hydrogen with small amounts of nitrogen, carbon monoxide, methane, ethane, and ethylene. It contains predominantly hydrocarbons such as methane, ethane, and ethylene with small amounts of hydrogen, nitrogen and carbon monoxide.]	270-766-0	68477-84-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-129-00-X	Gases (petroleum), dry sour, gas-concn.-unit-off; Refinery gas; [The complex combination of dry gases from a gas concentration unit. It consists of hydrogen, hydrogen sulfide and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₃ .]	270-774-4	68477-92-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-130-00-5	Gases (petroleum), gas concn. reabsorber distn.; Refinery gas; [A complex combination of hydrocarbons produced by distillation of products from combined gas streams in a gas concentration reabsorber. It consists predominantly of hydrogen, carbon monoxide, carbon dioxide, nitrogen, hydrogen sulfide and hydrocarbons having carbon numbers in the range of C ₁ through C ₃ .]	270-776-5	68477-93-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-131-00-0	Gases (petroleum), hydrogen absorber off; Refinery gas; [A complex combination obtained by absorbing hydrogen from a hydrogen rich stream. It consists of hydrogen, carbon monoxide, nitrogen, and methane with small amounts of C ₂ hydrocarbons.]	270-779-1	68477-96-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-132-00-6	Gases (petroleum), hydrogen-rich; Refinery gas; [A complex combination separated as a gas from hydrocarbon gases by chilling. It consists primarily of hydrogen with various small amounts of carbon monoxide, nitrogen, methane, and C ₂ hydrocarbons.]	270-780-7	68477-97-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-133-00-1	Gases (petroleum), hydrotreater blend oil recycle, hydrogen-nitrogen-rich; Refinery gas; [A complex combination obtained from recycled hydrotreated blend oil. It consists primarily of hydrogen and nitrogen with various small amounts of carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	270-781-2	68477-98-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-134-00-7	Gases (petroleum), recycle, hydrogen-rich; Refinery gas; [A complex combination obtained from recycled reactor gases. It consists primarily of hydrogen with various small amounts of carbon monoxide, carbon dioxide, nitrogen, hydrogen sulfide, and saturated aliphatic hydrocarbons having carbon numbers in the range of C ₁ through C ₅ .]	270-783-3	68478-00-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-135-00-2	Gases (petroleum), reformer make-up, hydrogen-rich; Refinery gas; [A complex combination obtained from the reformers. It consists primarily of hydrogen with various small amounts of carbon monoxide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	270-784-9	68478-01-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-136-00-8	Gases (petroleum), reforming hydrotreater; Refinery gas; [A complex combination obtained from the reforming hydrotreating process. It consists primarily of hydrogen, methane, and ethane with various small amounts of hydrogen sulfide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₅ .]	270-785-4	68478-02-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-137-00-3	Gases (petroleum), reforming hydrotreater, hydrogen-methane-rich; Refinery gas; [A complex combination obtained from the reforming hydrotreating process. It consists primarily of hydrogen and methane with various small amounts of carbon monoxide, carbon dioxide, nitrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₅ .]	270-787-5	68478-03-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-138-00-9	Gases (petroleum), reforming hydrotreater make-up, hydrogen-rich; Refinery gas; [A complex combination obtained from the reforming hydrotreating process. It consists primarily of hydrogen with various small amounts of carbon monoxide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	270-788-0	68478-04-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-139-00-4	Gases (petroleum), thermal cracking distn.; Refinery gas; [A complex combination produced by distillation of products from a thermal cracking process. It consists of hydrogen, hydrogen sulfide, carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-789-6	68478-05-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-140-00-X	Tail gas (petroleum), catalytic cracker refractionation absorber; Refinery gas; [A complex combination of hydrocarbons obtained from refractionation of products from a catalytic cracking process. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₃ .]	270-805-1	68478-25-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-141-00-5	Tail gas (petroleum), catalytic reformed naphtha separator; Refinery gas; [A complex combination of hydrocarbons obtained from the catalytic reforming of straight run naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-807-2	68478-27-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-142-00-0	Tail gas (petroleum), catalytic reformed naphtha stabilizer; Refinery gas; [A complex combination of hydrocarbons obtained from the stabilization of catalytic reformed naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-808-8	68478-28-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-143-00-6	Tail gas (petroleum), cracked distillate hydrotreater separator; Refinery gas; [A complex combination of hydrocarbons obtained by treating cracked distillates with hydrogen in the presence of a catalyst. It consists of hydrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	270-809-3	68478-29-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-144-00-1	Tail gas (petroleum), hydrodesulfurized straight-run naphtha separator; Refinery gas; [A complex combination of hydrocarbons obtained from hydrodesulfurization of straight-run naphtha. It consists of hydrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	270-810-9	68478-30-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-145-00-7	Gases (petroleum), catalytic reformed straight-run naphtha stabilizer overheads; Refinery gas; [A complex combination of hydrocarbons obtained from the catalytic reforming of straight-run naphtha followed by fractionation of the total effluent. It consists of hydrogen, methane, ethane and propane.]	270-999-8	68513-14-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-146-00-2	Gases (petroleum), reformer effluent high-pressure flash drum off; Refinery gas; [A complex combination produced by the high-pressure flashing of the effluent from the reforming reactor. It consists primarily of hydrogen with various small amounts of methane, ethane, and propane.]	271-003-4	68513-18-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-147-00-8	Gases (petroleum), reformer effluent low-pressure flash drum off; Refinery gas; [A complex combination produced by low-pressure flashing of the effluent from the reforming reactor. It consists primarily of hydrogen with various small amounts of methane, ethane, and propane.]	271-005-5	68513-19-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-148-00-3	Gases (petroleum), oil refinery gas distn. off; Refinery gas; [A complex combination separated by distillation of a gas stream containing hydrogen, carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers in the range of C ₁ through C ₆ or obtained by cracking ethane and propane. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₂ , hydrogen, nitrogen, and carbon monoxide.]	271-258-1	68527-15-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-149-00-9	Gases (petroleum), benzene unit hydrotreater depentanizer overheads; Refinery gas; [A complex combination produced by treating the feed from the benzene unit with hydrogen in the presence of a catalyst followed by depentanizing. It consists primarily of hydrogen, ethane and propane with various small amounts of nitrogen, carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ . It may contain trace amounts of benzene.]	271-623-5	68602-82-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-150-00-4	Gases (petroleum), secondary absorber off, fluidized catalytic cracker overheads fractionator; Refinery gas; [A complex combination produced by the fractionation of the overhead products from the catalytic cracking process in the fluidized catalytic cracker. It consists of hydrogen, nitrogen, and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₃ .]	271-625-6	68602-84-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-151-00-X	Petroleum products, refinery gases; Refinery gas; [A complex combination which consists primarily of hydrogen with various small amounts of methane, ethane, and propane.]	271-750-6	68607-11-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-152-00-5	Gases (petroleum), hydrocracking low-pressure separator; Refinery gas; [A complex combination obtained by the liquid-vapor separation of the hydrocracking process reactor effluent. It consists predominantly of hydrogen and saturated hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₃ .]	272-182-1	68783-06-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-153-00-0	Gases (petroleum), refinery; Refinery gas; [A complex combination obtained from various petroleum refining operations. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₃ .]	272-338-9	68814-67-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-154-00-6	Gases (petroleum), platformer products separator off; Refinery gas; [A complex combination obtained from the chemical reforming of naphthenes to aromatics. It consists of hydrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₄ .]	272-343-6	68814-90-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-155-00-1	Gases (petroleum), hydrotreated sour kerosine depentanizer stabilizer off; Refinery gas; [The complex combination obtained from the depentanizer stabilization of hydrotreated kerosine. It consists primarily of hydrogen, methane, ethane, and propane with various small amounts of nitrogen, hydrogen sulfide, carbon monoxide and hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₅ .]	272-775-5	68911-58-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-156-00-7	Gases (petroleum), hydrotreated sour kerosine flash drum; Refinery gas; [A complex combination obtained from the flash drum of the unit treating sour kerosine with hydrogen in the presence of a catalyst. It consists primarily of hydrogen and methane with various small amounts of nitrogen, carbon monoxide, and hydro-carbons having carbon numbers predominantly in the range of C ₂ through C ₅ .]	272-776-0	68911-59-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-157-00-2	Gases (petroleum), distillate unifier desulfurization stripper off; Refinery gas; [A complex combination stripped from the liquid product of the unifier desulfurization process. It consists of hydrogen sulfide, methane, ethane, and propane.]	272-873-8	68919-01-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-158-00-8	Gases (petroleum), fluidized catalytic cracker fractionation off; Refinery gas; [A complex combination produced by the fractionation of the overhead product of the fluidized catalytic cracking process. It consists of hydrogen, hydrogen sulfide, nitrogen, and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-874-3	68919-02-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-159-00-3	Gases (petroleum), fluidized catalytic cracker scrubbing secondary absorber off; Refinery gas; [A complex combination produced by scrubbing the overhead gas from the fluidized catalytic cracker. It consists of hydrogen, nitrogen, methane, ethane and propane.]	272-875-9	68919-03-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-160-00-9	Gases (petroleum), heavy distillate hydrotreater desulfurization stripper off; Refinery gas; [A complex combination stripped from the liquid product of the heavy distillate hydrotreater desulfurization process. It consists of hydrogen, hydrogen sulfide, and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-876-4	68919-04-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-161-00-4	Gases (petroleum), platformer stabilizer off, light ends fractionation; Refinery gas; [A complex combination obtained by the fractionation of the light ends of the platinum reactors of the platformer unit. It consists of hydrogen, methane, ethane and propane.]	272-880-6	68919-07-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-162-00-X	Gases (petroleum), preflash tower off, crude distn.; Refinery gas; [A complex combination produced from the first tower used in the distillation of crude oil. It consists of nitrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-881-1	68919-08-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-163-00-5	Gases (petroleum), tar stripper off; Refinery gas; [A complex combination obtained by the fractionation of reduced crude oil. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	272-884-8	68919-11-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-164-00-0	Gases (petroleum), unifiner stripper off; Refinery gas; [A combination of hydrogen and methane obtained by fractionation of the products from the unifiner unit.]	272-885-3	68919-12-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-165-00-6	Tail gas (petroleum), catalytic hydrodesulfurized naphtha separator; Refinery gas; [A complex combination of hydrocarbons obtained from the hydrodesulfurization of naphtha. It consists of hydrogen, methane, ethane, and propane.]	273-173-5	68952-79-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-166-00-1	Tail gas (petroleum), straight-run naphtha hydrodesulfurizer; Refinery gas; [A complex combination obtained from the hydrodesulfurization of straight-run naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	273-174-0	68952-80-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-167-00-7	Gases (petroleum), sponge absorber off, fluidized catalytic cracker and gas oil desulfurizer overhead fractionation; Refinery gas; [A complex combination obtained by the fractionation of products from the fluidized catalytic cracker and gas oil desulfurizer. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	273-269-7	68955-33-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-168-00-2	Gases (petroleum), crude distn. and catalytic cracking; Refinery gas; [A complex combination produced by crude distillation and catalytic cracking processes. It consists of hydrogen, hydrogen sulfide, nitrogen, carbon monoxide and paraffinic and olefinic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	273-563-5	68989-88-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-169-00-8	Gases (petroleum), gas oil diethanolamine scrubber off; Refinery gas; [A complex combination produced by desulfurization of gas oils with diethanolamine. It consists predominantly of hydrogen sulfide, hydrogen and aliphatic hydrocarbons having carbon numbers in the range of C ₁ through C ₅ .]	295-397-2	92045-15-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-170-00-3	Gases (petroleum), gas oil hydrodesulfurization effluent; Refinery gas; [A complex combination obtained by separation of the liquid phase from the effluent from the hydrogenation reaction. It consists predominantly of hydrogen, hydrogen sulfide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₃ .]	295-398-8	92045-16-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-171-00-9	Gases (petroleum), gas oil hydrodesulfurization purge; Refinery gas; [A complex combination of gases obtained from the reformer and from the purges from the hydrogenation reactor. It consists predominantly of hydrogen and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	295-399-3	92045-17-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-172-00-4	Gases (petroleum), hydrogenator effluent flash drum off; Refinery gas; [A complex combination of gases obtained from flash of the effluents after the hydrogenation reaction. It consists predominantly of hydrogen and aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	295-400-7	92045-18-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-173-00-X	Gases (petroleum), naphtha steam cracking high-pressure residual; Refinery gas; [A complex combination obtained as a mixture of the non-condensable portions from the product of a naphtha steam cracking process as well as residual gases obtained during the preparation of subsequent products. It consists predominantly of hydrogen and paraffinic and olefinic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ with which natural gas may also be mixed.]	295-401-2	92045-19-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-174-00-5	Gases (petroleum), residue visbaking off; Refinery gas; A complex combination obtained from viscosity reduction of residues in a furnace. It consists predominantly of hydrogen sulfide and paraffinic and olefinic hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	295-402-8	92045-20-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-175-00-0	Foots oil (petroleum), acid-treated; Foots oil; [A complex combination of hydrocarbons obtained by treatment of Foot's oil with sulfuric acid. It consists predominantly of branched-chain hydrocarbons with carbon numbers predominantly in the range of C ₂₀ through C ₅₀ .]	300-225-7	93924-31-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-176-00-6	Foots oil (petroleum), clay-treated; Foots oil; [A complex combination of hydrocarbons obtained by treatment of Foot's oil with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists predominantly of branched chain hydrocarbons with carbon numbers predominantly in the range of C ₂₀ through C ₅₀ .]	300-226-2	93924-32-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-177-00-1	Gases (petroleum), C ₃₋₄ ; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from the cracking of crude oil. It consists of hydrocarbons having carbon numbers in the range of C ₃ through C ₄ , predominantly of propane and propylene, and boiling in the range of approximately - 51 °C to - 1 °C (- 60°F to 30°F.)]	268-629-5	68131-75-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-178-00-7	Tail gas (petroleum), catalytic cracked distillate and catalytic cracked naphtha fractionation absorber; Petroleum gas; [The complex combination of hydrocarbons from the distillation of the products from catalytic cracked distillates and catalytic cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₁ through C ₄ .]	269-617-2	68307-98-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-179-00-2	Tail gas (petroleum), catalytic polymn. naphtha fractionation stabilizer; Petroleum gas; [A complex combination of hydrocarbons from the fractionation stabilization products from polymerization of naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₁ through C ₄ .]	269-618-8	68307-99-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-180-00-8	Tail gas (petroleum), catalytic reformed naphtha fractionation stabilizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation stabilization of catalytic reformed naphtha and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	269-619-3	68308-00-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-181-00-3	Tail gas (petroleum), cracked distillate hydrotreater stripper; Petroleum gas; [A complex combination of hydrocarbons obtained by treating thermal cracked distillates with hydrogen in the presence of a catalyst. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	269-620-9	68308-01-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-182-00-9	Tail gas (petroleum), straight-run distillate hydrodesulfurizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from catalytic hydrodesulfurization of straight run distillates and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	269-630-3	68308-10-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-183-00-4	Tail gas (petroleum), gas oil catalytic cracking absorber; Petroleum gas; [A complex combination of hydrocarbons obtained from the distillation of products from the catalytic cracking of gas oil. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	269-623-5	68308-03-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-184-00-X	Tail gas (petroleum), gas recovery plant; Petroleum gas; [A complex combination of hydrocarbons from the distillation of products from miscellaneous hydrocarbon streams. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	269-624-0	68308-04-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-185-00-5	Tail gas (petroleum), gas recovery plant deethanizer; Petroleum gas; [A complex combination of hydrocarbons from the distillation of products from miscellaneous hydrocarbon streams. It consists of hydrocarbon having carbon numbers predominantly in the range of C ₁ through C ₄ .]	269-625-6	68308-05-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-186-00-0	Tail gas (petroleum), hydrodesulfurized distillate and hydrodesulfurized naphtha fractionator, acid-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of hydrodesulfurized naphtha and distillate hydrocarbon streams and treated to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	269-626-1	68308-06-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-187-00-6	Tail gas (petroleum), hydrodesulfurized vacuum gas oil stripper, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from stripping stabilization of catalytic hydrodesulfurized vacuum gas oil and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	269-627-7	68308-07-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-188-00-1	Tail gas (petroleum), light straight-run naphtha stabilizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation stabilization of light straight run naphtha and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	269-629-8	68308-09-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-189-00-7	Tail gas (petroleum), propane-propylene alkylation feed prep deethanizer; Petroleum gas; [A complex combination of hydrocarbons obtained from the distillation of the reaction products of propane with propylene. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	269-631-9	68308-11-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-190-00-2	Tail gas (petroleum), vacuum gas oil hydrodesulfurizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from catalytic hydrodesulfurization of vacuum gas oil and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₆ .]	269-632-4	68308-12-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-191-00-8	Gases (petroleum), catalytic cracked overheads; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from the catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₅ and boiling in the range of approximately - 48 °C to 32 °C (-54°F to 90°F).]	270-071-2	68409-99-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-193-00-9	Alkanes, C ₁₋₂ ; Petroleum gas	270-651-5	68475-57-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-194-00-4	Alkanes, C ₂₋₃ ; Petroleum gas	270-652-0	68475-58-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-195-00-X	Alkanes, C ₃₋₄ ; Petroleum gas	270-653-6	68475-59-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-196-00-5	Alkanes, C ₄₋₅ ; Petroleum gas	270-654-1	68475-60-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-197-00-0	Fuel gases; Petroleum gas; [A combination of light gases. It consists predominantly of hydrogen and/or low molecular weight hydrocarbons.]	270-667-2	68476-26-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-198-00-6	Fuel gases, crude oil of distillates; Petroleum gas; [A complex combination of light gases produced by distillation of crude oil and by catalytic reforming of naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ and boiling in the range of approximately - 217 °C to - 12 °C (- 423°F to 10°F).]	270-670-9	68476-29-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-199-00-1	Hydrocarbons, C ₃₋₄ ; Petroleum gas	270-681-9	68476-40-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-200-00-5	Hydrocarbons, C ₄₋₅ ; Petroleum gas	270-682-4	68476-42-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-201-00-0	Hydrocarbons, C ₂₋₄ , C ₃ -rich; Petroleum gas	270-689-2	68476-49-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-202-00-6	Petroleum gases, liquefied; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₇ and boiling in the range of approximately - 40 °C to 80 °C (- 40 °F to 176 °F).]	270-704-2	68476-85-7	F+; R12 Carc. Cat. 1; R45 Muta. Cat. 2; R46	F+; T R: 12-45-46 S: 53-45		HKS
649-203-00-1	Petroleum gases, liquefied, sweetened; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting liquefied petroleum gas mix to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₇ and boiling in the range of approximately - 40 °C to 80 °C (-40 °F to 176 °F).]	270-705-8	68476-86-8	F+; R12 Carc. Cat. 1; R45 Muta. Cat. 2; R46	F+; T R: 12-45-46 S: 45-53		HKS
649-204-00-7	Gases (petroleum), C ₃₋₄ , isobutane-rich; Petroleum gas; [A complex combination of hydrocarbons from the distillation of saturated and unsaturated hydrocarbons usually ranging in carbon numbers from C ₃ through C ₆ , predominantly butane and isobutane. It consists of saturated and unsaturated hydrocarbons having carbon numbers in the range of C ₃ through C ₄ , predominantly isobutane.]	270-724-1	68477-33-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-205-00-2	Distillates (petroleum), C ₃₋₆ , piperylene-rich; Petroleum gas; [A complex combination of hydrocarbons from the distillation of saturated and unsaturated aliphatic hydrocarbons usually ranging in the carbon numbers C ₃ through C ₆ . It consists of saturated and unsaturated hydrocarbons having carbon numbers in the range of C ₃ through C ₆ , predominantly piperylenes.]	270-726-2	68477-35-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-206-00-8	Gases (petroleum), butane splitter overheads; Petroleum gas; [A complex combination of hydrocarbons obtained from the distillation of the butane stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₄ .]	270-750-3	68477-69-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-207-00-3	Gases (petroleum), C ₂ ; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic fractionation process. It contains predominantly ethane, ethylene, propane, and propylene.]	270-751-9	68477-70-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-208-00-9	Gases (petroleum), catalytic-cracked gas oil depropanizer bottoms, C ₄ -rich acid-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked gas oil hydrocarbon stream and treated to remove hydrogen sulfide and other acidic components. It consists of hydrocarbons having carbon numbers in the range of C ₃ through C ₅ , predominantly C ₄ .]	270-752-4	68477-71-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-209-00-4	Gases (petroleum), catalytic-cracked naphtha debutanizer bottoms, C ₃₋₅ -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from the stabilization of catalytic cracked naphtha. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₅ .]	270-754-5	68477-72-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-210-00-X	Tail gas (petroleum), isomerized naphtha fractionation stabilizer; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization products from isomerized naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₄ .]	269-628-2	68308-08-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-211-00-5	Foots oil (petroleum), carbon-treated; Foots oil; [A complex combination of hydrocarbons obtained by the treatment of Foots oil with activated carbon for the removal of trace constituents and impurities. It consists predominantly of saturated straight chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-126-0	97862-76-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-212-00-0	Distillates (petroleum), sweetened middle; Gasoil – unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₂₀ and boiling in the range of approximately 150 °C to 345 °C (302°F to 653°F).]	265-088-7	64741-86-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-213-00-6	Gas oils (petroleum), solvent-refined; Gasoil – unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₂₅ and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	265-092-9	64741-90-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-214-00-1	Distillates (petroleum), solvent-refined middle; Gasoil – unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₂₀ and boiling in the range of approximately 150 °C to 345 °C (302°F to 653°F).]	265-093-4	64741-91-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-215-00-7	Gas oils (petroleum), acid-treated; Gasoil – unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₂₅ and boiling in the range of approximately 230 °C to 400 °C (446°F to 752°F).]	265-112-6	64742-12-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-216-00-2	Distillates (petroleum), acid-treated middle; Gasoil – unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₂₀ and boiling in the range of approximately 205 °C to 345 °C (401°F to 653°F).]	265-113-1	64742-13-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-217-00-8	Distillates (petroleum), acid-treated light; Gasoil – unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-114-7	64742-14-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-218-00-3	Gas oils (petroleum), chemically neutralized; Gasoil – unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₂₅ and boiling in the range of approximately 230 °C to 400 °C (446°F to 752°F).]	265-129-9	64742-29-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-219-00-9	Distillates (petroleum), chemically neutralized middle; Gasoil – unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₂₀ and boiling in the range of approximately 205 °C to 345 °C (401°F to 653°F).]	265-130-4	64742-30-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-220-00-4	Distillates (petroleum), clay-treated middle; Gasoil – unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay, usually in a percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₂₀ and boiling in the range of approximately 150 °C to 345 °C (302°F to 653°F).]	265-139-3	64742-38-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-221-00-X	Distillates (petroleum), hydrotreated middle; Gasoil – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₂₅ and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	265-148-2	64742-46-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-222-00-5	Gas oils (petroleum), hydrodesulfurized; Gasoil – unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₂₅ and boiling in the range of approximately 230 °C to 400 °C (446°F to 752°F).]	265-182-8	64742-79-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-223-00-0	Distillates (petroleum), hydrodesulfurized middle; Gasoil – unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₂₅ and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	265-183-3	64742-80-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-224-00-6	Fuels, diesel; Gasoil – unspecified; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₂₀ and boiling in the range of approximately 163 °C to 357 °C (325°F to 675°F).]	269-822-7	68334-30-5	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H N
649-225-00-1	Fuel oil, No 2; Gasoil – unspecified; [A distillate oil having a minimum viscosity of 32,6 SUS at 37,7 °C (100°F) to a maximum of 37,9 SUS at 37,7 °C (100°F).]	270-671-4	68476-30-2	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H
649-226-00-7	Fuel oil, No 4; Gasoil – unspecified; [A distillate oil having a minimum viscosity of 45 SUS at 37,7 °C (100°F) to a maximum of 125 SUS at 37,7 °C (100°F).]	270-673-5	68476-31-3	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-227-00-2	Fuels, diesel, No 2; Gasoil – unspecified; [A distillate oil having a minimum viscosity of 32,6 SUS at 37,7 °C (100°F).]	270-676-1	68476-34-6	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H
649-228-00-8	Distillates (petroleum), catalytic reformer fractionator residue, high-boiling; Gasoil – unspecified; [A complex combination of hydrocarbons from the distillation of catalytic reformer fractionator residue. It boils in the range of approximately 343 °C to 399 °C (650°F to 750°F).]	270-719-4	68477-29-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-229-00-3	Distillates (petroleum), catalytic reformer fractionator residue, intermediate-boiling; Gasoil – unspecified; [A complex combination of hydrocarbons from the distillation of catalytic reformer fractionator residue. It boils in the range of approximately 288 °C to 371 °C (550°F to 700°F).]	270-721-5	68477-30-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-230-00-9	Distillates (petroleum), catalytic reformer fractionator residue, low-boiling; Gasoil – unspecified; [The complex combination of hydrocarbons from the distillation of catalytic reformer fractionator residue. It boils approximately below 288 °C (550°F).]	270-722-0	68477-31-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-231-00-4	Distillates (petroleum), highly refined middle; Gasoil – unspecified; [A complex combination of hydrocarbons obtained by the subjection of a petroleum fraction to several of the following steps: filtration, centrifugation, atmospheric distillation, vacuum distillation, acidification, neutralization and clay treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₂₀ .]	292-615-8	90640-93-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-232-00-X	Distillates (petroleum) catalytic reformer, heavy arom. conc.; Gasoil – unspecified; [A complex combination of hydrocarbons obtained from the distillation of a catalytically reformed petroleum cut. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₁₆ and boiling in the range of approximately 200 °C to 300 °C (392°F to 572°F).]	295-294-2	91995-34-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-233-00-5	Gas oils, paraffinic; Gasoil – unspecified; [A distillate obtained from the redistillation of a complex combination of hydrocarbons obtained by the distillation of the effluents from a severe catalytic hydrotreatment of paraffins. It boils in the range of approximately 190 °C to 330 °C (374°F to 594°F).]	300-227-8	93924-33-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-234-00-0	Naphtha (petroleum), solvent-refined hydrodesulfurized heavy; Gasoil – unspecified	307-035-3	97488-96-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-235-00-6	Hydrocarbons, C ₁₆₋₂₀ , hydrotreated middle distillate, distn. lights; Gasoil – unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the treatment of a middle distillate with hydrogen. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₂₀ and boiling in the range of approximately 290 °C to 350 °C (554°F to 662°F). It produces a finished oil having a viscosity of 2cSt at 100 °C (212°F).]	307-659-6	97675-85-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-236-00-1	Hydrocarbons, C ₁₂₋₂₀ , hydrotreated paraffinic, distn. lights; Gasoil – unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the treatment of heavy paraffins with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₂ through C ₂₀ and boiling in the range of approximately 230 °C to 350 °C (446°F to 662°F). It produces a finished oil having a viscosity of 2cSt at 100 °C (212°F).]	307-660-1	97675-86-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-237-00-7	Hydrocarbons, C ₁₁₋₁₇ , solvent-extd. light naphthenic; Gasoil – unspecified; [A complex combination of hydrocarbons obtained by extraction of the aromatics from a light naphthenic distillate having a viscosity of 2.2 cSt at 40 °C (104°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₁₇ and boiling in the range of approximately 200 °C to 300 °C (392°F to 572°F).]	307-757-9	97722-08-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-238-00-2	Gas oils, hydrotreated; Gasoil – unspecified; [A complex combination of hydrocarbons obtained from the redistillation of the effluents from the treatment of paraffins with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₇ through C ₂₇ and boiling in the range of approximately 330 °C to 340 °C (626°F to 644°F).]	308-128-1	97862-78-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-239-00-8	Distillates (petroleum), carbon-treated light paraffinic; Gasoil – unspecified; [A complex combination of hydrocarbons obtained by the treatment of a petroleum oil fraction with activated charcoal for the removal of traces of polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₂ through C ₂₈ .]	309-667-5	100683-97-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-240-00-3	Distillates (petroleum), intermediate paraffinic, carbon-treated; Gasoil – unspecified; [A complex combination of hydrocarbons obtained by the treatment of petroleum with activated charcoal for the removal of trace polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₃₆ .]	309-668-0	100683-98-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-241-00-9	Distillates (petroleum), intermediate paraffinic, clay-treated; Gasoil – unspecified; [A complex combination of hydrocarbons obtained by the treatment of petroleum with bleaching earth for the removal of trace polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₃₆ .]	309-669-6	100683-99-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-242-00-4	Alkanes, C ₁₂₋₂₆ -branched and linear	292-454-3	90622-53-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-243-00-X	Lubricating greases; Grease; [A complex combination of hydrocarbons having carbon numbers predominantly in the range of C ₁₂ through C ₅₀ . May contain organic salts of alkali metals, alkaline earth metals, and/or aluminium compounds.]	278-011-7	74869-21-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-244-00-5	Slack wax (petroleum); Slack wax; [A complex combination of hydrocarbons obtained from a petroleum fraction by solvent crystallization (solvent dewaxing) or as a distillation fraction from a very waxy crude. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₂₀ .]	265-165-5	64742-61-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-245-00-0	Slack wax (petroleum), acid-treated; Slack wax; [A complex combination of hydrocarbons obtained as a raffinate by treatment of a petroleum slack wax fraction with sulfuric acid treating process. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₂₀ .]	292-659-8	90669-77-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-246-00-6	Slack wax (petroleum), clay-treated; Slack wax; [A complex combination of hydrocarbons obtained by treatment of a petroleum slack wax fraction with natural or modified clay in either a contacting or percolation process. It consists predominantly of saturated straight and branched hydrocarbons having carbon numbers predominantly greater than C ₂₀ .]	292-660-3	90669-78-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-247-00-1	Slack wax (petroleum), hydrotreated; Slack wax; [A complex combination of hydrocarbons obtained by treating slack wax with hydrogen in the presence of a catalyst. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₂₀ .]	295-523-6	92062-09-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-248-00-7	Slack wax (petroleum), low-melting; Slack wax; [A complex combination of hydrocarbons obtained from a petroleum fraction by solvent deparaffination. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	295-524-1	92062-10-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-249-00-2	Slack wax (petroleum), low-melting, hydrotreated; Slack wax; [A complex combination of hydrocarbons obtained by treatment of low-melting petroleum slack wax with hydrogen in the presence of a catalyst. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	295-525-7	92062-11-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-250-00-8	Slack wax (petroleum), low-melting, carbon-treated; Slack wax; [A complex combination of hydrocarbons obtained by the treatment of low-melting slack wax with activated carbon for the removal of trace polar constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-155-9	97863-04-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-251-00-3	Slack wax (petroleum), low-melting, clay-treated; Slack wax; [A complex combination of hydrocarbons obtained by the treatment of low-melting petroleum slack wax with bentonite for removal of trace polar constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-156-4	97863-05-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-252-00-9	Slack wax (petroleum), low-melting, silicic acid-treated; Slack wax; [A complex combination of hydrocarbons obtained by the treatment of low-melting petroleum slack wax with silicic acid for the removal of trace polar constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-158-5	97863-06-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-253-00-4	Slack wax (petroleum), carbon-treated; Slack wax; [A complex combination of hydrocarbons obtained by treatment of petroleum slack wax with activated charcoal for the removal of trace polar constituents and impurities.]	309-723-9	100684-49-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-254-00-X	Petrolatum; Petrolatum; [A complex combination of hydrocarbons obtained as a semi-solid from dewaxing paraffinic residual oil. It consists predominantly of saturated crystalline and liquid hydrocarbons having carbon numbers predominantly greater than C ₂₅ .]	232-373-2	8009-03-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-255-00-5	Petrolatum (petroleum), oxidized; Petrolatum; [A complex combination of organic compounds, predominantly high molecular weight carboxylic acids, obtained by the air oxidation of petrolatum.]	265-206-7	64743-01-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-256-00-0	Petrolatum (petroleum), alumina-treated; Petrolatum; [A complex combination of hydrocarbons obtained when petrolatum is treated with Al ₂ O ₃ to remove polar components and impurities. It consists predominantly of saturated, crystalline, and liquid hydrocarbons having carbon numbers predominantly greater than C ₂₅ .]	285-098-5	85029-74-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-257-00-6	Petrolatum (petroleum), hydrotreated; Petrolatum; [A complex combination of hydrocarbons obtained as a semi-solid from dewaxed paraffinic residual oil treated with hydrogen in the presence of a catalyst. It consists predominantly of saturated microcrystalline and liquid hydrocarbons having carbon numbers predominantly greater than C ₂₀ .]	295-459-9	92045-77-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-258-00-1	Petrolatum (petroleum), carbon-treated; Petrolatum; [A complex combination of hydrocarbons obtained by the treatment of petroleum petrolatum with activated carbon for the removal of trace polar constituents and impurities. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly greater than C ₂₀ .]	308-149-6	97862-97-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-259-00-7	Petrolatum (petroleum), silicic acid-treated; Petrolatum; [A complex combination of hydrocarbons obtained by the treatment of petroleum petrolatum with silicic acid for the removal of trace polar constituents and impurities. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly greater than C ₂₀ .]	308-150-1	97862-98-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-260-00-2	Petrolatum (petroleum), clay-treated; Petrolatum; [A complex combination of hydrocarbons obtained by treatment of petrolatum with bleaching earth for the removal of traces of polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of greater than C ₂₅ .]	309-706-6	100684-33-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-261-00-8	Gasoline, natural; Low boiling point naphtha; [A complex combination of hydrocarbons separated from natural gas by processes such as refrigeration or absorption. It consists predominantly of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₈ and boiling in the range of approximately minus 20 °C to 120 °C (-4°F to 248°F).]	232-349-1	8006-61-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-262-00-3	Naphtha; Low boiling point naphtha; [Refined, partly refined, or unrefined petroleum products by the distillation of natural gas. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₆ and boiling in the range of approximately 100 °C to 200 °C (212°F to 392°F).]	232-443-2	8030-30-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-263-00-9	Ligroine; Low boiling point naphtha; [A complex combination of hydrocarbons obtained by the fractional distillation of petroleum. This fraction boils in a range of approximately 20 °C to 135 °C (58°F to 275°F).]	232-453-7	8032-32-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-264-00-4	Naphtha (petroleum), heavy straight-run; Low boiling point naphtha; [A complex combination of hydrocarbons produced by distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₂ and boiling in the range of approximately 65 °C to 230 °C (149°F to 446°F).]	265-041-0	64741-41-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-265-00-X	Naphtha (petroleum), full-range straight-run; Low boiling point naphtha; [A complex combination of hydrocarbons produced by distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately minus 20 °C to 220 °C (-4°F to 428°F).]	265-042-6	64741-42-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-266-00-5	Naphtha (petroleum), light straight-run; Low boiling point naphtha; [A complex combination of hydrocarbons produced by distillation of crude oil. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₀ and boiling in the range of approximately minus 20 °C to 180 °C (-4°F to 356°F).]	265-046-8	64741-46-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-267-00-0	Solvent naphtha (petroleum), light aliph.; Low boiling point naphtha; [A complex combination of hydrocarbons obtained from the distillation of crude oil or natural gasoline. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₀ and boiling in the range of approximately 35 °C to 160 °C (95°F to 320°F).]	265-192-2	64742-89-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-268-00-6	Distillates (petroleum), straight-run light; Low boiling point naphtha; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₇ and boiling in the range of approximately - 88 °C to 99 °C (- 127°F to 210°F).]	270-077-5	68410-05-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-269-00-1	Gasoline, vapor-recovery; Low boiling point naphtha; [A complex combination of hydrocarbons separated from the gases from vapor recovery systems by cooling. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately - 20 °C to 196 °C (-4°F to 384°F).]	271-025-4	68514-15-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-270-00-7	Gasoline, straight-run, topping-plant; Low boiling point naphtha; [A complex combination of hydrocarbons produced from the topping plant by the distillation of crude oil. It boils in the range of approximately 36,1 °C to 193,3 °C (97°F to 380°F).]	271-727-0	68606-11-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-271-00-2	Naphtha (petroleum), unsweetened; Low boiling point naphtha; [A complex combination of hydrocarbons produced from the distillation of naphtha streams from various refinery processes. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₂ and boiling in the range of approximately 0 °C to 230 °C (25°F to 446°F).]	272-186-3	68783-12-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-272-00-8	Distillates (petroleum), light straight-run gasoline fractionation stabilizer overheads; Low boiling point naphtha; [A complex combination of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₆ .]	272-931-2	68921-08-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-273-00-3	Naphtha (petroleum), heavy straight run, arom.-contg.; Low boiling point naphtha; [A complex combination of hydrocarbons obtained from a distillation process of crude petroleum. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₈ through C ₁₂ and boiling in the range of approximately 130 °C to 210 °C (266°F to 410°F).]	309-945-6	101631-20-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-274-00-9	Naphtha (petroleum), full-range alkylate; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C ₃ through C ₅ . It consist of predominantly branched chain saturated hydro-carbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 90 °C to 220 °C (194°F to 428°F).]	265-066-7	64741-64-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-275-00-4	Naphtha (petroleum), heavy alkylate; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C ₃ to C ₅ . It consists of predominantly branched chain saturated hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₂ and boiling in the range of approximately 150 °C to 220 °C (302°F to 428°F).]	265-067-2	64741-65-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-276-00-X	Naphtha (petroleum), light alkylate; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C ₃ through C ₅ . It consists of predominantly branched chain saturated hydro-carbons having carbon numbers predominantly in the range of C ₇ through C ₁₀ and boiling in the range of aproximately 90 °C to 160 °C (194°F to 320°F).]	265-068-8	64741-66-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-277-00-5	Naphtha (petroleum), isomerization; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained from catalytic isomerization of straight chain paraffinic C ₄ through C ₆ hydrocarbons. It consists predominantly of saturated hydrocarbons such as isobutane, isopentane, 2,2-dimethylbutane, 2-methylpentane, and 3-methylpentane.]	265-073-5	64741-70-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-278-00-0	Naphtha (petroleum), solvent-refined light; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₁ and boiling in the range of approximately 35 °C to 190 °C (95°F to 374°F).]	265-086-6	64741-84-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-279-00-6	Naphtha (petroleum), solvent-refined heavy; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-095-5	64741-92-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-280-00-1	Raffinates (petroleum), catalytic reformer ethylene glycol-water countercurrent exts.; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinate from the UDEX extraction process on the catalytic reformer stream. It consists of saturated hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₉ .]	270-088-5	68410-71-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-281-00-7	Raffinates (petroleum), reformer, Lurgi unit-sepd.; Low boiling point modified naphtha; [The complex combination of hydrocarbons obtained as a raffinate from a Lurgi separation unit. It consists predominantly of non-aromatic hydrocarbons with various small amounts of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₈ .]	270-349-3	68425-35-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-282-00-2	Naphtha (petroleum), full-range alkylate, butane-contg.; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by the distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C ₃ through C ₅ . It consists of predominantly branched chain saturated hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ with some butanes and boiling in the range of approximately 35 °C to 200 °C (95°F to 428°F).]	271-267-0	68527-27-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-283-00-8	Distillates (petroleum), naphtha steam cracking-derived, solvent-refined light hydrotreated; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinates from a solvent extraction process of hydrotreated light distillate from steam-cracked naphtha.]	295-315-5	91995-53-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-284-00-3	Naphtha (petroleum), C ₄₋₁₂ butane-alkylate, isooctane-rich; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by alkylation of butanes. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₂ , rich in isooctane, and boiling in the range of approximately 35 °C to 210 °C (95°F to 410°F).]	295-430-0	92045-49-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-285-00-9	Hydrocarbons, hydrotreated light naphtha distillates, solvent-refined; Low boiling point modified naphtha; [A combination of hydrocarbons obtained from the distillation of hydrotreated naphtha followed by a solvent extraction and distillation process. It consists predominantly of saturated hydrocarbons boiling in the range of approximately 94 °C to 99 °C (201°F to 210°F).]	295-436-3	92045-55-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-286-00-4	Naphtha (petroleum), isomerization, C ₆ -fraction; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by distillation of a gasoline which has been catalytically isomerized. It consists predominantly of hexane isomers boiling in the range of approximately 60 °C to 66 °C (140°F to 151°F).]	295-440-5	92045-58-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-287-00-X	Hydrocarbons, C ₆₋₇ , naphtha-cracking, solvent-refined; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by the sorption of benzene from a catalytically fully hydrogenated benzene-rich hydrocarbon cut that was distillatively obtained from prehydrogenated cracked naphtha. It consists predominantly of paraffinic and naphthenic hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₇ and boiling in the range of approximately 70 °C to 100 °C (158°F to 212°F).]	295-446-8	92045-64-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-288-00-5	Hydrocarbons, C ₆ -rich, hydrotreated light naphtha distillates, solvent-refined; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by distillation of hydrotreated naphtha followed by solvent extraction. It consists predominantly of saturated hydrocarbons and boiling in the range of approximately 65 °C to 70 °C (149°F to 158°F).]	309-871-4	101316-67-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-289-00-0	Naphtha (petroleum), heavy catalytic cracked; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by a distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₂ and boiling in the range of approximately 65 °C to 230 °C (148°F to 446°F). It contains a relatively large proportion of unsaturated hydrocarbons.]	265-055-7	64741-54-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-290-00-6	Naphtha (petroleum), light catalytic cracked; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F). It contains a relatively large proportion of unsaturated hydrocarbons.]	265-056-2	64741-55-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-291-00-1	Hydrocarbons, C ₃₋₁₁ , catalytic cracker distillates; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillations of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₁₁ and boiling in a range approximately up to 204 °C (400°F).]	270-686-6	68476-46-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-292-00-7	Naphtha (petroleum), catalytic cracked light distd.; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁ through C ₅ .]	272-185-8	68783-09-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-293-00-2	Distillates (petroleum), naphtha steam cracking-derived, hydrotreated light arom.; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons obtained by treating a light distillate from steam-cracked naphtha. It consists predom-inantly of aromatic hydrocarbons.]	295-311-3	91995-50-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-294-00-8	Naphtha (petroleum), heavy catalytic cracked, sweetened; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons obtained by subjecting a catalytic cracked petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₂ and boiling in the range of approximately 60 °C to 200 °C (140°F to 392°F).]	295-431-6	92045-50-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-295-00-3	Naphtha (petroleum), light catalytic cracked sweetened; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons obtained by subjecting naphtha from a catalytic cracking process to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons boiling in a range of approximately 35 °C to 210 °C (95°F to 410°F).]	295-441-0	92045-59-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-296-00-9	Hydrocarbons, C ₈₋₁₂ , catalytic-cracking, chem. neutralized; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of a cut from the catalytic cracking process, having undergone an alkaline washing. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₈ through C ₁₂ and boiling in the range of approximately 130 °C to 210 °C (266°F to 410°F).]	295-794-0	92128-94-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-297-00-4	Hydrocarbons, C ₈₋₁₂ , catalytic cracker distillates; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons obtained by distillation of products from a catalytic cracking process. It consists pre-dominantly of hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₁₂ and boiling in the range of approximately 140 °C to 210 °C (284°F to 410°F).]	309-974-4	101794-97-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-298-00-X	Hydrocarbons, C ₈₋₁₂ , catalytic cracking, chem. neutralized, sweetened; Low boiling point cat-cracked naphtha	309-987-5	101896-28-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-299-00-5	Naphtha (petroleum), light catalytic reformed; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced from the distillation of products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₁ and boiling in the range of approximately 35 °C to 190 °C (95°F to 374°F). It contains a relatively large proportion of aromatic and branched chain hydrocarbons. This stream may contain 10 vol. % or more benzene.]	265-065-1	64741-63-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-300-00-9	Naphtha (petroleum), heavy catalytic reformed; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced from the distillation of products from a catalytic reforming process. It consists of predominantly aromatic hydrocarbons having numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-070-9	64741-68-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-301-00-4	Distillates (petroleum), catalytic reformed depentanizer; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons from the distillation of products from a catalytic reforming process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₆ and boiling in the range of approximately - 49 °C to 63 °C - 57°F to 145°F].]	270-660-4	68475-79-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-302-00-X	Hydrocarbons, C ₂₋₆ , C ₆₋₈ catalytic reformer; Low boiling point cat-reformed naphtha	270-687-1	68476-47-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-303-00-5	Residues (petroleum), C ₆₋₈ catalytic reformer; Low boiling point cat-reformed naphtha; [A complex residuum from the catalytic reforming of C ₆₋₈ feed. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₆ .]	270-794-3	68478-15-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-304-00-0	Naphtha (petroleum), light catalytic reformed, arom.-free; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained from distillation of products from a catalytic reforming process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₈ and boiling in the range of approximately 35 °C to 120 °C (95°F to 248°F). It contains a relatively large proportion of branched chain hydrocarbons with the aromatic components removed.]	270-993-5	68513-03-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-305-00-6	Distillates (petroleum), catalytic reformed straight-run naphtha overheads; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by the catalytic reforming of straight-run naphtha followed by the fractionation of the total effluent. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₆ .]	271-008-1	68513-63-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-306-00-1	Petroleum products, hydrofiner-powerformer reformates; Low boiling point cat-reformed naphtha; [The complex combination of hydrocarbons obtained in a hydrofiner-powerformer process and boiling in a range of approximately 27 °C to 210 °C (80°F to 410°F).]	271-058-4	68514-79-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-307-00-7	Naphtha (petroleum, full-range reformed; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced by the distillation of the products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₂ and boiling in the range of approximately 35 °C to 230 °C (95°F to 446°F).]	272-895-8	68919-37-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-308-00-2	Naphtha (petroleum), catalytic reformed; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₂ and boiling in the range of approximately 30 °C to 220 °C (90°F to 430°F). It contains a relatively large proportion of aromatic and branched chain hydrocarbons. This stream may contain 10 vol.% or more benzene.]	273-271-8	68955-35-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-309-00-8	Distillates (petroleum), catalytic reformed hydrotreated light, C ₈₋₁₂ arom. fraction; Low boiling point cat-reformed naphtha; [A complex combination of alkylbenzenes obtained by the catalytic reforming of petroleum naphtha. It consists predominantly of alkylbenzenes having carbon numbers predominantly in the range of C ₈ through C ₁₀ and boiling in the range of approximately 160 °C to 180 °C (320°F to 356°F).]	285-509-8	85116-58-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-310-00-3	Aromatic hydrocarbons, C ₈ , catalytic reforming-derived; Low boiling point cat-reformed naphtha	295-279-0	91995-18-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-311-00-9	Aromatic hydrocarbons, C ₇₋₁₂ , C ₈ -rich; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by separation from the platformate-containing fraction. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ (primarily C ₈) and can contain nonaromatic hydrocarbons, both boiling in the range of approximately 130 °C to 200 °C (266°F to 392°F).]	297-401-8	93571-75-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-312-00-4	Gasoline, C ₅₋₁₁ , high-octane stabilized reformed; Low boiling point cat-reformed naphtha; [A complex high octane combination of hydrocarbons obtained by the catalytic dehydrogenation of a predominantly naphthenic naphtha. It consists predominantly of aromatics and non-aromatics having carbon numbers predominantly in the range of C ₅ through C ₁₁ and boiling in the range of approximately 45 °C to 185 °C (113°F to 365°F).]	297-458-9	93572-29-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-313-00-X	Hydrocarbons, C ₇₋₁₂ , C _{>9} -arom.-rich, reforming heavy fraction; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by separation from the platformate-containing fraction. It consists predominantly of nonaromatic hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 120 °C to 210 °C (248°F to 380°F) and C ₉ and higher aromatic hydrocarbons.]	297-465-7	93572-35-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-314-00-5	Hydrocarbons, C ₅₋₁₁ , nonaroms.-rich, reforming light fraction; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by separation from the platformate-containing fraction. It consists predominantly of nonaromatic hydrocarbons having carbon numbers predominantly in the range of C ₅ to C ₁₁ and boiling in the range of approximately 35 °C to 125 °C (94°F to 257°F), benzene and toluene.]	297-466-2	93572-36-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-315-00-0	Foots oil (petroleum), silicic acid-treated; Foots oil; [A complex combination of hydrocarbons obtained by the treatment of Foots oil with silicic acid for removal of trace constituents and impurities. It consists predominantly of straight chain hydrocarbons having carbon numbers predominantly greater than C ₁₂ .]	308-127-6	97862-77-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-316-00-6	Naphtha (petroleum), light thermal cracked; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons from distillation of products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₈ and boiling in the range of approximately minus 10 °C to 130 °C (14°F to 266°F).]	265-075-6	64741-74-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-317-00-1	Naphtha (petroleum), heavy thermal cracked; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons from distillation of the products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₂ and boiling in the range of approximately 65 °C to 220 °C (148°F to 428°F).]	265-085-0	64741-83-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-318-00-7	Distillates (petroleum), heavy arom.; Low boiling point thermally cracked naphtha; [The complex combination of hydrocarbons from the distillation of the products from the thermal cracking of ethane and propane. This higher boiling fraction consists predominantly of C ₅ -C ₇ aromatic hydrocarbons with some unsaturated aliphatic hydrocarbons having carbon number predominantly of C ₅ . This stream may contain benzene.]	267-563-4	67891-79-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-319-00-2	Distillates (petroleum), light arom.; Low boiling point thermally cracked naphtha; [The complex combination of hydrocarbons from the distillation of the products from the thermal cracking of ethane and propane. This lower boiling fraction consists predominantly of C ₅ -C ₇ aromatic hydrocarbons with some unsaturated aliphatic hydrocarbons having a carbon number predominantly of C ₅ . This stream may contain benzene.]	267-565-5	67891-80-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-320-00-8	Distillates (petroleum), naphtha-raffinate pyrolyzate-derived, gasoline-blending; Low boiling point thermally cracked naphtha; [The complex combination of hydrocarbons obtained by the pyrolysis fractionation at 816 °C (1500°F) of naphtha and raffinate. It consists predominantly of hydrocarbons having a carbon number of C ₉ and boiling at approximately 204 °C (400°F).]	270-344-6	68425-29-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-321-00-3	Aromatic hydrocarbons, C ₆₋₈ , naphtha-raffinate pyrolyzate-derived; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons obtained by the fractionation pyrolysis at 816 °C (1500°F) of naphtha and raffinate. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₈ , including benzene.]	270-658-3	68475-70-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-322-00-9	Distillates (petroleum), thermal cracked naphtha and gas oil; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by distillation of thermally cracked naphtha and/or gas oil. It consists predominantly of olefinic hydrocarbons having a carbon number of C ₅ and boiling in the range of approximately 33 °C to 60 °C (91°F to 140°F).]	271-631-9	68603-00-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-323-00-4	Distillates (petroleum), thermal cracked naphtha and gas oil, C ₅ -dimer-contg.; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by the extractive distillation of thermal cracked naphtha and/or gas oil. It consists predominantly of hydrocarbons having a carbon number of C ₅ with some dimerized C ₅ olefins and boiling in the range of approximately 33 °C to 184 °C (91°F to 363°F).]	271-632-4	68603-01-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-324-00-X	Distillates (petroleum), thermal cracked naphtha and gas oil, extractive; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by the extractive distillation of thermal cracked naphtha and/or gas oil. It consists of paraffinic and olefinic hydrocarbons, predominantly isoamylenes such as 2-methyl-1-butene and 2-methyl-2-butene and boiling in the range of approximately 31 °C to 40 °C (88°F to 104°F).]	271-634-5	68603-03-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-325-00-5	Distillates (petroleum), light thermal cracked, debutanized arom.; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a thermal cracking process. It consists predominantly of aromatic hydrocarbons, primarily benzene.]	273-266-0	68955-29-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-326-00-0	Naphtha (petroleum), light thermal cracked, sweetened; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate from the high temperature thermal cracking of heavy oil fractions to a sweetening process to convert mercaptans. It consists predominantly of aromatics, olefins and saturated hydrocarbons boiling in the range of approximately 20 °C to 100 °C (68°F to 212°F).]	295-447-3	92045-65-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-327-00-6	Naphtha (petroleum), hydrotreated heavy; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₃ and boiling in the range of approximately 65 °C to 230 °C (149°F to 446°F).]	265-150-3	64742-48-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-328-00-1	Naphtha (petroleum), hydrotreated light; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	265-151-9	64742-49-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-329-00-7	Naphtha (petroleum), hydrodesulfurized light; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	265-178-6	64742-73-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-330-00-2	Naphtha (petroleum), hydrodesulfurized heavy; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-185-4	64742-82-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-331-00-8	Distillates (petroleum), hydrotreated middle, intermediate boiling; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by the distillation of products from a middle distillate hydrotreating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₀ and boiling in the range of approximately 127 °C to 188 °C (262°F to 370°F).]	270-092-7	68410-96-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-332-00-3	Distillates (petroleum), light distillate hydrotreating process, low-boiling; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by the distillation of products from the light distillate hydrotreating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₉ and boiling in the range of approximately 3 °C to 194 °C (37°F to 382°F).]	270-093-2	68410-97-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-333-00-9	Distillates (petroleum), hydrotreated heavy naphtha, deisohexanizer overheads; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by distillation of the products from a heavy naphtha hydrotreating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₆ and boiling in the range of approximately - 49 °C to 68 °C (- 57°F to 155°F).]	270-094-8	68410-98-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-334-00-4	Solvent naphtha (petroleum), light arom., hydrotreated; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₁₀ and boiling in the range of approximately 135 °C to 210 °C (275°F to 410°F).]	270-988-8	68512-78-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-335-00-X	Naphtha (petroleum), hydrodesulfurized thermal cracked light; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by fractionation of hydrodesulfurized thermal cracker distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₅ to C ₁₁ and boiling in the range of approximately 23 °C to 195 °C (73°F to 383°F).]	285-511-9	85116-60-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-336-00-5	Naphtha (petroleum), hydrotreated light, cycloalkane-contg.; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from the distillation of a petroleum fraction. It consists predominantly of alkanes and cycloalkanes boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	285-512-4	85116-61-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-337-00-0	Naphtha (petroleum), heavy steam-cracked, hydrogenated; Low boiling point hydrogen treated naphtha	295-432-1	92045-51-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-338-00-6	Naphtha (petroleum), hydrodesulfurized full-range; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately 30 °C to 250 °C (86°F to 482°F).]	295-433-7	92045-52-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-339-00-1	Naphtha (petroleum), hydrotreated light steam-cracked; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction, derived from a pyrolysis process, with hydrogen in the presence of a catalyst. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₁ and boiling in the range of approximately 35 °C to 190 °C (95°F to 374°F).]	295-438-4	92045-57-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-340-00-7	Hydrocarbons, C ₄₋₁₂ , naphtha-cracking, hydrotreated; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by distillation from the product of a naphtha steam cracking process and subsequent catalytic selective hydrogenation of gum formers. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₂ and boiling in the range of approximately 30 °C to 230 °C (86°F to 446°F).]	295-443-1	92045-61-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-341-00-2	Solvent naphtha (petroleum), hydrotreated light naphthenic; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists predominantly of cycloparaffinic hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₇ and boiling in the range of approximately 73 °C to 85 °C (163°F to 185°F).]	295-529-9	92062-15-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-342-00-8	Naphtha (petroleum), light steam-cracked, hydrogenated; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons produced from the separation and subsequent hydrogenation of the products of a steam-cracking process to produce ethylene. It consists predominantly of saturated and unsaturated paraffins, cyclic paraffins and cyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₀ and boiling in the range of approximately 50 °C to 200 °C (122°F to 392°F). The proportion of benzene hydrocarbons may vary up to 30 wt. % and the stream may also contain small amounts of sulphur and oxygenated compounds.]	296-942-7	93165-55-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-343-00-3	Hydrocarbons, C ₆₋₁₁ , hydrotreated, dearomatized; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained as solvents which have been subjected to hydrotreatment in order to convert aromatics to naphthenes by catalytic hydrogenation.]	297-852-0	93763-33-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-344-00-9	Hydrocarbons, C ₉₋₁₂ , hydrotreated, dearomatized; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained as solvents which have been subjected to hydrotreatment in order to convert aromatics to naphthenes by catalytic hydrogenation.]	297-853-6	93763-34-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-345-00-4	Stoddard solvent; Low boiling point naphtha – unspecified; [A colourless, refined petroleum distillate that is free from rancid or objectionable odors and that boils in a range of approximately 300°F to 400°F.]	232-489-3	8052-41-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-346-00-X	Natural gas condensates (petroleum); Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons separated as a liquid from natural gas in a surface separator by retrograde condensation. It consists mainly of hydrocarbons having carbon numbers predominantly in the range of C ₂ to C ₂₀ . It is a liquid at atmospheric temperature and pressure.]	265-047-3	64741-47-5	Carc. Cat. 2; R4 Xn; R65	T R: 45-65 S: 53-45		H P
649-347-00-5	Natural gas (petroleum), raw liq. mix; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons separated as a liquid from natural gas in a gas recycling plant by processes such as refrigeration or absorption. It consists mainly of saturated aliphatic hydrocarbons having carbon numbers in the range of C ₂ through C ₈ .]	265-048-9	64741-48-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-348-00-0	Naphtha (petroleum), light hydrocracked; Low boiling naphtha – unspecified; [A complex combination of hydrocarbons from distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₀ , and boiling in the range of approximately minus 20 °C to 180 °C (-4°F to 356°F).]	265-071-4	64741-69-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-349-00-6	Naphtha (petroleum), heavy hydrocracked; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons from distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₂ , and boiling in the range of approximately 65 °C to 230 °C (148°F to 446°F).]	265-079-8	64741-78-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-350-00-1	Naphtha (petroleum), sweetened; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum naphtha to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₂ and boiling in the range of approximately minus 10 °C to 230 °C (14°F to 446°F).]	265-089-2	64741-87-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-351-00-7	Naphtha (petroleum), acid-treated; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-115-2	64742-15-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-352-00-2	Naphtha (petroleum), chemically neutralized heavy; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₂ and boiling in the range of approximately 65 °C to 230 °C (149°F to 446°F).]	265-122-0	64742-22-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-353-00-8	Naphtha (petroleum), chemically neutralized light; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	265-123-6	64742-23-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-354-00-3	Naphtha (petroleum), catalytic dewaxed; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained from the catalytic dewaxing of a petroleum fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₂ and boiling in the range of approximately 35 °C to 230 °C (95°F to 446°F).]	265-170-2	64742-66-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-355-00-9	Naphtha (petroleum), light steam-cracked; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by the distillation of the products from a steam cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F). This stream is likely to contain 10 vol. % or more benzene.]	265-187-5	64742-83-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-356-00-4	Solvent naphtha (petroleum), light arom.; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained from distillation of aromatic streams. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₁₀ and boiling in the range of approximately 135 °C to 210 °C (275°F to 410°F).]	265-199-0	64742-95-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-357-00-X	Aromatic hydrocarbons, C ₆₋₁₀ , acid-treated, neutralized; Low boiling point naphtha – unspecified	268-618-5	68131-49-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-358-00-5	Distillates (petroleum), C ₃₋₅ , 2-methyl-2-butene-rich; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons from the distillation of hydrocarbons usually ranging in carbon numbers from C ₃ through C ₅ , predominantly isopentane and 3-methyl-1-butene. It consists of saturated and unsaturated hydrocarbons having carbon numbers in the range of C ₃ through C ₅ , predominantly 2-methyl-2-butene.]	270-725-7	68477-34-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-359-00-0	Distillates (petroleum), polymd. steam-cracked petroleum distillates, C ₅₋₁₂ fraction; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained from the distillation of polymerized steam-cracked petroleum distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₂ .]	270-735-1	68477-50-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-360-00-6	Distillates (petroleum), steam-cracked, C ₅₋₁₂ fraction; Low boiling point naphtha – unspecified; [A complex combination of organic compounds obtained by the distillation of products from a steam cracking process. It consists of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₁₂ .]	270-736-7	68477-53-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-361-00-1	Distillates (petroleum), steam-cracked, C ₅₋₁₀ fraction, mixed with light steam-cracked petroleum naphtha C ₅ fraction; Low boiling point naphtha – unspecified	270-738-8	68477-55-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-362-00-7	Extracts (petroleum), cold-acid, C ₄₋₆ ; Low boiling point naphtha – unspecified; [A complex combination of organic compounds produced by cold acid unit extraction of saturated and unsaturated aliphatic hydrocarbons usually ranging in carbon numbers from C ₃ through C ₆ , predominantly pentanes and amylenes. It consists predominantly of saturated and unsaturated hydrocarbons having carbon numbers in the range of C ₄ through C ₆ , predominantly C ₅ .]	270-741-4	68477-61-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-363-00-2	Distillates (petroleum), depentanizer overheads; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained from a catalytic cracked gas stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₆ .]	270-771-8	68477-89-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-364-00-8	Residues (petroleum), butane splitter bottoms; Low boiling point naphtha – unspecified; [A complex residuum from the distillation of butane stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₆ .]	270-791-7	68478-12-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-365-00-3	Residual oils (petroleum), deisobutanizer tower; Low boiling point naphtha – unspecified; [A complex residuum from the atmospheric distillation of the butane-butylene stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₆ .]	270-795-9	68478-16-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-366-00-9	Naphtha (petroleum), full-range coker; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons produced by the distillation of products from a fluid coker. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₅ and boiling in the range of approximately 43 °C to 250 °C (110°F to 500°F).]	270-991-4	68513-02-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-367-00-4	Naphtha (petroleum), steam-cracked middle arom.; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons produced by the distillation of products from a steam-cracking process. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 130 °C to 220 °C (266°F to 428°F).]	271-138-9	68516-20-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-368-00-X	Naphtha (petroleum), clay-treated full-range straight-run; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons resulting from treatment of full-range straight-run naphtha with natural or modified clay, usually in a percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₁ and boiling in the range of approximately - 20 °C to 220 °C (-4°F to 429°F).]	271-262-3	68527-21-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-369-00-5	Naphtha (petroleum), clay-treated light straight-run; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons resulting from treatment of light straight-run naphtha with a natural or modified clay, usually in a percolation process to remove the trace amounts of polar compounds and impurities, present. It consists of hydro-carbons having carbon numbers predominantly in the range of C ₇ through C ₁₀ and boiling in the range of approximately 93 °C to 180 °C (200°F to 356°F).]	271-263-9	68527-22-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-370-00-0	Naphtha (petroleum), light steam-cracked arom.; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons produced by distillation of products from a steam-cracking process. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₉ and boiling in the range of approximately 110 °C to 165 °C (230°F to 329°F).]	271-264-4	68527-23-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-371-00-6	Naphtha (petroleum), light steam-cracked, debenzenized; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons produced by distillation of products from a steam-cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₁₂ and boiling in the range of approximately 80 °C to 218 °C (176°F to 424°F).]	271-266-5	68527-26-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-372-00-1	Naphtha (petroleum), arom.-contg.; Low boiling point naphtha – unspecified	271-635-0	68603-08-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-373-00-7	Gasoline, pyrolysis, debutanizer bottoms; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained from the fractionation of depropanizer bottoms. It consists of hydrocarbons having carbon numbers predominantly greater than C ₅ .]	271-726-5	68606-10-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-374-00-2	Naphtha (petroleum), light, sweetened; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of saturated and unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₃ through C ₆ and boiling in the range of approximately - 20 °C to 100 °C (-4°F to 212°F).]	272-206-0	68783-66-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-375-00-8	Natural gas condensates; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons separated and/or condensed from natural gas during transportation and collected at the wellhead and/or from the production, gathering, transmission, and distribution pipelines in deeps, scrubbers, etc. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₈ .]	272-896-3	68919-39-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H J
649-376-00-3	Distillates (petroleum), naphtha unifier stripper; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons produced by stripping the products from the naphtha unifier. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C ₂ through C ₆ .]	272-932-8	68921-09-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-377-00-9	Naphtha (petroleum), catalytic reformed light, arom.-free fraction; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons remaining after removal of aromatic compounds from catalytic reformed light naphtha in a selective absorption process. It consists predominantly of paraffinic and cyclic compounds having carbon numbers predominantly in the range of C ₅ to C ₈ and boiling in the range of approximately 66 °C to 121 °C (151°F to 250°F).]	285-510-3	85116-59-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-378-00-4	Gasoline; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons consisting primarily of paraffins, cycloparaffins, aromatic and olefinic hydrocarbons having carbon numbers predominantly greater than C ₃ and boiling in the range of 30 °C to 260 °C (86°F to 500°F).]	289-220-8	86290-81-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-379-00-X	Aromatic hydrocarbons, C ₇₋₈ , dealkylation products, distn. residues; Low boiling point naphtha – unspecified	292-698-0	90989-42-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-380-00-5	Hydrocarbons, C ₄₋₆ , depentanizer lights, arom. hydrotreater; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained as first runnings from the depentanizer column before hydrotreatment of the aromatic charges. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₆ , predominantly pentanes and pentenes, and boiling in the range of approximately 25 °C to 40 °C (77°F to 104°F).]	295-298-4	91995-38-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-381-00-0	Distillates (petroleum), heat-soaked steam-cracked naphtha, C ₅ -rich; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by distillation of heat-soaked steam-cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₄ through C ₆ , predominantly C ₅ .]	295-302-4	91995-41-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-382-00-6	Extracts (petroleum), catalytic reformed light naphtha solvent; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained as the extract from the solvent extraction of a catalytically reformed petroleum cut. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₈ and boiling in the range of approximately 100 °C to 200 °C (212°F to 392°F).]	295-331-2	91995-68-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-383-00-1	Naphtha (petroleum), hydrodesulfurized light, dearomatized; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by distillation of hydrodesulfurized and dearomatized light petroleum fractions. It consists predominantly of C ₇ paraffins and cycloparaffins boiling in a range of approximately 90 °C to 100 °C (194°F to 212°F).]	295-434-2	92045-53-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-384-00-7	Naphtha (petroleum), light, C ₅ -rich, sweetened; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum naphtha to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₄ through C ₅ , predominantly C ₅ , and boiling in the range of approximately minus 10 °C to 35 °C (14°F to 95°F).]	295-442-6	92045-60-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-385-00-2	Hydrocarbons, C ₈₋₁₁ , naphtha-cracking, toluene cut; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by distillation from prehydrogenated cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₁₁ and boiling in the range of approximately 130 °C to 205 °C (266°F to 401°F).]	295-444-7	92045-62-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-386-00-8	Hydrocarbons, C ₄₋₁₁ , naphtha-cracking, arom.-free; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained from prehydrogenated cracked naphtha after distillative separation of benzene- and toluene-containing hydrocarbon cuts and a higher boiling fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range C ₄ through C ₁₁ and boiling in the range of approximately 30 °C to 205 °C (86°F to 401°F).]	295-445-2	92045-63-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-387-00-3	Naphtha (petroleum), light heat-soaked, steam-cracked; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by the fractionation of steam cracked naphtha after recovery from a heat soaking process. It consists predominantly of hydrocarbons having a carbon numbers predominantly in the range of C ₄ through C ₆ and boiling in the range of approximately 0 °C to 80 °C (32°F to 176°F).]	296-028-8	92201-97-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-388-00-9	Distillates (petroleum), C ₆ -rich; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained from the distillation of a petroleum feedstock. It consists predominantly of hydrocarbons having carbon numbers of C ₅ through C ₇ , rich in C ₆ , and boiling in the range of approximately 60 °C to 70 °C (140°F to 158°F).]	296-903-4	93165-19-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-389-00-4	Gasoline, pyrolysis, hydrogenated; Low boiling point naphtha-unspecified; [A distillation fraction from the hydrogenation of pyrolysis gasoline boiling in the range of approximately 20 °C to 200 °C (68°F to 392°F).]	302-639-3	94114-03-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-390-00-X	Distillates (petroleum), steam-cracked, C ₈₋₁₂ fraction, polymd., distn. lights; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by distillation of the polymerized C ₈ through C ₁₂ fraction from steam-cracked petroleum distillates. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₁₂ .]	305-750-5	95009-23-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-391-00-5	Extracts (petroleum) heavy naphtha solvent, clay-treated; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by the treatment of heavy naphthic solvent petroleum extract with bleaching earth. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₈ and boiling in the range of approximately 80 °C to 180 °C (175°F to 356°F).]	308-261-5	97926-43-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-392-00-0	Naphtha (petroleum), light steam-cracked, debenzenized, thermally treated; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by the treatment and distillation of debenzenized light steam-cracked petroleum naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 95 °C to 200 °C (203°F to 392°F).]	308-713-1	98219-46-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-393-00-6	Naphtha (petroleum), light steam-cracked, thermally treated; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by the treatment and distillation of light steam-cracked petroleum naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₆ and boiling in the range of approximately 35 °C to 80 °C (95°F to 176°F).]	308-714-7	98219-47-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-394-00-1	Distillates (petroleum), C ₇₋₉ , C ₈ -rich, hydrodesulfurized de-aromatized; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by the distillation of petroleum light fraction, hydrodesulfurized and dearomatized. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₇ through C ₉ , predominantly C ₈ paraffins and cycloparaffins, boiling in the range of approximately 120 °C to 130 °C (248°F to 266°F).]	309-862-5	101316-56-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-395-00-7	Hydrocarbons, C ₆₋₈ , hydrogenated sorption-dearomatized, toluene raffination; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained during the sorptions of toluene from a hydrocarbon fraction from cracked gasoline treated with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₈ and boiling in the range of approximately 80 °C to 135 °C (176°F to 275°F).]	309-870-9	101316-66-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-396-00-2	Naphtha (petroleum), hydrodesulfurized full-range coker; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by fractionation from hydrodesulfurized coker distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₅ to C ₁₁ and boiling in the range of approximately 23 °C to 196 °C (73°F to 385°F).]	309-879-8	101316-76-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-397-00-8	Naphtha (petroleum), sweetened light; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum naphtha to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₅ through C ₈ and boiling in the range of approximately 20 °C to 130 °C (68°F to 266°F).]	309-976-5	101795-01-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-398-00-3	Hydrocarbons, C ₃₋₆ , C ₅ -rich, steam-cracked naphtha; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by distillation of steam-cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C ₃ through C ₆ , predominantly C ₅ .]	310-012-0	102110-14-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-399-00-9	Hydrocarbons, C ₅ -rich, dicyclopentadiene-contg.; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by distillation of the products from a stream-cracking process. It consists predominantly of hydrocarbons having carbon numbers of C ₅ and dicyclopentadiene and boiling in the range of approximately 30 °C to 170 °C (86°F to 338°F).]	310-013-6	102110-15-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-400-00-2	Residues (petroleum), steam-cracked light, arom.; Low boiling point naphtha – unspecified; [A complex combination of hydrocarbons obtained by the distillation of the products of steam cracking or similar processes after taking off the very light products resulting in a residue starting with hydrocarbons having carbon numbers greater than C ₅ . It consists predominantly of aromatic hydrocarbons having carbon numbers greater than C ₅ and boiling above approximately 40 °C (104°F).]	310-057-6	102110-55-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-401-00-8	Hydrocarbons, C ≥ 5, C ₅₋₆ -rich; Low boiling point naphtha – unspecified	270-690-8	68476-50-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-402-00-3	Hydrocarbons, C ₅ -rich; Low boiling point naphtha – unspecified	270-695-5	68476-55-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-403-00-9	Aromatic hydrocarbons, C ₈₋₁₀ ; Low boiling point naphtha – unspecified	292-695-4	90989-39-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-404-00-4	Kerosine (petroleum); Straight run kerosine; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of approximately 150 °C to 290 °C (320°F to 554°F).]	232-366-4	8008-20-6	Xn; R65	Xn R: 65 S: (2-)23-24-62		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-405-00-X	Solvent naphtha (petroleum), medium aliph.; Straight run kerosine; [A complex combination of hydrocarbons obtained from the distillation of crude oil or natural gasoline. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₂ and boiling in the range of approximately 140 °C to 220 °C (284°F to 428°F).]	265-191-7	64742-88-7	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-406-00-5	Solvent naphtha (petroleum) heavy aliph.; Straight run kerosine; [A complex combination of hydrocarbons obtained from the distillation of crude oil or natural gasoline. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₁₆ and boiling in the range of approximately 190 °C to 290 °C (374°F to 554°F).]	265-200-4	64742-96-7	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-407-00-0	Kerosine (petroleum), straight-run wide-cut; Straight run kerosine; [A complex combination of hydrocarbons obtained as a wide cut hydrocarbon fuel cut from atmospheric distillation and boiling in the range of approximately 70 °C to 220 °C (158°F to 428°F).]	295-418-5	92045-37-9	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-408-00-6	Distillates (petroleum), steam-cracked; Cracked kerosine; [A complex combination of hydrocarbons obtained by the distillation of the products from a steam cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₆ and boiling in the range of approximately 90 °C to 290 °C (190°F to 554°F).]	265-194-3	64742-91-2	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-409-00-1	Distillates (petroleum), cracked stripped steam-cracked petroleum distillates, C ₈₋₁₀ fraction; Cracked kerosine; [A complex combination of hydrocarbons obtained by distilling cracked stripped steam-cracked distillates. It consists of hydro-carbons having carbon numbers in the range of C ₈ through C ₁₀ and boiling in the range of approximately 129 °C to 194 °C (264°F to 382°F).]	270-728-3	68477-39-4	Xn; R65	Xn R: 65 S: (2-)23-24-62		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-410-00-7	Distillates (petroleum), cracked stripped steam-cracked petroleum distillates, C ₁₀₋₁₂ fraction; Cracked kerosine; [A complex combination of hydrocarbons obtained by distilling cracked stripped steam-cracked distillates. It consists predominantly of aromatic hydrocarbons having carbon numbers in the range of C ₁₀ through C ₁₂ .]	270-729-9	68477-40-7	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-411-00-2	Distillates (petroleum), steam-cracked, C ₈₋₁₂ fraction; Cracked kerosine; [A complex combination of organic compounds obtained by the distillation of products from a steam cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₁₂ .]	270-737-2	68477-54-3	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-412-00-8	Kerosine (petroleum), hydrodesulfurized thermal cracked; Cracked kerosine; [A complex combination of hydrocarbons obtained by fractionation from hydrodesulfurized thermal cracker distillate. It consists predominantly of hydrocarbons predominantly in the range of C ₈ to C ₁₆ and boiling in the range of approximately 120 °C to 283 °C (284°F to 541°F).]	285-507-7	85116-55-8	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-413-00-3	Aromatic hydrocarbons, C _{≥10} , steam-cracking, hydrotreated; Cracked kerosine; [A complex combination of hydrocarbons produced by the distillation of the products from a steam cracking process treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly greater than C ₁₀ and boiling in the range of approximately 150 °C to 320 °C (302°F to 608°F).]	292-621-0	90640-98-5	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-414-00-9	Naphtha (petroleum), steam-cracked, hydrotreated, C ₉₋₁₀ -arom.-rich; Cracked kerosine; [A complex combination of hydrocarbons produced by the distillation of the products from a steam cracking process thereafter treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers in the range of C ₉ through C ₁₀ and boiling in the range of approximately 140 °C to 200 °C (284°F to 392°F).]	292-637-8	90641-13-7	Xn; R65	Xn R: 65 S: (2-)23-24-62		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-415-00-4	Distillates (petroleum), thermal-cracked, alkylarom. hydrocarbon-rich; Cracked kerosine; [A complex combination of hydrocarbons obtained by distillation of thermal-cracking heavy tars. It consists predominantly of highly alkylated aromatic hydrocarbons boiling in the range of approximately 100 °C to 250 °C (212°F to 482°F).]	309-866-7	101316-61-4	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-416-00-X	Distillates (petroleum), catalytic cracked heavy tar light; Cracked kerosine; [A complex combination of hydrocarbons obtained by distillation of catalytic cracking heavy tars. It consists predominantly of highly alkylated aromatic hydrocarbons boiling in the range of approximately 100 °C to 250 °C (212°F to 482°F).]	309-938-8	101631-13-4	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-417-00-5	Solvent naphtha (petroleum), hydrocracked heavy arom.; Cracked kerosine; [A complex combination of hydrocarbons obtained by the distillation of hydrocracked petroleum distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of approximately 235 °C to 290 °C (455°F to 554°F).]	309-881-9	101316-80-7	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-418-00-0	Distillates (petroleum), steam-cracked heavy tar light; Cracked kerosine; [A complex combination of hydrocarbons obtained by distillation of steam cracking heavy tars. It consists predominantly of highly alkylated aromatic hydrocarbons boiling in the range of approximately 100 °C to 250 °C (212°F to 482°F).]	309-940-9	101631-15-6	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-419-00-6	Distillates (petroleum), alkylate; Kerosine – unspecified; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C ₃ through C ₅ . It consists of predominantly branched chain saturated hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₁₇ and boiling in the range of approximately 205 °C to 320 °C (401°F to 608°F).]	265-074-0	64741-73-7	Xn; R65	Xn R: 65 S: (2-)23-24-62		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-420-00-1	Extracts (petroleum), heavy naphtha solvent; Kerosine – unspecified; [A complex combination of hydrocarbons obtained as the extract from a solvent extraction process. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₇ through C ₁₂ and boiling in the range of approximately 90 °C to 220 °C (194°F to 428°F).]	265-099-7	64741-98-6	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-421-00-7	Distillates (petroleum), chemically neutralized light; Kerosine – unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-132-5	64742-31-0	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-422-00-2	Distillates (petroleum), hydrotreated light; Kerosine – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-149-8	64742-47-8	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-423-00-8	Kerosine (petroleum), hydrodesulfurized; Kerosine – unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-184-9	64742-81-0	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-424-00-3	Solvent naphtha (petroleum), heavy arom.; Kerosine – unspecified; [A complex combination of hydrocarbons obtained from distillation of aromatic streams. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of approximately 165 °C to 290 °C (330°F to 554°F).]	265-198-5	64742-94-5	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-425-00-9	Naphtha (petroleum), heavy coker; Kerosine – unspecified; [A complex combination of hydrocarbons from the distillation of products from a fluid coker. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₆ through C ₁₅ and boiling in the range of approximately 157 °C to 288 °C (315°F to 550°F).]	269-778-9	68333-23-3	Xn; R65	Xn R: 65 S: (2-)23-24-62		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-426-00-4	Naphtha (petroleum), catalytic reformed hydrodesulfurized heavy, arom. fraction; Kerosine – unspecified; [A complex combination of hydrocarbons produced by fractionation from catalytically reformed hydrodesulfurized naphtha. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₇ to C ₁₃ and boiling in the range of approximately 98 °C to 218 °C (208°F to 424°F).]	285-508-2	85116-57-0	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-427-00-X	Kerosine (petroleum), sweetened; Kerosine – unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₁₆ and boiling in the range of 130 °C to 290 °C (266°F to 554°F).]	294-799-5	91770-15-9	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-428-00-5	Kerosine (petroleum), solvent-refined sweetened; Kerosine – unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by solvent refining and sweetening and boiling in the range of approximately 150 °C to 260 °C (302°F to 500°F).]	295-416-4	92045-36-8	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-429-00-0	Hydrocarbons, C ₉₋₁₆ , hydrotreated, dearomatized; Kerosine – unspecified; [A complex combination of hydrocarbons obtained as solvents which have been subjected to hydrotreatment in order to convert aromatics to naphthenes by catalytic hydrogenation.]	297-854-1	93763-35-0	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-430-00-6	Kerosine (petroleum), solvent-refined hydrodesulfurized; Kerosine – unspecified	307-033-2	97488-94-3	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-431-00-1	Distillates (petroleum), hydrodesulfurized full-range middle coker; Kerosine – unspecified; [A complex combination of hydrocarbons obtained by fractionation from hydrodesulfurized coker distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₈ through C ₁₆ and boiling in the range of approximately 120 °C to 283 °C (248°F to 541°F).]	309-864-6	101316-58-9	Xn; R65	Xn R: 65 S: (2-)23-24-62		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-432-00-7	Solvent naphtha (petroleum), hydrodesulfurized heavy arom.; Kerosine – unspecified; [A complex combination of hydrocarbons obtained by the catalytic hydrodesulfurization of a petroleum fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₁₃ and boiling in the range of approximately 180 °C to 240 °C (356°F to 464°F).]	309-882-4	101316-81-8	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-433-00-2	Solvent naphtha (petroleum), hydrodesulfurized medium; Kerosine – unspecified; [A complex combination of hydrocarbons obtained by the catalytic hydrodesulfurization of a petroleum fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₁₃ and boiling in the range of approximately 175 °C to 220 °C (347°F to 428°F).]	309-884-5	101316-82-9	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-434-00-8	Kerosine (petroleum), hydrotreated; Kerosine – unspecified; [A complex combination of hydrocarbons obtained from the distillation of petroleum and subsequent hydrotreatment. It consists predominantly of alkanes, cycloalkanes and alkyl-benzenes having carbon numbers predominantly in the range of C ₁₂ through C ₁₆ and boiling in the range of approximately 230 °C to 270 °C (446°F to 518°F).]	309-944-0	101631-19-0	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-435-00-3	Distillates (petroleum), light catalytic cracked; Cracked gasoil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₂₅ and boiling in the range of approximately 150 °C to 400 °C (302°F to 752°F). It contains a relatively large proportion of bicyclic aromatic hydrocarbons.]	265-060-4	64741-59-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-436-00-9	Distillates (petroleum), intermediate catalytic cracked; Cracked gasoil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ through C ₃₀ and boiling in the range of approximately 205 °C to 450 °C (401°F to 842°F). It contains a relatively large proportion of tricyclic aromatic hydrocarbons.]	265-062-5	64741-60-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-437-00-4	Distillates (petroleum), light hydrocracked; Cracked gasoil; [A complex combination of hydrocarbons from distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₁₈ and boiling in the range of approximately 160 °C to 320 °C (320°F to 608°F).]	265-078-2	64741-77-1	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H
649-438-00-X	Distillates (petroleum), light thermal cracked; Cracked gasoil; [A complex combination of hydrocarbons from the distillation of the products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₂₂ and boiling in the range of approximately 160 °C to 370 °C (320°F to 698°F).]	265-084-5	64741-82-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-439-00-5	Distillates (petroleum), hydrosulfurized light catalytic cracked; Cracked gasoil; [A complex combination of hydrocarbons obtained by treating light catalytic cracked distillates with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₉ through C ₂₅ and boiling in the range of approximately 150 °C to 400 °C (302°F to 752°F). It contains a relatively large proportion of bicyclic aromatic hydrocarbons.]	269-781-5	68333-25-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-440-00-0	Distillates (petroleum), light steam-cracked naphtha; Cracked gasoil; [A complex combination of hydrocarbons from the multiple distillation of products from a steam cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₀ through C ₁₈ .]	270-662-5	68475-80-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-441-00-6	Distillates (petroleum), cracked steam-cracked petroleum distillates; Cracked gasoil; [A complex combination of hydrocarbons produced by distilling cracked steam cracked distillate and/or its fractionation products. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₀ to low molecular weight polymers.]	270-727-8	68477-38-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-442-00-1	Gas oils (petroleum), steam-cracked; Cracked gasoil; [A complex combination of hydrocarbons produced by distillation of the products from a steam cracking process. It consists of hydrocarbons having carbon numbers predominantly greater than C ₉ and boiling in the range of from approximately 205 °C to 400 °C (400°F to 752°F).]	271-260-2	68527-18-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-443-00-7	Distillates (petroleum), hydrodesulfurized thermal cracked middle; Cracked gasoil; [A complex combination of hydrocarbons obtained by fractionation from hydrodesulfurized thermal cracker distillate stocks. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₁ to C ₂₅ and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	285-505-6	85116-53-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-444-00-2	Gas oils (petroleum), thermal-cracked, hydrodesulfurized; Cracked gasoil	295-411-7	92045-29-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-445-00-8	Residues (petroleum), hydrogenated steam-cracked naphtha; Cracked gasoil; [A complex combination of hydrocarbons obtained as a residual fraction from the distillation of hydrotreated steam-cracked naphtha. It consists predominantly of hydrocarbons boiling in the range of approximately 200 °C to 350 °C (32°F to 662°F).]	295-514-7	92062-00-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-446-00-3	Residues (petroleum), steam-cracked naphtha distn.; Cracked gasoil; [A complex combination of hydrocarbons obtained as a column bottom from the separation of effluents from steam cracking naphtha at a high temperature. It boils in the range of approximately 147 °C to 300 °C (297°F to 572°F) and produces a finished oil having a viscosity of 18cSt at 50 °C.]	295-517-3	92062-04-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-447-00-9	Distillates (petroleum), light catalytic cracked, thermally degraded; Cracked gasoil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process which has been used as a heat transfer fluid. It consists predominantly of hydrocarbons boiling in the range of approximately 190 °C to 340 °C (374°F to 644°F). This stream is likely to contain organic sulfur compounds.]	295-991-1	92201-60-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-448-00-4	Residues (petroleum), steam-cracked heat-soaked naphtha; Cracked gasoil; [A complex combination of hydrocarbons obtained as residue from the distillation of steam cracked heat soaked naphtha and boiling in the range of approximately 150 °C to 350 °C (302°F to 662°F).]	297-905-8	93763-85-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-449-00-X	Hydrocarbons, C ₁₆₋₂₀ , solvent-dewaxed hydrocracked paraffinic distn. residue; Cracked gasoil; [A complex combination of hydrocarbons obtained by solvent dewaxing of a distillation residue from a hydrocracked paraffinic distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₂₀ and boiling in the range of approximately 360 °C to 500 °C (680 °F to 932 °F). It produces a finished oil having a viscosity of 4,5 cSt at approximately 100 °C (212 °F).]	307-662-2	97675-88-2	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H
649-450-00-5	Gas oils (petroleum), light vacuum, thermal-cracked hydrodesulfurized; Cracked gasoil; [A complex combination of hydrocarbons obtained by catalytic dehydrosulfurization of thermal-cracked light vacuum petroleum. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₄ through C ₂₀ and boiling in the range of approximately 270 °C to 370 °C (518°F to 698°F).]	308-278-8	97926-59-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-451-00-0	Distillates (petroleum), hydrodesulfurized middle coker; Cracked gasoil; [A complex combination of hydrocarbons by fractionation from hydrodesulfurised coker distillate stocks. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₂ through C ₂₁ and boiling in the range of approximately 200 °C to 360 °C (392°F to 680°F).]	309-865-1	101316-59-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-452-00-6	Distillates (petroleum), heavy steam-cracked; Cracked gasoil; [A complex combination of hydrocarbons obtained by distillation of steam cracking heavy residues. It consists predominantly of highly alkylated heavy aromatic hydrocarbons boiling in the range of approximately 250 °C to 400 °C (482°F to 752°F).]	309-939-3	101631-14-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-453-00-1	Distillates (petroleum), heavy hydrocracked; Baseoil – unspecified; [A complex combination of hydrocarbons from the distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers in the range of C ₁₅ -C ₃₉ and boiling in the range of approximately 260 °C to 600 °C (500°F to 1112°F).]	265-077-7	64741-76-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-454-00-7	Distillates (petroleum), solvent-refined heavy paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C).]	265-090-8	64741-88-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-455-00-2	Distillates (petroleum), solvent-refined light paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-091-3	64741-89-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-456-00-8	Residual oils (petroleum), solvent deasphalted; Baseoil – unspecified; [A complex combination of hydrocarbons obtained as the solvent soluble fraction from C ₃ -C ₄ solvent deasphalting of a residuum. It consists of hydrocarbons having carbon numbers predominantly higher than C ₂₅ and boiling above approximately 400 °C (752°F).]	265-096-0	64741-95-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-457-00-3	Distillates (petroleum), solvent-refined heavy naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt a 40 °C). It contains relatively few normal paraffins.]	265-097-6	64741-96-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-458-00-9	Distillates (petroleum), solvent-refined light naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-098-1	64741-97-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-459-00-4	Residual oils (petroleum,) solvent-refined; Baseoil – unspecified; [A complex combination by hydrocarbons obtained as the solvent insoluble fraction from solvent refining of a residuum using a polar organic solvent such as phenol or furfural. It consists of hydrocarbons having carbon numbers predominantly higher than C ₂₅ and boiling above approximately 400 °C (752°F).]	265-101-6	64742-01-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-460-00-X	Distillates (petroleum), clay-treated paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-137-2	64742-36-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-461-00-5	Distillates (petroleum), clay-treated light paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-138-8	64742-37-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-462-00-0	Residual oils (petroleum), clay-treated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treatment of a residual oil with a natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydro-carbons having carbon numbers predominantly higher than C ₂₅ and boiling above approximately 400 °C (752°F).]	265-143-5	64742-41-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-463-00-6	Distillates (petroleum), clay-treated heavy naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-146-1	64742-44-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-464-00-1	Distillates (petroleum), clay-treated light naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-147-7	64742-45-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-465-00-7	Distillates (petroleum), hydrotreated heavy naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-155-0	64742-52-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-466-00-2	Distillates (petroleum), hydrotreated light naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-156-6	64742-53-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-467-00-8	Distillates (petroleum), hydrotreated heavy paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-157-1	64742-54-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-468-00-3	Distillates (petroleum), hydrotreated light paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-158-7	64742-55-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-469-00-9	Distillates (petroleum), solvent-dewaxed light paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-159-2	64742-56-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-470-00-4	Residual oils (petroleum), hydrotreated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly greater than C ₂₅ and boiling above approximately 400 °C (752°F).]	265-160-8	64742-57-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-471-00-X	Residual oils (petroleum), solvent-dewaxed; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by removal of long, branched chain hydrocarbons from a residual oil by solvent crystallization. It consists of hydrocarbons having carbon numbers predominantly greater than C ₂₅ and boiling above approximately 400 °C (752°F).]	265-166-0	64742-62-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-472-00-5	Distillates (petroleum), solvent-dewaxed heavy naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil of not less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-167-6	64742-63-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-473-00-0	Distillates (petroleum), solvent-dewaxed light naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists of hydrocarbons having carbon numbers predominantly in the range C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-168-1	64742-64-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-474-00-6	Distillates (petroleum), solvent-dewaxed heavy paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity not less than 100 SUS at 100°F (19cSt at 40 °C).]	265-169-7	64742-65-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-475-00-1	Naphthenic oils (petroleum), catalytic dewaxed heavy; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-172-3	64742-68-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-476-00-7	Naphthenic oils (petroleum), catalytic dewaxed light; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-173-9	64742-69-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-477-00-2	Paraffin oils (petroleum), catalytic dewaxed heavy; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C).]	265-174-4	64742-70-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-478-00-8	Paraffin oils (petroleum), catalytic dewaxed light; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-176-5	64742-71-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-479-00-3	Naphthenic oils (petroleum), complex dewaxed heavy; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by removing straight chain paraffin hydrocarbons as a solid by treatment with an agent such as urea. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil having a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-179-1	64742-75-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-480-00-9	Naphthenic oils (petroleum), complex dewaxed light; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil having a viscosity less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-180-7	64742-76-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-481-00-4	Lubricating oils (petroleum), C ₂₀₋₅₀ , hydrotreated neutral oil-based, high-viscosity; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating light vacuum gas oil, heavy vacuum gas oil, and solvent deasphalted residual oil with hydrogen in the presence of a catalyst in a two stage process with dewaxing being carried out between the two stages. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil having a viscosity of approximately 112cSt at 40 °C. It contains a relatively large proportion of saturated hydrocarbons.]	276-736-3	72623-85-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-482-00-X	Lubricating oils (petroleum), C ₁₅₋₃₀ , hydrotreated neutral oil-based; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating light vacuum gas oil and heavy vacuum gas oil with hydrogen in the presence of a catalyst in a two stage process with dewaxing being carried out between the two stages. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil having a viscosity of approximately 15cSt at 40 °C. It contains a relatively large proportion of saturated hydrocabons.]	276-737-9	72623-86-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-483-00-5	Lubricating oils (petroleum), C ₂₀₋₅₀ , hydrotreated neutral oil-based; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating light vacuum gas oil, heavy vacuum gas oil and solvent deasphalted residual oil with hydrogen in the presence of a catalyst in a two stage process with dewaxing being carried out between the two stages. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of approximately 32cSt at 40 °C. It contains a relatively large proportion of saturated hydrocarbons.]	276-738-4	72623-87-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-484-00-0	Lubricating oils; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from solvent extraction and dewaxing processes. It consists predominantly of saturated hydrocarbons having carbon numbers in the range C ₁₅ through C ₅₀ .]	278-012-2	74869-22-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-485-00-6	Distillates (petroleum), complex dewaxed heavy paraffinci; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by dewaxing heavy paraffinic distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil with a viscosity of equal to or greater than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	292-613-7	90640-91-8	Carc. Cat. 2; R45	T R: 4 S: 53-45		H L
649-486-00-1	Distillates (petroleum), complex dewaxed light paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by dewaxing light paraffinic distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₂ through C ₃₀ and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	292-614-2	90640-92-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-487-00-7	Distillates (petroleum), solvent dewaxed heavy paraffinic, clay-treated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating dewaxed heavy paraffinic distillate with neutral or modified clay in either a contacting or percolation process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ .]	292-616-3	90640-94-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-488-00-2	Hydrocarbons, C ₂₀₋₅₀ , solvent dewaxed heavy paraffinic, hydrotreated; Baseoil – unspecified; [A complex combination of hydrocarbons produced by treating dewaxed heavy paraffinic distillate with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ .]	292-617-9	90640-95-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-489-00-8	Distillates (petroleum), solvent dewaxed light paraffinic, clay-treated; Baseoil – unspecified; [A complex combination of hydrocarbons resulting from treatment of dewaxed light paraffinic distillate with natural or modified clay in either a contacting or percolation process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ .]	292-618-4	90640-96-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-490-00-3	Distillates (petroleum), solvent dewaxed light paraffinic, hydrotreated; Baseoil – unspecified; [A complex combination of hydrocarbons produced by treating a dewaxed light paraffinic distillate with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ .]	292-620-5	90640-97-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-491-00-9	Residual oils (petroleum), hydrotreated solvent dewaxed; Baseoil – unspecified	292-656-1	90669-74-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-492-00-4	Residual oils (petroleum), catalytic dewaxed; Baseoil – unspecified	294-843-3	91770-57-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-493-00-X	Distillates (petroleum), dewaxed heavy paraffinic, hydrotreated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from an intensive treatment of dewaxed distillate by hydrogenation in the presence of a catalyst. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₂₅ through C ₃₉ and produces a finished oil with a viscosity of approximately 44 cSt at 50 °C.]	295-300-3	91995-39-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-494-00-5	Distillates (petroleum), dewaxed light paraffinic, hydrotreated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from an intensive treatment of dewaxed distillate by hydrogenation in the presence of a catalyst. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C ₂₁ through C ₂₉ and produces a finished oil with a viscosity of approximately 13 cSt at 50 °C.]	295-301-9	91995-40-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-495-00-0	Distillates (petroleum), hydrocracked solvent-refined, dewaxed; Baseoil – unspecified; [A complex combination of liquid hydrocarbons obtained by recrystallization of dewaxed hydrocracked solvent-refined petroleum distillates.]	295-306-6	91995-45-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-496-00-6	Distillates (petroleum), solvent-refined light naphthenic, hydrotreated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst and removing the aromatic hydrocarbons by solvent extraction. It consists predominantly of naphthenic hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ and produces a finished oil with a viscosity of between 13-15cSt at 40 °C.]	295-316-0	91995-54-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-497-00-1	Lubricating oils (petroleum), C ₁₇₋₃₅ , solvent-extd., dewaxed, hydrotreated; Baseoil – unspecified	295-423-2	92045-42-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-498-00-7	Lubricating oils (petroleum), hydrocracked nonarom. solvent-deparaffined; Baseoil – unspecified	295-424-8	92045-43-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-499-00-2	Residual oils (petroleum), hydrocracked acid-treated solvent-dewaxed; Baseoil – unspecified; [A complex combination of hydrocarbons produced by solvent removal of paraffins from the residue of the distillation of acid-treated, hydrocracked heavy paraffins and boiling approximately above 380 °C (716°F).]	295-499-7	92061-86-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-500-00-6	Paraffin oils (petroleum), solvent-refined dewaxed heavy; Baseoil – unspecified; [A complex combination of hydrocarbons obtained from sulfur-containing paraffinic crude oil. It consists predominantly of a solvent refined deparaffinated lubricating oil with a viscosity of 65cSt at 50 °C.]	295-810-6	92129-09-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-501-00-1	Lubricating oils (petroleum), base oils, paraffinic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by refining of crude oil. It consists predominantly of aromatics, naphthenics and paraffinics and produces a finished oil with a viscosity of 120 SUS at 100°F (23cSt at 40 °C).]	297-474-6	93572-43-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-502-00-7	Hydrocarbons, hydrocracked paraffinic distn. residues, solvent-dewaxed; Baseoil – unspecified	297-857-8	93763-38-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-503-00-2	Hydrocarbons, C ₂₀₋₅₀ , residual oil hydrogenation vacuum distillate; Baseoil – unspecified	300-257-1	93924-61-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-504-00-8	Distillates (petroleum), solvent-refined hydrotreated heavy, hydrogenated; Baseoil – unspecified	305-588-5	94733-08-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-505-00-3	Distillates (petroleum), solvent-refined hydrocracked light; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by solvent dearomatization of the residue of hydrocracked petroleum. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₈ through C ₂₇ and boiling in the range of approximately 370 °C to 450 °C (698°F to 842°F).]	305-589-0	94733-09-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-506-00-9	Lubricating oils (petroleum), C ₁₈₋₄₀ , solvent-dewaxed hydro-cracked distillate-based; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by solvent deparaffination of the distillation residue from hydrocracked petroleum. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₈ through C ₄₀ and boiling in the range of approximately 370 °C to 550 °C (698°F to 1022°F).]	305-594-8	94733-15-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-507-00-4	Lubricating oils (petroleum), C ₁₈₋₄₀ , solvent-dewaxed hydrogenated raffinate-based; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by solvent deparaffination of the hydrogenated raffinate obtained by solvent extraction of a hydrotreated petroleum distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₈ through C ₄₀ and boiling in the range of approximately 370 °C to 550 °C (698°F to 1022°F).]	305-595-3	94733-16-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-508-00-X	Hydrocarbons, C ₁₃₋₃₀ , arom.-rich, solvent-extd. naphthenic distillate; Baseoil – unspecified	305-971-7	95371-04-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-509-00-5	Hydrocarbons, C ₁₆₋₃₂ , arom. rich, solvent-extd. naphthenic distillate; Baseoil – unspecified	305-972-2	95371-05-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-510-00-0	Hydrocarbons, C ₃₇₋₆₈ , dewaxed deasphalted hydrotreated vacuum distn. residues; Baseoil – unspecified	305-974-3	95371-07-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-511-00-6	Hydrocarbons, C ₃₇₋₆₅ , hydrotreated deasphalted vacuum distn. residues; Baseoil – unspecified	305-975-9	95371-08-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-512-00-1	Distillates (petroleum), hydrocracked solvent-refined light; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by the solvent treatment of a distillate from hydrocracked petroleum distillates. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₈ through C ₂₇ and boiling in the range of approximately 370 °C to 450 °C (698°F to 842°F).]	307-010-7	97488-73-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-513-00-7	Distillates (petroleum), solvent-refined hydrogenated heavy; Baseoil – unspecified; [A complex combination of hydrocarbons, obtained by the treatment of a hydrogenated petroleum distillate with a solvent. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₉ through C ₄₀ and boiling in the range of approximately 390 °C to 550 °C (734°F to 1022°F).]	307-011-2	97488-74-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-514-00-2	Lubricating oils (petroleum), C ₁₈₋₂₇ , hydrocracked solvent-dewaxed; Baseoil – unspecified	307-034-8	97488-95-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-515-00-8	Hydrocarbons, C ₁₇₋₃₀ , hydrotreated solvent-deasphalted atm. distn. residue, distn. lights; Baseoil – unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the treatment of a solvent deasphalted short residue with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₇ through C ₃₀ and boiling in the range of approximately 300 °C to 400 °C (572°F to 752°F). It produces a finished oil having a viscosity of 4cSt at approximately 100 °C (212°F).]	307-661-7	97675-87-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-516-00-3	Hydrocarbons, C ₁₇₋₄₀ , hydrotreated solvent-deasphalted distn. residue, vacuum distn. lights; Baseoil – unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the catalytic hydrotreatment of a solvent deasphalted short residue having a viscosity of 8cSt at approximately 100 °C (212°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₇ through C ₄₀ and boiling in the range of approximately 300 °C to 500 °C (592°F to 932°F).]	307-755-8	97722-06-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-517-00-9	Hydrocarbons, C ₁₃₋₂₇ , solvent-extd. light naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by extraction of the aromatics from a light naphthenic distillate having a viscosity of 9.5cSt at 40 °C (104°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₂₇ and boiling in the range of approximately 240 °C to 400 °C (464°F to 752°F).]	307-758-4	97722-09-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-518-00-4	Hydrocarbons, C ₁₄₋₂₉ , solvent-extd. light naphthenic; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by extraction of the aromatics from a light naphthenic distillate having a viscosity of 16cSt at 40 °C (104°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₄ through C ₂₉ and boiling in the range of approximately 250 °C to 425 °C (482°F to 797°F).]	307-760-5	97722-10-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-519-00-X	Hydrocarbons, C ₂₇₋₄₂ , dearomatized; Baseoil – unspecified	308-131-8	97862-81-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-520-00-5	Hydrocarbons, C ₁₇₋₃₀ , hydrotreated distillates, distn. lights; Baseoil – unspecified	308-132-3	97862-82-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-521-00-0	Hydrocarbons, C ₂₇₋₄₅ , naphthenic vacuum distn.; Baseoil – unspecified	308-133-9	97862-83-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-522-00-6	Hydrocarbons, C ₂₇₋₄₅ , dearomatized; Baseoil – unspecified	308-287-7	97926-68-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-523-00-1	Hydrocarbons, C ₂₀₋₅₈ , hydrotreated; Baseoil – unspecified	308-289-8	97926-70-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-524-00-7	Hydrocarbons, C ₂₇₋₄₂ , naphthenic; Baseoil – unspecified	308-290-3	97926-71-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-525-00-2	Residual oils (petroleum), carbon-treated solvent-dewaxed; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by the treatment of solvent-dewaxed petroleum residual oils with activated charcoal for the removal of trace polar constituents and impurities.]	309-710-8	100684-37-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-526-00-8	Residual oils (petroleum), clay-treated solvent-dewaxed; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by treatment of solvent-dewaxed petroleum residual oils with bleaching earth for the removal of trace polar constituents and impurities.]	309-711-3	100684-38-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-527-00-3	Lubricating oils (petroleum), C _{>25} , solvent-extd., deasphalted, dewaxed, hydrogenated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of vacuum distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C ₂₅ and produces a finished oil with a viscosity in the order of 32cSt to 37cSt at 100 °C (212°F).]	309-874-0	101316-69-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-528-00-9	Lubricating oils (petroleum), C ₁₇₋₃₂ , solvent-extd., dewaxed, hydrogenated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of atmospheric distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₇ through C ₃₂ and produced a finished oil with a viscosity in the order of 17cSt to 23cSt at 40 °C (104°F).]	309-875-6	101316-70-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-529-00-4	Lubricating oils (petroleum), C ₂₀₋₃₅ , solvent-extd., dewaxed, hydrogenated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of atmospheric distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₃₅ and produces a finished oil with a viscosity in the order of 37cSt to 44cSt at 40 °C (104°F).]	309-876-1	101316-71-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-530-00-X	Lubricating oils (petroleum), C ₂₄₋₅₀ , solvent-extd., dewaxed, hydrogenated; Baseoil – unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of atmospheric distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₄ through C ₅₀ and produces a finished oil with a viscosity in the order of 16cSt to 75cSt at 40 °C (104°F).]	309-877-7	101316-72-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-531-00-5	Extracts (petroleum), heavy naphthenic distillate solvent, arom. conc.; Distillate aromatic extract (treated); [An aromatic concentrate produced by adding water to heavy naphthenic distillate solvent extract and extraction solvent.]	272-175-3	68783-00-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-532-00-0	Extracts (petroleum), solvent-refined heavy paraffinic distillate solvent; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as the extract from the re-extraction of solvent-refined heavy paraffinic distillate. It consists of saturated and aromatic hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ .]	272-180-0	68783-04-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-533-00-6	Extracts (petroleum), heavy paraffinic distillates, solvent-deasphalted; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as the extract from a solvent extraction of heavy paraffinic distillate.]	272-342-0	68814-89-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-534-00-1	Extracts (petroleum), heavy naphthenic distillate solvent, hydrotreated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by treating a heavy naphthenic distillate solvent extract with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ and produces a finished oil of at least 19cSt at 40 °C (100 SUS at 100°F).]	292-631-5	90641-07-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-535-00-7	Extracts (petroleum), heavy paraffinic distillate solvent, hydrotreated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons produced by treating a heavy paraffinic distillate solvent extract with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₂₁ through C ₃₃ and boiling in the range of approximately 350 °C to 480 °C (662°F to 896°F).]	292-632-0	90641-08-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-536-00-2	Extracts (petroleum), light paraffinic distillate solvent, hydro-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons produced by treating a light paraffinic distillate solvent extract with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₇ through C ₂₆ and boiling in the range of approximately 280 °C to 400 °C (536°F to 752°F).]	292-633-6	90641-09-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-537-00-8	Extracts (petroleum), hydrotreated light paraffinic distillate solvent; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as the extract from solvent extraction of intermediate paraffinic top solvent distillate that is treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₃₆ .]	295-335-4	91995-73-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-538-00-3	Extracts (petroleum), light naphthenic distillate solvent, hydrodesulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by treating the extract, obtained from a solvent extraction process, with hydrogen in the presence of a catalyst under conditions primarily to remove sulfur compounds. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₃₀ . This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	295-338-0	91995-75-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-539-00-9	Extracts (petroleum), light paraffinic distillate solvent, acid-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as a fraction of the distillation of an extract from the solvent extraction of light paraffinic top petroleum distillates that is subjected to a sulfuric acid refining. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₃₂ .]	295-339-6	91995-76-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-540-00-4	Extracts (petroleum), light paraffinic distillate solvent, hydro-desulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by solvent extraction of a light paraffin distillate and treated with hydrogen to convert the organic sulfur to hydrogen sulfide which is eliminated. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₄₀ and produces a finished oil with a viscosity of greater than 10cSt at 40 °C.]	295-340-1	91995-77-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-541-00-X	Extracts (petroleum), light vacuum gas oil solvent, hydro-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons, obtained by solvent extraction from light vacuum petroleum gas oils and treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₃₀ .]	295-342-2	91995-79-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-542-00-5	Extracts (petroleum), heavy paraffinic distillate solvent, clay-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contact or percolation process to remove the trace amounts of polar compounds and impurities present. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ . This stream is likely to contain 5 wt.% or more 4-6 membered ring aromatic hydrocarbons.]	296-437-1	92704-08-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-543-00-0	Extracts (petroleum), heavy naphthenic distillate solvent, hydrodesulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₅₀ and produces a finished oil with a viscosity of greater than 19cSt at 40 °C.]	297-827-4	93763-10-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-544-00-6	Extracts (petroleum), solvent-dewaxed heavy paraffinic distillate solvent, hydrodesulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained from a solvent dewaxed petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C ₁₅ through C ₅₀ and produces a finished oil with a viscosity of greater than 19cSt at 40 °C.]	297-829-5	93763-11-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-545-00-1	Extracts (petroleum), light paraffinic distillate solvent, carbon-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as a fraction from distillation of an extract recovered by solvent extraction of light paraffinic top petroleum distillate treated with activated charcoal to remove traces of polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₃₂ .]	309-672-2	100684-02-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-546-00-7	Extracts (petroleum), light paraffinic distillate solvent, clay-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as a fraction from distillation of an extract recovered by solvent extraction of light paraffinic top petroleum distillates treated with bleaching earth to remove traces of polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₆ through C ₃₂ .]	309-673-8	100684-03-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-547-00-2	Extracts (petroleum), light vacuum, gas oil solvent, carbon-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by solvent extraction of light vacuum petroleum gas oil treated with activated charcoal for the removal of trace polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₃₀ .]	309-674-3	100684-04-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-548-00-8	Extracts (petroleum), light vacuum gas oil solvent, clay-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by solvent extraction of light vacuum petroleum gas oils treated with bleaching earth for removal of trace polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C ₁₃ through C ₃₀ .]	309-675-9	100684-05-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
649-549-00-3	Foots oil (petroleum); Foots oil; [A complex combination of hydrocarbons obtained as the oil fraction from a solvent deoiling or a wax sweating process. It consists predominantly of branched chain hydrocarbons having carbon numbers predominantly in the range of C ₂₀ through C ₅₀ .]	265-171-8	64742-67-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-550-00-9	Foots oil (petroleum), hydrotreated; Foots oil	295-394-6	92045-12-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
650-002-00-6	turpentine, oil	232-350-7	8006-64-2	R10 Xn; R20/21/ 22-65 Xi; R36/38 R43 N; R51-53	Xn; N R: 10-20/21/22-36/ 38-43-51/53-65 S: (2-)36/37-46-61-62		
650-003-00-1	fenson (ISO); 4-chlorophenyl benzenesulphonate;	201-274-6	80-38-6	Xn; R22 Xi; R36 N; R51-53	Xn; N R: 22-36-51/53 S: (2-)24-26-61		
650-004-00-7	norbormide (ISO); 5-(α -hydroxy- α -2-pyridylbenzyl)-7-(α -2-pyridylbenzylidene) bicyclo [2.2.1] hept-5-ene-2,3-dicarboximide	213-589-6	991-42-4	Xn; R22	Xn R: 22 S: (2-)		
650-005-00-2	(2R,6aS,12aS)-1,2,6,6a,12,12a-hexahydro-2-isopropenyl-8,9-dimethoxychromeno[3,4-b]furo[2,3-h]chromen-6-one, rotenone	201-501-9	83-79-4	T; R25 Xi; R36/37/ 38 N; R50-53	T; N R: 25-36/37/38-50/ 53 S: (1/2-)22-24/25-36- 45-60-61		
650-006-00-8	benquinox (ISO); p-benzoquinone 1-benzoylhydrazone 4-oxime	207-807-9	495-73-8	T; R25 Xn; R21	T R: 21-25 S: (1/2-)36/37-45		
650-007-00-3	chlordimeform (ISO); N ₂ -(4-chloro-o-tolyl)-N ₁ ,N ₁ -dimethylformamidine	228-200-5	6164-98-3	Carc. Cat. 3; R40 Xn; R21/22 N; R50-53	Xn; N R: 21/22-40-50/53 S: (2-)22-36/37-60-61		
650-008-00-9	drazoxolon (ISO); 4-(2-chlorophenylhydrazone)-3-methyl-5-isoxazolone	227-197-8	5707-69-7	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)22-24-36/37- 45-60-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
650-009-00-4	chlordimeform hydrochloride; N'-(4-chloro- <i>o</i> -tolyl)-N,N-dimethylformamidine monohydrochloride; N ² -(4-chloro- <i>o</i> -tolyl)-N ¹ ,N ¹ -dimethylformamidine hydorchloride	243-269-1	19750-95-9	Carc. Cat. 3; R40 Xn; R22 N; R50-53	Xn; N R: 22-40-50/53 S: (2-)22-36/37-60-61		
650-010-00-X	benzyl violet 4B; α-[4-(4-dimethylamino-α-[4-[ethyl(3-sodiosulphonatobenzyl)amino] phenyl]benzylidene)cyclohexa-2,5-dienylidene(ethyl) ammonio]toluene-3-sulphonate	216-901-9	1694-09-3	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		
650-012-00-0	erionite	—	12510-42-8	Carc. Cat. 1; R45	T R: 45 S: 53-45		
650-013-00-6	asbestos	— — — — — — —	12001-28-4 132207-32-0 12172-73-5 77536-66-4 77536-68-6 77536-67-5 12001-29-5	Carc. Cat. 1; R45 T; R48/23	T R: 45-48/23 S: 53-45		E
650-014-00-1	diethyl 2,4-dihydroxycyclodisiloxane-2,4-diylbis(trimethylene) diphosphonate, tetrasodium salt, reaction products with disodium metasilicate	401-770-4	—	C; R34 Xn; R22	C R: 22-34 S: (1/2-)26-36/37/39-45		
650-015-00-7	rosin; colophony	232-475-7 232-484-6 277-299-1	8050-09-7 8052-10-6 73138-82-6	R43	Xi R: 43 S: (2-)24-37		
650-016-00-2	Mineral wool, with the exception of those specified elsewhere in this Annex; [Man-made vitreous (silicate) fibres with random orientation with alkaline oxide and alkali earth oxide (Na ₂ O+K ₂ O+CaO +MgO+BaO) content greater than 18 % by weight]	—	—	Carc. Cat. 3; R40 Xi; R38	Xn R: 38-40 S: (2-)36/37		AQR
650-017-00-8	Refractory Ceramic Fibres; Special Purpose Fibres, with the exception of those specified elsewhere in this Annex; [Man-made vitreous (silicate) fibres with random orientation with alkaline oxide and alkali earth oxide (Na ₂ O+K ₂ O+CaO+MgO+BaO) content less or equal to 18 % by weight]	—	—	Carc. Cat. 2; R49 Xi; R38	T R: 49-38 S: 53-45		A R

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
650-018-00-3	reaction product of: acetophenone, formaldehyde, cyclohexylamine, methanol and acetic acid	406-230-1	—	R10 Carc. Cat. 3; R40 C; R34 Xn; R20 R43 N; R50-53	C; N R: 10-20-34-40-43-50/53 S: (1/2-)26-36/37/39-45-60-61		
650-031-00-4	bis(4-hydroxy-N-methylanilinium) sulphate	200-237-1	55-55-0	Xn; R22-48/22 R43 N; R50-53	Xn; N R: 22-43-48/22-50/53 S: (2-)36/37-46-60-61		
650-032-00-X	cyproconazole (ISO); (2RS,3RS;2RS,3SR)-2-(4-chlorophenyl)-3-cyclopropyl-1-(1H-1,2,4-triazol-1-yl)butan-2-ol	—	94361-06-5	Repr. Cat. 3; R63 Xn; R22 N; R50-53	Xn; N R: 22-50/53-63 S: (2-)36/37-60-61		
650-033-00-5	(S)-α-cyano-3-phenoxybenzyl-(S)-2-(4-chlorophenyl)-3-methylbutyrate; esfenvalerate	—	66230-04-4	T; R23/25 R43 N; R50-53	T; N R: 23/25-43-50/53 S: (1/2-)24-36/37/39-45-60-61		
650-041-00-9	triasulfuron (ISO); 1-[2-(2-chloroethoxy)phenylsulfonyl]-3-(4-methoxy-6-methyl-1,3,5-triazin-2-yl)urea	—	82097-50-5	N; R50-53	N R: 50/53 S: 60-61		
650-042-00-4	reaction product of: polyethylene-polyamine-(C ₁₆ -C ₁₈)-alkylamides with monothio-(C ₂)-alkyl phosphonates	417-450-2	—	Xi; R36/38 R43 R52-53	Xi R: 36/38-43-52/53 S: (2-)24-26-37-61		
650-043-00-X	reaction product of: 3,5-bis-tert-butylsalicylic acid and aluminiumsulfate	420-310-3	—	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)22-56-60-61		
650-044-00-5	mixed linear and branched C ₁₄₋₁₅ alcohols ethoxylated, reaction product with epichlorohydrin	420-480-9	158570-99-1	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)24-37-60-61		
650-045-00-0	reaction product of: 1,2,3-propanetricarboxylic acid, 2-hydroxy, diethyl ester, 1-propanol and zirconium tetra-n-propanolate	417-110-3	—	F; R11 Xi; R38-41 N; R51-53	F; Xi; N R: 11-38-41-51/53 S: (2-)9-16-26-37/39-61		

Indeks št.	Kemijsko ime	št. EC	št. CAS	Razvrstitev	Označitev	Mejne koncentracije	Opombe
650-046-00-6	di(tetramethylammonium)(29H,31H-phthalocyanin-N29,N30,N31,N32)disulfonamide disulfonate, cuprate(2-)complex, derivatives	416-180-2	12222-04-7	Xn; R22-48/22 N; R51-53	Xn; N R: 22-48/22-51/53 S: (2-)22-36-61		
650-047-00-1	dibenzylphenylsulfonium hexafluoroantimonate	417-760-8	134164-24-2	T; R48/25 Xn; R22 Xi; R41 R43 N; R51-53	T; N R: 22-41-43-48/25-51/53 S: (1/2-)22-26-36/37/39-45-61		
650-048-00-7	reaction product of: borax, hydrogen peroxide, acetic acid anhydride and acetic acid	420-070-1	—	O; R7 Xn; R20/21/22 C; R35 N; R50	O; C; N R: 7-20/21/22-35-50 S: (1/2-)3/7-14-26-36/37/39-45-61		
650-049-00-2	2-alkoxyloxyethyl hydrogen maleate, where alkoyl represents (by weight) 70 to 85 % unsaturated octadecoyl, 0.5 to 10 % saturated octadecoyl, and 2 to 18 % saturated hexadecoyl	417-960-5	—	Xi; R38-41 R43 N; R50-53	Xi; N R: 38-41-43-50/53 S: (2-)24-26-37/39-60-61		
650-050-00-8	reaction mass of: 1-methyl-3-hydroxypropyl 3,5-[1,1-dimethylethyl]-4-hydroxydihydro-cinnamate and/or 3-hydroxybutyl 3,5-[1,1-dimethylethyl]-4-hydroxydihydrocinnamate; 1,3-butanediol bis[3-(3'-(1,1-dimethylethyl)-4'-hydroxy-phenyl)propionate] isomers; 1,3-butanediol bis[3-(3',5'-(1,1-dimethylethyl)-4'-hydroxyphenyl)propionate] isomers	423-600-8	—	N; R51-53	N R: 51/53 S: 61		
650-055-00-5	silver sodium zirconium hydrogenphosphate	422-570-3	155925-27-2	N; R50-53	N R: 50/53 S: 60-61		

PRILOGA VII

Tabela za pretvorbo razvrstitve po Direktivi 67/548/EGS v razvrstitev na podlagi te uredbe

Ta priloga vsebuje tabelo, ki pomaga pri pretvorbi razvrstitev snovi ali zmesi iz Direktive 67/548/EGS oziroma Direktive 1999/45/ES v ustrezno razvrstitev iz te uredbe. Zmeraj, ko so na voljo podatki za snovi ali zmesi, se vrednotenje in razvrstitev opravi v skladu s členi 9 do 13 te uredbe.

1. Tabela za pretvorbo

Oznake se vstavijo v tabelo 1.1 in oddelek 1.1.2.2 Priloge VI.

Tabela 1.1

Pretvorba med razvrstitvami iz Direktive 67/548/EGS in to uredbo

Razvrstitev na podlagi Direktive 67/548/EGS	Agregatno stanje snovi, kadar je to pomembno	Razvrstitev na podlagi te uredbe		Opomba
		Razred in kategorija nevarnosti	Stavek o nevarnosti	
E; R2		Neposredna pretvorba ni mogoča.		
E; R3		Neposredna pretvorba ni mogoča.		
O; R7		Org. Perox. CD	H242	
		Org. Perox. EF	H242	
O; R8	plin	Ox. Gas 1	H270	
O; R8	Trdna snov/tekočina	Neposredna pretvorba ni mogoča.		
O; R9	tekočina	Ox. Liq. 1	H271	
O; R9	trdna snov	Ox. Sol. 1	H271	
R10	tekočina	Neposredna pretvorba ni mogoča. Pravilna pretvorba R10, tekočina je: — Flam. Liq. 1, H224, če je plamenište < 23 °C in začetno vrelišče ≤ 35 °C — Flam. Liq. 2, H225, če je plamenište < 23 °C in začetno vrelišče > 35 °C — Flam. Liq. 3, H226, če je plamenište ≥ 23 °C		
F; R11	tekočina	Neposredna pretvorba ni mogoča. Pravilna pretvorba F; R11, tekočina je: — Flam. Liq. 1, H224, če je začetno vrelišče ≤ 35 °C — Flam. Liq. 2, H225, če je začetno vrelišče > 35 °C		
F; R11	trdna snov	Neposredna pretvorba ni mogoča.		
F+; R12	plin	Neposredna pretvorba ni mogoča. Pravilna pretvorba F+; R12, plinast se pretvori v vnet. plin 1, H220 ali vnet. plin 2, H221.		
F+; R12	tekočina	Flam. Liq. 1	H224	
F+; R12	tekočina	Self-react. CD	H242	
		Self-react. EF	H242	
		Self-react. G	nič	
F; R15		Pretvorba ni mogoča.		
F; R17	tekočina	Pyr. Liq. 1	H250	
F; R17	trdna snov	Pyr. Liq. 1	H250	

Razvrstitev na podlagi Direktive 67/548/EGS	Agregatno stanje snovi, kadar je to pomembno	Razvrstitev na podlagi te uredbe		Opomba
		Razred in kategorija nevarnosti	Stavek o nevarnosti	
Xn; R20	plin	Acute Tox. 4	H332	(1)
Xn; R20	hlapi	Acute Tox. 4	H332	(1)
Xn; R20	prah/meglice	Acute Tox. 4	H332	
Xn; R21		Acute Tox. 4	H312	(1)
Xn; R22		Acute Tox. 4	H302	(1)
T; R23	plin	Acute Tox. 3	H331	(1)
T; R23	hlapi	Acute Tox. 2	H330	
T; R23	prah/meglice	Acute Tox. 3	H331	(1)
T; R24		Acute Tox. 3	H311	(1)
T; R25		Acute Tox. 3	H301	(1)
T+; R26	plin	Acute Tox. 2	H330	(1)
T+; R26	hlapi	Acute Tox. 1	H330	
T+; R26	prah/meglice	Acute Tox. 2	H330	(1)
T+; R27		Acute Tox. 1	H310	
T+; R28		Acute Tox. 2	H300	(1)
R33		STOT RE 2	H373	(3)
C; R34		Skin Corr. 1B	H314	(2)
C; R35		Skin Corr. 1A	H314	
Xi; R36		Eye Irrit. 2	H319	
Xi; R37		STOT SE 3	H335	
Xi; R38		Skin Irrit. 2	H315	
T; R39/23		STOT SE 1	H370	(3)
T; R39/24		STOT enkrat. 1	H370	(3)
T; R39/25		STOT SE 1	H370	(3)
T+; R39/26		STOT SE 1	H370	(3)
T+; R39/27		STOT SE. 1	H370	(3)
T+; R39/28		STOT SE. 1	H370	(3)
Xi; R41		Eye Dam. 1	H318	
R42		Resp. Sens. 1	H334	
R43		Skin Sens. 1	H317	
Xn; R48/20		STOT RE. 2	H373	(3)
Xn; R48/21		STOT RE. 2	H373	(3)
Xn; R48/22		STOT RE. 2	H373	(3)
T; R48/23		STOT RE. 1	H372	(3)
T; R48/24		STOT RE. 1	H372	(3)
T; R48/25		STOT RE. 1	H372	(3)

Razvrstitev na podlagi Direktive 67/548/EGS	Agregatno stanje snovi, kadar je to pomembno	Razvrstitev na podlagi te uredbe		Opomba
		Razred in kategorija nevarnosti	Stavek o nevarnosti	
R64		Lact.	H362	
Xn; R65		Asp. Tox. 1	H304	
R67		STOT SE 3	H336	
Xn; R68/20		STOT SE 2	H371	(3)
Xn; R68/21		STOT SE 2	H371	(3)
Xn; R68/22		STOT SE 2	H371	(3)
Carc. Cat. 1; R45		Carc. 1A	H350	
Carc. Cat. 2; R45		Carc. 1B	H350	
Carc. Cat. 1; R49		Carc. 1A	H350i	
Carc. Cat. 2; R49		Carc. 1B	H350i	
Carc. Cat. 3; R40		Carc. 2	H351	
Muta. Cat. 2; R46		Muta. 1B	H340	
Muta. Cat. 3; R68		Muta. 2	H341	
Repr. Cat. 1; R60		Repr. 1A	H360F	(4)
Repr. Cat. 2; R60		Repr. 1B	H360F	(4)
Repr. Cat. 1; R61		Repr. 1A	H360D	(4)
Repr. Cat. 2; R61		Repr. 1B	H360D	(4)
Repr. Cat. 3; R62		Repr. 2	H361f	(4)
Repr. Cat. 3; R63		Repr. 2	H361d	(4)
Repr. Cat. 1; R60–61		Repr. 1A	H360FD	
Repr. Cat. 1; R60 Repr. Cat. 2; R61		Repr. 1A	H360FD	
Repr. Cat. 2; R60 Repr. Cat. 1; R61		Repr. 1A	H360FD	
Repr. Cat. 2; R60–61		Repr. 1B	H360FD	
Repr. Cat. 3; R62–63		Repr. 2	H361fd	
Repr. Cat. 1; R60 Repr. Cat. 3; R63		Repr. 1A	H360Fd	
Repr. Cat. 2; R60 Repr. Cat. 3; R63		Repr. 1B	H360Fd	
Repr. Cat. 1; R61 Repr. Cat. 3; R62		Repr. 1A	H360Df	
Repr. Cat. 2; R61 Repr. Cat. 3; R62		Repr. 1B	H360Df	
N; R50		Aquatic. Acute 1	H400	
N; R50–53		Aquatic. Acute. 1 Aquatic Chronic 1	H400 H410	
N; R51–53		Aquatic Chronic 2	H411	
R52–53		Aquatic Chronic 3	H412	

Razvrstitev na podlagi Direktive 67/548/EGS	Agregatno stanje snovi, kadar je to pomembno	Razvrstitev na podlagi te uredbe		Opomba
		Razred in kategorija nevarnosti	Stavek o nevarnosti	
R53		Aquatic Chronic 4	H413	
N; R59		Ozone	EUH059	

Opomba 1

Za te razrede je mogoče uporabiti priporočeno minimalno razvrstitev, kot je določena v oddelku 1.2.1.1 Priloge VI. Na voljo so lahko podatki ali druge informacije, ki kažejo, da je primerna ponovna razvrstitev v strožjo kategorijo.

Opomba 2

Priporoča se razvrstitev v kategorijo 1B, tudi če je v nekaterih primerih mogoča razvrstitev v kategorijo 1C. Izvirni podatki morda ne omogočajo razlikovanja med kategorijama 1B in 1C, ker je izpostavljenost glede na Uredbo (ES) št. 440/2008 običajno trajala do 4 ure. Ko se bodo v prihodnje pridobivali podatki iz testov po zaporednem pristopu, kot ga predvideva Uredba (ES) št. 440/2008, pa bo mogoča tudi razvrstitev v kategorijo 1C.

Opomba 3

Način izpostavljenosti je mogoče dodati k stavku o nevarnosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti.

Opomba 4

Stavki o nevarnosti H360 in H361 nakazujejo na splošno zaskrbljenost zaradi škodljivih učinkov na razmnoževanje glede plodnosti in razvoja otroka: „Lahko škoduje/Sum škodljivosti za plodnost ali nerojenega otroka“. V skladu s tem kriterijem za razvrstitev (Priloga I, oddelek 3.7) je splošni stavek o nevarnosti mogoče nadomestiti s stavkom o nevarnosti, ki se nanaša le na lastnost, ki sproža skrb, če niti plodnost niti učinki na razvoj dokazano niso pomembni.

Tabela 1.2

Pretvorba med opozorilnimi stavki iz Direktive 67/548/EGS in dodatnimi zahtevami za označevanje iz te uredbe

Direktiva 67/548/EGS	Ta uredba
R1	EUH001
R6	EUH006
R14	EUH014
R18	EUH018
R19	EUH019
R44	EUH044
R29	EUH029
R31	EUH031
R32	EUH032
R66	EUH066
R39–41	EUH070