# Official Journal

## of the European Communities

ISSN 0378-6978

L 252

Volume 21

14 September 1978

English edition

## Legislation

Contents

I Acts whose publication is obligatory

•	of the Cu	stoms Convention on the international transport of goods under cover of ets (TIR Convention) of 14 November 1975 at Geneva	1
		Convention on the international transport of goods under cover of TIR carnets vention)	2
	Annex 1:	Specimen of TIR carnet	12
	Annex 2:	Regulations on technical conditions applicable to road vehicles which may be accepted for international transport under customs seal	25
	Annex 3:	Procedure for the approval of road vehicles complying with the technical conditions set forth in the Regulations contained in Annex 2	33
	Annex 4:	Model certificate of approval of a road vehicle	35
	Annex 5:	TIR plates	37
	Annex 6:	Explanatory Notes	37
	Annex 7:	Annex regarding approval of containers	50
	Annex 8:	Composition and Rules of Procedure of the Administrative Committee	65

I

(Acts whose publication is obligatory)

### COUNCIL REGULATION (EEC) No 2112/78

of 25 July 1978

concerning the conclusion of the Customs Convention on the international transport of goods under cover of TIR carnets (TIR Convention) of 14 November 1975 at Geneva

THE COUNCIL OF THE EUROPEAN COMMUNITIES,

Having regard to the Treaty establishing the European Economic Community,

Having regard to the recommendation from the Commission,

Whereas the conclusion of the Customs Convention on the international transport of goods under cover of TIR carnets (TIR Convention) of 14 November 1975 at Geneva introduces new provisions into the system of international transport of goods by road vehicles; whereas the nature of the provisions is such as to contribute to the harmonious development of international trade in accordance with the objectives of the European Economic Community;

Whereas it is therefore appropriate that the TIR Convention should be approved on behalf of the Community,

HAS ADOPTED THIS REGULATION:

#### Article 1

The Customs Convention on the international transport of goods under cover of TIR carnets (TIR Convention) of 14 November 1975 at Geneva is hereby approved on behalf of the European Economic Community.

The text of the Convention and the Annexes thereto is annexed to this Regulation.

#### Article 2

The President of the Council is hereby authorized to deposit the instrument of ratification on behalf of the Community in accordance with Article 52 (1) (b) of the Convention (1).

This Regulation shall be binding in its entirety and directly applicable in all Member States.

Done at Brussels, 25 July 1978.

For the Council

The President

K. von DOHNANYI

<sup>(1)</sup> The date of entry into force of the Convention will be published in the Official Journal of the European Communities by the General Secretariat of the Council.

# CUSTOMS CONVENTION ON THE INTERNATIONAL TRANSPORT OF GOODS UNDER COVER OF TIR CARNETS

#### (TIR CONVENTION)

THE CONTRACTING PARTIES,

DESIRING to facilitate the international carriage of goods by road vehicle,

CONSIDERING that the improvement of the conditions of transport constitutes one of the factors resential to the development of cooperation among them,

DECLARING themselves in favour of a simplification and a harmonization of administrative formalities in the field of international transport, in particular at frontiers,

HAVE AGREED AS FOLLOWS:

CHAPTER I

#### **GENERAL**

#### (a) Definitions

#### Article 1

For the purposes of this Convention:

- (a) the term 'TIR operation' shall mean the transport of goods from a customs office of departure to a customs office of destination under the procedure, called the 'TIR procedure', laid down in this Convention;
- (b) the term 'import or export duties and taxes' shall mean customs duties and all other duties, taxes, fees and other charges which are collected on, or in connection with, the import or export of goods, but not including fees and charges limited in amount to the approximate cost of services rendered;
- (c) the term 'road vehicle' shall mean not only any power-driven road vehicle but also any trailer or semi-trailer designed to be coupled thereto;
- (d) the term 'combination of vehicles' shall mean coupled vehicles which travel on the road as a unit;
- (e) the term 'container' shall mean an article of transport equipment (lift-van, movable tank or other similar structure):

- (i) fully or partially enclosed to constitute a compartment intended for containing goods,
- (ii) of a permanent character and accordingly strong enough to be suitable for repeated use,
- (iii) specially designed to facilitate the transport of goods by one or more modes of transport without intermediate reloading,
- (iv) designed for ready handling, particularly when being transferred from one mode of transport to another,
- (v) designed to be easy to fill and to empty, and
- (vi) having an internal volume of one cubic metre or more.
- 'Demountable bodies' are to be treated as containers;
- (f) the term 'customs office of departure' shall mean any customs office of a Contracting Party where the international transport of a load or part-load of goods under the TIR procedure begins;
- (g) the term 'customs office of destination' shall mean any customs office of a Contracting Party where the international transport of a load or part-load of goods under the TIR procedure ends;
- (h) the term 'customs office en route' shall mean any customs office of a Contracting Party through which a road vehicle, combination of vehicles or container is imported or exported in the course of a TIR operation;

- (j) the term 'person' shall mean both natural and legal persons;
- (k) the term 'heavy or bulky goods' shall mean any heavy or bulky object which because of its weight, size or nature is not normally carried in a closed road vehicle or closed container;
- (l) the term 'guaranteeing association' shall mean an association approved by the customs authorities of a Contracting Party to act as surety for persons using the TIR procedure.

#### (b) Scope

#### Article 2

This Convention shall apply to the transport of goods without intermediate reloading, in road vehicles, combinations of vehicles or in containers, across one or more frontiers between a customs office of departure of one Contracting Party and a customs office of destination of another or of the same Contracting Party, provided that some portion of the journey between the beginning and the end of the TIR operation is made by road.

#### Article 3

For the provisions of this Convention to become applicable:

- (a) the transport operations must be performed:
  - (i) by means of road vehicles, combinations of vehicles or containers previously approved under the conditions set forth in Chapter III (a), or
  - (ii) by means of other road vehicles, other combinations of vehicles or other containers under the conditions set forth in Chapter III (c);
- (b) the transport operations must be guaranteed by associations approved in accordance with the provisions of Article 6 and must be performed under cover of a TIR carnet, which shall conform to the model reproduced in Annex 1 to this Convention.

#### (c) Principles

#### Article 4

Goods carried under the TIR procedure shall not be subjected to the payment or deposit of import or export duties and taxes at customs offices *en route*.

#### Article 5

- 1. Goods carried under the TIR procedure in sealed road vehicles, combinations of vehicles or containers shall not as a general rule be subjected to examination at customs offices *en route*.
- 2. However, to prevent abuses, customs authorities may in exceptional cases, and particularly when irregularity is suspected, carry out an examination of the goods at such offices.

#### CHAPTER II

#### ISSUE OF TIR CARNETS

#### Liability of guaranteeing associations

#### Article 6

- 1. Subject to such conditions and guarantees as it shall determine, each Contracting Party may authorize associations to issue TIR carnets, either directly or through corresponding associations, and to act as guarantors.
- 2. An association shall not be approved in any country unless its guarantee also covers the liabilities incurred in that country in connection with operations under cover of TIR carnets issued by foreign associations affiliated to the same international organization as that to which it is itself affiliated.

#### Article 7

TIR carnet forms sent to the guaranteeing associations by the corresponding foreign associations or by international organizations shall not be liable to import and export duties and taxes and shall be free of import and export prohibitions and restrictions.

#### Article 8

- 1. The guaranteeing association shall undertake to pay the import or export duties and taxes, together with any default interest, due under the customs laws and regulations of the country in which an irregularity has been noted in connection with a TIR operation. It shall be liable, jointly and severally with the persons from whom the sums mentioned above are due, for payment of such sums.
- 2. In cases where the laws and regulations of a Contracting Party do not provide for payment of import or

export duties and taxes as provided for in paragraph 1 above, the guaranteeing association shall undertake to pay, under the same conditions, a sum equal to the amount of the import or export duties and taxes and any default interest.

- 3. Each Contracting Party shall determine the maximum sum per TIR carnet, which may be claimed from the guaranteeing association on the basis of the provisions of paragraphs 1 and 2 above.
- 4. The liability of the guaranteeing association to the authorities of the country where the customs office of departure is situated shall commence at the time when the TIR carnet is accepted by the customs office. In the succeeding countries through which goods are transported under the TIR procedure, this liability shall commence at the time when the goods are imported or, where the TIR operation has been suspended under Article 26 (1) and (2), at the time when the TIR carnet is accepted by the customs office where the TIR operation is resumed.
- 5. The liability of the guaranteeing association shall cover not only the goods which are enumerated in the TIR carnet but also any goods which, though not enumerated therein, may be contained in the sealed section of the road vehicle or in the sealed container. It shall not extend to any other goods.
- 6. For the purpose of determining the duties and taxes mentioned in paragraphs 1 and 2 of this Article, the particulars of the goods as entered in the TIR carnet shall, in the absence of evidence to the contrary, be assumed to be correct.
- 7. When payment of sums mentioned in paragraphs 1 and 2 of this Article becomes due, the competent authorities shall so far as possible require payment from the person or persons directly liable before making a claim against the guaranteeing association.

#### Article 9

- 1. The guaranteeing association shall fix the period of validity of the TIR carnet by specifying a final date of validity after which the carnet may not be presented for acceptance at the customs office of departure.
- 2. Provided that it has been accepted by the customs office of departure on or before the final date of validity, as provided for in paragraph 1 of this Article, the

carnet shall remain valid until the termination of the TIR operation at the customs office of destination.

#### Article 10

- 1. The TIR carnet may be discharged unconditionally or conditionally; where discharge is conditional this shall be on account of facts connected with the TIR operation itself. These facts shall be clearly indicated in the TIR carnet.
- 2. When the customs authorities of a country have discharged a TIR carnet unconditionally they can no longer claim from the guaranteeing association payment of the sums mentioned in Article 8 (1) and (2) unless the certificate of discharge was obtained in an improper or fraudulent manner.

#### Article 11

- 1. Where a TIR carnet has not been discharged or has been discharged conditionally, the competent authorities shall not have the right to claim payment of the sums mentioned in Article 8 (1) and (2) from the guaranteeing association unless, within a period of one year from the date of acceptance of the TIR carnet by those authorities, they have notified the association in writing of the non-discharge or conditional discharge. The same provision shall apply where the certificate of discharge was obtained in an improper or fraudulent manner, save that the period shall be two years.
- 2. The claim for payment of the sums referred to in Article 8 (1) and (2) shall be made to the guaranteeing association at the earliest three months after the date on which the association was informed that the carnet had not been discharged or had been discharged conditionally or that the certificate of discharge had been obtained in an improper or fraudulent manner and at the latest not more than two years after that date. However, in cases which, during the abovementioned period of two years, become the subject of legal proceedings, any claim for payment shall be made within one year of the date on which the decision of the court becomes enforceable.
- 3. The guaranteeing association shall have a period of three months, from the date when a claim for payment is made upon it, in which to pay the amounts claimed. The sums paid shall be reimbursed to the association if, within the two years following the date on which the claim for payment was made, it has been established to the satisfaction of the customs authorities that no irregularity was committed in connection with the transport operation in question.

#### CHAPTER III

#### TRANSPORT OF GOODS UNDER TIR CARNET

#### (a) Approval of vehicles and containers

#### Article 12

In order to fall within the provisions of (a) and (b) of this Chapter, every road vehicle must as regards its construction and equipment fulfil the conditions set out in Annex 2 to this Convention and must have been approved according to the procedure laid down in Annex 3 hereto. The certificate of approval shall conform to the specimen reproduced in Annex 4.

#### Article 13

- 1. To fall within the provisions of (a) and (b) of this Chapter, containers must be constructed in conformity with the conditions laid down in Part I of Annex 7 and must have been approved according to the procedure laid down in Part II of that Annex.
- 2. Containers approved for the transport of goods under customs seal in accordance with the Customs Convention on containers, 1956, the agreements arising therefrom concluded under the auspices of the United Nations, the Customs Convention on containers, 1972, or any international instruments that may supersede or modify the latter Convention, shall be considered as complying with the provisions of paragraph 1 above and must be accepted for transport under the TIR procedure without further approval.

#### Article 14

- 1. Each Contracting Party reserves the right to refuse to recognize the validity of the approval of road vehicles or containers which do not meet the conditions set forth in Articles 12 and 13 above. Nevertheless, Contracting Parties shall avoid delaying traffic when the defects found are of minor importance and do not involve any risk of smuggling.
- 2. Before it is used again for the transport of goods under customs seal, any road vehicle or container which no longer meets the conditions which justified its approval, shall be either restored to its original state, or presented for re-approval.

#### (b) Procedure for transport under cover of a TIR carnet

#### Article 15

- 1. No special customs document shall be required in respect of the temporary importation of a road vehicle, combination of vehicles or container carrying goods under cover of the TIR procedure. No guarantee shall be required for the road vehicle or combination of vehicles or container.
- 2. The provisions of paragraph 1 of this Article shall not prevent a Contracting Party from requiring the fulfilment at the customs office of destination of formalities laid down by its national regulations to ensure that, once the TIR operation has been completed, the road vehicle, the combination of vehicles or the container will be re-exported.

#### Article 16

When a road vehicle or combination of vehicles is carrying out a TIR operation, one rectangular plate bearing the inscription 'TIR' and conforming to the specifications given in Annex 5 to this Convention shall be affixed to the front and another to the rear of the road vehicle or combination of vehicles. These plates shall be so placed as to be clearly visible and shall be removable.

#### Article 17

- 1. A single TIR carnet shall be made out in respect of each road vehicle or container. However, a single TIR carnet may be made out in respect of a combination of vehicles or for several containers loaded on to a single road vehicle or on to a combination of vehicles. In that case the TIR manifest of the goods covered by the TIR carnet shall list separately the content of each vehicle in the combination of vehicles or of each container.
- 2. The TIR carnet shall be valid for one journey only. It shall contain at least the number of detachable vouchers for customs acceptance and for discharge which are necessary for the transport operation in question.

#### Article 18

A TIR operation may involve several customs offices of departure and destination, but, save as may otherwise be authorized by the Contracting Party or Parties concerned:

(a) the customs offices of departure shall be situated in only one country;

- (b) the customs offices of destination shall be situated in not more than two countries;
- (c) the total number of customs offices of departure and destination shall not exceed four.

#### Article 19

The goods and the road vehicle, the combination of vehicles or the container shall be produced with the TIR carnet at the customs office of departure. The customs authorities of the country of departure shall take such measures as are necessary for satisfying themselves as to the accuracy of the goods manifest and/or for affixing the customs seals or for checking customs seals affixed under the responsibility of the said customs authorities by duly authorized persons.

#### Article 20

For journeys in the territory of their country, the customs authorities may fix a time limit and require the road vehicle, the combination of vehicles or the container to follow a prescribed route.

#### Article 21

At each customs office *en route* and at customs offices of destination, the road vehicle, the combination of vehicles or the container shall be produced for purposes of control to the customs authorities together with the load and the TIR carnet relating thereto.

#### Article 22

- 1. As a general rule and except when they examine the goods in accordance with Article 5 (2), the customs authorities of the customs offices *en route* of each of the Contracting Parties shall accept the customs seals of other Contracting Parties, provided that they are intact. The said customs authorities may, however, if control requirements make it necessary, add their own seals.
- 2. The customs seals thus accepted by a Contracting Party shall have in the territory of that Contracting Party the benefit of the same legal protection as is accorded to the national seals.

#### Article 23

The customs authorities shall not, except in special cases:

 require road vehicles, combinations of vehicles or containers to be escorted at the carriers' expense on the territory of their country,  require examination en route of road vehicles, combinations of vehicles or containers and their loads.

#### Article 24

If the customs authorities conduct an examination of the load of a road vehicle, combination of vehicles or container in the course of the journey or at a customs office *en route*, they shall record on the TIR carnet vouchers used in their country, on the corresponding counterfoils, and on the vouchers remaining in the TIR carnet, particulars of the new seals affixed and of the controls carried out.

#### Article 25

If the customs seals are broken *en route* otherwise than in the circumstances of Articles 24 and 35, or if any goods are destroyed or damaged without breaking of such seals, the procedure laid down in Annex 1 to this Convention for the use of the TIR carnet shall, without prejudice to the possible application of the provisions of national law, be followed, and the certified report in the TIR carnet shall be completed.

#### Article 26

- 1. When transport under cover of a TIR carnet takes place in part in the territory of a State which is not a Contracting Party to this Convention, the TIR operation shall be suspended during that part of the journey. In that case, the customs authorities of the Contracting Party on whose territory the journey continues shall accept the TIR carnet for the resumption of the TIR operation, provided that the customs seals and/or identifying marks have remained intact.
- 2. The same shall apply where for a part of the journey the TIR carnet is not used by the holder of the carnet in the territory of a Contracting Party because of the existence of simpler customs transit procedures or when the use of a customs transit régime is not necessary.
- 3. In such cases the customs offices where the TIR operation is suspended or resumed shall be deemed to be customs offices of exit *en route* and customs offices of entry *en route* respectively.

#### Article 27

Subject to the provisions of this Convention, and in particular Article 18, another customs office of destination may be substituted for a customs office of destination originally indicated.

#### Article 28

On arrival of the load at the customs office of destination, and provided that the goods are then placed under another system of customs control or are cleared for home use, discharge of the TIR carnet shall take place without delay.

## (c) Provisions concerning transport of heavy or bulky goods

#### Article 29

- 1. The provisions of this section apply only to the transport of heavy or bulky goods as defined in Article 1 (k) of this Convention.
- 2. Where the provisions of this section apply, heavy or bulky goods may, if the authorities at the customs office of departure so decide, be carried by means of nonsealed vehicles or containers.
- 3. The provisions of this section shall apply only if, in the opinion of the authorities at the customs office of departure, the heavy or bulky goods carried and any accessories carried with them can be easily identified by reference to the description given, or can be provided with customs seals and/or identifying marks so as to prevent any substitution, or removal of the goods, without its being obvious.

#### Article 30

All the provisions of this Convention, save those to which the special provisions of this section make an exception, shall apply to the transport of heavy or bulky goods under the TIR procedure.

#### Article 31

The liability of the guaranteeing association shall cover not only the goods enumerated in the TIR carnet, but also any goods which, though not enumerated in the carnet, are on the load platform or among the goods enumerated in the TIR carnet.

#### Article 32

The cover and all vouchers of the TIR carnet shall bear the endorsement 'heavy or bulky goods' in bold letters in English or in French.

#### Article 33

The authorities at the customs office of departure may require such packing lists, photographs, drawings, etc., as are necessary for the identification of the goods carried to be appended to the TIR carnet. In this case they shall endorse these documents, one copy of the said documents shall be attached to the inside of the cover page of the TIR carnet, and all the manifests of the TIR carnet shall include a reference to such documents.

#### Article 34

The authorities at the customs offices *en route* of each of the Contracting Parties shall accept the customs seals and/or identifying marks affixed by the competent authorities of other Contracting Parties. They may, however, affix additional seals and/or identifying marks; they shall record particulars of the new seals and/or identifying marks on the vouchers of the TIR carnet used in their country, on the corresponding counterfoils and on the vouchers remaining in the TIR carnet.

#### Article 35

If customs authorities conducting an examination of the load at a customs office *en route* or in the course of the journey are obliged to break seals and/or remove identifying marks, they shall record the new seals and/or identifying marks on the vouchers of the TIR carnet, used in their country, on the corresponding counterfoils and on the vouchers remaining in the TIR carnet.

#### CHAPTER IV

#### **IRREGULARITIES**

#### Article 36

Any breach of the provisions of this Convention shall render the offender liable, in the country where the offence was committed, to the penalties prescribed by the law of that country.

#### Article 37

When it is not possible to establish in which territory an irregularity was committed it shall be deemed to have been committed in the territory of the Contracting Party where it is detected.

#### Article 38

- 1. Each of the Contracting Parties shall have the right to exclude temporarily or permanently from the operation of this Convention any person guilty of a serious offence against the customs laws or regulations applicable to the international transport of goods.
- 2. This exclusion shall be notified immediately to the customs authorities of the Contracting Party on whose territory the person concerned is established or resident, and also to the guaranteeing association(s) in the country where the offence has been committed.

#### Article 39

When TIR operations are accepted as being otherwise in order:

- The Contracting Parties shall disregard minor discrepancies in the observance of time limits or routes prescribed.
- 2. Likewise, discrepancies between the particulars on the goods manifest of the TIR carnet and the actual contents of a road vehicle, combination of vehicles or container shall not be considered as infringements of the Convention by the holder of the TIR carnet when evidence is produced to the satisfaction of the competent authorities that these discrepancies were not due to mistakes committed knowingly or through negligence at the time when the goods were loaded or dispatched or when the manifest was made out.

#### Article 40

The customs administrations of the countries of departure and of destination shall not consider the holder of the TIR carnet responsible for the discrepancies which may be discovered in those countries, when the discrepancies in fact relate to the customs procedures which preceded or followed a TIR operation and in which the holder was not involved.

#### Article 41

When it is established to the satisfaction of the customs authorities that goods specified on the manifest of a TIR carnet have been destroyed or have been irrecoverably lost by accident or *force majeure* or that they are short by reason of their nature, payment of the duties and taxes normally due shall be waived.

#### Article 42

On receipt from a Contracting Party of a request giving the relevant reasons, the competent autorities of the Contracting Parties concerned in a TIR operation shall furnish that Contracting Party with all available information needed for implementation of the provisions of Articles 39, 40 and 41 above.

#### CHAPTER V

#### **EXPLANATORY NOTES**

#### Article 43

The Explanatory Notes set out in Annex 6 and in Part III of Annex 7 interpret certain provisions of this Convention and its Annexes. They also describe certain recommended practices.

#### CHAPTER VI

#### MISCELLANEOUS PROVISIONS

#### Article 44

Each Contracting Party shall provide the guaranteeing associations concerned with facilities for:

- (a) the transfer of the currency necessary for the sums claimed by the authorities of Contracting Parties by virtue of the provisions of Article 8 of this Convention; and
- (b) the transfer of currency for payment for TIR carnet forms sent to the guaranteeing association by the corresponding foreign associations or by the international organizations.

#### Article 45

Each Contracting Party shall cause to be published the list of customs offices of departure, customs offices en route and customs offices of destination approved by it for accomplishing TIR operations. The Contracting Parties of adjacent territories shall consult each other to agree upon corresponding frontier offices and upon their opening hours.

#### | Article 46

1. No charge shall be made for customs attendance in connection with the customs operations mentioned in this Convention, save where it is provided on days or at times or places other than those normally appointed for such operations.

2. Contracting Parties shall arrange to the fullest extent possible for customs operations concerning perishable goods at customs offices to be facilitated.

#### Article 47

- 1. The provisions of this Convention shall preclude neither the application of restrictions and controls imposed under national regulations on grounds of public morality, public security, hygiene or public health, or for veterinary or phytopathological reasons, nor the levy of dues chargeable by virtue of such regulations.
- 2. The provisions of this Convention shall not preclude the application of other provisions either national or international governing transport.

#### Article 48

Nothing in this Convention shall prevent Contracting Parties which form a customs or economic union from enacting special provisions in respect of transport operations commencing or terminating in, or passing through, their territories, provided that such provisions do not attenuate the facilities provided for by this Convention.

#### Article 49

This Convention shall not prevent the application of greater facilities which Contracting Parties grant or may wish to grant either by unilateral provisions or by virtue of bilateral or multilateral agreements provided that such facilities do not impede the application of the provisions of this Convention and, in particular, TIR operations.

#### Article 50

The Contracting Parties shall communicate to one another, on request, information necessary for implementing the provisions of this Convention, and particularly information relating to the approval of road vehicles or containers and to the technical characteristics of their design.

#### Article 51

The Annexes to this Convention form an integral part thereof.

#### CHAPTER VII

#### FINAL CLAUSES

#### Article 52

## Signature, ratification, acceptance, approval and

- 1. All States which are members of the United Nations or members of any of the specialized agencies or of the International Atomic Energy Agency or parties to the Statute of the International Court of Justice, and any other State invited by the General Assembly of the United Nations, may become Contracting Parties to this Convention:
- (a) by signing it without reservation of ratification, acceptance or approval;
- (b) by depositing an instrument of ratification, acceptance or approval after signing it subject to ratification, acceptance or approval; or
- (c) by depositing an instrument of accession.
- 2. This Convention shall be open from 1 January until 31 December 1976 inclusive for signature at the Office of the United Nations at Geneva by the States referred to in paragraph 1 of this Article. Thereafter it shall be open for their accession.
- 3. Customs or economic unions may, together with all their member States or at any time after all their member States have become Contracting Parties to this Convention, also become Contracting Parties to this Convention in accordance with the provisions of paragraphs 1 and 2 of this Article. However, these unions shall not have the right to vote.
- 4. The instruments of ratification, acceptance, approval or accession shall be deposited with the Secretary-General of the United Nations.

#### Article 53

#### Entry into force

- 1. This Convention shall enter into force six months after the date on which five States referred to in Article 52 (1) have signed it without reservation of ratification, acceptance or approval or have deposited their instruments of ratification, acceptance, approval or accession.
- 2. After five States referred to in Article 52 (1) have signed it without reservation of ratification, acceptance or approval, or have deposited their instruments of ratification, acceptance, approval or accession, this

Convention shall enter into force for further Contracting Parties six months after the date of the deposit of their instruments of ratification, acceptance, approval or accession.

- 3. Any instrument of ratification, acceptance, approval or accession deposited after the entry into force of an amendment to this Convention shall be deemed to apply to this Convention as amended.
- 4. Any such instrument deposited after an amendment has been accepted but before it has entered into force shall be deemed to apply to this Convention as amended on the date when the amendment enters into force.

#### Article 54

#### Denunciation

- 1. Any Contracting Party may denounce this Convention by so notifying the Secretary-General of the United Nations.
- 2. Denunciation shall take effect 15 months after the date of receipt by the Secretary-General of the notification of denunciation.
- 3. The validity of TIR carnets accepted by the customs office of departure before the date when the denunciation takes effect shall not be effected thereby and the guarantee of the guaranteeing association shall hold good in accordance with the provisions of this Convention.

#### Article 55

#### **Termination**

If, after the entry into force of this Convention, the number of States which are Contracting Parties is for any period of 12 consecutive months, reduced to less than five, the Convention shall cease to have effect from the end of the 12 month period.

#### Article 56

## Termination of the operation of the TIR Convention, 1959

- 1. Upon its entry into force, this Convention shall terminate and replace, in relations between the Contracting Parties to this Convention, the TIR Convention, 1959.
- 2. Certificates of approval issued in respect of road vehicles and containers under the conditions of the TIR

Convention, 1959, shall be accepted during the period of their validity or any extension thereof for the transport of goods under customs seal by Contracting Parties to this Convention, provided that such vehicles and containers continue to fulfil the conditions under which they were originally approved.

#### Article 57

#### Settlement of disputes

- 1. Any dispute between two or more Contracting Parties concerning the interpretation or application of this Convention shall, so far as possible, be settled by negotiation between them or other means of settlement.
- 2. Any dispute between two or more Contracting Parties concerning the interpretation or application of this Convention which cannot be settled by the means indicated in paragraph 1 of this Article shall, at the request of one of them, be referred to an arbitration tribunal composed as follows: each party to the dispute shall appoint an arbitrator and these arbitrators shall appoint another arbitrator, who shall be chairman. If, three months after receipt of a request, one of the parties has failed to appoint an arbitrator or if the arbitrators have failed to elect the chairman, any of the parties may request the Secretary-General of the United Nations to appoint an arbitrator or the chairman of the arbitration tribunal.
- 3. The decision of the arbitration tribunal established under the provisions of paragraph 2 shall be binding on the parties to the dispute.
- 4. The arbitration tribunal shall determine its own rules of procedure.
- 5. Decisions of the arbitration tribunal shall be taken by majority vote.
- 6. Any controversy which may arise between the parties to the dispute as regards the interpretation and execution of the award may be submitted by any of the parties for judgment to the arbitration tribunal which made the award.

#### Article 58

#### Resefvations

1. Any State may, at the time of signing, ratifying or acceding to this Convention, declare that it does not consider itself bound by Article 57 (2) to (6) of this

Convention. Other Contracting Parties shall not be bound by these paragraphs in respect of any Contracting Party which has entered such a reservation.

- 2. Any Contracting Party having entered a reservation as provided for in paragraph 1 of this Article may at any time withdraw such reservation by notifying the Secretary-General of the United Nations.
- 3. Apart from the reservations provided for in paragraph 1 of this Article, no reservation to this Convention shall be permitted.

#### Article 59

#### Procedure for amending this Convention

- 1. This Convention, including its Annexes, may be amended upon the proposal of a Contracting Party by the procedure specified in this Article.
- 2. Any proposed amendment to this Convention shall be considered by an Administrative Committee composed of all the Contracting Parties in accordance with the Rules of Procedure set out in Annex 8. Any such amendment considered or prepared during the meeting of the Administrative Committee and adopted by it by a two-thirds majority of the members present and voting shall be communicated by the Secretary-General of the United Nations to the Contracting Parties for their acceptance.
- 3. Except as provided for under Article 60, any proposed amendment communicated in accordance with the preceding paragraph shall come into force with respect to all Contracting Parties three months after the expiry of a period of 12 months following the date of communication of the proposed amendment during which period no objection to the proposed amendment has been communicated to the Secretary-General of the United Nations by a State which is a Contracting Party.
- 4. If an objection to the proposed amendment has been communicated in accordance with paragraph 3 of this Article, the amendment shall be deemed not to have been accepted and shall have no effect whatsoever.

#### Article 60

#### Special procedure for amending Annexes 1 to 7

1. Any proposed amendment to Annexes 1 to 7 considered in accordance with Article 59 (1) and (2) shall come into force on a date to be determined by the

Administrative Committee at the time of its adoption unless, by a prior date determined by the Administrative Committee at the same time, one fifth or five of the States which are Contracting Parties, whichever number is less, notify the Secretary-General of the United Nations of their objection to the amendment. Determination by the Administrative Committee of the dates referred to in this paragraph shall be by a two thirds majority of those present and voting.

2. On entry into force, any amendment adopted in accordance with the procedures set out in paragraph 1 above shall for all Contracting Parties replace and supersede any previous provisions to which the amendment refers.

#### Article 61

#### Requests, communications and objections

The Secretary-General of the United Nations shall inform all Contracting Parties and all States referred to in Article 52 (1) of this Convention of any request, communication or objection under Articles 59 and 60 above and of the date on which any amendment enters into force.

#### Article 62

#### Review conference

- 1. Any State which is a Contracting Party may, by notification to the Secretary-General of the United Nations, request that a conference be convened for the purpose of reviewing this Convention.
- 2. A review conference, to which all Contracting Parties and all States referred to in Article 52 (1) shall be invited, shall be convened by the Secretary-General of the United Nations if, within a period of six months following the date of notification by the Secretary-General, not less than one fourth of the States which are Contracting Parties notify him of their concurrence with the request.
- 3. A review conference, to which all Contracting Parties and all States referred to in Article 52 (1) shall be invited, shall also be convened by the Secretary-General of the United Nations upon notification of a request by the Administrative Committee. The Administrative Committee shall make a request if agreed to by a majority of those present and voting in the Committee.

4. If a conference is convened in pursuance of paragraph 1 or 3 of this Article, the Secretary-General of the United Nations shall so advise all the Contracting Parties and invite them to submit, within a period of three months, the proposals which they wish the conference to consider. The Secretary-General of the United Nations shall circulate to all Contracting Parties the provisional agenda for the conference, together with the texts of such proposals, at least three months before the date on which the conference is to meet.

#### Article 63

#### **Notifications**

In addition to the notifications and communications provided for in Articles 61 and 62, the Secretary-General of the United Nations shall notify all the States referred to in Article 52 of the following:

(a) signatures, ratifications, acceptances, approvals and accessions under Article 52;

- (b) the dates of entry into force of this Convention in accordance with Article 53;
- (c) denunciations under Article 54;
- (d) the termination of this Convention under Article 55;
- (e) reservations under Article 58.

#### Article 64

#### Authentic text

After 31 December 1976, the original of this Convention shall be deposited with the Secretary-General of the United Nations, who shall transmit certified true copies to each of the Contracting Parties and to the States referred to in Article 52 (1) which are not Contracting Parties.

In witness whereof, the undersigned, being duly authorized thereto, have signed this Convention.

Done at Geneva, this fourteenth day of November one thousand nine hundred an seventy-five, in a single copy in the English, French and Russian languages, the three texts being equally authentic.

#### ANNEX 1

#### SPECIMEN TIR CARNET

The TIR carnet is printed in French except for page 1 of the cover where the items are also printed in English. The 'rules regarding the use of the TIR carnet' given in given in French on page 2 of the cover are also printed in English on page 3 of the cover.

## (Nom de l'organisme international)

# CARNET TIR'

		ure up to and including					
	, , ,						
D	élivré parsued by						
13	suco by						
	Man de Vancasta de La Constantina de La Constant						
	(Nom de l'association émettrice / Name d	of issuing association)					
Titulaire							
-	lolder						
•	(Nom, adresse, pays / Name, adc	ress, country)					
	ignatura du délégué de l'agonistica	Cinnature du constaire					
	ignature du délégué de l'association E mettrice	<ul> <li>Signature du secrétaire de l'organisme international:</li> </ul>					
е	t cachet de cette association:	Signature of the secretary of the international					
	ignature of authorized official of the suing association and stamp of that	organization :					
	ssuing association and stamp of that ssociation:						
	<b>/</b>						
	The second secon						
	•						
	•						
.	Country of departure						
	À remplir avant l'utilisation par le titulaire du carnet / To be Pays de départ Country of departure						
	A remplir avant l'utilisation par le titulaire du carnet / To be Pays de départ Country of departure Pays de destination Country/Countries of destination (¹)  Numéro(s) d'immatriculation du (des) véhicule(s) routier(s) (¹)						
	A remplir avant l'utilisation par le titulaire du carnet / To be  Pays de départ  Country of departure  Pays de destination  Country/Countries of destination (¹)  Numéro(s) d'immatriculation du (des) véhicule(s) routier(s) (¹)  Registration No(s) of road vehicle(s) (¹)  Certificat(s) d'agrément du (des) véhicule(s) routier(s) (numéro						
	A remplir avant l'utilisation par le titulaire du carnet / To be Pays de départ Country of departure Pays de destination Country/Countries of destination (¹)  Numéro(s) d'immatriculation du (des) véhicule(s) routier(s) (¹)  Registration No(s) of road vehicle(s) (¹)  Certificat(s) d'agrément du (des) véhicule(s) routier(s) (numéro Certificate(s) of approval of road vehicle(s) (No and date) (¹)  Numéro(s) d'identification du (des) conteneur(s) (¹)  Identification No(s) of container(s) (¹)						
	A remplir avant l'utilisation par le titulaire du carnet / To be Pays de départ Country of departure Pays de destination Country/Countries of destination (1)  Numéro(s) d'immatriculation du (des) véhicule(s) routier(s) (1)  Registration No(s) of road vehicle(s) (1)  Certificat(s) d'agrément du (des) véhicule(s) routier(s) (numéro Certificate(s) of approval of road vehicle(s) (No and date) (1)  Numéro(s) d'identification du (des) conteneur(s) (1)  Identification No(s) of container(s) (1)	et date) (1)					

Voir annexe 1 de la convention TIR, 1975, élaborée sous les auspices de la Commission économique des Nations unies pour l'Europe.

See Annex 1 to the TIR Convention, 1975, prepared under the auspices of the United Nations Economic Commission for Europe.

#### RÈGLES RELATIVES À L'UTILISATION DU CARNET TIR

#### A. Généralités

- 1. Émission: Le carnet TIR sera émis dans le pays de départ ou dans le pays où le titulaire est établi ou domicilié
- 2. Langue: Le carnet TIR est imprimé en français, à l'exception de la page 1 de la couverture dont les rubriques sont également imprimées en anglais; les règles relatives à l'utilisation du carnet TIR sont reproduites en version anglaise à la page 3 de ladite couverture. Par ailleurs, des feuillets supplémentaires donnant une traduction en d'autres langues du texte imprimé peuvent être ajoutés.
- 3. Validité: Le carnet TIR demeure valable jusqu'à l'achèvement de l'opération TIR au bureau de douane de destination, pour autant qu'il ait été pris en charge au bureau de douane de départ dans le délai fixé par l'association émettrice (rubrique 1 de la page 1 de la couverture et rubrique 4 des volets).
- 4. Nombre de carnets: Il pourra être établi un seul carnet TIR pour un ensemble de véhicules (véhicules couplés) ou pour plusieurs conteneurs chargés soit sur un seul véhicule soit sur un ensemble de véhicules [voir également la règle 10 sous d) ci-dessous].
- 5. Nombré de bureaux de douane de départ et de destination: Les transports effectués sous le couvert d'un carnet TIR peuvent comporter plusieurs bureaux de douane de départ et de destination, mais, sauf autorisation:
  - a) les bureaux de douane de départ devront être situés dans le même pays;
  - b) les bureaux de douane de destination ne pourront pas être situés dans plus de deux pays;
  - c) le nombre total des bureaux de douane de départ et de destination ne pourra dépasser quatre [voir également la règle 10 sous e) ci-dessous].
- 6. Nombre de feuillets: Si le transport comporte un seul bureau de douane de départ et un seul bureau de douane de destination, le carnet TIR devra comporter au moins 2 feuillets pour le pays de départ, 3 feuillets pour le pays de destination, puis 2 feuillets pour chaque autre pays dont le territoire est emprunté. Pour chaque bureau de douane de départ ou de destination supplémentaire, 2 autres feuillets, respectivement 3 autres feuillets, seront nécessaires; en outre, il faudra ajouter 2 feuillets si les bureaux de douane de destination sont situés dans deux pays différents.
- 7. Présentation aux bureaux de douane: Le carnet TIR sera présenté avec le véhicule routier, l'ensemble de véhicules, le ou les conteneurs à chacun des bureaux de douane de départ, de passage et de destination. Au dernier bureau de douane de départ, la signature de l'agent et le timbre à date du bureau de douane doivent être apposés au bas du manifeste de tous les volets à utiliser pour la suite du transport (rubrique 19).

#### B. Manière de remplir le carnet TIR

- 8. Grattage, surcharge: Le carnet TIR ne comportera ni grattage ni surcharge. Toute rectification devra être effectuée en biffant les indications erronées et en ajoutant, le cas échéant, les indications voulues. Toute modification devra être approuvée par son auteur et visée par les autorités douanières.
- Indication relative à l'immatriculation: Lorsque les dispositions nationales ne prévoient pas l'immatriculation des remorques et semi-remorques, on indiquera, en lieu et place du numéro d'immatriculation, le numéro d'identification ou de fabrication.

#### 10. Manifeste:

- a) Le manifeste sera rempli dans la langue du pays de départ, à moins que les autorités douanières n'autorisent l'usage d'une autre langue. Les autorités douanières des autres pays empruntés se réservent le droit d'en exiger une traduction dans leur langue. En vue d'éviter des retards qui pourraient résulter de cette exigence, il est conseillé au transporteur de se munir des traductions nécessaires.
- b) Les indications portées sur le manifeste devraient être dactylographiées ou polycopiées de manière qu'elles soient nettement lisibles sur tous les feuillets. Les feuillets illisibles seront refusés par les autorités douanières.
- c) Lorsqu'il n'y a pas assez d'espace pour inscrire sur le manifeste toutes les marchandises transportées, des feuilles-annexes, du même modèle que le manifeste, ou des documents commerciaux comportant toutes les indications du manifeste peuvent être attachés aux volets. Dans ce cas, tous les volets devront porter les indications suivantes: i) nombre des feuilles-annexes (case 10),
  - ii) nombre et nature des colis ou des objets ainsi que le poids brut total des marchandises énumérées sur ces feuilles-annexes (cases 11 à 13).
- d) Lorsque le carnet TIR couvre un ensemble de véhicules ou plusieurs conteneurs, le contenu de chaque véhicule ou de chaque conteneur sera indiqué séparément sur le manifeste. Cette indication devra être précédée du numéro d'immatriculation du véhicule ou du numéro d'identification du conteneur (rubrique 11 du manifeste).
- e) De même, s'il y a plusieurs bureaux de douane de départ ou de destination, les inscriptions relatives aux marchandises prises en charge ou destinées à chaque bureau de douane seront nettement séparées les unes des autres sur le manifeste.
- 11. Listes de colisage, photos, plans, etc.: Lorsque, pour l'identification des marchandises pondéreuses ou volumineuses, les autorités douanières exigeront que de tels documents soient annexés au carnet TIR, ces derniers seront visés par les autorités douanières et attachés à la page 2 de la couverture du carnet. Au surplus, une mention de ces documents sera faite dans la case 10 de tous les volets.
- 12. Signature: Tous les volets (rubriques 16 et 17) seront datés et signés par le titulaire du carnet TIR ou par son repré-

#### C. Incidents ou accidents

- 13. S'il arrive en cours de route, pour une cause fortuite, qu'un scellement douanier soit rompu ou que des marchandises périssent ou soient endommagées, le transporteur s'adressera immédiatement aux autorités douanières s'il s'en trouve à proximité ou, à défaut, à d'autres autorités compétentes du pays où il se trouve. Ces dernières établiront dans le plus bref délai le procès-verbal de constat figurant dans le carnet TIR.
- delair le proces-verbair de constat rigurant dans le carnet rin.

  14. En cas d'accident nécessitant le transbordement sur un autre véhicule ou dans un autre conteneur, ce transbordement ne peut s'effectuer qu'en présence de l'une des autorités désignées à la règle 13 ci-dessus. Ladite autorité établira le procès-verbal de constat. À moins que le carnet ne porte la mention «marchandises pondéreuses ou volumineuses», le véhicule ou conteneur de substitution devra être agréé pour le transport de marchandises sous scellements douaniers. En plus, il sera scellé et le scellement apposé sera indiqué dans le procès-verbal de constat. Toutefois, si aucun véhicule ou conteneur agréé n'est disponible, le transbordement pourra être effectué sur un véhicule ou dans un conteneur non agréé, pour autant qu'il offre des garanties suffisantes. Dans ce dernier cas, les autorités douanières des pays suivants apprécieront si elles peuvent, elles aussi, laisser continuer dans ce véhicule ou conteneur le transport sous le couvert du carnet TIR.
- 15. En cas de péril imminent nécessitant le déchargement immédiat, partiel ou total, le transporteur peut prendre des mesures de son propre chef sans demander ou sans attendre l'intervention des autorités visées à la règle 13 ci-dessus. Il aura alors à prouver qu'il a dû agir ainsi dans l'intérêt du véhicule ou conteneur ou de son chargement et, aussitôt après avoir pris les mesures préventives de première urgence, avertira une des autorités visées à la règle 13 ci-dessus pour faire constater les faits, vérifier le chargement, sceller le véhicule ou conteneur et établir le procès-verbal de constat.
- 16. Le procès-verbal de constat restera joint au carnet TIR jusqu'au bureau de douane de destination.
- 17. Il est recommandé aux associations de fournir aux transporteurs, outre le modèle inséré dans le carnet TIR lui-même, un certain nombre de formules de procès-verbaux de constat rédigées dans la ou les langues des pays à traverser.

## COUNTERFOIL No 1(odd-numbered pages, white) of the TIR CARNET Customs officer's signature and customs office date stamp 1. Accepted by the customs office at 2. Under No ..... 3. Seals or identification marks applied 4. Seals or identification marks found to be intact 5. Miscellaneous (route prescribed, customs office at which the load must be produced, etc.) **VOUCHER No 1** 1. TIR CARNET 2. Customs office(s) of departure 3. Issued by (name of issuing association) Valid for the acceptance of goods by the customs office of departure up to and including For official use 5. Holder of the carnet (name, address and country) 7. Country/countries of destination 6. Country of departure 8. Registration No(s) of road vehicle(s) 10. Documents attached to the manifest 9. Certificate(s) of approval (No and date) **GOODS MANIFEST** 11. (a) Load compartment(s) or container(s) 12. Number and type of packages or articles; description of goods 13. Gross weight (in kg) 18. Seals or identification marks applied (b) Marks and Nos of packages or articles 14. Total number of packages entered on the manifest, Destination: 15. I declare the information in items 1 to 14 to be correct and complete Customs office of departure, customs officer's signature and customs office date stamp Number 1. Customs office 16. Place and date 17. Signature of holder or agent 2. Customs office 3. Customs office 20. Certificate of acceptance of goods (customs office of departure or of entry en route) 21. Seals or identification marks found to be intact 22. Time limit for transit 23. Registered by the customs office at under No 24. Miscellaneous (route prescribed, customs office at which the load must be produced, etc.) 25. Customs officer's signature and customs office date stamp

## COUNTERFOIL No 2 (even-numbered pages, green) of the TIR CARNET 6. Customs officer's signature and customs office date stam 1. Arrival certified by the customs office at .. 2. Seals or identification marks found to be intact 3. Discharged ...... packages or articles (as specified in the manifest) 4 New seals affixed 5. Conditions of discharge (if any) **VOUCHER No 2** 1. TIR CARNET 2. Customs office(s) of departure 3. Issued by (name of issuing association) Valid for the acceptance of goods by the customs office of departure up to and including For official use 5. Holder of the carnet (name, address and country) 7. Country/countries of destination 6. Country of departure 8. Registration No(s) of road vehicle(s) 10. Documents attached to the manifest 9. Certificate(s) of approval (No and date) **GOODS MANIFEST** 11. (a) Load compartment(s) or container(s) 12. Number and type of packages or articles; description of goods 13. Gross weight (in kg) 18. Seals or identification marks applied (number, (b) Marks and Nos of packages or articles identification 14. Total number of packages entered on the manifest, Destination: 15. I declare the information in items 1 to 14 to be correct and complete Customs office of departure, customs officer's signature and customs office date stamp 1. Customs office 16. Place and date 17. Signature of holder or agent 2. Customs office 3. Customs office Certificate of acceptance of goods (customs office of departure or of entry *en route*) 26. Certificate of discharge (customs office of exit *en route* or of destination) 21. Seals or identification marks found to be intact 27. Seals or identification marks found to be intact 22. Time limit for transit 23. Registered by the customs office at under No 28. Number of packages discharged Miscellaneous (route prescribed, customs office at which the load must be produced, etc.) 29. Conditions of discharge (if any) 25. Customs officer's signature and customs office date stamp Customs officer's signature and customs office date stamp

CARNET No



# VOUCHER INTENDED EXCLUSIVELY for the customs office of destination if so required



VOUCHER No 2	(pink)		1. TIR C	ARNET		
2. Customs office(s) of departure	•		3. Issued by (na	me of issuing assoc	iation)	
1	2			acceptance of good	ds by the customs	office of departure
3			up to and inc	-		
For official use			5. Holder of the	carnet (name, addr	ess and country)	
<del>-</del>						
			6. Country of de	eparture	7. Country/of destin	
8. Registration No(s) of road vehicle	(s)		10. Documents a	attached to the mani	fest	
9. Certificate(s) of approval (No and	date)					
GOODS MANIF	EST					
11. (a) Load compartment(s) or container(s)	12. Number and	I type of packages	or articles; descript	tion of goods	13. Gross weight (in kg)	18. Seals or identification marks applied (number.
(b) Marks and Nos of packages or articles						identification
				,		
14. Total number of packages	Number	15. I declare the	information	19. Customs offi	ce of departure	J
entered on the manifest, Destination:  1. Customs office		in items 1 to correct and 16. Place and da	14 to be complete	customs offi	cer's signature and ce date stamp	i
2. Customs office		17. Signature of				
3. Customs office						\
·		(1	T			**************************************
Certificate of acceptance of good or of entry en route)     Seals or identification marks found to be intact	22. Time limit fo		or of destina	f discharge (customs ation) identification marks		ute 
23. Registered by the customs office	e at	under No	28. Number of p	oackages discharged		
24. Miscellaneous (route prescribed must be produced, etc.)	l, customs office at	which the load	29. Conditions	of discharge (if any)		
25. Customs officer's signature and customs office date stamp			30. Customs of and custom	ficer's signature is office date stamp		

Certified report (yellow)

Drawn up in accordance with Article 25 of the TIR Convention (See also rules 13 to 17 regarding the use of the TIR carnet)

. Customs office(s) of departure		2.	TIR CAR	NET CONTRACTOR
		3. Issued I	ру	
Registration No(s) of road vehicle Identification No(s) of container(s)	e(s) s)	5. Holdero	f the carnet	
			•	
. The customs seal(s) is/are	intact not intact	8. Remark	s	
. The load compartment(s) or container(s) is/are	intact not intact			
. No goods appeared to be mis			ms 10 to 13 are missi ) as indicated in colu	
Load compartment(s) or container(s)     Marks and Nos of packages or articles	Number and type of package description of goods	es or articles;	12. 13 M or D	Remarks (give particulars of quantities missing or destroyed)
4. Date, place and circumstances o	of the accident			
5. Measures taken to enable the TI affixing of new seals: numb transfer of load (see item 16	er description			
6. If the goods have been transfer	red: description of road vehicle(s)/c Registration No	ontainer(s) substi	tuted No of certificate	Muselmand
(a) vehicle	Identification No	Yes No	of approval	Number and particulars of seals affixed/
(b) container	identification No			
7. Authority which drew up this ce	rtified report	18. Endors	ement of next custon	ns office reached by the TIR transport

#### RULES REGARDING THE USE OF THE TIR CARNET

#### A. General

- Issue: The TIR carnet may be issued either in the country of departure or in the country in which the holder is established or resident.
- 2. Language: The TIR carnet is printed in French except for page 1 of the cover where the items are also printed in English; this page is a translation of the 'Rules regarding the use of the TIR carnet' given in French on page 2 of the cover. Additional sheets giving a translation of the printed text may also be inserted.
- 3. Validity: The TIR carnet remains valid until the completion of the TIR operation at the customs office of destination, provided that it has been taken under customs control at the customs office of departure within the time limit set by the issuing association (item 1 of page 1 of the cover and item 4 of the vouchers).
- Number of carnets: Only one TIR carnet need be required for a combination of vehicles (coupled vehicles) or for several containers loaded either on a single vehicle or on a combination of vehicles (see also rule 10 (d) below).
- Number of customs offices of departure and customs offices of destination: Transport under cover of a TIR carnet
  may involve several customs offices of departure and destination, but, unless otherwise authorized:
  - (a) the customs offices of departure must be situated in the same country:
  - (b) the customs offices of destination may not be situated in more than two countries;
  - (c) the total number of customs offices of departure and destination may not exceed four (see also rule 10 (e) below).
- 6. Number of forms: Where there is only one customs office of departure, and one customs office of destination, the TIR carnet must contain at least two sheets for the country of departure, three sheets for the country of destination and two sheets for each country traversed. For each additional customs office of departure two extra sheets and for each additional customs office of destination three extra sheets shall be required; in addition, there must be two more sheets if the customs offices of destination are situated in two different countries.
- 7. **Presentation at customs offices:** The TIR carnet shall be presented with the road vehicle, combination of vehicles, or container(s) at each customs office of departure, customs office *en route* and customs office of destination. At the last customs office of departure, the customs office shall sign and date stamp item 19 below the manifest on all vouchers to be used on the remainder of the journey.

#### B. How to fill in the TIR carnet

- 8. Erasures, over-writing: No erasures or over-writing shall be made on the TIR carnet. Any corrections shall be made by crossing out the incorrect particulars and adding, if necessary, the required particulars. Any change shall be initialled by the person making it and endorsed by the customs authorities.
- Information concerning registration: When national legislation does not provide for registration of trailers and semitrailers, the identification of manufacturer's number shall be shown instead of the registration number.
- 10. The manifest:
  - (a) The manifest must be completed in the language of the country of departure, unless the customs authorities allow another language to be used. The customs authorities of the other countries traversed reserve the right to require its translation into their own language. In order to avoid delays which might ensue from this requirement, carriers are advised to supply the driver of the vehicle with the requisite translations.
  - (b) The information on the manifest should be typed or multicopied in such a way as to be clearly legible on all the sheets. Illegible sheets will not be accepted by the customs authorities.
  - (c) When there is not enough space in the manifest to enter all the goods carried, separate sheets of the same model as the manifest or commercial documents providing all the information required by the manifest may be attached to the vouchers. In such cases, all the vouchers must contain the following particulars:
    - (i) the number of sheets attached (box 10),
    - (ii) the number and type of packages or articles and the total gross weight of the goods listed on the attached sheets (boxes 11 to 13).
  - (d) When the TIR carnet covers a combination of vehicles or several containers, the contents of each vehicle or each container shall be indicated separately on the manifest. This information shall be preceded by the registration number of the vehicle or the identification number of the container (item 11 of the manifest).
  - (e) Likewise, if there are several customs offices of departure or of destination, the entries concerning the goods taken under customs control at, or intended for, each customs office shall be clearly separated from eachother on the manifest.
- 11. Packing lists, photographs, plans, etc.: When such documents are required by the customs authorities for the identification of heavy or bulky goods, they shall be endorsed by the customs authorities and attached to page 2 of the cover of the carnet. In addition, a reference shall be made to these documents in box 10 of all vouchers.
- 12. Signature: All vouchers (items 16 and 17) must be dated and signed by the holder of the TIR carnet or his agent.

#### C. Incidents or accidents

- 13. In the event of customs seals being broken or goods being destroyed or damaged by accident en route the carrier shall immediately contact the customs authorities, if there are any near at hand, or, if not, any other competent authorities of the country he is in. The authorities concerned shall draw up with the minimum delay the certified report which is contained in the TIR carnet.
- 14. In the event of an accident necessitating transfer of the load to another vehicle or another container, this transfer may be carried out only in the presence of one of the authorities mentioned in rule 13 above. The said authority shall draw up the certified report. Unless the carnet carries the words 'Heavy or bulky goods', the vehicle or container substituted must be one approved for the transport of goods under customs seals. Furthermore, it shall be sealed and details of the seal affixed shall be indicated in the certified report. However, if no approved vehicle or container is available, the goods may be transferred to an unapproved vehicle or container, provided it affords adequate safeguards. In the latter event, the customs authorities of succeeding countries shall judge whether they, too, can allow the transport under cover of the TIR carnet to continue in that vehicle or container.
- 15. In the event of imminent danger necessitating immediate unloading of the whole or of part of the load, the carrier may take action on his own initiative without requesting, or waiting for action by the authorities mentioned in rule 13 above. It shall then be for him to furnish proof that he was compelled to take such action in the interests of the vehicle or container or of the load and, as soon as he has taken such preventive measures as the emergency may require, he shall notify one of the authorities mentioned in rule 13 above in order that the facts may be verified, the load checked, the vehicle or container sealed and the certified report drawn up.
- 16. The certified report shall remain attached to the TIR carnet until the customs office of destination is reached.
- 17. In addition to the model form inserted in the TIR carnet itself, associations are recommended to furnish carriers with a supply of certified report forms in the language or languages of the countries of transit.

• 

#### ANNEX 2

# REGULATIONS ON TECHNICAL CONDITIONS APPLICABLE TO ROAD VEHICLES WHICH MAY BE ACCEPTED FOR INTERNATIONAL TRANSPORT UNDER CUSTOMS SEAL

#### Article 1

#### Basic principles

Approval for the international transport of goods under customs seal may be granted only to vehicles, the load compartments of which are constructed and equipped in such a manner that:

- (a) no goods can be removed from, or introduced into, the sealed part of the vehicle without leaving obvious traces of tampering or without breaking the customs seal;
- (b) customs seals can be simply and effectively affixed to them;
- (c) they contain no concealed spaces where goods may be hidden;
- (d) all spaces capable of holding goods are readily accessible for customs inspection.

#### Article 2

#### Structure of load compartments

- 1. To meet the requirements of Article 1 of these Regulations:
- (a) the constituent parts of the load compartment (sides, floor, doors, roof, uprights, frames, cross-pieces, etc.) shall be assembled either by means of devices which cannot be removed and replaced from the outside without leaving obvious traces or by such methods as will produce a structure which cannot be modified without leaving obvious traces. When the sides, floor, doors and roof are made up of various components, these shall meet the same requirements and be of sufficient strength;
- (b) doors and all other closing systems (including stopcocks, manhole-covers, flanges, etc.) shall be fitted with a device on which customs seals can be fixed. This device must be such that it cannot be removed and replaced from the outside without leaving obvious traces, or the door or fastening be opened without breaking the customs seals. The latter shall

- be adequately protected. Opening roofs shall be permitted;
- (c) apertures for ventilation and drainage shall be provided with a device preventing access to the interior of the load compartment. This device must be such that it cannot be removed and replaced from the outside without leaving obvious traces.
- 2. Notwithstanding the provisions of Article 1 (c) of these Regulations, constituent parts of the load compartment which, for practical reasons, have to include empty spaces (for example, between the partitions of a double wall) shall be permitted. In order that the said spaces cannot be used to conceal goods:
- (i) where it covers the full height from floor to roof, or, in other cases, where the space between it and the outer wall is completely enclosed, the lining inside the load compartment shall be so fitted that it cannot be removed and replaced without leaving obvious traces, and
- (ii) where a lining is of less than full height and the spaces between the lining and the outer wall are not completely enclosed, and in all other cases where spaces occur in the construction of a load compartment, the number of such spaces shall be kept to a minimum and these spaces shall be readily accessible for customs inspection.
- 3. Windows shall be allowed provided that they are made of materials of sufficient strength and that they cannot be removed and replaced from the outside without leaving obvious traces. Glass shall nevertheless be permitted, but in this case the window shall be fitted with a fixed metal grille which cannot be removed from the outside; the mesh of the grille shall not exceed 10 mm.
- 4. Openings made in the floor for technical purposes, such as lubrication, maintenance and filling of the sandbox, shall be allowed only on condition that they are fitted with a cover capable of being fixed in such a way as to render the load compartment inaccessible from the outside.

#### Article 3

#### Sheeted vehicles

1. Where applicable, the provisions of Articles 1 and 2 of these Regulations shall apply to sheeted vehicles. In

addition, these vehicles shall conform to the provisions of this Article.

- 2. The sheet shall be either of strong canvas or of plastic-covered or rubberized cloth, which shall be of sufficient strength and unstretchable. It shall be in good condition and made up in such a way that once the closing device has been secured, it is impossible to gain access to the load compartment without leaving obvious traces.
- 3. If the sheet is made up of several pieces, their edges shall be folded into one another and sewn together with two seams at least 15 mm apart. These seams shall be made as shown in Sketch No 1 appended to these Regulations; however, where in the case of certain parts of the sheet (such as flaps and reinforced corners) it is not possible to assemble the pieces in that way, it shall be sufficient to fold the edge of the top section and make the seams as shown in Sketch No 2 or 2 (a) appended to these Regulations. One of the seams shall be visible only from the inside and the colour of the thread used for that seam shall be clearly different from the colour of the sheet itself and from the colour of the thread used for the other seam. All seams shall be machine-sewn.
- 4. If the sheet is of plastic-covered cloth, and is made up of several pieces, the pieces may alternatively be welded together in the manner shown in Sketch No 3 appended to these Regulations. The edges of the pieces shall overlap by at least 15 mm. The pieces shall be fused together over the whole width of the overlap. The edge of the outer sheet shall be covered with a band of plastic material at least 7 mm wide, affixed by the same welding process. The plastic band and the sheet on each side of it for a width of at least 3 mm shall have a clearly-defined uniform relief pattern stamped on them. The pieces shall be welded in such a way that they cannot be separated and rejoined without leaving obvious traces.
- 5. Repairs shall be made in accordance with the method described in Sketch No 4 appended to these Regulations; the edges shall be folded into one another and sewn together with two visible seams at least 15 mm apart; the colour of the thread visible from the inside shall be different from that of the thread visible from the outside and from that of the sheet itself; all seams shall be machine-sewn. When a sheet which has been damaged near the edges is repaired by replacing the damaged part by a patch, the seam can also be made in accordance with the provisions of paragraph 3 of this Article and Sketch No 1 appended to these Regulations. Sheets of plastic-covered cloth may alternatively be repaired in accordance with the method described in paragraph 4 of this Article, but in that case the plastic band must be affixed to both sides of the sheet, the patch being fitted on the inside of the sheet.

- 6. (a) The sheet shall be fixed to the vehicle in strict compliance with the conditions set forth in Article 1 (a) and (b) of these Regulations. The following types of fastening shall be provided:
  - (i) metal rings fixed to the vehicles,
  - (ii) eyelets let into the edge of the sheet,
  - (iii) a fastening passing through the rings above the sheet and visible from the outside for its entire length.

The sheet shall overlap solid parts of the vehicle by at least 250 mm, measured from the centre of the securing rings, unless the system of construction of the vehicle in itself prevents all access to the load compartment.

- (b) When any edge of a sheet is to be permanently secured to a vehicle, the two surfaces shall be joined together without a break and shall be held in place by strong devices.
- 7. The sheet shall be supported by an adequate superstructure (uprights, sides, arches, slats, etc.).
- 8. The spaces between the rings and the spaces between the eyelets shall not exceed 200 mm. The eyelets shall be reinforced.
- 9. The following fastenings shall be used:
- (a) steel wire ropes of at least 3 mm diameter; or
- (b) ropes of hemp or sisal of at least 8 mm diameter encased in a transparent sheath of unstretchable plas-

Wire ropes may have a transparent sheath of unstretchable plastic.


- 10. Each rope shall be in one piece and have a hard metal end-piece at each end. The fastener of each metal end-piece shall include a hollow rivet passing through the rope so as to allow the introduction of the thread or strap of the customs seal. The rope shall remain visible on either side of the hollow rivet so that it is possible to ensure that the rope is in one piece (see Sketch No 5 appended to these Regulations).
- 11. At the openings in the sheet, used for loading and unloading, the two edges of the sheet shall have an adequate overlap. They shall also be fastened by:
- (a) a flap sewn or welded in accordance with paragraphs 3 and 4 of this Article;
- (b) rings and eyelets meeting the conditions of paragraph 8 of this Article; and
- (c) a thong made of appropriate material, in one piece and unstretchable, at least 20 mm wide and 3 mm thick, passing through the rings and holding together the two edges of the sheet and the flap; the thong shall

be secured inside the sheet and fitted with an eyelet to take the rope mentioned in paragraph 9 of this Article.


A flap shall not be required if a special device, such as a baffle plate, is fitted, which prevents access to the load compartment without leaving obvious traces.

Sketch No 1

#### Sheet made of several pieces sewn together

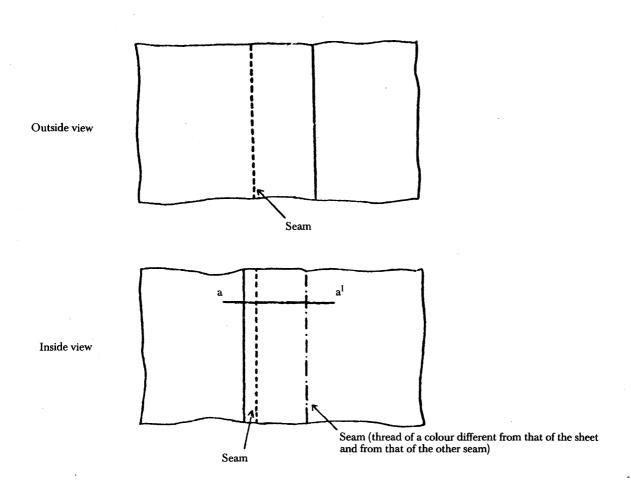


Section, a-a<sup>1</sup>
Double flat seam




Sketch No 2


Sheet made of several pieces sewn together

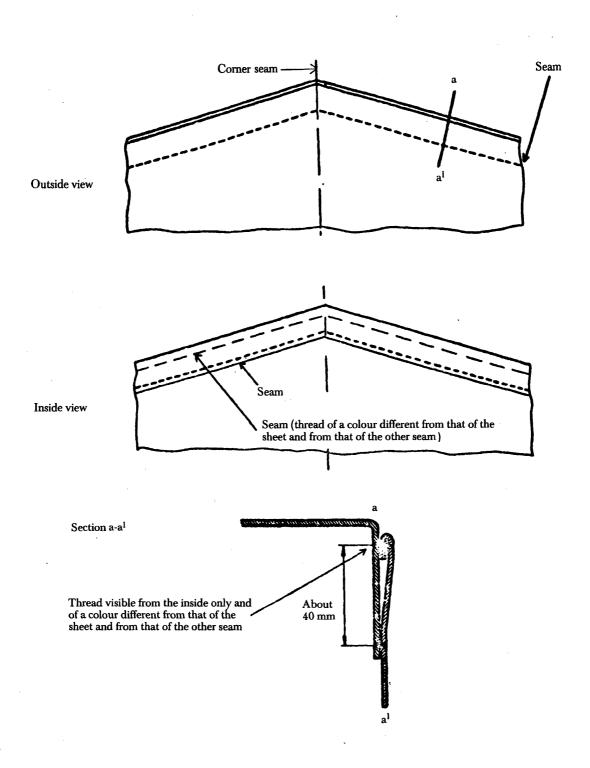


Sketch No 2 (a)

#### Sheet made of several pieces sewn together

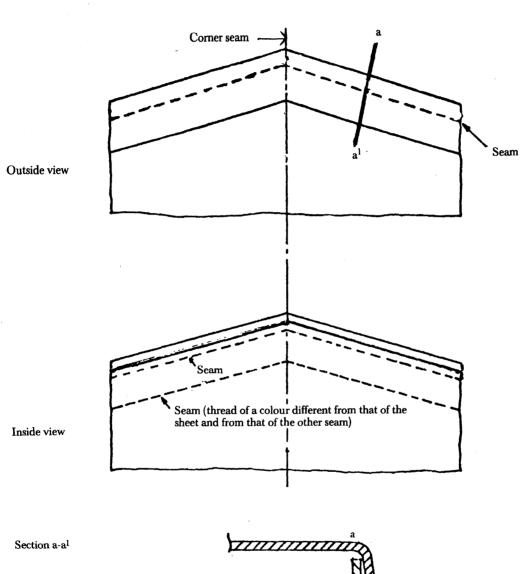

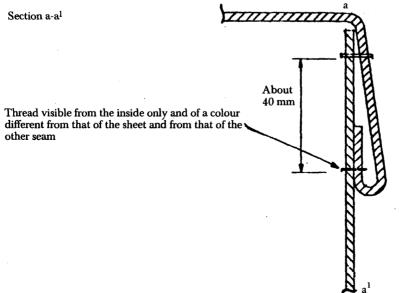


Sketch No 3
Sheet made of several pieces welded together

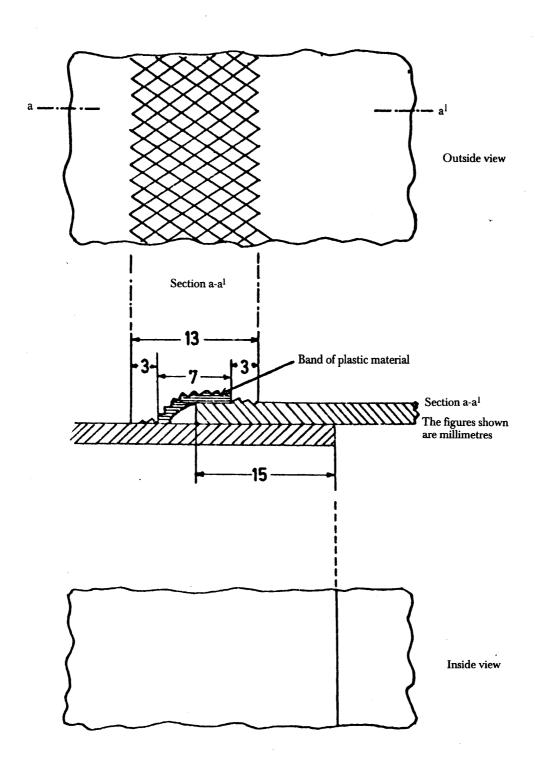

Sketch No 4


#### Repair of the sheet

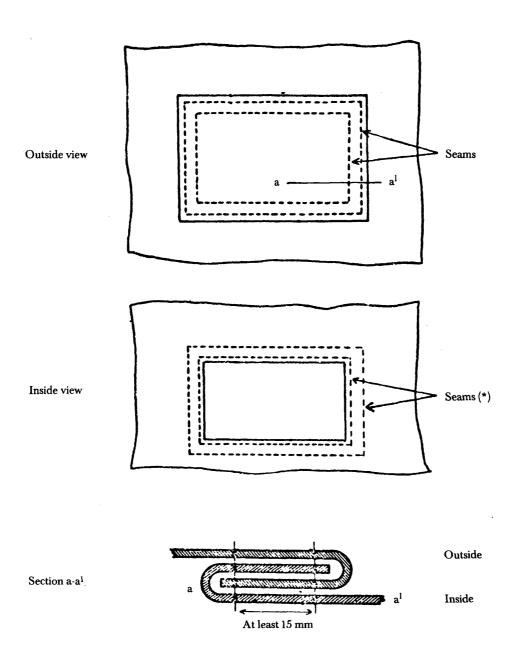

<sup>(\*)</sup> Threads visible from inside shall be of a colour different from that of the threads visible from the outside and from that of the sheet.

#### Sketch No 5

#### Example of end-piece

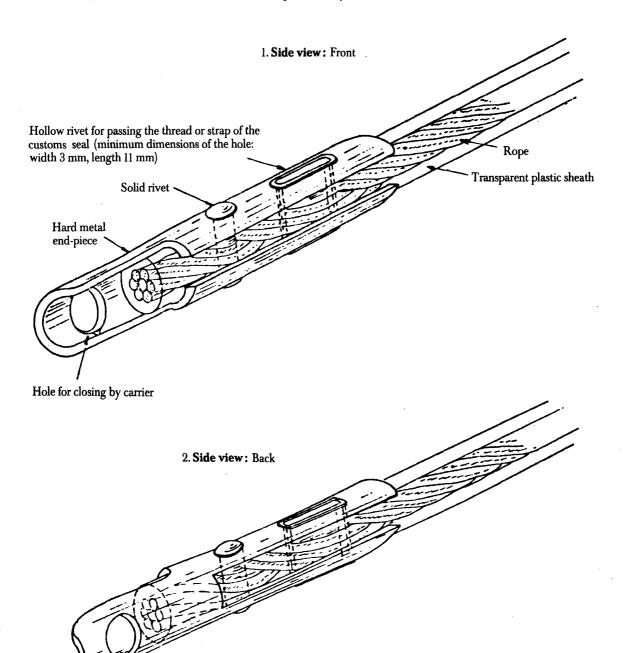

#### ANNEX 3

# PROCEDURE FOR THE APPROVAL OF ROAD VEHICLES COMPLYING WITH THE TECHNICAL CONDITIONS SET FORTH IN THE REGULATIONS CONTAINED IN ANNEX 2

#### General

- 1. Road vehicles may be approved by one of the following procedures:
- (a) individually; or
- (b) by design type (series of road vehicles).
- 2. An approval certificate conforming to the standard form of Annex 4 shall be issued for approved vehicles. This certificate shall be printed in the language of the country of issue and in French or English. When the authority which has granted the approval deems it necessary, photographs or diagrams authenticated by that authority shall be attached to the certificate. The number of those documents shall then be inserted by that authority under item 6 of the approval certificate.
- 3. The approval certificate shall be kept on the road vehicle.
- 4. Road vehicles shall be produced every two years, for the purposes of inspection and of renewal of approval, where appropriate, to the competent authorities of the country in which the vehicle is registered or, in the case of unregistered vehicles, of the country in which the owner or user is resident.
- 5. If a road vehicle no longer complies with the technical conditions prescribed for its approval, it shall, before it can be used for the transport of goods under cover of TIR carnets, be restored to the condition which had justified its approval so as to comply again with the said technical conditions.
- 6. If the essential characteristics of a road vehicle are changed, the vehicle shall cease to be covered by the approval and shall be reapproved by the competent authority before it can be used for the transport of goods under cover of TIR carnets.
- 7. The competent authorities of the country of registration of the vehicle or, in the case of vehicles for which registration is not required, the competent authorities of the country where the owner or user of the vehicle is established may, as the case may be, withdraw or renew the approval certificate or issue a new approval certificate in the circumstances set out in Article 14 of this Convention and in paragraphs 4, 5 and 6 of this Annex.

#### Procedure for individual approval

8. The owner, the operator or the representative of either shall apply to the competent authority for individual approval. The competent authority shall inspect the road vehicle produced in accordance with the general rules laid down in paragraphs 1 to 7 above and shall satisfy itself that the vehicle complies with the technical conditions prescribed in Annex 2, and after approval shall issue a certificate conforming to the model in Annex 4.

## Procedure for approval by design type (series of road vehicles)

- 9. Where road vehicles are manufactured by type series, the manufacturer may apply to the competent authority of the country of manufacture for approval by design-type.
- 10. The manufacturer shall state in his application the identification numbers or letters which he assigns to the type of road vehicle to which his application for approval relates.
- 11. The application shall be accompanied by drawings and a detailed design specification of the type of road vehicle to be approved.
- 12. The manufacturer shall give an undertaking in writing that he will:
- (a) produce to the competent authority such vehicles of the type concerned as that authority may wish to examine;
- (b) permit the competent authority to examine further units at any time during the production of the type series concerned;
- (c) advise the competent authority of any change, however small, in the design or specification before proceeding with such change;
- (d) mark the road vehicles in a visible place with the identification numbers or letters of the design-type and the serial number of the vehicle in the type series (manufacturer's number);
- (e) keep a record of vehicles manufactured to the approved design-type.

- 13. The competent authority shall state what changes, if any, must be made to the proposed design-type in order that approval may be granted.
- 14. No approval by design-type shall be granted unless the competent authority has satisfied itself by examination of one or more vehicles manufactured to the design-type concerned that vehicles of that type comply with the technical conditions prescribed in Annex 2.
- 15. The competent authority shall notify the manufacturer in writing of its decision to grant approval by design-type. This decision shall be dated and numbered. The authority which took the decision shall be clearly designated.
- 16. The competent authority shall take the necessary steps to issue an approval certificate, which it has duly signed, in respect of every vehicle built in conformity with an approved design-type.
- 17. The holder of the approval certificate shall, before using the vehicle for the carriage of goods under the cover of a TIR carnet, fill in, as may be required, on the approval certificate:
- the registration number given to the vehicle (item 1) or,
- in the case of a vehicle not subject to registration, particulars of his name and business address (item 8).
- 18. When a vehicle which has been approved by designtype is exported to another country which is a Contracting Party to this Convention, no further approval procedure shall be required in that country on account of its importation.

## Procedure for endorsement of the certificate of approval

- 19. When an approved vehicle, carrying goods under cover of a TIR carnet, is found to have major defects, the competent authorities of Contracting Parties may either refuse to allow the vehicle to continue its journey under a TIR carnet, or allow the vehicle to continue its journey under a TIR carnet on its territory while taking the necessary security precautions. The approved vehicle must be restored to a satisfactory state as rapidly as possible, and in any case before it is again used for the transport of goods under cover of a TIR carnet.
- 20. In each of these cases the customs authorities shall make an appropriate endorsement in item 10 of the certificate of approval of the vehicle. When the vehicle has been restored to a condition which justifies approval, it shall be presented to the competent authorities of a Contracting Party who shall revalidate the certificate by adding an endorsement to item 11 cancelling the earlier observations. No vehicle, the certificate of which has been endorsed at item 10 under the provisions of the preceding paragraph, may again be used for the transport of goods under a TIR carnet until it has been restored to a satisfactory condition and until the endorsement in item 10 has been cancelled as stated above.
- 21. Each endorsement made on the certificate shall be dated and authenticated by the competent authorities.
- 22. When a vehicle is found to have defects which the customs authorities consider to be of minor importance and not involving the risk of smuggling, the continued use of the vehicle for the transport of goods under cover of a TIR carnet can be authorized. The holder of the approval certificate shall be notified of the defects and shall restore his vehicle to a satisfactory state within a reasonable time.

#### ANNEX 4

### MODEL CERTIFICATE OF APPROVAL OF A ROAD VEHICLE

(Cover page)	of a road vehicle for the transport of goods under customs seal  CERTIFICATE No  TIR Convention of 14 November 1975  Issued by (competent authority)	
(Back page)	1. When the authority which has granted the approval deems it necessary, photographs or diagrams authenticated by that authority, shall be attached to the approval certificate. The number of those documents shall then be inserted by the competent authority, under item 6 of the certificate.  2. The certificate shall be kept on the road vehicle.  3. Road vehicles shall be produced every two years, for the purposes of inspection and of renewal of approval where appropriate, to the competent authorities of the country in which the vehicle is registered or, in the case of unregistered vehicles, of the country in which the owner or user is resident.  4. If a road vehicle no longer complies with the technical conditions prescribed for its approval, it shall, before it can be used for the transport of goods under cover of TIR carnets, be restored to the condition which had justified its approval so as to comply again with the said technical conditions.  5. If the essential characteristics of a road vehicle are changed, the vehicle shall cease to be covered by the approval and shall be reapproved by the competent authority before it can be used for the transport of goods under cover of TIR carnets.	

	Stamp	Signature	Date	Place	Valid until	9. Renewals	Name and address	8. Holder (owner or operator) (for unregistered vehicles only)	Signature	Place	approval by design type (mark applicable alternative with an 'X')	7. Approval  individual approval	5. Other particulars	4. Trade mark (or name of manufacturer)	3. Chassis No	Negistration No	Identification	
							Name and address	red vehicles only)		Stamp P	x)	Valid until	5. Other particulars			1. Kegistration No		Certificate of approval No
		12. Other remarks		Signature		Authority		10. Defects noted	Signature	Authority	-	10. Defects noted	Signature	Authority			10. Defects noted	
Important no						Stamp				Stamp				Stamp				(reserved for the us
ortant notice overleaf				Signature		Authority		11. Rectification of defects	Signature	Authority		11. Rectification of defects	Signature	Authority			11. Rectification of defects	N. emarks (reserved for the use of competent authorities)
						Stamp		iects		Stamp		fecta		Stamp			rfects	

#### ANNEX 5

## TIR PLATES

- 1. The dimensions of the plates shall be 250  $\times$  400 mm.
- 2. The letters 'TIR' in capital Latin characters shall be 200 mm high and their strokes at least 20 mm wide. The letters shall be white on a blue background.

#### ANNEX 6

## **EXPLANATORY NOTES**

#### INTRODUCTION

- (i) In accordance with the provisions of Article 43 of this Convention, the Explanatory Notes interpret certain provisions of this Convention and of its Annexes. They also describe certain recommended practices.
- (ii) The Explanatory Notes do not modify the provisions of this Convention or of its Annexes but merely make their contents, meaning and scope more precise.
- (iii) In particular, having regard to the provisions of Article 12 of this Convention and of Annex 2 relating to the technical conditions for the approval of road vehicles for transport under customs seal, the Explanatory Notes specify, where appropriate, the construction techniques to be accepted by the Contracting Parties as complying with those provisions. The Explanatory Notes also specify, where appropriate, which construction techniques do not comply with those provisions.
- (iv) The Explanatory Notes provide a means of applying the provisions of this Convention and of its Annexes so as to take into account the development of technology and economic requirements.

## 0. MAIN TEXT OF THE CONVENTION

## 0.1. Article 1

- 0.1. (b) The fees and charges excepted in Article 1 (b) mean all sums, other than import or export duties and taxes, levied by Contracting Parties on or in connection with importation or exportation. These sums shall be limited in amount to the approximate cost of the services rendered and shall not represent an indirect protection to domestic products or a tax on imports or exports for fiscal purposes. Such fees and charges include inter alia payments relating to:
  - certificates of origin if they are required for transit,
  - analyses carried out by customs laboratories for control purposes,
  - customs inspections and other clearance operations carried out outside normal working hours or away from customs offices,
  - inspections for sanitary, veterinary or phytopathological reasons.

- 0.1. (e) The term 'demountable body' means a load compartment which has no means of locomotion and which is designed to be transported upon a road vehicle, the chassis of which, together with the under-framing of the body, is specially adapted for this purpose.
- 0.1. (e) (i) The term 'partially enclosed', as applied to equipment in Article 1 (e) (i), relates to equipment generally consisting of a floor and a superstructure marking off a loading space equivalent to that of a closed container. The superstructure is generally made up of metal members forming the frame of a container. Containers of this type may also comprise one or more lateral or frontal walls. In some cases there is only a roof attached to the floor by uprights. This type of container is used in particular for the transport of bulky goods (motor cars, for example).

## 0.2. Article 2

- 0.2—1. Article 2 provides that a transport operation under cover of a TIR carnet may begin and end in the same country on condition that part of the journey is performed in foreign territory. In such cases there is nothing to prevent the customs authorities of the country of departure from requiring, in addition to the TIR carnet, a national document, intended to ensure duty-free re-importation of the goods. It is nevertheless recommended that customs authorities should not insist on the use of such a document but accept instead an appropriate endorsement on the TIR carnet.
- 0.2—2. The provisions of this Article allow goods to be carried under cover of a TIR carnet when only part of the journey is made by road. They do not specify what part of the journey has to be made by road and it is sufficient that this should occur at some point between the beginning and the end of the TIR operation. However, it may happen that, for unforeseen reasons of a commercial or accidental nature, no part of the journey can be made by road, despite the intentions of the sender at the start of the journey. In these exceptional cases the Contracting Parties shall nevertheless accept the TIR carnet and the liability of the guaranteeing associations shall remain in force.

## 0.5. Article 5

This Article does not exclude the right to carry out spot checks on the goods but stresses that these checks should be very limited in number. The international TIR carnet procedure, in fact, provides protection greater than that given by national procedures. Firstly the particulars on the TIR carnet relating to the goods must agree with the particulars given on the customs documents which may be required in the country of departure. In addition the countries of transit and destination are given protection by the controls which are carried out at departure and which are certified by the customs authorities at the office of departure (see note to Article 19).

## 0.6.2. Article 6 (2)

Under the provisions of this paragraph, the customs authorities of a country may approve more than one association, each of which may incur liability arising from the operations undertaken under cover of the carnets issued by it or by its corresponding associations.

## 0.8.3. Article 8 (3)

Customs authorities are recommended to limit to a sum equal to \$ US 50 000 per TIR carnet the maximum amount which may be claimed from the guaranteeing association.

### 0.8.6. Article 8 (6)

1. In the absence in the TIR carnet of particulars detailed enough to enable charges on the goods to be determined, the parties concerned may produce evidence of their precise nature. 2. If no evidence is furnished, duties and taxes will be charged, not at a flat rate unrelated to the nature of the goods, but at the highest rate applicable to the kind of goods covered by the particulars in the TIR carnet.

## 0.10. Article 10

The certificate of discharge of the TIR carnet shall be regarded as having been obtained in an improper or fraudulent manner when the TIR operation has been carried out by means of load compartments or containers adapted for fraudulent purposes, or when such malpractices as the use of false or inaccurate documents, the substitution of goods, tampering with customs seals, etc., have been discovered, or when the certificate has been obtained by other illicit means.

#### 0.11. Article 11

- 0.11—1. In deciding whether or not to release the goods or vehicle, customs authorities should not, when they have other means in law of protecting the interests for which they are responsible, be influenced by the fact that the guaranteeing association is liable for the payment of duties, taxes and default interest payable by the holder of the carnet.
- 0.11—2. If a guaranteeing association is asked, in accordance with the procedure set out in Article 11, to pay the sums referred to in Article 8 (1) and (2) and fails to do so within the time limit of three months prescribed by the Convention, the competent authorities may rely on national regulations in requiring payment of the sums in question because what is involved in such cases is a failure to carry out a contract of guarantee entered into by the guaranteeing association under national law.

## 0.15. Article 15

Certain difficulties may arise in the case of vehicles not subject to registration, such as in some countries, trailers or semi-trailers, when customs documents are not required for temporary admission. In that case, the provisions of Article 15 may be observed, while assuring adequate protection for the customs authorities, by recording particulars of these vehicles (make and numbers) on vouchers 1 and 2 of the TIR carnet used by the countries concerned and on the corresponding counterfoils.

## 0.17. Article 17

- 0.17—1. The provision that the manifest of the goods covered by the TIR carnet shall show separately the contents of each vehicle of a combination of vehicles, or of each container, is only intended to simplify customs inspection of the contents of each vehicle or container. This provision shall not therefore be interpreted so rigidly that each variation between the actual contents of a vehicle or container and the contents of that vehicle or container as shown on the manifest is considered a breach of the provisions of the Convention. If the carrier can satisfy the relevant authorities that, notwithstanding such a variation, all the goods shown on the manifest agree with the total of goods loaded in the combination of vehicles or in all the containers covered by the TIR carnet, this shall not normally be considered a breach of customs requirements.
- 0.17—2. In the case of household removals, the procedure laid down in paragraph 10 (c) of the rules for the use of the TIR carnet can be applied, the list of articles concerned being reasonably condensed.

## 0.18. Article 18

0.18—1. It is essential for the smooth operation of the TIR procedure that the customs authorities of one country should refuse to designate a customs office of exit as a customs office of

destination for a transport operation which is going on to a neighbouring country when that country is also a Contracting Party to this Convention, unless there are some special circumstances to justify the request.

- 0.18—2.
   Goods should be so loaded that the consignment to be unloaded at the first unloading point can be taken out of the vehicle or the container without it being necessary to unload the other consignment or consignments of goods due to be unloaded at the other unloading points.
  - 2. Where a transport operation involves unloading at more than one office it is necessary that, after a partial unloading, a record of it should be made in box 12 on all the remaining manifests of the TIR carnet, and at the same time another record should be made on the remaining vouchers and the corresponding counterfoils to the effect that new seals have been affixed.

#### 0.19. Article 19

The requirement that the customs office of departure should check the accuracy of the goods manifest implies the need to verify at least that the particulars in the goods manifest tally with those in the export documents and in the transport or other commercial documents relating to the goods; the customs office of departure may also have to examine the goods. The customs office of departure must also, before affixing seals, check the condition of the road vehicle or container and, in the case of sheeted vehicles or containers, the condition of the sheets and sheet fastenings, as this equipment is not included in the certificate of approval.

## 0.20. Article 20

When fixing time limits for the transport of goods within their territory, customs authorities must likewise take into account *inter alia* any special regulations to which carriers are subject, particularly regulations concerning working hours and mandatory rest periods for drivers of road vehicles. It is recommended that these authorities should exercise their right to prescribe a route only when they consider it essential.

## 0.21. Article 21

- 0.21—1. The provisions of this Article do not restrict the right of customs authorities to examine all parts of a vehicle other than the sealed load compartment.
- 0.21—2. The customs office of entry may turn back the carrier to the customs office of exit of the adjacent country if it finds that no clearance has been given by that office or that clearance has not been given in due form. In such cases the customs office of entry inserts a note in the TIR carnet for the customs office of exit concerned.
- 0.21—3. If in the course of an examination, customs authorities draw samples of goods, a note recording full particulars of the goods taken must be made by those authorities on the goods manifest of the TIR carnet.

## 0.28. Article 28

- 1. Article 28 provides that discharge of the TIR carnet at the office of destination shall take place without delay, on condition that the goods are placed under another customs procedure or cleared for home use.
- 2. The use of the TIR carnet must be restricted to the function which it was intended to cover, namely the transit operation. The TIR carnet must not, for example, be used to cover the storage of goods under customs control at destination. Where no irregularity has taken place, the office of destination must discharge the TIR carnet as soon as the goods covered by the carnet have come under another customs procedure or have been cleared for home use. In practice discharge must be given as soon as the goods have been

directly re-exported (as, for example, when they are shipped on arrival at a port), or as soon as a declaration for customs purposes has been made at the place of destination, or as soon as the goods have been received into a place approved for storage while awaiting a declaration for customs purposes (for example, a transit shed), in accordance with the regulations in force in the country of destination.

## 0.29. Article 29

No certificate of approval is required for road vehicles or containers transporting heavy or bulky goods. It is, nevertheless, the responsibility of the customs office of departure to make sure that the other conditions laid down in this Article for this type of transport operation are met. Customs offices of other Contracting Parties shall accept the decision of the customs office of departure unless in their opinion it is clearly in conflict with the provisions of Article 29.

## 0.38.1. Article 38 (1)

A business enterprise should not be excluded from the TIR system because of offences committed by one of its drivers without the knowledge of the management.

#### 0.38.2. Article 38 (2)

Where a Contracting Party has been notified that a person established or resident in its territory has committed an offence on the territory of a foreign country, it need not cease to allow the issue of TIR carnets to that person.

## 0.39. Article 39

The expression 'mistakes committed through negligence' is to be taken to mean acts which, although not committed deliberately and in full knowledge of the facts, are due to a failure to take reasonable and necessary steps to ensure the accuracy of the facts in any particular case.

### 0.45. Article 45

Contracting Parties are recommended to make the largest possible number of customs offices, both inland and at the frontier, available for dealing with TIR operations.

## 2. ANNEX 2

## 2.2. Article 2

## 2.2.1.(a) Subparagraph 1 (a) — Assembly of constituent parts

(a) Where joining devices (rivets, screws, bolts and nuts, etc.) are used, a sufficient number of such devices shall be inserted from outside, traverse the assembled constituent parts, protrude inside and there be firmly secured (e.g. riveted, welded, bushed or bolted and swaged or welded on the nut). However, coventional rivets (i.e. rivets whose placing requires handling from both sides of the assembly of constituent parts) may be inserted from the inside. Notwithstanding the above, load compartment floors may be secured by means of self-tapping screws, or self-drilling rivets or rivets inserted by means of an explosive charge, when placed from inside and passing at right-angles through the floor and the metallic cross-pieces underneath, on condition, except in the case of self-tapping screws, that some of their ends be flush with the level of the outside part of the cross-piece or be welded on to it.

- (b) The competent authority shall determine what joining devices, and how many of them, must fulfil the requirements of subparagraph (a) of this note; they shall do so by making sure that the constituent parts so assembled cannot be displaced and replaced without leaving obvious traces. The choice and placing of other joining devices are not subject to any restriction.
- (c) Joining devices which can be removed and replaced from one side without leaving obvious traces (i.e. without requiring handling from both sides of the constituent parts to be assembled) shall not be allowed under subparagraph (a) of this note. Examples of such devices are expansion rivets, blind rivets and the like.
- (d) The assembly methods described above shall apply to special vehicles, for example to insulated vehicles, refrigerated vehicles and tank-vehicles in so far as they are not incompatible with the technical requirements which such vehicles must fulfil having regard to their use. Where, due to technical reasons, it is not practicable to secure parts in the manner described in subparagraph (a) of this note, the constituent parts may be joined by means of the devices mentioned in subparagraph (c) of this note provided that the devices used on the inner face of the wall are not accessible from the outside.

## 2.2.1.(b) Subparagraph 1 (b) — Doors and other closing systems

- (a) The device on which customs seals can be fixed must:
  - (i) be secured by welding, or by not less than two joining devices conforming to subparagraph (a) of Explanatory Note 2.2.1 (a), or
  - (ii) be so designed that when the load compartment has been closed and sealed the device cannot be removed without leaving obvious traces.

It must also:

- (iii) incorporate holes of not less than 11 mm in diameter or slots of at least 11 mm in length by 3 mm in width, and
- (iv) afford equal security whatever type of seal is used.
- (b) Butt hinges, strap hinges, hinge-pins and other devices for hanging doors and the like must be secured in conformity with the requirements of subparagraphs (a) (i) and (ii) of this note. Moreover, the various components of such devices (e.g. hingeplates, pins or swivels) must be so fitted that they cannot be removed or dismantled when the load compartment is closed and sealed without leaving obvious traces. However, where such a device is not accessible from outside it will suffice if, when the door or the like has been closed and sealed, it cannot be detached from the hinge or similar device without leaving obvious traces. Where a door or closure-device has more than two hinges, only those two hinges nearest to the extremities of the door need to be fixed in conformity with the requirements of subparagraph (a) (i) and (ii) above.
- (c) Exceptionally, in the case of vehicles having insulated load compartments, the customs sealing device, the hinges and any fittings, the removal of which would give access to the interior of the load compartment or to spaces in which goods could be concealed, may be fixed to the doors of such load compartments by means of set bolts or set screws which are inserted from the outside but which do not otherwise meet the requirements of Explanatory Note 2.2.1 (a), subparagraph (a) above, on condition that:
  - (i) the tails of the set bolts or set screws are fixed into a tapping plate or similar device fitted behind the outer layer or layers of the door structure, and

(ii) the heads of the appropriate number of set bolts or set screws are so welded to the customs sealing device, hinges, etc., that they are completely deformed and that the set bolts or set screws cannot be removed without leaving visible signs of tampering (1).

The term 'insulated load compartment' is to be taken to include refrigerated and isothermic load compartments.

- (d) Vehicles comprising a large number of such closures as valves, stopcocks, manhole covers, flanges and the like must be designed so as to keep the number of customs seals to a minimum. To this end, neighbouring closures must be interconnected by a common device requiring only one customs seal, or must be provided with a cover meeting the same purpose.
- (e) Vehicles with opening roofs must be constructed in such a manner as to permit sealing with a minimum number of customs seals.

## 2.2.1.(c) — 1. Subparagraph 1 (c) — Ventilation apertures

- (a) Their greatest dimension must, in principle, not exceed 400 mm.
- (b) Apertures permitting direct access to the load compartment, must be obstructed by means of wire gauze or perforated metal screens (maximum dimension of holes: 3 mm in both cases) and protected by welded metal lattice work (maximum dimension of holes: 10 mm).
- (c) Apertures not permitting direct access to the load compartment (e.g. because of elbow or baffle-plate systems) must be provided with the same devices, in which, however, the dimensions of the holes may be as much as 10 and 20 mm respectively.
- (d) Where openings are made in sheets, the devices referred to in subparagraph (b) of this note must in principle be prescribed. However, blocking devices in the form of a perforated metal screen fitted outside, and wire or other gauze fitted inside, will be allowed.
- (e) Identical non-metal devices may be allowed provided that the holes are of the requisite dimensions and the material used is strong enough to prevent the holes from being substantially enlarged without visible damage. In addition, it must be impossible to replace the ventilation device by working from one side of the sheet only.

## 2.2.1.(c) — 2. Subparagraph 1 (c) — Drainage apertures

- (a) Their greatest dimension must, in principle, not exceed 35 mm.
- (b) Apertures permitting direct access to the load compartment must be provided with the devices described in subparagraph (b) of Explanatory Note 2.2.1 (c)
   1 for ventilation apertures.
- (c) When drainage apertures do not permit direct access to the load compartment, the devices referred to in subparagraph (b) of this note will not be prescribed, on condition that the apertures are provided with a reliable baffle system readily accessible from inside the load compartment.

## 2.3. Article 3

## 2.3.3. Paragraph 3 — Sheets made up of pieces

(a) The several pieces constituting one sheet may be made of different materials conforming to the provisions of Article 3 (2) of Annex 2.

<sup>(1)</sup> See Sketch No 1 appended to this Annex.

(b) Any arrangement of the pieces which adequately guarantees security will be allowed in making up the sheet, on condition that the pieces are assembled in conformity with the requirements of Article 3 of Annex 2.

## 2.3.6.(a) Subparagraph 6 (a) — Vehicles with sliding rings

Metal securing rings sliding on metal bars fixed to the vehicles are acceptable for the purpose of this paragraph (see Sketch No 2 appended to this Annex) provided that:

- (a) the bars are affixed to the vehicles at maximum spacings of 60 cm and in such a manner that they cannot be removed and replaced without leaving obvious traces;
- (b) the rings are made with a double hoop or equipped with a central bar and made in one piece without the use of welding; and
- (c) the sheet is fixed to the vehicle in strict compliance with the conditions set forth in Article 1 (a) of Annex 2 to this Convention.

## 2.3.6.(b) Subparagraph 6 (b) — Permanently-secured sheets

Where one or more edges of the sheet are permanently attached to the body of the vehicle, the sheet shall be held in place by one or more strips of metal or other suitable material secured to the body of the vehicle by joining devices meeting the requirements of subparagraph (a) of Explanatory Note 2.2.1 (a) of this Annex.

## 2.3.9. Paragraph 9 — Textile-cored steel fastening ropes

For purposes of this paragraph, ropes comprising a textile core surrounded by six strands consisting solely of steel wire and completely covering the core will be allowed on condition that the ropes (without taking into account the transparent plastic sheath, if any) are not less than 3 mm in diameter.

## 2.3.11.(a) Subparagraph 11 (a) — Sheet-tensioning flaps

The sheets of many vehicles are provided on the outside with a horizontal flap pierced by eyelets running along the length of the side of the vehicle. Such flaps, known as tensioning flaps, are used to tauten the sheet by means of tensioning cords or similar devices. Such flaps have been used to conceal horizontal slits made in the sheets giving improper access to the goods carried in the vehicle. It is therefore recommended that the use of flaps of this type should not be allowed. The following devices may be used instead:

- (a) tensioning flaps of similar design fixed on the inside of the sheet; or
- (b) small individual flaps each pierced by one eyelet secured to the outside surface of the sheet and spaced at such distances as will permit an adequate tensioning of the sheet.

Alternatively, it may be possible in certain cases to avoid the use of tensioning flaps on sheets.

## 2.3.11.(c) Subparagraph 11 (c) — Sheet thongs

2.3.11. (c)—1. The following materials are regarded as suitable for making thongs:

- (a) leather;
- (b) non-tensile textile materials including plastic-covered or rubberized cloth, provided that such materials cannot after severance be welded or reconstituted without leaving obvious traces. Furthermore, the plastic material used to cover thongs shall be transparent and smooth-surfaced.

2.3.11. (c)—2. The device shown in Sketch No 3 appended to this Annex meets the requirements of the last part of Article 3 (11) of Annex 2. It also meets the requirements of Article 3 (6) of Annex 2.

## 3. ANNEX 3

## 3.0.17. Approval procedure


- 1. Annex 3 provides that the competent authorities of a Contracting Party may issue a certificate of approval in respect of a vehicle constructed within its territory and that no additional approval procedures shall be applied in respect of such a vehicle in the country where it is registered or, as the case may be, where the owner is resident.
- 2. These provisions are not intended to restrict the right of the competent authorities of the Contracting Party where the vehicle is registered or where the owner is resident to require the production of such a certificate of approval either at importation or subsequently for purposes connected with the registration or control of the vehicle or with similar legal requirements.

## 3.0.20. Procedure for endorsement of the certificate of approval


When an endorsement concerning defects is to be cancelled after the vehicle has been restored to a satisfactory state, it is sufficient to state, under item 11 provided for the purpose, 'defects rectified' followed by the name, signature and stamp of the competent authority concerned.

Sketch No 1

Example of hinge and customs sealing device on doors of vehicles having insulated load compartments

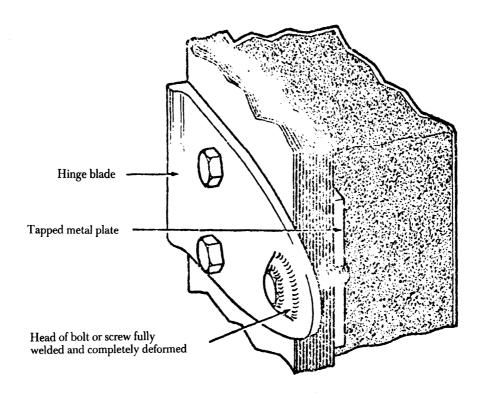


Hinge

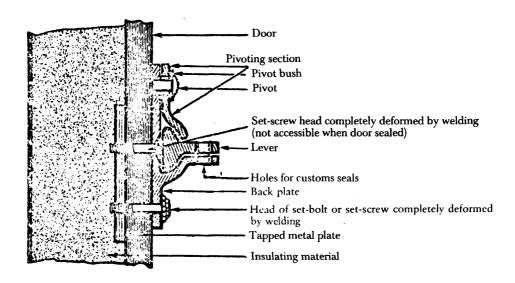

Customs sealing device


Sketch No 2
Sheeted vehicles with sliding rings

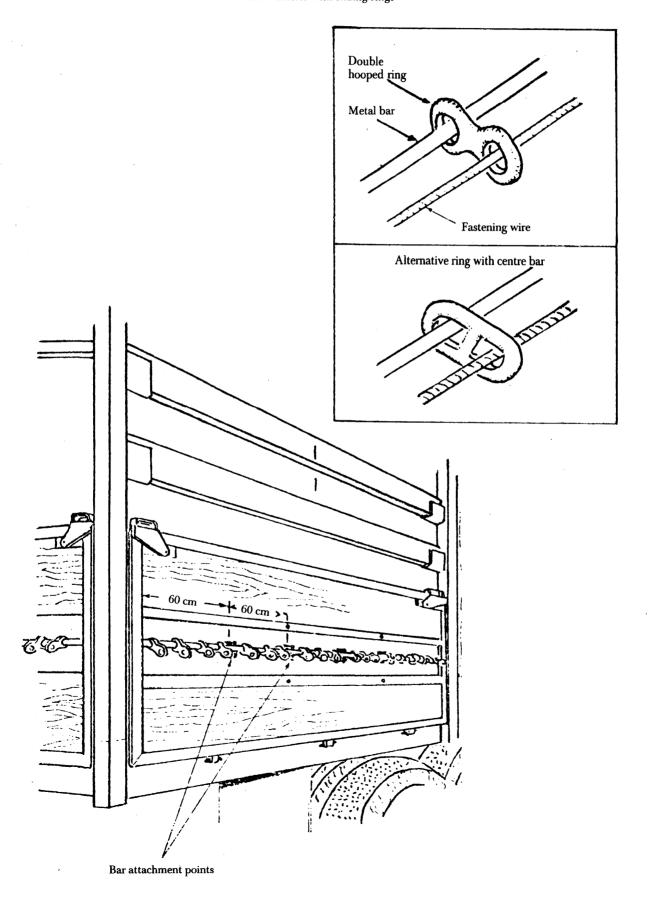

## Sketch No 3

## Example of a device for fastening vehicle sheets


The device illustrated below meets the requirements of the last part of Article 3 (11) of Annex 2. It also meets the requirements of Article 3 (6) of Annex 2.

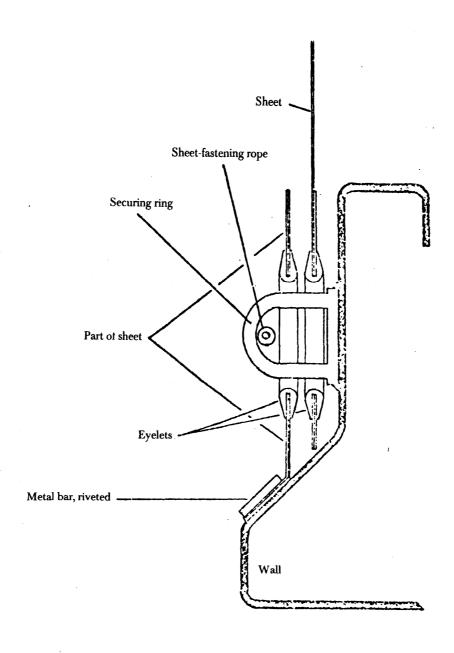

## Sketch No 4

## Device for fastening sheets

The device illustrated below meets the requirements of Article 3 (6) (a) of Annex 2.

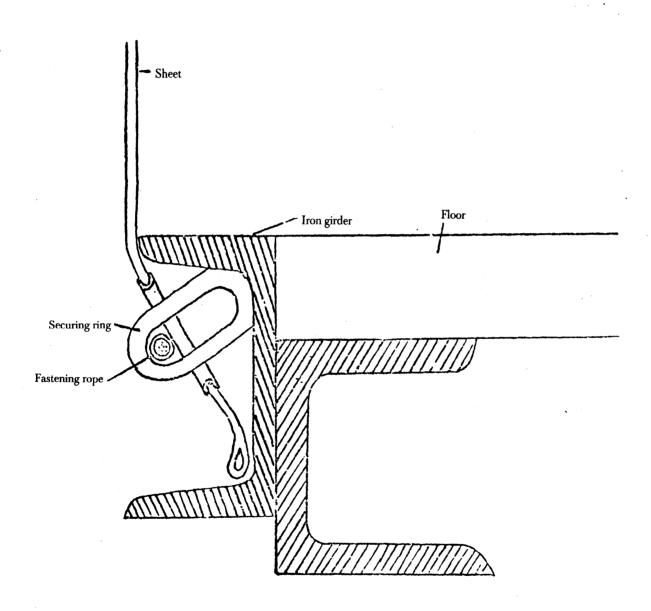

#### ANNEX 7

## ANNEX REGARDING APPROVAL OF CONTAINERS

## PART I

# REGULATIONS OF TECHNICAL CONDITIONS APPLICABLE TO CONTAINERS WHICH MAY BE ACCEPTED FOR INTERNATIONAL TRANSPORT UNDER CUSTOMS SEAL

#### Article 1

## Basic principles

Approval for the international transport of goods under customs seal may be granted only to containers constructed and equipped in such a manner that:

- (a) no goods can be removed from, or introduced into, the sealed part of the container without leaving visible traces of tampering or without breaking the customs seal;
- (b) customs seals can be simply and effectively affixed to them;
- (c) they contain no concealed spaces where goods may be hidden;
- (d) all spaces capable of holding goods are readily accessible for customs inspection.

## Article 2

### Structure of containers

- 1. To meet the requirements of Article 1 of these Regulations:
- (a) the constituent parts of the container (sides, floor, doors, roof, uprights, frames, cross-pieces, etc.) shall be assembled either by means of devices which cannot be removed and replaced from the outside without leaving visible traces or by such methods as will produce a structure which cannot be modified without leaving visible traces. When the sides, floor, doors and roof are made up of various components, these shall meet the same requirements and be of sufficient strength;
- (b) doors and all other closing systems (including stopcocks, manhole-covers, flanges, etc.) shall be fitted with a device

on which customs seals can be fixed. This device must be such that it cannot be removed and replaced from outside the container without leaving visible traces, or the door or fastening be opened without breaking the customs seals. The latter shall be adequately protected. Opening roofs shall be permitted;

- (c) apertures for ventilation and drainage shall be provided with a device preventing access to the interior of the container. This device must be such that it cannot be removed and replaced from outside the container without leaving visible traces.
- 2. Notwithstanding the provisions of Article 1 (c) of these Regulations, constituent parts of the container which, for practical reasons, have to include empty spaces (for example, between the partitions of a double wall) shall be permitted. In order that the said spaces cannot be used to conceal goods:
- (i) it shall not be possible to remove and replace the lining inside the container without leaving visible traces, or
- (ii) the number of the said spaces shall be kept to a minimum and these spaces shall be readily accessible for customs inspection.

## Article 3

## Containers capable of being folded or dismantled

Containers capable of being folded or dismantled shall be subject to the provisions of Articles 1 and 2 of these Regulations; in addition, they shall be fitted with a bolting system which locks the various parts together once the container has been erected. This bolting system must be capable of being sealed by the customs authorities if it is on the outside of the container when the latter has been erected.

## Article 4

#### Sheeted containers

- 1. Where applicable, the provisions of Articles 1, 2 and 3 of these Regulations shall apply to sheeted containers. In addition, these containers shall conform to the provisions of this Article.
- 2. The sheet shall be either of strong canvas or of plastic-covered or rubberized cloth, which shall be of sufficient strength and unstretchable. It shall be in good condition and made up in such a way that once the closing device has been secured, it is impossible to gain access to the load without leaving visible traces.
- 3. If the sheet is made up of several pieces, their edges shall be folded into one another and sewn together with two seams at least 15 mm apart. These seams shall be made as shown in Sketch No 1 appended to these Regulations; however, where in the case of certain parts of the sheet (such as flaps at the rear and reinforced corners) it is not possible to assemble the pieces in that way, it shall be sufficient to fold the edge of the top section and make the seams as shown in Sketch No 2 appended to these Regulations. One of the seams shall be visible only from the inside and the colour of the thread used for that seam shall be clearly different from the colour of the sheet itself and from the colour of the thread used for the other seam. All seams shall be machine-sewn.
- 4. If the sheet is of plastic-covered cloth, and is made up of several pieces, the pieces may alternatively be welded together in the manner shown in Sketch No 3 appended to these Regulations. The edges of the pieces shall overlap by at least 15 mm. The pieces shall be fused together over the whole width of the overlap. The edge of the outer sheet shall be covered with a band of plastic material at least 7 mm wide, affixed by the same welding process. The plastic band and a width of at least 3 mm on each side shall have a well-marked uniform relief stamped on it. The pieces shall be welded in such a way that they cannot be separated and rejoined without leaving visible traces.
- 5. Repairs shall be made in accordance with the method described in Sketch No 4 appended to these Regulations; the edges shall be folded into one another and sewn together with two visible seams at least 15 mm apart; the colour of the thread visible from the inside shall be different from that of the thread visible from the outside and from that of the sheet itself; all seams shall be machine-sewn. When a sheet which has been damaged near the edges is repaired by replacing the damaged part by a patch, the seam can also be made in accordance with the provisions of paragraph 3 of this Article and Sketch No 1 appended to these Regulations. Sheets of plastic-covered cloth may alternatively be repaired in

accordance with the method described in paragraph 4 of this Article, but in that case the weld must be made on both sides of the sheet, the patch being fitted on the inside of the sheet.

- 6. (a) The sheet shall be fixed to the container in strict compliance with the conditions set forth in Article 1 (a) and (b) of these Regulations. The following types of fastening shall be provided:
  - (i) metal rings fixed to the container,
  - (ii) eyelets in the edge of the sheet,
  - (iii) a fastening passing through the rings above the sheet and visible from the outside for its entire length.

The sheet shall overlap solid parts of the container by at least 250 mm, measured from the centre of the securing rings, unless the system of construction of the container by itself prevents all access to the goods.

- (b) When the edge of a sheet is to be permanently secured to a container, the joint shall be continuous and effected by means of solid devices.
- 7. The interval between rings and between eyelets shall not exceed 200 mm. The eyelets shall be reinforced.
- 8. The following fastenings shall be used:
- (a) steel wire rope of at least 3 mm diameter; or
- (b) a rope of hemp or sisal of at least 8 mm diameter encased in a transparent unstretchable plastic sheath.

Wire ropes may have a transparent unstretchable plastic sheath.

- 9. Each rope shall be in one piece and have a hard metal end-piece at each end. The fastener of each metal end-piece shall include a hollow rivet passing through the rope so as to allow the introduction of the thread or the strap of the customs seal. The rope shall remain visible on either side of the hollow rivet so that it is possible 'to ensure that the rope is in one piece (see Sketch No 5 appended to these Regulations).
- 10. At the openings in the sheet, used for loading and unloading, the two edges of the sheet shall have an adequate overlap. They shall also be fastened by:
- (a) a flap sewn or welded in accordance with paragraphs 3 and 4 of this Article;

- (b) rings and eyelets meeting the conditions of paragraph 7 of this Article; and
- (c) a thong made of appropriate material, in one piece and unstretchable, at least 20 mm wide and 3 mm thick, passing through the rings and holding together the two edges of the sheet and the flap; the thong shall be secured inside the sheet and fitted with an eyelet to take the rope mentioned in paragraph 8 of this Article.

A flap shall not be required if a special device, such as a baffle plate, is fitted, which prevents access to the goods without leaving visible traces.

11. The identification marks, which must appear on the container, and the approval plate provided for in Part II of this Annex, shall in no circumstances be covered by the sheet.


## Article 5

## Transitional provisions


Until 1 January 1977, end-pieces shall be allowed which conform to Sketch No 5 appended to these Regulations, even if they include hollow rivets of a type previously accepted with holes of dimensions less than those given in the sketch.

Sketch No 1


Sheets made of several pieces (sewn together by means of seams)

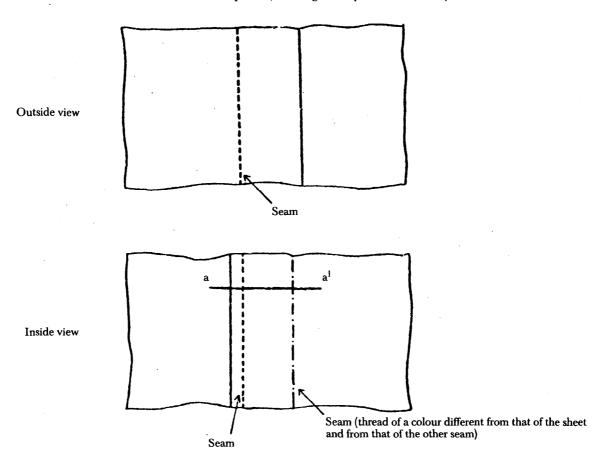

Section a-a<sup>1</sup>
Double flat seam




Sketch No 2
Sheets made of several pieces

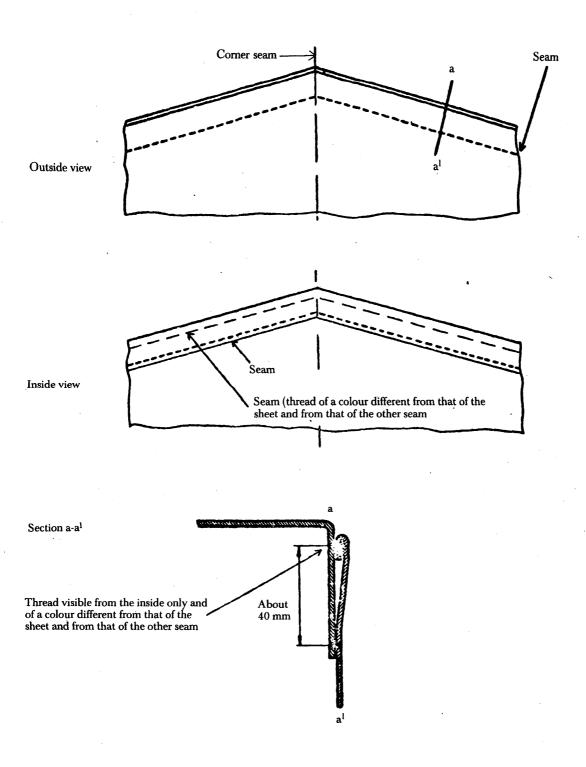

Note: The corner seams made according to the method illustrated in Sketch No 2 (a) in Annex 2 to this Convention are also allowed.


Sketch No 3

Sheets made of several pieces (welded together)

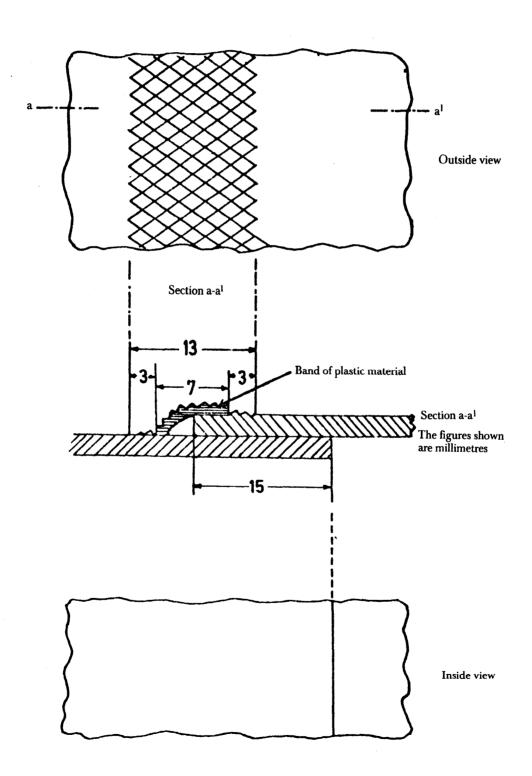

## Sketch No 4


## Repair of the sheet

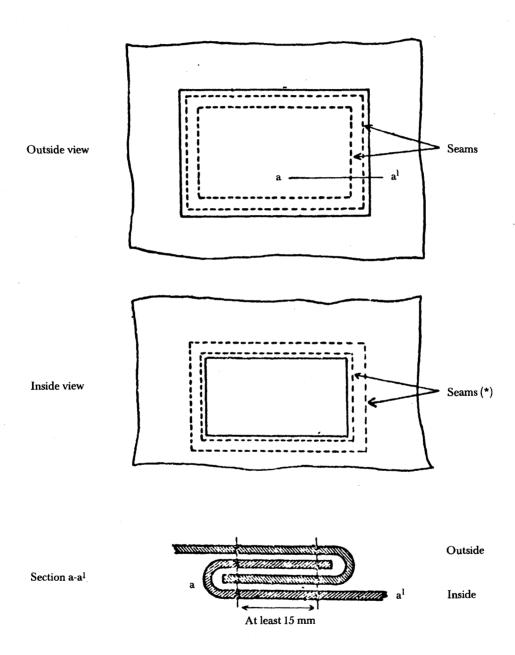

<sup>(\*)</sup> Threads visible from the inside shall be of a colour different from that of the threads visible from the outside and from that of the sheet.

## Sketch No 5

## Specimen of end-piece

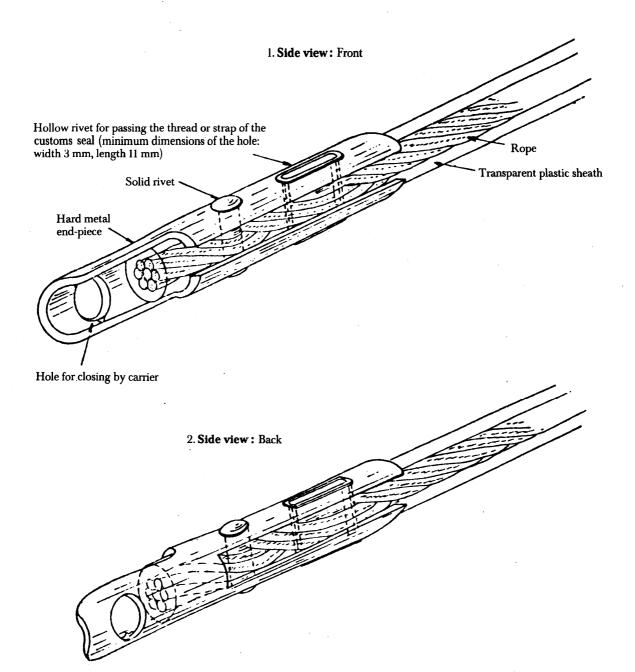

#### PART II

## PROCEDURES FOR THE APPROVAL OF CONTAINERS COMPLYING WITH THE TECHNICAL CONDITIONS PRESCRIBED IN PART I

## General

- 1. Containers may be approved for the transport of goods under customs seal either:
- (a) at the manufacturing stage, by design type (procedure for approval at the manufacturing stage); or
- (b) at a stage subsequent to manufacture, either individually or in respect of a specified number of containers of the same type (procedure for approval at a stage subsequent to manufacture).

## Provisions common to both approval procedures

- 2. The competent authority responsible for granting approval shall issue to the applicant, after approval, a certificate of approval valid, as the case may be, either for an unlimited series of containers of the approved type or for a specified number of containers.
- 3. The beneficiary of approval shall affix an approval plate to the approved container or containers before their use for the transport of goods under customs seal.
- 4. The approval plate shall be affixed permanently and in a clearly visible place adjacent to any other approval plate issued for official purposes.
- 5. The approval plate, conforming to Model I reproduced in Appendix 1 hereto, shall take the form of a metal plate measuring not less than  $20 \times 10$  cm. The following particulars shall be stamped into or embossed on the plate or indicated on its surface in any other permanent and legible way, in at least the English or the French language:
- (a) the words 'Approved for transport under customs seal';
- (b) an indication of the country in which approval was granted either by name or by means of the distinguishing sign used to indicate the country of registration of motor vehicles in international road traffic, and the number (figures, letters, etc.) of the certificate of approval and the year (e.g. 'NL/26/73' means 'Netherlands, certificate of approval No 26, issued in 1973');
- (c) the serial number assigned to the container by the manufacturer (manufacturer's number);

- (d) if the container has been approved by type, the identification numbers or letters of the type of container.
- 6. If a container no longer complies with the technical conditions prescribed for its approval, it shall, before it can be used for the transport of goods under customs seal, be restored to the condition which had justified its approval, so as to comply again with the said technical conditions.
- 7. If the essential characteristics of a container are changed, the container shall cease to be covered by the approval and shall be reapproved by the competent authority before it can be used for the transport of goods under customs seal.

# Special provisions for approval by design type at the manufacturing stage

- 8. Where the containers are manufactured by type series, the manufacturer may apply to the competent authority of the country of manufacture for approval by design type.
- 9. The manufacturer shall state in his application the identification numbers or letters which he assigns to the type of container to which his application for approval relates.
- 10. The application shall be accompanied by drawings and a detailed design specification of the container type to be approved.
- 11. The manufacturer shall give an undertaking in writing that he will:
- (a) produce to the competent authority such containers of the type concerned as that authority may wish to examine;
- (b) permit the competent authority to examine further units at any time during the production of the type series concerned;
- (c) advise the competent authority of any change, of whatever magnitude, in the design or specification before proceeding with such change;
- (d) mark the containers in a visible place with, in addition to the markings required on the approval plate, the identification numbers or letters of the design

- type and the serial number of the container in the type series (manufacturer's number);
- (e) keep a record of containers manufactured to the approved design type.
- 12. The competent authority shall state what changes, if any, must be made to the proposed design type so that approval may be granted.
- 13. No type-approval by design type shall be granted unless the competent authority has satisfied itself by examination of one or more containers manufactured to the design type concerned that containers of that type comply with the technical conditions prescribed in Part I.
- 14. When a container type is approved there shall be issued to the applicant a single certificate of approval conforming to Model II reproduced in Appendix 2 hereto and valid for all containers manufactured in conformity with the specifications of the type so approved. Such certificate shall entitle the manufacturer to affix to every container of the type series an approval plate in the form prescribed in paragraph 5.


## Special provisions for approval at a stage subsequent to manufacture

- 15. If approval has not been applied for at the manufacturing stage, the owner, the operator, or the representative of either, may apply for approval to the competent authority to which he is able to produce the container or containers and for which he seeks approval.
- 16. An application for approval submitted under paragraph 15 shall state the serial number (manufacturer's number) placed on each container by the manufacturer.
- 17. When the competent authority has ascertained that the container or containers comply with the technical conditions prescribed in Part I, by examination of as many containers as it considers necessary, it shall issue a certificate of approval conforming to Model III reproduced in Appendix 3 hereto and valid solely for the number of containers approved. Such certificate, which shall bear the manufacturer's serial number or numbers assigned to the container or containers to which it relates, shall entitle the applicant to affix to each container so approved the approval plate prescribed in paragraph 5.

## APPENDIX 1 TO PART II

## MODEL I

# APPROVAL PLATE (English version)

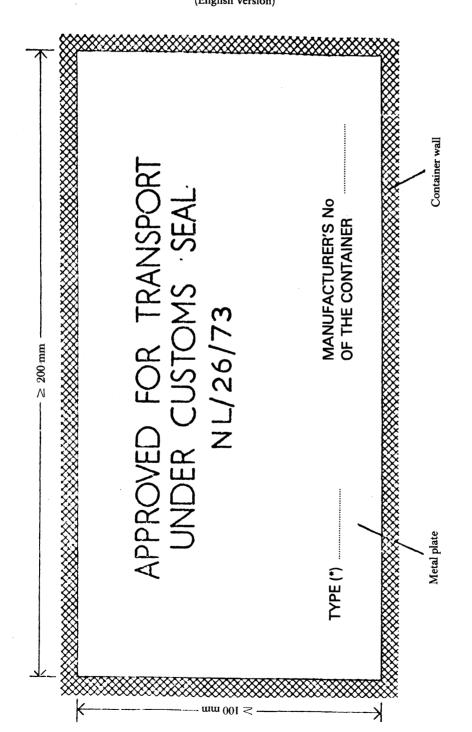


(\*) Only in case of approval by design type.

## APPENDIX 1 TO PART II

## MODEL I

## APPROVAL PLATE

(French version)

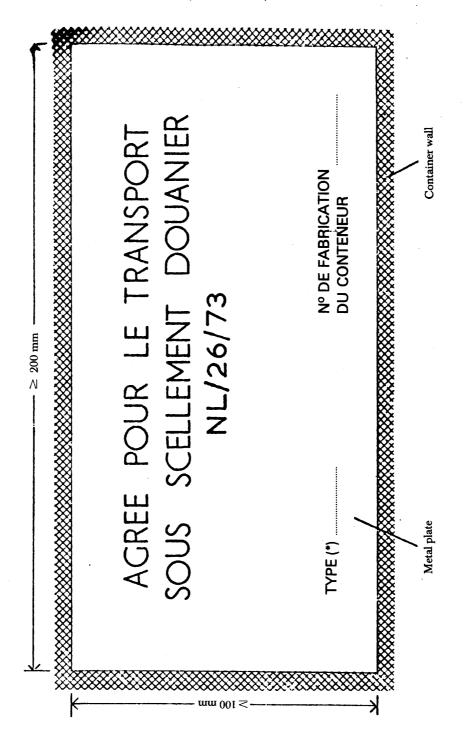

(\*) Only in case of approval by design type.

## APPENDIX 2 TO PART II

## MODEL II

# CUSTOMS CONVENTION ON THE INTERNATIONAL TRANSPORT OF GOODS UNDER COVER OF TIR CARNETS (1975)

## CERTIFICATE OF APPROVAL BY DESIGN TYPE

1.	Certificate No (*)
2.	This is to certify that the container design type described below has been approved and that containers manufactured to this type can be accepted for the transport of goods under customs seal.
3.	Kind of container
4.	Identification number or letters of the design type
5.	Identification number of the working drawings
6.	Identification number of the design specifications
7.	Tare weight
8.	External dimensions (in cm)
9.	Essential characteristics of structure (nature of materials, kind of construction, etc.)
10.	This certificate is valid for all containers manufactured in conformity with the drawings and specifications referred to above.
11.	Issued to
	(Manufacturer's name and address) who is authorized to affix an approval plate to each container of the approved design type manufactured by him,
	at
	by(Signature and stamp of issuing service or organization)
	(organization)

## IMPORTANT NOTICE

(Paragraphs 6 and 7 of Part II of Annex 7 to the Customs Convention on the international transport of goods under cover of TIR carnets, 1975)

- 6. If a container no longer complies with the technical conditions prescribed for its approval, it shall, before it can be used for the transport of goods under customs seal, be restored to the condition which had justified its approval, so as to comply again with the said technical conditions.
- 7. If the essential characteristics of a container are changed, the container shall cease to be covered by the approval and shall be reapproved by the competent authority before it can be used for the transport of goods under customs seal.

<sup>(\*)</sup> Insert the letters and figures, which are to be marked on the approval plate (see paragraph 5 (b) of Part II of Annex 7 to the Customs Convention on the international transport of goods under cover of TIR carnets, 1975).

## APPENDIX 3 TO PART II

## MODEL III

# CUSTOMS CONVENTION ON THE INTERNATIONAL TRANSPORT OF GOODS UNDER COVER OF TIR CARNETS (1975)

CERTIFICATE OF APPROVAL GRANTED AT A STAGE SUBSEQUENT TO MANUFAC TURE

١.	Certificate No (*)
2.	This is to certify that the container (containers) specified below has (have) been approved for the transport of goods under customs seal.
3.	Kind of container(s)
1.	Serial number(s) assigned to the container(s) by the manufacturer
5.	Tare weight
5.	External dimensions (in cm)
7.	Essential characteristics of structure (nature of materials, kind of construction, etc.)
8.	Issued to
	(Applicant's name and address)
	who is authorized to affix an approval plate to the abovementioned container(s),
	at
	by
	(Signature and stamp of issuing service or organization)

## IMPORTANT NOTICE

(Paragraphs 6 and 7 of Part II of Annex 7 to the Customs Convention on the international transport of goods under cover of TIR carnets, 1975)

- 6. If a container no longer complies with the technical conditions prescribed for its approval, it shall, before it can be used for the transport of goods under customs seal, be restored to the condition which had justified its approval, so as to comply again with the said technical conditions.
- 7. If the essential characteristics of a container are changed, the container shall cease to be covered by the approval and shall be reapproved by the competent authority before it can be used for the transport of goods under customs seal.

<sup>(\*)</sup> Insert the letters and figures, which are to be marked on the approval plate (see paragraph 5 (b) of Part II of Annex 7 to the Customs Convention on the international transport of goods under cover of TIR carnets, 1975)

## PART III

## **EXPLANATORY NOTES**

- 1. The Explanatory Notes to Annex 2 set out in Annex 6 to this Convention apply mutatis mutandis to containers approved for transport under customs seal for the application of this Convention.
- 2. Part I Article 4 (6) (a)


Example of a system of affixing sheets around containers' corner-castings, acceptable from a customs point of view, is given in the sketch appended hereto.


## 3. Part II - paragraph 5

If two sheeted containers, approved for transport under customs seal have been joined together in such a way that they form one container, covered by a single sheet and fulfilling the conditions for transport under customs seal, a separate certificate of approval, or approval plate, shall not be required for the combination.

## Device for affixing sheets around containers' corner castings

The device illustrated below meets the requirements of Article 4 (6) (a) of Part I:

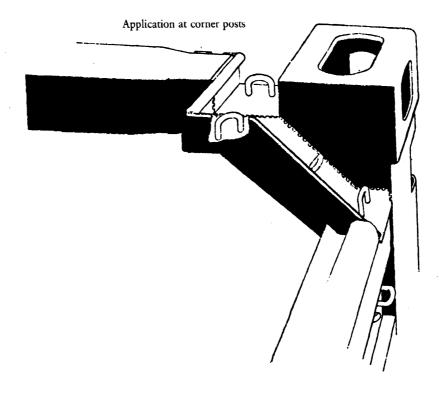

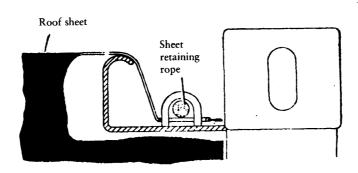

Sectional view

#### ANNEX 8

## COMPOSITION AND RULES OF PROCEDURE OF THE ADMINISTRATIVE COMMITTEE

#### Article 1

- (i) The Contracting Parties shall be members of the Administrative Committee.
- (ii) The Committee may decide that the competent administrations of States referred to in Article 52 (1) of this Convention which are not Contracting Parties or representatives of international organizations may, for questions which interest them, attend the sessions of the Committee as observers.

## Article 2

The Secretary-General of the United Nations shall provide the Committee with secretariat services.

## Article 3

The Committee shall, at its first session each year, elect a chairman and a vice-chairman.

## Article 4

The Secretary-General of the United Nations shall convene under the auspices of the Economic Commission for Europe the Committee annually and also at the request of the competent administrations of at least five States which are Contracting Parties.

## Article 5

Proposals shall be put to the vote. Each State which is a Contracting Party represented at the session shall have one vote. Proposals other than amendments to this Convention shall be adopted by the Committee by a majority of those present and voting. Amendments to this Convention and the decisions referred to in Articles 59 and 60 of this Convention shall be adopted by a two-thirds majority of those present and voting.

## Article 6

A quorum consisting of not less than half of the States which are Contracting Parties is required for the purposes of taking decisions.

#### Article 7

Before the closure of its session, the Committee shall adopt its report.

#### Article 8

In the absence of relevant provisions in this Annex, the Rules of Procedure of the Economic Commission for Europe shall be applicable unless the Committee decides otherwise